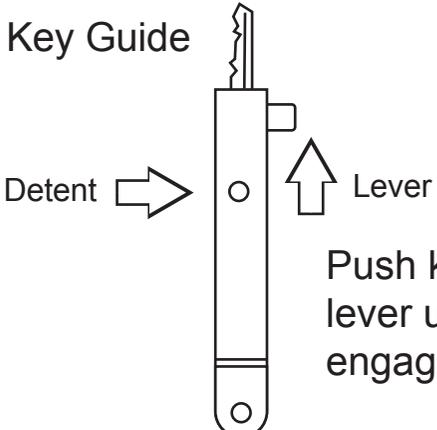
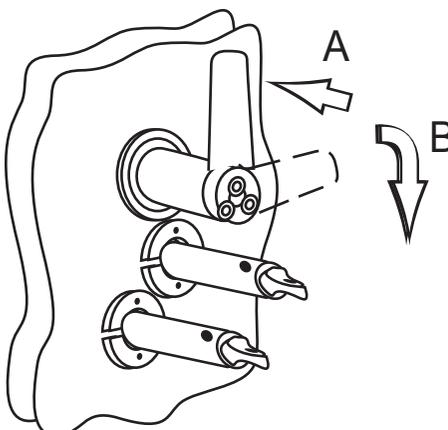
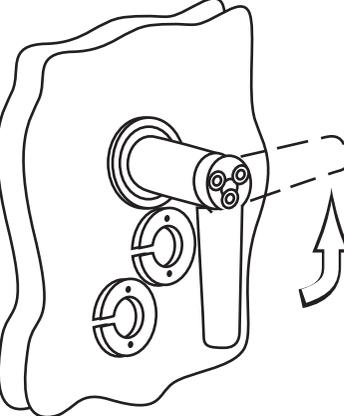
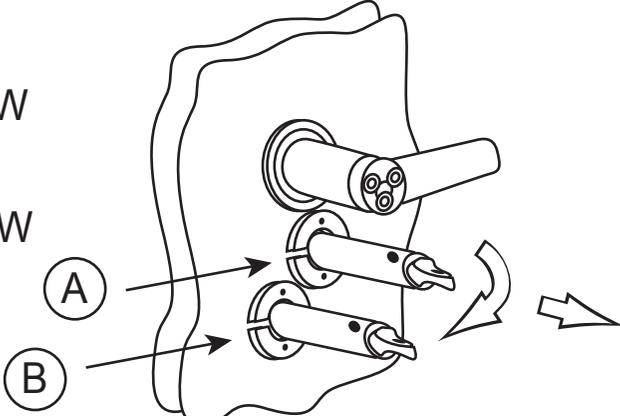
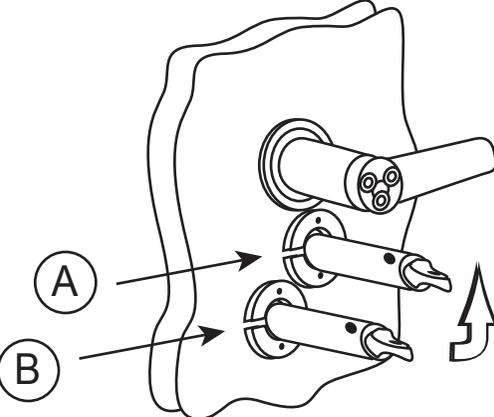
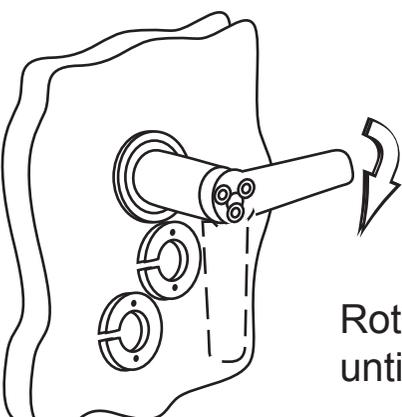
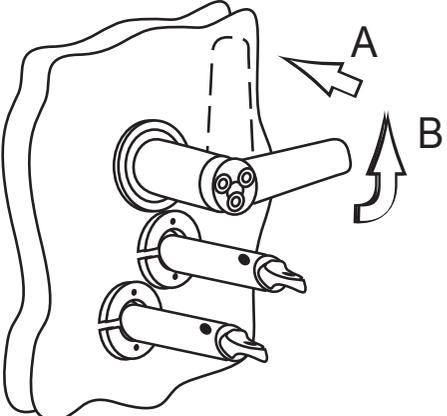
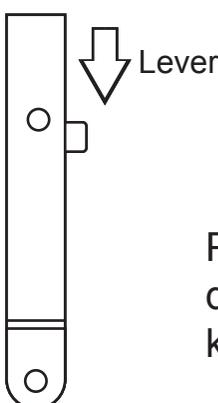


ILD DUAL Key Unlocking Procedure

NOTE: Handle and key always rotate CCW to unlock.

ILD DUAL Key Locking Procedure

NOTE: Handle and key always rotate CW to lock.

<p>1</p> <p>Key Guide</p>  <p>Detent → ↑ Lever</p> <p>Push key forward with the lever until detent is engaged.</p>	<p>1</p>  <p>Push and hold the handle in (A) and rotate 90° CW (B) until it stops.</p>
<p>2</p>  <p>Whether the handle is straight up or down, rotate 90° CCW until it stops.</p>	<p>2</p> <p>Rotate key A 180° CW and remove.</p> <p>Rotate key B 180° CW and remove.</p> 
<p>3</p> <p>Insert key A and rotate 180° CCW.</p> <p>Insert key B and rotate 180° CCW.</p> 	<p>3</p>  <p>Rotate handle 90° CW until it stops.</p>
<p>4</p>  <p>Push and hold the handle in (A) and rotate 90° CCW (B) until it stops. The door is now unlocked.</p>	<p>4</p>  <p>Push to release detent and retract key into key guide.</p>



ILD Dual Key Operating Procedure

NAVFAC ESC
DoD Lock Program, Code CI661
1100 23rd Avenue
Port Hueneme, CA 93043-4370

Technical Support Hotline:
Toll Free: (800) 290-7607, Commercial: (805) 982-1212
DSN: 551-1212, FAX: (805) 982-1253
Website: <https://portal.navy.mil/go/locks>