

N62604.AR.000836
NCBC GULFPORT
5090.3a

FINAL ACCIDENT PREVENTION AND SITE SAFETY AND HEALTH PLAN FOR SITE
INVESTIGATION AT SITE 7 RUBBLE DISPOSAL AREA NCBC GULFPORT MS
2/1/2012
TETRA TECH

Comprehensive Long-term Environmental Action Navy

CONTRACT NUMBER N62470-08-D-1001



Rev. 0
February 2012

Final Accident Prevention Plan and Site Safety and Health Plan for Site Investigation at Site 7 – Rubble Disposal Area

**Naval Construction Battalion Center Gulfport
Gulfport, Mississippi**

Contract Task Order JM23

February 2012



NAS Jacksonville
Jacksonville, Florida 32212-0030



TETRA TECH

Document Tracking Number 12JAX0072

February 10, 2012

Project Number 112G02723

Commanding Officer, Southeast
Naval Facilities Engineering Command
Attn: Charles Cook (Code OPA6)
Remedial Project Manager
NAS Jacksonville
135 Ajax Street
Jacksonville, Florida 32212-0030

Reference: CLEAN Contract Number N62470-08-D-1001
Contract Task Order Number JM23

Subject: Final Accident Prevention Plan and Site Safety and Health Plan for Site Investigation at Site 7, Rubble Disposal Area, Naval Construction Battalion Center Gulfport, Mississippi

Dear Mr. Cook:

Tetra Tech is pleased to submit the Final Accident Prevention Plan and Site Safety and Health Plan for Site Investigation at Site 7, Rubble Disposal Area, Naval Construction Battalion Center (NCBC) Gulfport, Mississippi that was prepared for the United States Navy, Naval Facilities Engineering Command Southeast under Contract Task Order (CTO) JM22 for the Comprehensive Long-term Environmental Action Navy (CLEAN) Contract Number N62470-08-D-1001.

If you have any questions with regard to this submittal, please do not hesitate to contact me by telephone at (904) 730-4669, extension 215, or via e-mail at Gregory.Roof@TetraTech.com.

Sincerely,

Gregory S. Roof
Project Manager

GSR/lc

Enclosure

c: Gordon Crane, NCBC Gulfport
Bob Merrill, MDEQ
RDM, Tetra Tech (unbound, CD)
CTO JM23 Project File

**ACCIDENT PREVENTION PLAN
AND
SITE SAFETY AND HEALTH PLAN
FOR
SITE INVESTIGATION
AT
SITE 7 - RUBBLE DISPOSAL AREA**

**Naval Construction Battalion Center Gulfport
Gulfport, Mississippi**

**Submitted to:
Naval Facilities Engineering Command Southeast
P.O. Box 30, Building 903
NAS Jacksonville, Florida 32212-0030**

**Submitted by:
Tetra Tech, Inc.
234 Mall Boulevard, Suite 260
King of Prussia, Pennsylvania 19406**

**CONTRACT NUMBER N62470-08-D-1001
CONTRACT TASK ORDER JM23**

JANUARY 2012

PREPARED UNDER THE SUPERVISION OF:



**GREGORY S. ROOF, P.E.
PROJECT MANAGER
TETRA TECH
JACKSONVILLE, FLORIDA**

APPROVED FOR SUBMISSION BY:



**MATTHEW M. SOLTIS, CH, CSP
CLEAN HEALTH AND SAFETY MANAGER
TETRA TECH
PITTSBURGH, PENNSYLVANIA**

ACRONYMS

§	Section
ACGIH	American Conference of Governmental Industrial Hygienists
AHA	Activity Hazard Analysis
ANSI	American National Standards Institute
APP	Accident Prevention Plan
BBP	Blood Borne pathogen
BLS	Bureau of Labor Statistics
CFR	Code of Federal Regulations
CIH	Certified Industrial Hygienist
CPR	Cardiopulmonary resuscitation
CRZ	Contamination Reduction Zone
CSP	Certified Safety Professional
CTO	Contract Task Order
DART	Days Away/Restricted Duty/Transfer
dB	decibels
DOD	Department of Defense
DOT	Department of Transportation
EM	Engineer Manual
EMR	Experience Modification Rate
EPA	Environmental Protection Agency
FOL	Field Operations Leader
HAZWOPER	Hazardous Waste Operations and Emergency Response
HSM	Health and Safety Manager
NAICS	North American Industry Classification System
NRR	Noise Reduction Rating
OSHA	Occupational Safety and Health Administration (U.S. Department of Labor)
PE	Professional Engineer
PHSO	Project Health and Safety Officer
PM	Project Manager
PPE	Personal Protective Equipment
RCIR	Recordable Case Incident Rate
RPM	Remedial Project Manager
SOP	Standard Operating Procedure
SSO	Site Safety Officer
SSHP	Site Safety and Health Plan
TP	Technical Paper

ACCIDENT PREVENTION PLAN

TABLE OF CONTENTS

SECTION	PAGE
ACCIDENT PREVENTION PLAN	
1.0 SIGNATURE SHEET	1-IV
2.0 BACKGROUND INFORMATION	2-1
2.1 PROJECT DESCRIPTION	2-1
2.2 SITE MAPS	2-3
2.3 WORK PHASES	2-4
3.0 STATEMENT OF SAFETY AND HEALTH POLICY	3-1
3.1 TETRA TECH SAFETY STATISTICS	3-3
4.0 RESPONSIBILITIES AND LINES OF AUTHORITY	4-1
4.1 KEY PROJECT PERSONNEL AND ORGANIZATION	4-3
4.1.1 Project Manager	4-3
4.1.2 Project Health and Safety Officer	4-3
4.1.3 Field Operations Leader/Site Safety Officer	4-4
4.1.4 Health and Safety and Health Manager	4-5
4.1.5 Site Personnel	4-5
4.2 GENERAL SAFETY AND HEALTH PROVISIONS COMPETENT PERSON	4-6
4.3 REQUIREMENTS OF PRE-TASK SAFETY AND HEALTH ANALYSIS	4-6
4.3.1 APP and SSHP Compliance	4-7
5.0 SUBCONTRACTORS AND SUPPLIERS	5-1
6.0 TRAINING	6-1
6.1 MANDATORY TRAINING AND CERTIFICATIONS	6-1
6.2 SITE-SPECIFIC SAFETY AND HEALTH TRAINING	6-2
6.3 TRAINING DOCUMENTATION	6-2
6.4 MEDICAL SURVEILLANCE	6-2
7.0 SAFETY AND HEALTH INSPECTIONS	7-1
7.1 SPECIFIC ASSIGNMENT OF RESPONSIBILITY FOR A MINIMUM DAILY JOB SITE SAFETY AND HEALTH INSPECTION DURING PERIODS OF WORK ACTIVITY	7-1
7.1.1 Proof of Inspector's training/qualifications	7-1
7.1.2 Inspection Schedule	7-1
7.1.3 Documentation Procedures	7-1
7.1.4 Deficiency Tracking System and Follow-up Procedures	7-1
8.0 ACCIDENT REPORTING	8-1
8.1 INCIDENT REPORTING/NOTIFICATIONS	8-1
8.2 INCIDENT REPORTING PROCEDURES	8-2
8.2.1 TOTAL Incident Reporting System	8-2
8.2.2 How to Access TOTAL to Report an Incident	8-3

TABLE OF CONTENTS (Continued)

SECTION	PAGE
9.0 PLANS (PROGRAMS, PROCEDURES) REQUIRED BY THE SAFETY MANUAL	9-1
9.1 SPILL PLANS.....	9-2
9.2 POSTING OF EMERGENCY TELEPHONE NUMBERS.....	9-2
9.3 MEDICAL SUPPORT (ONSITE/OFFSITE).....	9-2
9.4 PLAN FOR PREVENTION OF DRUG AND ALCOHOL ABUSE.....	9-2
9.5 HAZARD COMMUNICATION PROGRAM	9-3
9.6 FIRE PREVENTION PLAN	9-3
9.7 CONTINGENCY PLAN FOR SEVERE WEATHER.....	9-3
9.8 COMPRESSED AIR PLAN	9-3
9.9 SSHP FOR HTRW WORK.....	9-4
10.0 RISK MANAGEMENT PROCESSES.....	10-1
 <u>APPENDICES</u>	
A SITE SAFETY AND HEALTH PLAN	

LIST OF TABLES

3-1 Comparison of Concentrations with Current Occupational Exposure Limits 3-3

LIST OF FIGURES

2-1 Site Location Map 2-3

2-2 Aerial View of the Site 2-4

3-1 Health and Safety Policy 3-2

4-1 Organization Chart 4-2

8-1 Tetra Tech Incident Report Form 8-4

1.0 SIGNATURE SHEET

Prepared by:

James K. Laffey
Tetra Tech NUS
Project Health and Safety Officer



Signature

(412) 921-8678
Phone

Approved by:

John Trepanowski, P.E.
Tetra Tech NUS
Vice-President



Signature

(610) 491-9688
Phone

Concurred by:

Matthew M. Soltis, CIH, CSP
Tetra Tech NUS
CLEAN Health and Safety Manager



Signature

(412) 921-8912
Phone

2.0 BACKGROUND INFORMATION

Contractor: Tetra Tech
Contract Number: N62470-08-D-1001
Project Name: Site Investigation Activities at Site 7 Rubble Disposal Area, in Gulfport, Mississippi

2.1 PROJECT DESCRIPTION

This Accident Prevention Plan (APP) and Site Safety and Health Plan (SSHP) have been prepared to support sampling activities for Site Investigation Activities at Site 7 Rubble Disposal Area, in Gulfport, Mississippi. It presents support to the technical approach described in the Sampling and Analysis Plan (SAP) for Site 7 Rubble Disposal Area. The specific tasks to be completed are monitoring well installation, groundwater sampling activities and associated activities.

The Naval Construction Battalion Center (NCBC) Gulfport is located in the City of Gulfport, in Harrison County, in the southeast corner of the State of Mississippi. The site is bounded by Building 383 and Fifth Street to the north, Colby Avenue to the west, Simms Avenue to the east, and Building 391 to the south.

This APP addresses only the activities to be performed by Tetra Tech and its sub-contractor personnel. The site-specific health and safety provisions in this document have been developed for use during the provision of the Site Investigation.

This document addresses applicable items specified under the U.S. Army Corps of Engineers Safety and Health Requirements Manual, Engineering Manual (EM) 385-1-1, and United States Occupational Safety and Health Administration (OSHA) Hazardous Waste Operations and Emergency Response (HAZWOPER) standard Title 29 of CFR, § 1910.120 and 1910.126.

This APP is available to (1) on-site personnel who may be exposed to hazardous on-site conditions, including Tetra Tech and subcontractor personnel participating in field activities, and (2) site visitors, including regulatory agency representatives.

Site-specific sections of EM 385-1-1 applicable to this field effort are as follows if the box is checked "Yes" the topic listed is applicable and if it box is check "NA" it is not applicable to this project:

Yes NA

- | | | |
|-------------------------------------|-------------------------------------|---|
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 1 - Program Management |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 2 - Sanitation |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 3 - Medical and First Aid Requirements |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 4 - Temporary Facilities |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 5 - Personal Protective and Safety Equipment |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 6 - Hazardous Substances, Agents, and Environments |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 7 - Lighting |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 8 - Accident Prevention Signs, Tags, Labels, Signals, Piping System Identification, and Traffic Control |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 9 - Fire Prevention and Protection |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 10 - Welding and Cutting |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 11 - Electrical |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 12 - Control of Hazardous Energy |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 13 - Hand and Power Tools |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 14 - Material Handling, Storage, and Disposal |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 15 - Rigging |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 16 - Machinery and Mechanized Equipment |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 17 - Conveyors |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 18 - Motor Vehicles and Aircraft |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 19 - Floating Plant and Marine Activities |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 20 - Pressurized Equipment and Systems |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 21 - Safe Access and Fall Protection |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 22 - Work Platforms |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 23 - Demolition |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 24 - Floor and Wall Holes and Openings |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 25 - Excavations |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 26 - Underground Construction, Shafts, and Caissons |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 27 - Concrete and Masonry Construction and Steel Erection |
| <input checked="" type="checkbox"/> | <input type="checkbox"/> | 28 - HAZWOPER |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 29 - Blasting |
| <input type="checkbox"/> | <input checked="" type="checkbox"/> | 30 - Contract Diving Operations |

This APP and SSHP has been developed using the latest available information regarding known or suspected chemical contaminants and potential physical hazards associated with the proposed work at the site. These documents will be modified if new information becomes available. Changes will be made with the approval of the Tetra Tech Project Health and Safety Officer (PHSO), and the Tetra Tech Corporate Manager of Health and Safety who serves as the Health and Safety Manager (HSM). Requests for modifications to the SSHP will be directed to the Site Safety Officer (SSO), who will determine if the changes are necessary. The SSO will notify the Project Manager (PM), who will notify affected personnel of changes.

The information contained in this plan, as well as policies on conducting on-site operations, have been obtained from the Tetra Tech Health and Safety Program, and supporting Standard Operating Procedures (SOPs).

2.2 SITE MAPS

A facility location map and a site location map showing the location where Tetra Tech employees will be performing work are shown as Figure 2-1 Site Location Map and Figure 2-2 area aerial view of the site.

**FIGURE 2-1
SITE LOCATION MAP**

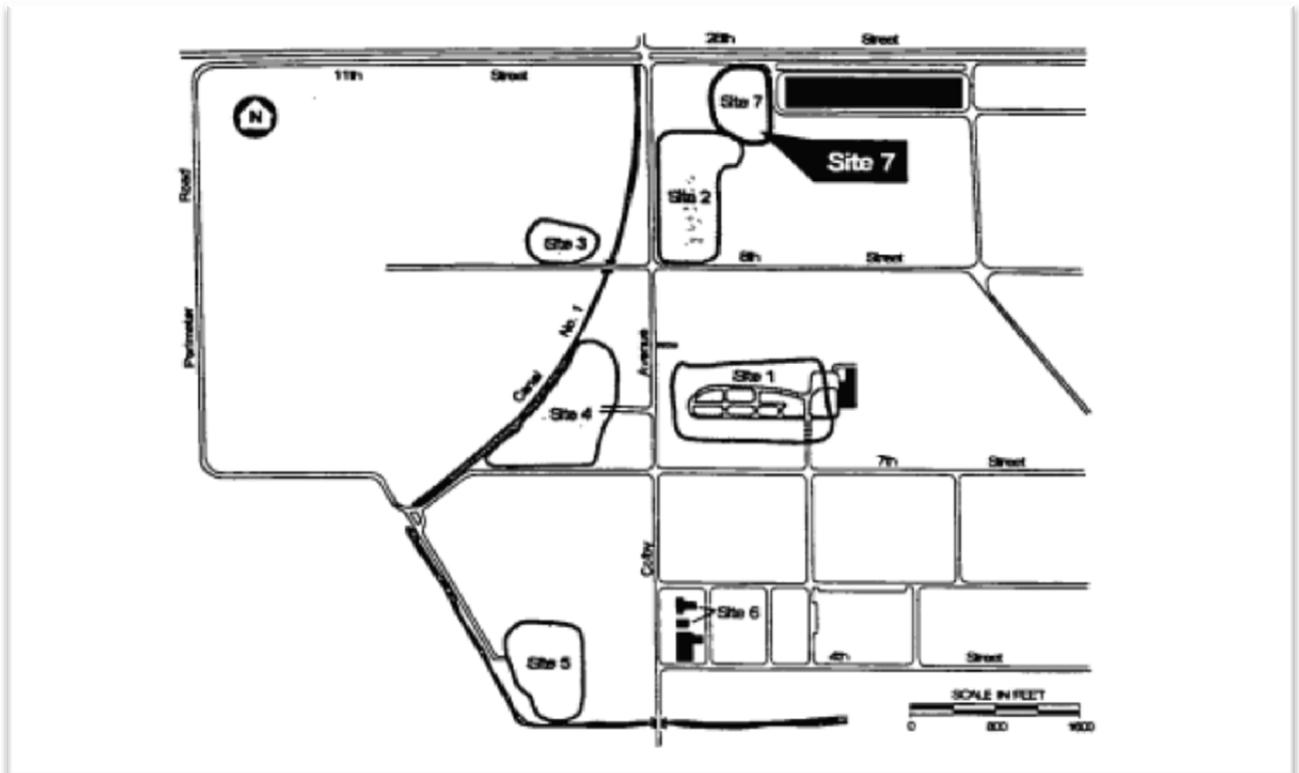


FIGURE 2-2
AERIAL VIEW OF THE SITE



2.3 WORK PHASES

Work on this project will occur in the following phases. Associated dates when Tetra Tech personnel will be on site performing work will be listed for each phase of the project following authorization to proceed.

- Phase 1 – Mobilization
- Phase 2 – Passive Soil Gas Survey; Multi-media sampling; Soil Boring
- Phase 3 – Demobilization

3.0 STATEMENT OF SAFETY AND HEALTH POLICY

Tetra Tech is committed to providing our employees with a safe and healthful workplace. It is the goal of Tetra Tech to continue excellent safety performance on NAVFAC contracts to support the Navy in their safety efforts. Specifically, Tetra Tech will perform work in a manner that is consistent with the Zero Incident Philosophy. It is our goal to plan and perform the work in a manner that integrates safety and health considerations so that worker injuries or illnesses, environmental releases/impacts, or property damage are eliminated. In addition to the line and staff management functions described in this APP and the accompanying SSHP, each individual performing work under this contract has the responsibility for their own personal health and safety, as well as assisting in assuring the health and safety of their co-workers. This element is also the first one listed in our corporate Health and Safety Policy Statement, which requires that "each employee recognize a *personal* responsibility for their own health and safety and for actions that affect the health and safety of fellow employees." This employee responsibility includes observing specified health and safety requirements and communicating with the designated SSO on matters such as the effectiveness of specified control measures, identification of new potential hazards, and other related issues.

An employee's failure to adhere to the requirements of this APP and SSHP or to observe specified safety requirements and restrictions or to properly use identified protective equipment may lead to injury or illness. As a result, deviation from safety and health procedures is not tolerated. Failure to comply with health and safety procedures and requirements will lead to reprimand up to and including dismissal.

Health and safety-related information is communicated to employees through meetings, postings, written communications, and reporting of hazards.

The principal elements of our program are founded on the requirements presented in the Health and Safety Policy in Figure 3-1.

FIGURE 3-1
HEALTH AND SAFETY POLICY




TETRA TECH NUS, INC. HEALTH AND SAFETY POLICY


Tetra Tech NUS, Inc., is committed to providing our employees with a safe and healthful workplace. We believe that occupational injuries and illness can be prevented; and we are convinced that a strong Health and Safety Program is essential to achieve this objective.

The principal elements of our program are founded on the requirements that our managers and employees:

- Recognize a *personal responsibility* for their own health and safety and for actions that affect the health and safety of fellow employees.
- Integrate safety and health into *all aspects* of their work, with the well-being of employees as the primary concern in all activities.
- Comply with applicable *federal, state, and local regulations*, as well as with our internal Corporate and our clients' safety and health policies and procedures.
- Take an *active role* in the Health and Safety Program by providing input and constructive criticism for improvements to the program.

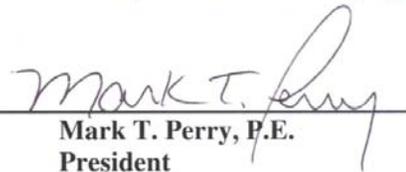


Mark T. Perry, P.E.
President



Matthew M. Soltis, CIH, CSP
Health and Safety Manager



Tetra Tech NUS, Inc.
January 2010

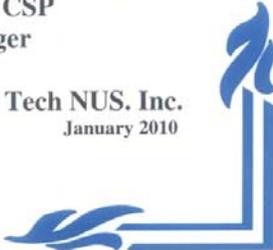

3.1 TETRA TECH SAFETY STATISTICS

Table 3-1 presents safety statistics for Tetra Tech for the last 3 calendar years compared to the national averages for our industry. This comparison uses data collected by the United States Department of Labor, Bureau of Labor Statistics (BLS) for different types of employers, segregated by North American Industry Classification System (NAICS) codes.

**TABLE 3-1
COMPARISON OF TETRA TECH AND 2009 BLS DATA FOR
NAICS CODE 541 (RCIR AND DART CASE RATES)**

	NAICS 541 Professional, Scientific and Technical Services 2009	Tetra Tech 2008	Tetra Tech 2009	Tetra Tech 2010
Total Recordable Case Incident Rate (RCIR)	1.2	0.3	0.2	0.6
Days Away/Restricted Duty/Transfer Case Rate (DART)	0.3	0.2	0.2	0.2

The data comparison illustrates that Tetra Tech's performance compares favorably with the most-recent national averages for the environmental engineering and hazardous waste services industries. Raw data for these statistics can be found in the OSHA Form 300 and 300A attached

Tetra Tech Man Hours Worked

2008	834,876
2009	890,072
2010	900,132

**Tetra Tech Experience Modification Rates
(Policy Year October 1 - September 30):**

2009-2010:	0.74
2010-2011:	0.76
2011-2012:	0.78

OSHA's Form 300A (Rev. 01/2004) Summary of Work-Related Injuries and Illnesses

Year 2008



U.S. Department of Labor
Occupational Safety and Health Administration

Form approved OMB no. 1218-0176

All establishments covered by Part 1904 must complete this Summary page, even if no injuries or illnesses occurred during the year. Remember to review the Log to verify that the entries are complete.

Using the Log, count the individual entries you made for each category. Then write the totals below, making sure you've added the entries from every page of the log. If you had no cases write "0."

Employees, former employees, and their representatives have the right to review the OSHA Form 300 in its entirety. They also have limited access to the OSHA Form 301 or its equivalent. See 29 CFR 1904.35, in OSHA's Recordkeeping rule, for further details on the access provisions for these forms.

Number of Cases

Total number of deaths	Total number of cases with days away from work	Total number of cases with job transfer or restriction	Total number of other recordable cases
<u>0</u>	<u>1</u>	<u>1</u>	<u>0</u>
(G)	(H)	(I)	(J)

Number of Days

Total number of days away from work	Total number of days of job transfer or restriction
<u>1</u>	<u>14</u>
(K)	(L)

Injury and Illness Types

Total number of...			
(M)			
(1) Injury	<u>1</u>	(4) Poisoning	<u>0</u>
(2) Skin Disorder	<u>0</u>	(5) Hearing Loss	<u>0</u>
(3) Respiratory Condition	<u>0</u>	(6) All Other Illnesses	<u>1</u>

Post this Summary page from February 1 to April 30 of the year following the year covered by the form

Public reporting burden for this collection of information is estimated to average 58 minutes per response, including time to review the instruction, search existing data sources, gather the data needed, and to collect and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any aspect of this data collection, contact: US Department of Labor, OSHA Office of Statistics, Room 14-3644, 200 Constitution Ave, NW, Washington, DC 20210. Do not send the completed forms to this office.

Establishment information

Your establishment name Tetra Tech NUS, Inc.

Street 661 Andersen Drive, Foster Plaza 7

City Pittsburgh State PA Zip 15220

Industry description (e.g., Manufacture of motor truck trailers)
Environmental Consulting

Standard Industrial Classification (SIC), if known (e.g., SIC 3715)

OR North American Industrial Classification (NAICS), if known (e.g., 336212)
5 4 1 8 2 0

Employment information

Annual average number of employees 420

Total hours worked by all employees last year 334,876

Sign here

Knowingly falsifying this document may result in a fine.

I certify that I have examined this document and that to the best of my knowledge the entries are true, accurate, and complete.

Ronald J. Chu President
Company executive Title

(625) 470-2819 9-Jan-09
Phone Date

OSHA's Form 300 (Rev. 01/2004) Log of Work-Related Injuries and Illnesses

Attention: This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

Year 2008

U.S. Department of Labor
 Occupational Safety and Health Administration

Form approved OMB no. 1218-0176

You must record information about every work-related injury or illness that involves loss of consciousness, restricted work activity or job transfer, days away from work, or medical treatment beyond first aid. You must also record significant work-related injuries and illnesses that are diagnosed by a physician or licensed health care professional. You must also record work-related injuries and illnesses that meet any of the specific recording criteria listed in 29 CFR 1904.5 through 1904.12. Feel free to use two lines for a single case if you need to. You must complete an injury and illness incident report (OSHA Form 301) or equivalent form for each injury or illness recorded on this form. If you're not sure whether a case is recordable, call your local OSHA office for help.

Establishment name Tetra Tech NUS, Inc.
 City Pittsburgh State PA

Identify the person				Describe the case		Classify the case				Enter the number of days the injured or ill worker was:							
(A) Case No.	(B) Employee's Name	(C) Job Title (e.g., Welder)	(D) Date of injury or onset of illness (mo./day)	(E) Where the event occurred (e.g. Loading dock north end)	(F) Describe injury or illness, parts of body affected, and object/substance that directly injured or made person ill (e.g. Second degree burns on right forearm from acetylene torch)	CHECK ONLY ONE box for each case based on the most serious outcome for that case:				Enter the number of days the injured or ill worker was:		Check the "injury" column or choose one type of illness:					
						Death	Days away from work	Remained at work		Away From Work (days)	On job transfer or restriction (days)	(M)					
								Job transfer or restriction	Other recordable cases			Injury	Skin Disorder	Respiratory Condition	Poisoning	Hearing Loss	All other illnesses
						(G)	(H)	(I)	(J)	(K)	(L)	(1)	(2)	(3)	(4)	(5)	(6)
1	XXXXXXXXXXXXXX	Env. Eng.	03/14/08	NAS Willow Grove, PA	Lower back strain crossing ditch while carrying small generator			X			14	X					
2	XXXXXXXXXXXXXX	Env. Sci.	06/09/08	NAS South Weymouth, MA	Heat stress		X			1							X
Page totals						0	1	1	0	1	14	1	0	0	0	0	1

Be sure to transfer these totals to the Summary page (Form 300A) before you post it.

Public reporting burden for this collection of information is estimated to average 14 minutes per response, including time to review the instruction, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistics, Room N-3644, 200 Constitution Ave, NW, Washington, DC 20210. Do not send the completed forms to this office.

Injury (1)
 Skin Disorder (2)
 Respiratory Condition (3)
 Poisoning (4)
 Hearing Loss (5)
 All other illnesses (6)

OSHA's Form 300A (Rev. 01/2004) Summary of Work-Related Injuries and Illnesses

Year 2009



U.S. Department of Labor
Occupational Safety and Health Administration
Form approved OMB no. 1218-0176

All establishments covered by Part 1904 must complete this Summary page, even if no injuries or illnesses occurred during the year. Remember to review the Log to verify that the entries are complete

Using the Log, count the individual entries you made for each category. Then write the totals below, making sure you've added the entries from every page of the log. If you had no cases write "0."

Employees former employees, and their representatives have the right to review the OSHA Form 300 in its entirety. They also have limited access to the OSHA Form 301 or its equivalent. See 29 CFR 1904.35, in OSHA's Recordkeeping rule, for further details on the access provisions for these forms.

Number of Cases

Total number of deaths	Total number of cases with days away from work	Total number of cases with job transfer or restriction	Total number of other recordable cases
0	0	1	0
(G)	(H)	(I)	(J)

Number of Days

Total number of days away from work	Total number of days of job transfer or restriction
0	38
(K)	(L)

Injury and Illness Types

Total number of... (M)			
(1) Injury	1	(4) Poisoning	0
(2) Skin Disorder	0	(5) Hearing Loss	0
(3) Respiratory Condition	0	(6) All Other Illnesses	0

Post this Summary page from February 1 to April 30 of the year following the year covered by the form

Public reporting burden for this collection of information is estimated to average 58 minutes per response, including time to review the instruction, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistics, Room N-3644, 200 Constitution Ave, NW, Washington, DC 20210. Do not send the completed forms to this office.

Establishment information	
Your establishment name	<u>Tetra Tech NUS, Inc.</u>
Street	<u>661 Andersen Drive, Foster Plaza 7</u>
City	<u>Pittsburgh</u> State <u>PA</u> Zip <u>15220</u>
Industry description (e.g., Manufacture of motor truck trailers)	<u>Environmental Consulting</u>
Standard Industrial Classification (SIC), if known (e.g., SIC 3715)	
OR North American Industrial Classification (NAICS), if known (e.g., 336212)	<u>5 4 1 6 2 0</u>
Employment information	
Annual average number of employees	<u>437</u>
Total hours worked by all employees last year	<u>890,072</u>
Sign here	
Knowingly falsifying this document may result in a fine.	
I certify that I have examined this document and that to the best of my knowledge the entries are true, accurate, and complete.	
<u><i>David J. Chu</i></u> Company Executive	_____ President Title
<u>(626) 470-2819</u> Phone	<u>13-Jan-10</u> Date

OSHA's Form 300 (Rev. 01/2004) Log of Work-Related Injuries and Illnesses

Attention: This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

Year 2009

U.S. Department of Labor
 Occupational Safety and Health Administration

Form approved OMB no. 1218-0176

You must record information about every work-related injury or illness that involves loss of consciousness, restricted work activity or job transfer, days away from work, or medical treatment beyond first aid. You must also record significant work-related injuries and illnesses that are diagnosed by a physician or licensed health care professional. You must also record work-related injuries and illnesses that meet any of the specific recording criteria listed in 29 CFR 1904.8 through 1904.12. Feel free to use two lines for a single case if you need to. You must complete an injury and illness incident report (OSHA Form 301) or equivalent form for each injury or illness recorded on this form. If you're not sure whether a case is recordable, call your local OSHA office for help.

Establishment name Tetra Tech NUS, Inc.
 City Pittsburgh State PA

Identify the person				Describe the case		Classify the case											
(A) Case No.	(B) Employee's Name	(C) Job Title (e.g., Welder)	(D) Date of injury or onset of illness (mo./day)	(E) Where the event occurred (e.g., Loading dock north end)	(F) Describe injury or illness, parts of body affected, and object/substance that directly injured or made person ill (e.g., Second degree burns on right forearm from acetylene torch)	CHECK ONLY ONE box for each case based on the most serious outcome for that case:				Enter the number of days the injured or ill worker was:		Check the "injury" column or choose one type of illness:					
						Death	Days away from work	Remained at work		Away From Work (days)	On job transfer or restriction (days)	(M)					
						(G)	(H)	Job transfer or restriction	Other recordable cases	(K)	(L)	Injury	Skin Disorder	Respiratory Condition	Poisoning	Hearing Loss	All other illnesses
						(I)	(J)	(M)	(N)	(O)	(P)	(1)	(2)	(3)	(4)	(5)	(6)
NUS-2009-10	XXXXXXXXXXXXXXXX	Environmental Engineer	9/4/2009	MarkWest Energy - E&S Permits	Sprained right ankle while walking a gas pipeline			X			38	X					
Page totals						0	0	1	0	0	38	1	0	0	0	0	0

Be sure to transfer these totals to the Summary page (Form 300A) before you post it.

Public reporting burden for this collection of information is estimated to average 14 minutes per response, including time to review the instruction, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistics, Room N-3644, 200 Constitution Ave, NW, Washington, DC 20210. Do not send the completed forms to this office.

OSHA's Form 300A (Rev. 01/2004) Summary of Work-Related Injuries and Illnesses

Year 2010 
 U.S. Department of Labor
 Occupational Safety and Health Administration
 Form approved OMB no. 1218-0176

All establishments covered by Part 1904 must complete this Summary page, even if no injuries or illnesses occurred during the year. Remember to review the Log to verify that the entries are complete

Using the Log, count the individual entries you made for each category. Then write the totals below, making sure you've added the entries from every page of the log. If you had no cases write "0."

Employees former employees, and their representatives have the right to review the OSHA Form 300 in its entirety. They also have limited access to the OSHA Form 301 or its equivalent. See 29 CFR 1904.35, in OSHA's Recordkeeping rule, for further details on the access provisions for these forms.

Number of Cases

Total number of deaths	Total number of cases with days away from work	Total number of cases with job transfer or restriction	Total number of other recordable cases
0	0	1	2
(G)	(H)	(I)	(J)

Number of Days

Total number of days away from work	Total number of days of job transfer or restriction
0	2
(K)	(L)

Injury and Illness Types

Total number of... (M)	
(1) Injury	3
(2) Skin Disorder	0
(3) Respiratory Condition	0
(4) Poisoning	0
(5) Hearing Loss	0
(6) All Other Illnesses	0

Post this Summary page from February 1 to April 30 of the year following the year covered by the form

Public reporting burden for this collection of information is estimated to average 58 minutes per response, including time to review the instruction, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistics, Room N-3644, 200 Constitution Ave, NW, Washington, DC 20210. Do not send the completed forms to this office.

Establishment information

Your establishment name Tetra Tech NUS, Inc.

Street Foster Plaza 7, 661 Andersen Drive

City Pittsburgh State Pennsylvania Zip 15220

Industry description (e.g., Manufacture of motor truck trailers)
Environmental Consulting

Standard Industrial Classification (SIC), if known (e.g., SIC 3715)

OR North American Industrial Classification (NAICS), if known (e.g., 336212)
5 4 1 6 2 0

Employment information

Annual average number of employees 465

Total hours worked by all employees last year 900,132

Sign here

Knowingly falsifying this document may result in a fine.

I certify that I have examined this document and that to the best of my knowledge the entries are true, accurate, and complete.



 Company executive

 President
 Title

(412) 921-7217

 Phone

 28-Jan-11
 Date

OSHA's Form 300 (Rev. 01/2004) Log of Work-Related Injuries and Illnesses

Attention: This form contains information relating to employee health and must be used in a manner that protects the confidentiality of employees to the extent possible while the information is being used for occupational safety and health purposes.

Year 2010
U.S. Department of Labor
 Occupational Safety and Health Administration

You must record information about every work-related injury or illness that involves loss of consciousness, restricted work activity or job transfer, days away from work, or medical treatment beyond first aid. You must also record significant work-related injuries and illnesses that are diagnosed by a physician or licensed health care professional. You must also record work-related injuries and illnesses that meet any of the specific recording criteria listed in 29 CFR 1904.6 through 1904.12. Feel free to use two lines for a single case if you need to. You must complete an injury and illness incident report (OSHA Form 301) or equivalent form for each injury or illness recorded on this form. If you're not sure whether a case is recordable, call your local OSHA office for help.

Form approved CMB no. 1218-0178

Establishment name Tetra Tech NUS, Inc.
 City Pittsburgh State PA

Identify the person			Describe the case			Classify the case					Enter the number of days the injured or ill worker was						
(A) Case No.	(B) Employee's Name	(C) Job Title (e.g., Welder)	(D) Date of injury or onset of illness (mo./day)	(E) Where the event occurred (e.g., loading dock north end)	(F) Describe injury or illness, parts of body affected, and object/substance that directly injured or made person ill (e.g., Second degree burns on right forearm from acetylene torch)	CHECK ONLY ONE box for each case based on the most serious outcome for that case:					Check the "injury" column or choose one type of illness:						
						Death	Days away from work	Remained at work		Away From Work (days)	On job transfer or restriction (days)	(M)					
						(G)	(H)	Job transfer or restriction (I)	Other recordable cases (J)	(K)	(L)	Injury (1)	Skin Disorder (2)	Respiratory Condition (3)	Poisoning (4)	Hearing Loss (5)	All other illnesses (6)
NUS-2010-10	***** (Wilmington, MA)	Environmental Scientist	3/22/2010	NAVY CLEAN LANT CTC WE45	Back injury from lifting empty cooler and bottlenecks boxes			X			2	X					
NUS-2010-19	***** (Newark, DE)	Environmental Technician	12/3/2010	DNREC - Strytech Columbia	Cut hand with blade removing equipment from wall				X			X					
NUS-2010-20	***** (Germantown, MD)	Graphic	1/27/2010	112 Germantown, MD - 2	Sprain Ankle				X			X					
Page totals						0	0	1	2	0	2	3	0	0	0	0	0

Be sure to transfer these totals to the Summary page (Form 300A) before you post it.

Public reporting burden for this collection of information is estimated to average 14 minutes per response, including time to review the instruction, search and gather the data needed, and complete and review the collection of information. Persons are not required to respond to the collection of information unless it displays a currently valid OMB control number. If you have any comments about these estimates or any aspects of this data collection, contact: US Department of Labor, OSHA Office of Statistics, Room N-3644, 200 Constitution Ave, NW, Washington, DC 20210. Do not send the completed forms to this office.

Injury (1)
 Skin Disorder (2)
 Respiratory Condition (3)
 Poisoning (4)
 Hearing Loss (5)
 All other illnesses (6)

4.0 RESPONSIBILITIES AND LINES OF AUTHORITY

Tetra Tech, as the employer for the staff that will be engaged in performing the work presented in this APP, fully recognizes and accepts the ultimate responsibility for protecting the safety and health of our employees, and for the implementation of an effective Safety and Occupational Health program. The Tetra Tech SSO for this project has been appointed by the PM and is responsible for field implementation of tasks and procedures contained in the SSHP (see Appendix A) portion of the APP. The SSO has completed 40-Hour HAZWOPER and subsequent 8-Hour HAZWOPER Refresher Training, 8-Hour HAZWOPER Supervisor Training, and First Aid/CPR and Blood-borne Pathogen training in accordance with regulatory requirements applicable to the work that will be performed for this project. The Tetra Tech SSO has primary responsibility for responding to and correcting emergency situations and for taking appropriate measures to ensure the safety of site personnel and the public (e.g., evacuation of personnel from the site area). The SSO is also responsible for ensuring that corrective measures have been implemented, appropriate internal and Navy authorities have been notified, and follow-up reports have been completed.


Individual subcontractors are required to cooperate with the SSO within the parameters of their Scope of Work.

Personnel are required to immediately report injuries, illnesses, spills, fires, and property damage to the SSO. The SSO must be notified of any on-site emergencies and is responsible for ensuring that the appropriate emergency procedures described in this section are followed. The SSO is also responsible for informing the Navy Remedial Project Manager (RPM) of major incidents and associated corrective actions.

The work under this contract, including this field effort, is subject to a comprehensive health and safety program developed, designed, and implemented by Matthew M. Soltis, CIH, CSP. Mr. Soltis serves as Vice President of Health and Safety for Tetra Tech TSS and as the Health and HSM for the planned work addressed in this APP. He has over 25 years of experience in the Health and Safety field.

Management at Tetra Tech has the authority and responsibility for implementing and maintaining this APP and SSHP. An organization chart presenting the lines of authority is provided as Figure 4-1.

**FIGURE 4-1
ORGANIZATION CHART
FIELD ACTIVITIES AT SITE 7 RUBBLE DISPOSAL AREA**

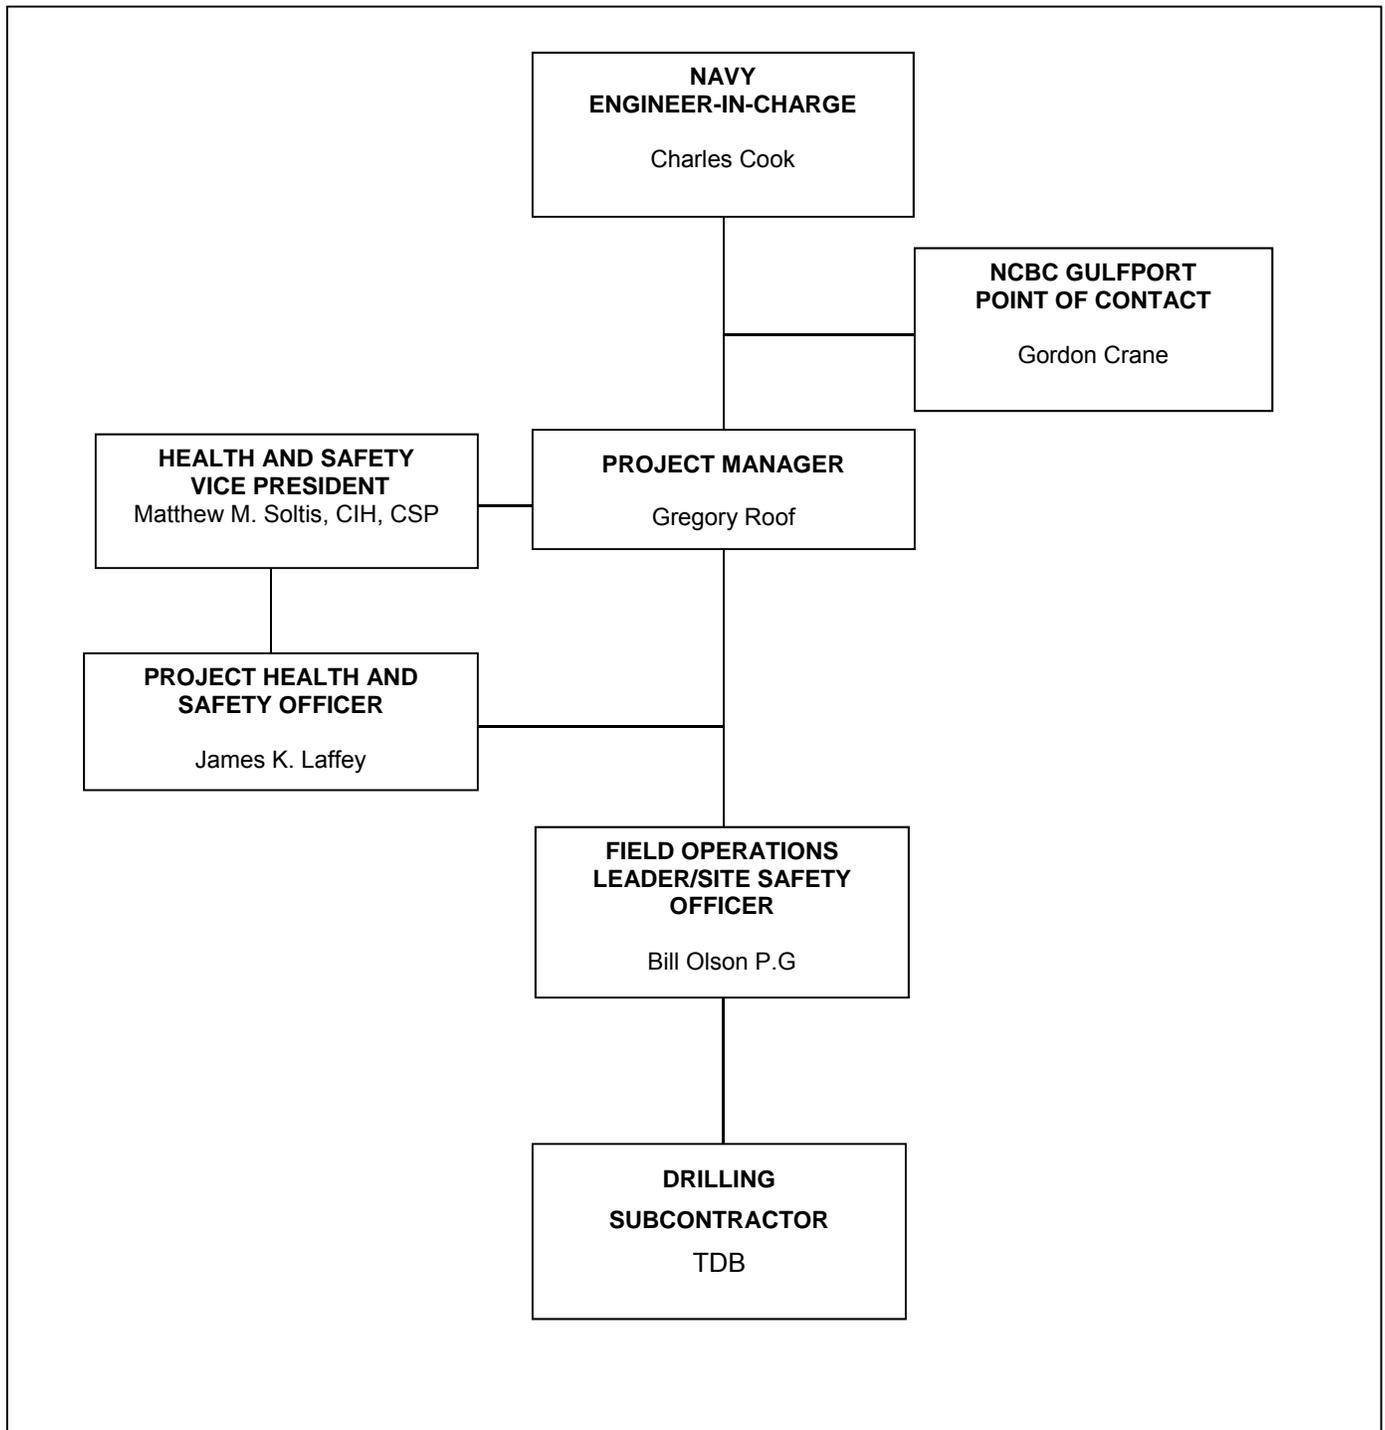

4.1 KEY PROJECT PERSONNEL AND ORGANIZATION

This section defines responsibility for safety and health for Tetra Tech and subcontractor employees engaged in onsite activities. Personnel assigned to these positions will exercise the primary responsibility for onsite health and safety. These persons will be the primary point of contact for any questions regarding the safety and health procedures and the selected control measures that are to be implemented for onsite activities.

4.1.1 Project Manager

The Tetra Tech PM is responsible for the overall direction and implementation of health and safety for this work. The PM coordinates closely with the Navy RPM who is responsible to oversee the project implementation, including scoping, data review, and evaluation for the Navy. This includes the responsibility for ensuring that:

- Work is appropriately planned and executed in accordance with contractual, regulatory, and internal requirements.
- Adequate resources (including personnel, equipment, and supplies) are assembled, and made available to the Field Operations Leader (FOL)/SSO to safely and effectively accomplish the work.

4.1.2 Project Health and Safety Officer

The PHSO is responsible for developing this APP and SSHP in accordance with applicable OSHA regulations. Specific responsibilities include:

- Providing information regarding site contaminants and physical hazards associated with the site.
- Establishing air monitoring and decontamination procedures.
- Assigning personal protective equipment based on task and potential hazards.
- Determining emergency action procedures and emergency contacts.
- Stipulating training requirements and reviewing training and medical surveillance certificates.
- Providing standard work practices to minimize potential injuries and exposures.
- Modifying this SSHP, as necessary.

4.1.3 Field Operations Leader/Site Safety Officer

The Tetra Tech FOL is responsible for implementation of the SSHP and in accordance with the contractual requirements serves as the project SSO. The FOL manages field activities, executes the SAP, and enforces safety procedures as applicable to the SAP. Other duties include:

- Ensuring that the notifications are given prior to beginning work.
- Conducting intrusive operations.
- Verifying training and medical clearance of onsite personnel status in relation to site activities.
- Selecting, applying, inspecting, and maintaining personal protective equipment.
- Implementing Hazard Communication, Respiratory Protection Programs, and other health and safety programs as needed.
- Providing site-specific training for onsite personnel.
- Investigating accidents and injuries

Included in the SSO responsibilities are air monitoring, establishing a decontamination protocol, and ensuring the signing of the Daily Tailgate Safety Meeting form and the Site-Specific Training Documentation Form by personnel working on site.

The FOL/SSO will have advanced field work experience (minimum of 1 year) and be familiar with health and safety requirements specific to the project. The SSO will have the following additional specific responsibilities:

- Coordinating health and safety activities
- Selecting, applying, inspecting, and maintaining personal protective equipment
- Establishing work zones and control points
- Implementing air monitoring procedures
- Implementing hazard communication, respiratory protection, and other associated safety and health programs.
- Coordinating emergency services
- Providing elements of site-specific training

Compliance with the requirements stipulated in this APP and SSHP is monitored by the SSO and coordinated through the Tetra Tech HSM. In some cases one person may be designated responsibilities for more than one position. This action will be performed only as credentials, experience, and availability permits.

4.1.4 Health and Safety and Health Manager

The HSM is responsible for the development and administration of the company health and safety program. The HSM will act in an advisory capacity to PM and site personnel for project-specific health and safety issues. The Tetra Tech PM will establish a liaison between the Navy RPM and the HSM on matters relating to health and safety. In the fulfillment of the duties of this position, the HSM will enlist the support of safety and occupational health professionals, as appropriate. The HSM is responsible for the following actions:

- Developing, maintaining, and overseeing implementation of this APP and SSHP.
- Visiting project sites as needed to audit the effectiveness of the APP and SSHP.
- Remaining available for project emergencies.
- Developing modifications to the APP and SSHP, as needed.
- Evaluating occupational exposure monitoring/air sampling data and adjusting APP and SSHP as necessary.
- Serving as a Quality Control (QC) staff member.
- Approving the APP and SSHP by signature.

4.1.5 Site Personnel

In addition to the line and staff management functions, each individual performing work under this contract has the responsibility for their own personal health and safety, as well as assisting in assuring the health and safety of their co-workers. This element is also the first one listed in our corporate Health and Safety Policy Statement, which requires that "each employee recognize a *personal* responsibility for their own health and safety and for actions that affect the health and safety of fellow employees." This employee responsibility includes observing specified health and safety requirements and communicating with the designated SSO on matters such as the effectiveness of specified control measures, identification of new potential hazards, and other related issues.

An employee's failure to adhere to the requirements of this Accident Prevention Plan, the Project Specific Work and Safety Plans, or to observe specified safety requirements and restrictions or to properly use identified protective equipment may lead to injury or illness. As a result, deviation from safety and health procedures is not tolerated. Failure to comply with health and safety procedures and requirements will lead to reprimand up to and including dismissal.

Health and safety-related information will be communicated to employees through meetings, postings, written communications, and reporting of hazards.

4.2 GENERAL SAFETY AND HEALTH PROVISIONS COMPETENT PERSON

An OSHA "competent person" is defined as "one who is capable of identifying existing and predictable hazards in the surroundings or working conditions which are unsanitary, hazardous, or dangerous to employees, and who has authorization to take prompt corrective measures to eliminate them". By way of training and/or experience, a competent person is knowledgeable of applicable standards, is capable of identifying workplace hazards relating to the specific operation, and has the authority to correct them. Some standards add additional specific requirements which must be met by the competent person.

The SSO has a minimum of fifteen (15) years of field supervision in environmental site investigation activities. Mr. Bill Olsen meets the requirements as defined in the definitions of EM 385-1-1, OSHA 29 CFR Part 1920, and 29 CFR Part 1926 for knowledge of HAZWOPER and applicable construction safety.

The SSO, or his assignee, will conduct daily pre-shift tailgate safety meetings discussing the planned site activities, the hazards associated with each task, and the training required of personnel involved in these tasks. The related personal protective equipment or related work equipment will be inspected by the competent/qualified person before any work is started. No work will be conducted unless the SSO or task applicable Competent Person is present. Mr. Bill Olsen will be the competent person provided by Tetra Tech to oversee site work.

4.3 REQUIREMENTS OF PRE-TASK SAFETY AND HEALTH ANALYSIS

Tetra Tech requires that an AHA be prepared for each job task to be performed at this site to identify hazards before they occur and provide mitigation measures. The AHAs focus on the relationship between the worker, the task, the tools, and the work environment. The AHAs are reviewed at the tail gate safety meeting at the beginning of each work day. These sessions inform each person of the potential hazards for each task and give steps to take to eliminate or reduce them to an acceptable risk level. The AHAs are found in the SSHP in Section 2.0.

Personnel will be encouraged to report to the SSO any conditions or practices that they consider detrimental to their health or safety, or those they believe violate applicable health and safety standards. Such reports may be made orally or in writing. Personnel who believe that an imminent danger threatens human health or the environment are encouraged to bring the matter to the immediate attention of the SSO for resolution. Job site activities presenting danger to life or limb should be stopped immediately and reported to the SSO for resolution. Near miss incidents are to be reported to the SSO who will record the information in the site logbook and in the Tetra Tech TOTAL System.

At least one copy of this APP and SSHP will be available to site personnel. Each vehicle taken to the job site will contain a copy of the APP and SSHP to ensure quick and easy access by employees. In addition to a review of the AHAs, minor changes and any other relevant topics will be discussed by the SSO at the daily tailgate safety meeting. However, significant revisions must be discussed with the SHM and PM and approved prior to implementation.

It is the goal of Tetra Tech to continue its excellent safety performance on NAVFAC contracts to support the Navy in their safety efforts. Specifically, Tetra Tech will perform the work in a manner that is consistent with the Zero Incident philosophy. In accordance with this philosophy, it is our stated goal to plan and perform the work in a manner that integrates safety and health considerations so that it is accomplished without experiencing any worker injuries or illnesses, environmental releases/impacts, or property damage events.

4.3.1 APP and SSHP Compliance

Personnel that will be working on this project (Tetra Tech and subcontractors) are covered by this APP and SSHP. These documents shall be rigorously enforced during this field effort. Violators of the APP and SSHP will be verbally notified upon first violation, and the violation will be noted by the Tetra Tech SSO in a field logbook. Upon second violation, the violator will be notified in writing, and the Tetra Tech PM and the violator's supervisor will be notified. A third violation will result in a written notification and the violator's eviction from the sites. The written notification will be sent to the human resources development and the SHM.

Any violations that are deemed to be serious, intentional, or otherwise egregious will be subject to immediate corrective action, up to and including removal from the site, and will not require adherence to this progressive, three-step disciplinary process.

In the Tetra Tech Health and Safety Program Summary it is stated by the company Chief Executive Officer Mr. Daniel L. Batrack, "Management is responsible for ensuring that all aspects of the workplace, including offices and project locations, are safe and that any risks, hazards, and safety violations are brought to their attention, investigated, and corrected promptly."

Tetra Tech's associates are responsible for complying with the H&S policy, programs and standards, and conducting their work safely and without detriment to themselves, other employees, other individuals or property.

Compliance with this policy is mandatory. Willful violation or negligent disregard of this policy will be considered cause for disciplinary action up to and including termination."

5.0 SUBCONTRACTORS AND SUPPLIERS

Tetra Tech will employ subcontractors in the performance of work covered by this APP and SSHP. Subcontractor personnel are required to read and comply with the sections of this Tetra Tech APP and SSHP. The subcontractor personnel entering the site must sign the Site-Specific Training Documentation form included in the APP and the individual AHAs included in the SSHP. Subcontractor personnel must comply with the applicable 29 CFR §1910.120 training and medical surveillance requirements. Subcontractors are responsible for providing personal protective equipment (PPE) needed to protect personnel as specified by their safety and health planning documents and by this APP, and are directly responsible for assuring the health and safety of their employees. Subcontractors who have not met OSHA training, medical surveillance, and PPE requirements are not permitted to enter areas where exposure to hazardous materials is possible.

This APP and associated SSHP shall be rigorously enforced during this field effort. Violators of the SSHP will be verbally notified upon first violation, and the violation will be noted by the Tetra Tech SSO in a field logbook. Upon second violation, the violator will be notified in writing, and the Tetra Tech PM and the violator's supervisor will be notified. A third violation will result in a written notification and the violator's eviction from the sites. The written notification will be sent to the human resources development and the HSM.

NOTE: Any violations that are deemed to be serious, intentional, or otherwise egregious will be subject to immediate corrective action, up to and including removal from the site, and will not require adherence to this progressive, three-step disciplinary process.

Personnel will be encouraged to report to the SSO any conditions or practices that they consider detrimental to their health or safety, or those they believe violate applicable health and safety standards. Such reports may be made orally or in writing. Personnel who believe that an imminent danger threatens human health or the environment are encouraged to bring the matter to the immediate attention of the SSO for resolution. Job site activities presenting danger to life or limb should be stopped immediately and reported to the SSO for resolution.

At least one copy of this APP and the SSHP will always be available to site personnel. Each vehicle taken to the job site will contain a copy of the APP and the SSHP to ensure quick and easy access by employees. Minor changes in the SSHP procedures will be discussed at the beginning of each work day by the SSO at the daily tailgate safety meeting. Significant SSHP revisions must be discussed with the HSM and PM and approved via the SSHP amendment form.

6.0 TRAINING

Tetra Tech's emphasis on safety is introduced at the time of hire. New employees receive a general safety orientation training along with unit specific programs and processes. Tetra Tech continues to strengthen and foster this culture of safety with employees through ongoing training, mentoring, and regular communications.

Personnel who may be exposed to hazardous conditions and who will participate in site activities are required to meet the training requirements outlined in OSHA 29 CFR §1910.120, Hazardous Waste Operations and Emergency Response (HAZWOPER). Furthermore, site personnel must satisfy any specialized training requirements that are presented in the AHAs for tasks to be completed under this CTO.

6.1 MANDATORY TRAINING AND CERTIFICATIONS

Tetra Tech personnel qualification and training certification documentation will be obtained by the PM and included in Attachment III and a copy maintained on-site. Mandatory training and certifications applicable to this project include the following:

- 40 hours of introductory hazardous waste site training prior to performing work at Site 7 Rubble Disposal Area.
- Three days actual field experience for on-site managers, supervisors and general site workers (under the direction of a skilled supervisor).
- 8 hours of refresher training within the past 12 months before being cleared for site work. (Field personnel who have had introductory training more than 12 months prior to site work must complete this training again.)
- 8-hour supervisory training in accordance with 29 CFR 1910.120(e)(4) will be required for site personnel operating in a supervisory capacity.
- 30-hour OSHA Construction Safety Training
- At least two site personnel will be trained in basic First Aid and cardio pulmonary resuscitation.

- DOT training for employees preparing DOT shipping papers, hazardous waste manifests and labeling packaging and/or markings containers for transport.

Documentation of Tetra Tech introductory, supervisory, and refresher training as well as site-specific training will be maintained at the site.

6.2 SITE-SPECIFIC SAFETY AND HEALTH TRAINING

The Tetra Tech SSO will provide site-specific training to Tetra Tech employees who will perform work on this project. This will consist of a brief meeting at the beginning of each day to discuss operations planned for that day and a review of the appropriate AHAs with the planned task participants. Based on field activities, a short meeting may also be held at the end of the day to discuss the operations completed and any problems encountered.

6.3 TRAINING DOCUMENTATION

Attachment I of the SSHP documents the provision and content of the project-specific and associated training. Site personnel will be required to sign this form prior to commencement of site activities. This training documentation identifies personnel who, through record review and attendance of the site-specific training, are cleared for participation in site activities. This document shall be maintained at the site to identify and maintain an active list of trained and cleared site personnel.

6.4 MEDICAL SURVEILLANCE

Site personnel will have had a physical examination by a board certified occupational health medicine physician that meets the requirements of Tetra Tech's medical surveillance program. Documentation for medical clearances will be maintained in the Tetra Tech Pittsburgh office and made available, as necessary, and will be documented using Attachment I of the SSHP for every employee participating in on-site work activities at the sites.

7.0 SAFETY AND HEALTH INSPECTIONS

It is Tetra Tech's internal policy that the job sites involving work for Midwest Naval Facilities Engineering Command are subject to audits by corporate safety staff.

7.1 SPECIFIC ASSIGNMENT OF RESPONSIBILITY FOR A MINIMUM DAILY JOB SITE SAFETY AND HEALTH INSPECTION DURING PERIODS OF WORK ACTIVITY

Daily site safety inspections shall be conducted by the Tetra Tech SSO during this field effort to ensure safe work areas and compliance with the SSHP.

7.1.1 Proof of Inspector's training/qualifications

The corporate safety staff and the SSO are certified as HAZWOPER Supervisors under OSHA 29 CFR 1910.120(e)(4).

7.1.2 Inspection Schedule

The corporate safety staff conducts unannounced random onsite safety audits. The SSO conducts inspections at the beginning of each shift and as necessary through the duration of the project.

7.1.3 Documentation Procedures

The corporate safety staff reviews the findings of the audit with the FOL and SSO. The audit is then filed with the project files. The SSO records any deficiencies in the Field Log Book which is maintained on site for the site practices.

7.1.4 Deficiency Tracking System and Follow-up Procedures

The items noted during field audits will be communicated to the Tetra Tech HSM who maintains a corrective/preventive action database. Responsibility for resolving each item noted during these audits is assigned and tracked through resolution. Results from field audits are also regularly communicated throughout Tetra Tech through training and electronic means as a method of continuous program improvement.

8.0 ACCIDENT REPORTING

Accidents or incidents as well as near-miss events are to be reported using the Tetra Tech web-based incident reporting process. Tetra Tech employees have been educated that prompt and accurate reporting of any incidents they encounter is one of their personal health and safety responsibilities. On this project, the FOL and the SSO are responsible for assuring that the incidents and serious near miss events are reported via the Tetra Tech TOTAL incident reporting system. The HSM is responsible for assuring that the incidents and serious near-miss events are adequately investigated and is also responsible for collecting, tracking, and trending incident data (e.g., recordable cases, employee hours worked, etc.). Accidents involving near misses, injuries, or illnesses must be immediately reported to the PM and the HSM, and documented on the Tetra Tech Incident Report provided at the end of this section.

Hazardous work conditions or unsafe work practices will be corrected in a timely manner, both in the field and in the office. Upon discovery of an unsafe condition at a field site, the degree of hazard must be assessed and action may range from complete shutdown of the operation to phased correction. The Tetra Tech employees working on this project will have "Stop Work" authority in the event that a potentially serious action or condition is observed. Tetra Tech will shut down a project during which life threatening, severe environmental impact, or significant equipment or property damage conditions may exist. Employees shall follow specific information for emergency evacuation and PPE usage as described in this APP and associated SSHP. The PM and Navy RPM must be contacted regarding each incident.

8.1 INCIDENT REPORTING/NOTIFICATIONS

Any occupational incidents meeting the definitions presented below that occur on this project will be reported to the Contracting Officer/Representative (CO/COR) as soon as possible, but not later than 24 hours from the time of the event. Incidents that must be reported to the CO/COR include those that result in any of the following:

- Fatalities
- Permanent total disability
- Permanent partial disability
- Hospitalization of 3 or more people resulting from a single occurrence
- Property damage of \$200,000 or more

With consultation with the PHSO, the PM will coordinate with the Program Manager in making any such notifications to the CO/COR

8.2 INCIDENT REPORTING PROCEDURES

Following this procedure is necessary for documenting of the information obtained at the time of the incident.

8.2.1 TOTAL Incident Reporting System

TOTAL is Tetra Tech's new online incident reporting system. Site employees can use TOTAL to directly report health and safety incidents, notify key personnel, and initiate the process for properly investigating and addressing the causes of incidents, including near-miss events.

An incident is considered any unplanned event. It may include several types of near misses, events where no loss was incurred, or incidents that resulted in injuries or illness, property or equipment damage, chemical spills, fires, or damage to motor vehicles. Some examples of incidents are as follows:

- Work-related injury or illness
- Suspected hazardous substance exposure over the allowable exposure limit
- Automobile or vehicle-related incidents
- Significant property or equipment damage
- An unplanned fire or explosion
- An unplanned spill or release (including air releases) to the environment
- A permit or permit equivalent exceedance
- Unexpected contact with damage to aboveground or below ground utilities

A near miss incident is described as an undesired event or workplace condition which under slightly different circumstances had a reasonable probability of resulting in one of the outcomes described above. Some examples of near miss incidents are as follows:

- Tools falling from overhead work near workers below
- Unexpected contact without damage to aboveground or below ground utilities
- Discovery of an unknown and potentially hazardous material, or anomaly

Incidents, including near-miss incidents, involving Tetra Tech personnel or Tetra Tech subcontractors under Tetra Tech's immediate direction shall be reported and investigated.

TOTAL looks like the incident reporting form. TOTAL is an intuitive system that will guide you through the necessary steps to report an incident within 24 hours of its occurrence. Behind the scenes, TOTAL is a tool for Tetra Tech to better track incidents, analyze root causes, implement corrective action plans, and share lessons learned. TOTAL is maintained on the secure Tetra Tech Intranet site at <https://my.tetrattech.com/>.

8.2.2 How to Access TOTAL to Report an Incident

Once on the “My Tetra Tech” web site (<https://my.tetrattech.com/>), TOTAL can be found under the “Health and Safety” tab, by clicking on the Incident Reporting, select “Report an Incident (TOTAL)”. Then, near the bottom of the screen, click on “Launch TOTAL Application”. This will connect you directly to TOTAL. Next, click on “Enter new incident”, and follow the steps as presented. The system was designed to be “fail safe” in that the employee will not be able to skip any required information. TOTAL can also be accessed directly from the internet using the following web address: <http://totalhs.tetrattech.com/>.

Note: When using the system outside the Tetra Tech intranet system or when operating in a wireless mode, a VPN connection will be required. The speed of the application may be affected dependent upon outside factors such as connection, signal strength, etc. Enter the system using your network user name and password. The user name should be in the following format - TT\firstname.lastname.

If any Tetra Tech personnel are injured or develop an illness as a result of working on site, and they are at a remote location where they cannot establish reliable internet connection with TOTAL to report an incident, then the employee will complete a hard-copy Tetra Tech “Incident Report Form” and submit that to the HSM as soon as possible but not less than the same day as the event..

Report Date	Report Prepared By	Incident Report Number
INSTRUCTIONS: All incidents (including those involving subcontractors under direct supervision of Tetra Tech personnel) must be documented on the IR Form. Complete any additional parts to this form as indicated below for the type of incident selected.		
TYPE OF INCIDENT (Check all that apply)		Additional Form(s) Required for this type of incident
Near Miss (No losses, but could have resulted in injury, illness, or damage)	<input type="checkbox"/>	Complete IR Form Only
Injury or Illness	<input type="checkbox"/>	Complete Form IR-A; Injury or Illness
Property or Equipment Damage, Fire, Spill or Release	<input type="checkbox"/>	Complete Form IR-B; Damage, Fire, Spill or Release
Motor Vehicle	<input type="checkbox"/>	Complete Form IR-C; Motor Vehicle
INFORMATION ABOUT THE INCIDENT		
Description of Incident		
<hr/> <hr/> <hr/>		
Date of Incident	Time of Incident	
	_____ AM <input type="checkbox"/> PM <input type="checkbox"/> OR Cannot be determined <input type="checkbox"/>	
Weather conditions at the time of the incident	Was there adequate lighting?	
	_____ Yes <input type="checkbox"/> No <input type="checkbox"/>	
Location of Incident		
_____ Was location of incident within the employer's work environment? Yes <input type="checkbox"/> No <input type="checkbox"/>		
Street Address	City, State, Zip Code and Country	
Project Name/Number	Client:	
Tt Supervisor or Project Manager	Was supervisor on the scene?	
	Yes <input type="checkbox"/> No <input type="checkbox"/>	
WITNESS INFORMATION (attach additional sheets if necessary)		
Name	Company	
Street Address	City, State and Zip Code	
Telephone Number(s)		

CORRECTIVE ACTIONS				
Corrective action(s) immediately taken by unit reporting the incident:				
<hr style="border: 0; border-top: 1px solid black; margin-bottom: 5px;"/> <hr style="border: 0; border-top: 1px solid black; margin-bottom: 5px;"/>				
Corrective action(s) still to be taken (by whom and when):				
<hr style="border: 0; border-top: 1px solid black; margin-bottom: 5px;"/> <hr style="border: 0; border-top: 1px solid black; margin-bottom: 5px;"/>				
ROOT CAUSE ANALYSIS LEVEL REQUIRED				
Root Cause Analysis Level Required: Level - 1 <input type="checkbox"/> Level - 2 <input type="checkbox"/> None <input type="checkbox"/>				
Root Cause Analysis Level Definitions				
Level - 1	<p>Definition: A Level 1 RCA is conducted by an individual(s) with experience or training in root cause analysis techniques and will conduct or direct documentation reviews, site investigation, witness and affected employee interviews, and identify corrective actions. Activating a Level 1 RCA and identifying RCA team members will be at the discretion of the Corporate Administration office.</p> <p>The following events may trigger a Level 1 RCA:</p> <ul style="list-style-type: none"> ▪ Work related fatality ▪ Hospitalization of one or more employee where injuries result in total or partial permanent disability ▪ Property damage in excess of \$75,000 ▪ When requested by senior management 			
Level - 2	<p>Definition: A Level 2 RCA is self performed within the operating unit by supervisory personnel with assistance of the operating unit HSR. Level 2 RCA will utilize the 5 Why RCA methodology and document the findings on the tools provided.</p> <p>The following events will require a Level 2 RCA:</p> <ul style="list-style-type: none"> ▪ OSHA recordable lost time incident ▪ Near miss incident that could have triggered a Level 1 RCA ▪ When requested by senior management 			
Complete the Root Cause Analysis Worksheet and Corrective Action form. Identify a corrective action(s) for each root cause identified within each area of inquiry.				
NOTIFICATIONS				
Title	Printed Name	Signature	Telephone Number	Date
Project Manager or Supervisor				
Site Safety Coordinator or Office H&S Representative				
Operating Unit H&S Representative				
Other: _____				

The signatures provided above indicate that appropriate personnel have been notified of the incident.



INSTRUCTIONS: Complete all sections below for incidents involving injury or illness. Do NOT leave any blanks. Attach this form to the IR FORM completed for this incident.		
Incident Report Number: (From the IR Form)		
EMPLOYEE INFORMATION		
Company Affiliation		
Tetra Tech Employee? <input type="checkbox"/>		Tetra Tech subcontractor employee (directly supervised by Tt personnel)? <input type="checkbox"/>
Full Name	Company (if not Tt employee)	
Street Address, City, State and Zip Code		Address Type
_____		Home address (for Tt employees) <input type="checkbox"/>
_____		Business address (for subcontractors) <input type="checkbox"/>
Telephone Numbers		
Work: _____	Home: _____	Cell: _____
Occupation (regular job title)	Department	
Was the individual performing regular job duties?		Time individual began work
Yes <input type="checkbox"/> No <input type="checkbox"/>		_____ AM <input type="checkbox"/> PM <input type="checkbox"/> OR Cannot be determined <input type="checkbox"/>
Safety equipment		
Provided? Yes <input type="checkbox"/> No <input type="checkbox"/>	Type(s) provided: <input type="checkbox"/> Hard hat <input type="checkbox"/> Protective clothing	
Used? Yes <input type="checkbox"/> No <input type="checkbox"/> If no, explain why	<input type="checkbox"/> Gloves <input type="checkbox"/> High visibility vest	
_____	<input type="checkbox"/> Eye protection <input type="checkbox"/> Fall protection	
_____	<input type="checkbox"/> Safety shoes <input type="checkbox"/> Machine guarding	
_____	<input type="checkbox"/> Respirator <input type="checkbox"/> Other (list) _____	
NOTIFICATIONS		
Name of Tt employee to whom the injury or illness was first reported	Was H&S notified within one hour of injury or illness?	
	Yes <input type="checkbox"/> No <input type="checkbox"/>	
Date of report	H&S Personnel Notified	
Time of report	Time of Report	
If subcontractor injury, did subcontractor's firm perform their own incident investigation?		
Yes <input type="checkbox"/> No <input type="checkbox"/> If yes, request a copy of their completed investigation form/report and attach it to this report.		

INJURY / ILLNESS DETAILS			
What was the individual doing just before the incident occurred? Describe the activity as well as the tools, equipment, or material the individual was using. Be specific. Examples: "Climbing a ladder while carrying roofing materials"; "Spraying chlorine from a hand sprayer"; "Daily computer key-entry"			
<hr/> <hr/> <hr/>			
What Happened? Describe how the injury occurred. Examples: "When ladder slipped on wet floor and worker fell 20 feet"; "Worker was sprayed with chlorine when gasket broke during replacement"; Worker developed soreness in wrist over time"			
<hr/> <hr/> <hr/>			
Describe the object or substance that directly harmed the individual: Examples: "Concrete floor"; "Chlorine"; "Radial Arm Saw". If this question does not apply to the incident, write "Not Applicable".			
<hr/> <hr/> <hr/>			
MEDICAL CARE PROVIDED			
Was first aid provided at the site: Yes <input type="checkbox"/> No <input type="checkbox"/> If yes, describe the type of first aid administered and by whom?			
<hr/>			
Was treatment provided away from the site: Yes <input type="checkbox"/> No <input type="checkbox"/> If yes, provide the information below.			
Name of physician or health care professional		Facility Name	
<hr/>		<hr/>	
Street Address, City State and Zip Code		Type of Care?	
<hr/> <hr/>		Was individual treated in emergency room? Yes <input type="checkbox"/> No <input type="checkbox"/> Was individual hospitalized overnight as an in-patient? Yes <input type="checkbox"/> No <input type="checkbox"/> Did the individual die? Yes <input type="checkbox"/> No <input type="checkbox"/> If yes, date: _____ Will a worker's compensation claim be filed? Yes <input type="checkbox"/> No <input type="checkbox"/>	
Telephone Number			
<hr/>			
NOTE: Attach any police reports or related diagrams to this report.			
SIGNATURES			
I have reviewed this report and agree that all the supplied information is accurate			
Affected individual (print)	Affected individual (signature)	Telephone Number	Date
<hr/>	<hr/>	<hr/>	<hr/>

This form contains information relating to employee health and must be used in a manner that protects the confidentiality of the employee to the extent possible while the information is being used for occupational safety and health purposes.



INSTRUCTIONS:

Complete all sections below for incidents involving property/equipment damage, fire, spill or release.
Do NOT leave any blanks.
Attach this form to the IR FORM completed for this incident.

Incident Report Number: (From the IR Form)

TYPE OF INCIDENT (Check all that apply)

Property Damage Equipment Damage Fire or Explosion Spill or Release

INCIDENT DETAILS

Results of Incident: Fully describe damages, losses, etc.

Response Actions Taken:

Responding Agency(s) (i.e. police, fire department, etc.)

Agency(s) Contact Name(s)

DAMAGED ITEMS (List all damaged items, extent of damage and estimated repair cost)

Item:	Extent of damage:	Estimated repair cost

SPILLS / RELEASES (Provide information for spilled/released materials)

Substance	Estimated quantity and duration	Specify Reportable Quantity (RQ)
		_____ Exceeded? Yes <input type="checkbox"/> No <input type="checkbox"/> NA <input type="checkbox"/>

FIRES / EXPLOSIONS (Provide information related to fires/explosions)

Fire fighting equipment used? Yes No If yes, type of equipment: _____

NOTIFICATIONS

Required notifications	Name of person notified	By whom	Date / Time
Client: _____ Yes <input type="checkbox"/> No <input type="checkbox"/>			
Agency: _____ Yes <input type="checkbox"/> No <input type="checkbox"/>			
Other: _____ Yes <input type="checkbox"/> No <input type="checkbox"/>			

Who is responsible for reporting incident to outside agency(s)? Tt Client Other Name: _____

Was an additional written report on this incident generated? Yes No If yes, place in project file.

INSTRUCTIONS:			
<p>Complete all sections below for incidents involving motor vehicle accidents. Do NOT leave any blanks. Attach this form to the IR FORM completed for this incident.</p>			
Incident Report Number: (From the IR Form)			
INCIDENT DETAILS			
Name of road, street, highway or location where accident occurred		Name of intersecting road, street or highway if applicable	
County	City	State	
Did police respond to the accident?		Did ambulance respond to the accident?	
Yes <input type="checkbox"/> No <input type="checkbox"/>		Yes <input type="checkbox"/> No <input type="checkbox"/>	
Name and location of responding police department		Ambulance company name and location	
Officer's name/badge #			
Did police complete an incident report? Yes <input type="checkbox"/> No <input type="checkbox"/> If yes, police report number: _____ Request a copy of completed investigation report and attach to this form.			
VEHICLE INFORMATION			
How many vehicles were involved in the accident? _____ (Attach additional sheets as applicable for accidents involving more than 2 vehicles.)			
Vehicle Number 1 – Tetra Tech Vehicle		Vehicle Number 2 – Other Vehicle	
Vehicle Owner / Contact Information		Vehicle Owner / Contact Information	
Color		Color	
Make		Make	
Model		Model	
Year		Year	
License Plate #		License Plate #	
Identification #		Identification #	
Describe damage to vehicle number 1		Describe damage to vehicle number 2	
Insurance Company Name and Address		Insurance Company Name and Address	
Agent Name		Agent Name	
Agent Phone No.		Agent Phone No.	
Policy Number		Policy Number	

DRIVER INFORMATION						
Vehicle Number 1 – Tetra Tech Vehicle				Vehicle Number 2 – Other Vehicle		
Driver's Name				Driver's Name		
Driver's Address				Driver's Address		
Phone Number				Phone Number		
Date of Birth				Date of Birth		
Driver's License #				Driver's License #		
Licensing State				Licensing State		
Gender		Male <input type="checkbox"/> Female <input type="checkbox"/>		Gender		Male <input type="checkbox"/> Female <input type="checkbox"/>
Was traffic citation issued to Tetra Tech driver? Yes <input type="checkbox"/> No <input type="checkbox"/>				Was traffic citation issued to driver of other vehicle? Yes <input type="checkbox"/> No <input type="checkbox"/>		
Citation #				Citation #		
Citation Description				Citation Description		
PASSENGERS IN VEHICLES (NON-INJURED)						
List all non-injured passengers (excluding driver) in each vehicle. Driver information is captured in the preceding section. Information related to persons injured in the accident (non-Tt employees) is captured in the section below on this form. Injured Tt employee information is captured on FORM IR-A						
Vehicle Number 1 – Tetra Tech Vehicle				Vehicle Number 2 – Other Vehicle		
How many passengers (excluding driver) in the vehicle? ____				How many passengers (excluding driver) in the vehicle? ____		
Non-Injured Passenger Name and Address				Non-Injured Passenger Name and Address		
Non-Injured Passenger Name and Address				Non-Injured Passenger Name and Address		
Non-Injured Passenger Name and Address				Non-Injured Passenger Name and Address		
INJURIES TO NON-TETRATECH EMPLOYEES						
Name of injured person 1				Address of injured person 1		
Age	Gender	Car No.	Location in Car	Seat Belt Used?	Ejected from car?	Injury or Fatality?
	Male <input type="checkbox"/> Female <input type="checkbox"/>			Yes <input type="checkbox"/> No <input type="checkbox"/>	Yes <input type="checkbox"/> No <input type="checkbox"/>	Injured <input type="checkbox"/> Died <input type="checkbox"/>
Name of injured person 2				Address of injured person 2		
Age	Gender	Car No.	Location in Car	Seat Belt Used?	Ejected from car?	Injury or Fatality?
	Male <input type="checkbox"/> Female <input type="checkbox"/>			Yes <input type="checkbox"/> No <input type="checkbox"/>	Yes <input type="checkbox"/> No <input type="checkbox"/>	Injured <input type="checkbox"/> Died <input type="checkbox"/>
OTHER PROPERTY DAMAGE						
Describe damage to property other than motor vehicles						
Property Owner's Name				Property Owner's Address		



COMPLETE AND SUBMIT DIAGRAM DEPICTING WHAT HAPPENED

A large, empty rectangular area with a thin black border, intended for the user to draw a diagram depicting the incident. The area is currently blank.

9.0 PLANS (PROGRAMS, PROCEDURES) REQUIRED BY THE SAFETY MANUAL

Based on a risk assessment of the planned activities, the following indicated plans are applicable to this work and are included in or appended to this APP.

Yes/NA		Yes/NA	
<input type="checkbox"/> <input checked="" type="checkbox"/>	Layout Plans	<input type="checkbox"/> <input checked="" type="checkbox"/>	Night Operations Lighting Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Emergency Response Plans	<input checked="" type="checkbox"/> <input type="checkbox"/>	Fire Prevention Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Procedures and Tests	<input type="checkbox"/> <input checked="" type="checkbox"/>	Wild Land Fire Management Plan
<input checked="" type="checkbox"/> <input type="checkbox"/>	Spill Plans	<input type="checkbox"/> <input checked="" type="checkbox"/>	Hazardous Energy Control (LO/TO) Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Firefighting Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Critical Lift Plan
<input checked="" type="checkbox"/> <input type="checkbox"/>	Posting of Emergency Telephone Numbers	<input type="checkbox"/> <input checked="" type="checkbox"/>	Contingency Plan for Severe Weather
<input type="checkbox"/> <input checked="" type="checkbox"/>	Man Overboard/Abandon Ship	<input type="checkbox"/> <input checked="" type="checkbox"/>	Float Plan
<input checked="" type="checkbox"/> <input type="checkbox"/>	Medical Support (Onsite/Offsite)	<input type="checkbox"/> <input checked="" type="checkbox"/>	Site-Specific Fall Protection & Prevention Plan
<input checked="" type="checkbox"/> <input type="checkbox"/>	Plan for Prevention of Drug and Alcohol Abuse	<input type="checkbox"/> <input checked="" type="checkbox"/>	Demolition Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Site Sanitation Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Excavation/Trenching Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Access and Haul Road Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Emergency Rescue (Tunneling) Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Respiratory Protection Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Underground Construction Fire Prevention and Protection Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Health Hazard Control Program	<input checked="" type="checkbox"/> <input type="checkbox"/>	Compressed Air Plan
<input checked="" type="checkbox"/> <input type="checkbox"/>	Hazard Communication Program	<input type="checkbox"/> <input checked="" type="checkbox"/>	Formwork/Shoring Erection and Removal Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Process Safety Management Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Pre-Cast Concrete Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Lead Abatement Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Lift Slab Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Asbestos Abatement Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Steel Erection Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Radiation Safety Program	<input checked="" type="checkbox"/> <input type="checkbox"/>	SSHP for HTRW Work
<input type="checkbox"/> <input checked="" type="checkbox"/>	Abrasive Blasting Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Blasting Safety Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Heat/Cold Stress Monitoring Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Diving Plan
<input type="checkbox"/> <input checked="" type="checkbox"/>	Crystalline Silica Monitoring Plan	<input type="checkbox"/> <input checked="" type="checkbox"/>	Confined Space Program

The follow sections further describe the plans and/or identify the location of the information.

9.1 SPILL PLANS

Spill Plans for this site are found in Section 9.2 of the SSHP.

9.2 POSTING OF EMERGENCY TELEPHONE NUMBERS

See Table 14-1 of the SSHP

9.3 MEDICAL SUPPORT (ONSITE/OFFSITE)

See Section 13.0 of the SSHP

9.4 PLAN FOR PREVENTION OF DRUG AND ALCOHOL ABUSE

The Tetra Tech Substance Abuse policy prohibits the unlawful manufacture, distribution, dispensation, possession, or use of alcohol, illegal drugs or intoxicants on any Company-owned or leased space, client facility, or work site. Use of these substances, regardless of whether it is determined that such use occurred during the work hours or at a company work location, or whether such use actually affected an employee's ability to perform his or her job, is a violation of this policy.

In order to enforce this policy, the Company may investigate potential violations and require personnel to undergo drug/alcohol screening, including urinalysis, blood tests or other appropriate tests. The Company may also conduct searches of all areas of the Company premises, including, but not limited to work areas, rest rooms, break areas, personal articles, employee's clothes, desks, work stations, lockers, and personal and Company-owned vehicles.

Violation of this policy or any of its provisions may result in disciplinary action up to and including termination of employment. Employees may be subject to discipline up to and including termination for refusing to cooperate with searches or investigations, refusing to submit to screening, or failing to execute consent forms when required by supervisors.

Employees who are convicted of any criminal drug statute for a violation occurring in the workplace are required to notify their Human Resources Representative no later than five days after the conviction. It shall also be the responsibility of each employee who observes or has knowledge of another employee in a condition which impairs the employee to perform his or her job duties or who presents a hazard to the safety and welfare of others to promptly report that fact to his or her immediate supervisor.

9.5 HAZARD COMMUNICATION PROGRAM

See Section 10.5 of the SSHP

9.6 FIRE PREVENTION PLAN

Proper housekeeping is an essential component of fire prevention. Rubbish pickup from each site will be arranged with site contacts as needed. Storage of excessive quantities of empty boxes and other combustible materials is discouraged. Site personnel will avoid placing flammable materials near baseboard heaters. Storage of supplies and field equipment shall not be allowed to interfere with access to doors, exits, fire ladders, or fire extinguishers. Stairways will be kept clear of items that can be tripped over. The areas under stairways that are egress routes should will not be used to store combustibles. Section 13.0 discusses fire extinguishers.

9.7 CONTINGENCY PLAN FOR SEVERE WEATHER

Project tasks under this Scope of Work will be performed outdoors. As a result, inclement weather may be encountered. In the event that adverse weather (electrical storms, tornadoes, etc.) conditions arise, the FOL and/or the SSO will be responsible for temporarily suspending or terminating activities until hazardous conditions no longer exist.

9.8 COMPRESSED AIR PLAN

It is the responsibility of the SSO to assure that all compressed gas cylinders are handled stored and used according to the procedures outlined in this document. Further, the SSO shall ensure that affected Tetra Tech personnel are trained in the safe handling procedures for compressed gases present at the site.

- Compressed cylinders must be stored outside of buildings and away from doors, windows, and building air intakes.
- Compressed gas cylinders must be protected from adverse weather, heat, and any other type of adverse atmosphere.
- The storage area should be paved and easily accessible to delivery trucks and users.

- Cylinders must be secured and locked in an upright position with chains or straps and secured to a poll or post.
- Cylinder storage areas must be designed to prevent flame and spark contact with the cylinders.
- Empty cylinders are to be stored separately from full cylinders, and tagged with surveyor tape.

When transported, cylinders must be secured to prevent rolling or cylinder damage. Cylinders shall only be transported in a van or pick-up truck, and only when the valve cap is secured. Cylinders should only be transported using a dolly or other piece of material handling equipment.

- Cylinders then must be secured during use and located in a well ventilated area.
- Never use of oil and grease as lubricants with on system fittings.

9.9 SSHP FOR HTRW WORK

See Appendix A.

10.0 RISK MANAGEMENT PROCESSES

The AHA defines the activity being performed, the hazards posed, and control measures required to perform the work safely. Site workers are briefed on the AHA before doing the work and their input is solicited before, during, and after the performance of work to further identify the hazards posed and control measures required. Figure 11-1 details the AHAs for the activities being provided in support of the Site 7 Investigation field activities.

APPENDIX A

SITE SAFETY AND HEALTH PLAN

**SITE SAFETY AND HEALTH PLAN
TABLE OF CONTENTS**

SITE SAFETY AND HEALTH PLAN

1.0	PLAN ORGANIZATION AND RESPONSIBILITIES	1
1.1	STAFF ORGANIZATION, QUALIFICATIONS AND RESPONSIBILITIES	1
1.2	RESPONSIBILITIES OF HEALTH AND SAFETY PERSONNEL	1
1.3	STOP WORK AUTHORIZATION.....	2
1.4	SITE INFORMATION AND PERSONNEL ASSIGNMENTS.....	3
1.5	SITE DESCRIPTION AND CONTAMINATION CHARACTERIZATION.....	4
1.5.1	Previous Environmental Sampling Studies.....	4
1.6	POTENTIAL CONTAMINANTS OF CONCERN	6
1.6.1	VOCs.....	6
1.6.2	Dioxins.....	6
1.6.3	Metals.....	6
1.6.4	Potential Exposure Concerns.....	7
2.0	HAZARD/RISK ANALYSIS	8
2.1	SPECIFIC SITE ACTIVITIES	8
3.0	TRAINING, GENERAL AND PROJECT-SPECIFIC	28
3.1	GENERAL	28
3.2	SITE SPECIFIC.....	28
4.0	PERSONAL PROTECTIVE EQUIPMENT.....	30
5.0	MEDICAL SURVILLANCE.....	32
6.0	EXPOSURE MONITORING/AIR SAMPLING PROGRAM	33
6.1	INSTRUMENTS AND USE	33
6.1.1	FID Action Level.....	34
6.2	LANDTEC GEM 2000	34
6.3	INSTRUMENT MAINTENANCE AND CALIBRATION	34
6.4	DOCUMENTING INSTRUMENT READINGS	35
7.0	TEMPERATURE EXTREMES.....	37
7.1	HEAT RELATED DISORDERS.....	37
7.1.1	Heat Rash	37
7.1.2	Heat Cramps	38
7.1.3	Heat Exhaustion.....	38
7.1.4	Heat Stroke	39
7.1.5	Controlling Heat Stress	39
7.1.6	Temperature Extremes – Heat Stress Indication.....	42
7.1.7	Heat Stress Treatment and Field Management.....	43
7.2	COLD STRESS RELATED DISORDERS.....	44
7.2.1	Signs and Symptoms	44
7.2.2	Control Measures.....	45
7.2.3	Monitoring.....	46
7.2.4	Special Conditions - Evaluation and Control.....	46
7.2.5	Work - Warming Regimen.....	48

**SITE SAFETY AND HEALTH PLAN
TABLE OF CONTENTS**

8.0	STANDARD OPERATING PROCEDURES, ENGINEERING CONTROLS AND WORK PRACTICES	54
8.1	SITE RULES/PROHIBITIONS	54
8.2	MATERIAL HANDLING PROCEDURES	55
8.2.1	Spill Contingency	56
8.2.2	Potential Spill Areas	56
8.2.3	Leak and Spill Detection	56
8.2.4	Personnel Training and Spill Prevention	57
8.2.5	Spill Control Plan.....	57
8.3	DRUM/CONTAINER/TANK HANDLING	57
9.0	SITE CONTROL MEASURES	59
9.1	CONTROL ZONES	59
9.1.1	Exclusion Zone.....	59
9.1.2	Contamination Reduction Zone	59
9.1.3	Support Zone	60
9.2	SITE VISITORS	60
9.3	SITE SECURITY	60
9.4	MATERIAL SAFETY DATA SHEET (MSDS) REQUIREMENTS	61
9.5	COMMUNICATION	61
9.6	CONFINED SPACE ENTRY	61
9.7	DRILL/INCIDENT AFTER-ACTION CRITIQUE	61
10.0	PERSONAL HYGIENE AND DECONTAMINATION	62
10.1	RESPONSIBILITIES	62
10.2	DECONTAMINATION	62
10.3	CONTAMINATION AVOIDANCE.....	63
10.4	DECONTAMINATION GUIDANCE.....	63
10.5	CLOSURE OF THE DECONTAMINATION LINE	63
11.0	EQUIPMENT DECONTAMINATION	64
12.0	EMERGENCY EQUIPMENT AND FIRST AID	65
12.1	FIRST AID.....	66
13.0	EMERGENCY ACTION PLAN AND CONTINGENCY PROCEDURES	67
13.1	EMERGENCY PLANNING.....	67
13.2	PERSONNEL AND LINES OF AUTHORITY FOR EMERGENCY SITUATIONS	68
13.3	CRITERIA AND PROCEDURES FOR EMERGENCY RECOGNITION AND SITE EVACUATION	70
13.3.1	Emergency Recognition	70
13.3.2	Site Evacuation	70
13.3.3	Emergency Alarm Systems.....	72
13.4	DECONTAMINATION AND MEDICAL TREATMENT OF INJURED PERSONNEL	73
13.5	ROUTE MAPS AND PHONE NUMBERS FOR EMERGENCY RESPONDERS	73
13.5.1	Emergency Route to Memorial Hospital	75
13.6	CRITERIA FOR ALERTING LOCAL COMMUNITY RESPONDERS	76
14.0	REFERENCES, MATERIALS AND DOCUMENTATION	77

LIST OF TABLES

1-1	Comparison of Concentrations With Current Occupational Exposure Limits	4
7-1	Permissible Heat Exposure Threshold Limit Values	42
7-2	Heat Strain Symptoms	39
7-3	Progressive Clinical Presentation of Hypothermia.....	51
7-4	Cooling Power of Wind on Exposed Flesh Expressed as Equivalent Temperatures	52
7-5	Threshold Limit Values Work/Warm Up Schedule for Four Hour Shift.....	53
13-1	Emergency Contacts Site 7 Rubble Disposal Area	74

LIST OF FIGURES

2-1	Activity Hazard Analyses.....	7
6-1	Documentation of Field Calibration.....	36
13-1	Medical Data Sheet.....	69
13-2	Safe Place of Refuge	71
13-3	Map of Route to Medical Center	75

ATTACHMENTS

- I Site-Specific Training Documentation
- II Employee Training/Qualifications/Medical Clearances
- III Equipment Inspection Checklist
- IV Tetra Tech Standard Operating Procedures (SOP) Utility Location and Excavation Clearance
- V OSHA Poster

1.0 PLAN ORGANIZATION AND RESPONSIBILITIES

This SSHP has been developed to provide safe work practices and procedures for Tetra Tech and subcontractor personnel conducting site activities in support of the Site Investigation at Site 7 Rubble Disposal Area. The objective of the field work is to collect additional samples in order to obtain current analytical data.

This SSHP was developed using historical site background information regarding known or suspected chemical contaminants, previous site visits, and potential physical hazards that may be associated with the proposed work at the site. This SSHP will be modified, as necessary, if new information becomes available, and changes will be made with the approval of the Tetra Tech SSO and the CLEAN HSM. Requests for modifications to the SSHP should be directed to the SSO. The SSO will notify the HSM, who will then notify affected personnel of the changes.

1.1 STAFF ORGANIZATION, QUALIFICATIONS AND RESPONSIBILITIES

Section 4.0 of the APP outlines the project organization qualifications and responsibilities.

1.2 RESPONSIBILITIES OF HEALTH AND SAFETY PERSONNEL

The HSM, dependent upon the contaminant-related hazards on the project, shall be a Certified Industrial Hygienist (CIH) and/or Certified Safety Professional (CSP).

- The HSM shall have 3 years of experience managing safety and occupational health at hazardous waste site cleanup operations.
- The HSM shall enlist the support of safety and occupational health professionals with appropriate education and experience when working on sites with multiple (chemical, safety, ionizing radiation) hazards.
- The HSM shall be responsible for the following actions:
 - Developing, maintaining, and overseeing implementation of the SSHP
 - Visiting the project as needed to audit the effectiveness of the SSHP
 - Remaining available for project emergencies
 - Developing modifications to the SSHP as needed

- Evaluating occupational exposure monitoring/air sampling data and adjusting SSHP requirements as necessary
- Serving as a Quality Control staff member
- Approving the SSHP by signature.

The SSO is required at site operations.

- The SSO shall have a minimum 1 year experience implementing safety and occupational health procedures at cleanup operations.
- The SSO shall have training and experience to conduct exposure monitoring/air sampling and select/adjust protective equipment use.
- The SSO shall have the authority and is responsible for the following actions
 - Being present anytime cleanup operations are being performed to implement the SSHP.
 - Inspecting site activities to identify safety and occupational health deficiencies and correct them.
 - Coordinating changes/modifications to the SSHP with the SHM, site superintendent, and contracting officer.
 - Conducting project specific training.

1.3 STOP WORK AUTHORIZATION

ALL employees are empowered, authorized, and responsible to STOP WORK at any time when an imminent and uncontrolled safety or health hazard is perceived. In a Stop Work event (immediately after the involved task has been shut down and the work area has been secured in a safe manner) the employee shall contact the PM and the Corporate Health and Safety Manager. Through observations and communication, all parties involved shall then develop, communicate, and implement corrective actions necessary and appropriate to modify the task and to resume work.

1.4 SITE INFORMATION AND PERSONNEL ASSIGNMENTS

Site Name: Site 7 Rubble Disposal Area **Client Contact:** Charles Cook

Address: Gulfport, Mississippi **Phone Number:** (904) 542-6409

Site Point of Contact: Gordon Crane **Phone Number:** (228) 871-2485

Project Team:

Tetra Tech Personnel:	Discipline/Tasks Assigned:	Phone:
<u>Gregory Roof</u>	<u>PM</u>	<u>(904) 730-4669 X 215</u>
<u>Bill Olson P.G.</u>	<u>FOL/SSO</u>	<u>(850) 385-9866 X 1359</u>
<u>Matthew M. Soltis, CIH, CSP</u>	<u>HSM</u>	<u>(412) 921-8912</u>
<u>James K. Laffey</u>	<u>PHSO</u>	<u>(412) 921-8678</u>

Subcontractor Personnel:	Affiliation/Task Assigned:	Phone:
<u>TBD</u>	<u>_____</u>	<u>_____</u>
<u>TBD</u>	<u>_____</u>	<u>_____</u>
<u>TBD</u>	<u>_____</u>	<u>_____</u>

1.5 SITE DESCRIPTION AND CONTAMINATION CHARACTERIZATION

Site 7 - Rubble Disposal Area was operational from 1978 to 1984 during which time it was the disposal area for general rubble and debris generated at NCBC Gulfport. The disposal operation included concrete, lumber, scrap metals, tree clippings and similar inert material. The majority of the waste disposed was due to construction and building demolitions. There have been no reports or evidence of hazardous waste being disposed in the site. Waste was buried just below the surface.

In 1984 landfill activities at Site 7 continued even after it was recommended at that time to post "No dumping" signs to discourage additional dumping. The site was continued to be used as a dumping site. It remained undeveloped until the current golf course fairway was constructed in late 1998.

1.5.1 Previous Environmental Sampling Studies

Based on an evaluation of previous groundwater samples taken in the vicinity of Site 7, low levels of volatile organic compounds (VOCs), metals, and dioxins have been reported. The majority of these substances were at concentrations below Federal drinking water standards. From a worst case scenario, methylene chloride is the only contaminant of concern (COC) that could potentially reach concentrations that exceed current Occupational Exposure Limits (OEL). These results for VOCs are summarized in Table 1-1.

**TABLE 1-1
COMPARISON OF VOC WORST-CASE AIR CONCENTRATIONS
WITH CURRENT OCCUPATIONAL EXPOSURE LIMITS**

COC	Highest Concentration Previously Detected in Groundwater (μL)	Worst-Case Air Concentration That Could Be Encountered (ppm)	Current OEL
Chloroform	14	0.43	ACGIH: 9 ppm TWA ₈ OSHA: 50 ppm, STEL
Methylene Chloride	5,200	199	OSHA: 25 ppm, TWA ₈ OSHA: 125 ppm, STEL
Toluene	8	0.58	ACGIH: 20 ppm TWA ₈ OSHA: 300 ppm, STEL
Trichloroethene	5	0.37	ACGIH: 9 ppm TWA ₈ 25 ppm STEL

Table Notes:

TWA₈: Average air concentration over an 8-hour work period that is not to be exceeded

ACGIH STEL: Concentration in air that is not be exceeded for more than 15 minutes more than 4 times per day

As indicated in this table, from a worst-case scenario, concentrations immediately above a captured air phase above contaminated groundwater (such as in the head space of a monitoring well) could reach concentrations that exceed permissible limits. In regarding the results of this data evaluation, it is important to recognize the following:

- the planned work area is outdoors, with ample natural ventilation that will reduce any airborne VOCs through dilution and dispersion,
- the groundwater value used in this evaluation was the highest concentration detected during the two most recent groundwater monitoring events,

As a result of these factors, it is very unlikely that workers participating in this activity will encounter any airborne concentrations of any of the COCs that would represent an occupational exposure concern. To monitor this route, real-time direct reading monitoring instruments will be used (as described in Section 7.0). This will be performed during the intrusive tasks of groundwater sampling and IDW management activities, as these tasks are the most likely to involve encountering/releasing any VOCs into the air phase.

1.6 POTENTIAL CONTAMINANTS OF CONCERN

1.6.1 VOCs

VOCs are emitted as gases from certain solids or liquids. VOCs include a variety of chemicals, some of which may have short- and long-term adverse health effects. Concentrations of many VOCs are consistently higher indoors (up to ten times higher) than outdoors. VOCs are emitted by a wide array of products numbering in the thousands. Examples include: paints and lacquers, paint strippers, cleaning supplies, pesticides, building materials and furnishings, office equipment such as copiers and printers, correction fluids and carbonless copy paper, graphics and craft materials including glues and adhesives, permanent markers, and photographic solutions. Health effects include eye, nose, and throat irritation; headaches, loss of coordination, nausea; damage to liver, kidney, and central nervous system. Some organics can cause cancer in animals; some are suspected or known to cause cancer in humans. Key signs or symptoms associated with exposure to VOCs include conjunctival irritation, nose and throat discomfort, headache, allergic skin reaction, dyspnea, declines in serum cholinesterase levels, nausea, emesis, epistaxis, fatigue, dizziness.

1.6.2 Dioxins

The most noted health effect in people exposed to large amounts of dioxin is chloracne. Chloracne is a severe skin disease with acne-like lesions that occur mainly on the face and upper body. Other skin effects noted in people exposed to high doses of dioxin include skin rashes, discoloration, and excessive body hair. Changes in blood and urine that may indicate liver damage also are seen in people. Exposure to high concentrations of CDDs may induce long-term alterations in glucose metabolism and subtle changes in hormonal levels.

In certain animal species, dioxin is especially harmful and can cause death after a single exposure. Exposure to lower levels can cause a variety of effects in animals, such as weight loss, liver damage, and disruption of the endocrine system. In many species of animals, dioxin weakens the immune system and causes a decrease in the system's ability to fight bacteria and viruses. In other animal studies, exposure to dioxin has caused reproductive damage and birth defects. Some animal species exposed to CDDs during pregnancy had miscarriages and the offspring of animals exposed to dioxin during pregnancy often had severe birth defects including skeletal deformities, kidney defects, and weakened immune responses.

1.6.3 Metals

The physical effects of poisoning from heavy metals tend to be a very slow process and occur over a long period of continued exposure to the source of the toxic metal. The physical symptoms which are typically

induced by the presence of toxic metals in the body tend to be very vague and can include symptoms such as persistent fatigue, the appearance of splitting and blinding headaches, the presence of an upset stomach, disorders such as colic and even anemia in some cases. The central nervous system is the main part of the human body likely to be affected by the presence of toxic metals. Symptoms of a disrupted central nervous system include the appearance of muscular tremors, the development of spells of dizziness, the presence of insomnia, the poor concentration abilities in the person and a sudden lack of muscular coordination in the body.

1.6.4 Potential Exposure Concerns

Potential exposure concerns to COCs may also occur through ingesting or coming into direct skin contact with contaminated groundwater. The likelihood of worker exposure concerns through these two routes are also considered very unlikely, provided that workers follow good personal hygiene and standard good sample collection/sample handling practices, and wear appropriate PPE as specified in this SSHP. Examples onsite practices that are to be observed that will protect workers from exposure via ingestion or skin contact include the following:

- No hand-to-mouth activities on site (eating, drinking, smoking, etc.)
- Washing hands upon leaving the work area and prior to performing any hand to mouth activities
- Wearing surgeon's-style gloves whenever handling potentially-contaminated media, including groundwater and any potential free product, sampling equipment, and sample containers.

2.0 HAZARD/RISK ANALYSIS

Work conducted in support of this project will be performed using Activity Hazard Analysis (AHA) to guide and direct field crews on a task by task basis. See Figure 2-1. It is the SSO's responsibility to review the AHAs with the task participants as part of a pre-task tail gate briefing session.

Daily safety meetings will be conducted during site work and the task-specific AHA(s) will be reviewed prior to initiating any field activities. This effort will ensure that site-specific considerations and changing conditions are incorporated into the planning effort. Use of the APP will provide the line of communication for reviewing task-specific hazards and protective measures associated with each operation. The SSHP will be used as the primary reference for selecting levels of protection and control measures.

The FOL and/or the SSO will be responsible for making the parties aware of the contents and requirements of the APP. Any problems encountered with the protective measures required will be documented and brought to the attention of the SSO.

As an ongoing quality assurance effort, the SSO will review operations to ensure the AHAs adequately address potential hazards for the tasks being conducted at least monthly. Where deficient, they will be corrected and that information shared with the field personnel. Amended AHAs will be forwarded to the PHSO for inclusion in future APPs for similar activities.

2.1 SPECIFIC SITE ACTIVITIES

The detailed Scope of Work for field activities to be performed for the remedial investigation at Site 7 Rubble Disposal Area is presented in the Project-Specific SAP. For each of these tasks, detailed Activity Hazard Analyses (AHAs) have been prepared and are provided in Section 2.0 of this SSHP. If additional tasks are determined to be necessary, the SAP and this APP and SSHP will be amended and a hazard evaluation of the additional tasks performed. This APP and accompanying SSHP addresses proposed site activities that are to be conducted at Site 7 which include:

- Mobilization and Demobilization
- Landfill gas monitoring with Landtec GEM 2000 gas analyzer and extraction monitor
- Passive soil gas survey
 - Advance 1 inch (or smaller) borehole to maximum of 3 feet using hand auger or power auger
 - Screen with Landtec GEM 2000
 - Install Gore-sorber passive sampler

- Remove Gore-sorber passive sampler two weeks later
- Multimedia sampling
 - Surface soil sampling
 - Surface water/sediment sampling
 - Groundwater sampling
 - Monitoring well sampling
- Soil Boring
 - Monitoring well installation HSA
 - Subsurface soil sampling using DPT
 - Groundwater sampling using DPT
- Decontamination of sampling and heavy equipment
- IDW management
- Geographic and Geophysical Surveying

These are the only activities that are anticipated to be necessary. If it becomes apparent that additional or modified tasks must be performed beyond those listed above, the work is not will only proceed after the FOL or SSO notifies the Project Manager and the HSM, so that any appropriate modifications to this SSHP can be developed and communicated to the intended task participants.

**FIGURE 2-1
Activity Hazard Analysis (AHA)**

Activity/Work Task: Site Mobilization/Demobilization		Overall Risk Assessment Code (RAC) (Use highest code)				M	
Project Location: Site 7 Rubble Disposal Area Gulfport, Mississippi		Risk Assessment Code (RAC) Matrix					
Contract Number: JM23		Severity	Probability				
Date Prepared: December 8, 2011			Frequent	Likely	Occasional	Seldom	Unlikely
Prepared by: J.K. Laffey		Catastrophic	E	E	H	H	M
Reviewed by: Jennifer Carothers, PhD		Critical	E	H	H	M	L
		Marginal	H	M	M	L	L
Notes: (Field Notes, Review Comments, etc.)		Negligible	M	L	L	L	L
		Step 1: Review each "Hazard" with identified safety "Controls" and determine RAC (See above)					
"Probability" is the likelihood to cause an incident, near miss, or accident and Identified as: Frequent, Likely, Occasional, Seldom, or Unlikely.					RAC Chart		
"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible					E= Extremely High Risk		
Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.					H= High Risk		
					M= Moderate Risk		
					L= Low Risk		
JOB STEPS	HAZARDS	CONTROLS				RAC	
<ul style="list-style-type: none"> • Assembling equipment and supplies • Performing initial/exit inspections of the intended work areas • Arranging for utilities, site access, notifying appropriate client contacts • Performing equipment inspections of vehicles and equipment arriving/preparing to depart the site 	1. Heavy Equipment	1. Conduct heavy initial site acceptance inspection prior to performing any work at this site. 2. Use the equipment inspection checklist for drill rigs in Attachment IV. Once the equipment passes inspection the AHA for Soil Boring with DPT or HSA will be followed.				L	
	2. Minor cuts, abrasions or contusions	1. Wear cut-resistant gloves when handling items with sharp or rough edges.				M	
	3. Heavy lifting (muscle strains and pulls)	1. Practice safe lifting techniques. Use mechanical lifting devices such as a dolly whenever possible 2. Ensure clear path of travel. 3. Have a good grasp on object. Perform "test lift" to gauge ability to safely make the lift. 4. Lift with legs not back. Obtain help when needed to lift large, bulky, or heavy items).				M	
	4. Vehicular traffic when moving large equipment to the support area	1. Designate and mark vehicle and equipment staging areas. Inform the site personnel of heavy equipment areas and of their responsibility to stay clear of moving vehicles. 2. In high traffic areas, wear a high-visibility vest, shirt or jacket.				M	

ACTIVITY HAZARD ANALYSIS
Site Mobilization/Demobilization
Page 2 of 3

JOB STEPS	HAZARDS	CONTROLS	RAC
<ul style="list-style-type: none"> Conducting site geographic surveys 	5. Slips, Trips, Falls	<ol style="list-style-type: none"> Watch for tree branches, roots, weeds, limbs and other ground hazards. Wear appropriate foot protection to prevent slips and trips. Use caution when working on uneven and wet ground surfaces. 	M
	6. Intermittent high noise levels	<ol style="list-style-type: none"> Site personnel are to wear hearing protection if noise levels are such that they must raise their voice in order to communicate with someone who is within arm's reach (approx. 2') of them. SSO is responsible for determining and designating when hearing protection is required. Hearing protection is to consist of either ear muffs or plugs that have a noise reduction rating (NRR) of at least 25 dB. 	L
	7. Inclement weather	<ol style="list-style-type: none"> The FOL and/or the SSHO will temporarily suspend outside activities in the event of electrical storms or high winds. It is preferred that supported systems such as lightning detection devices or emergency weather broadcasts are employed. However, when this is not possible field personnel should use the 30/30 Rule: <i>"If there is less than 30 seconds between thunder and lightning go inside and stay inside for at least 30 minutes after the last thunder."</i> 	M
Equipment To Be Used	Training Requirements/Competent or Qualified Personnel name(s)		Inspection Requirements
Hand tools (dollies, hand carts, hand knives, etc.)	Review of AHA during pre-task tailgate safety briefing with the intended task participants. Competent or Qualified Person(s): Bill Olsen		Visual inspection prior to use by user.
Personal Protective Equipment Minimum: Safety toe boots, safety glasses. Optional items: Hardhat, hearing protection. HTRW: None anticipated for this task.	PPE training in proper use, care, storage, and limitations. It is anticipated that this has been covered in employees' 40 hour HAZWOPER training, which is to be verified by the SSO through initial training documentation and review prior to permitting personnel to participate in any onsite activities, and will be confirmed by visual observations of worker activities.		Initial PPE inspection performed by SSO. Ongoing (prior to each use) inspections responsibilities of PPE users.

ACTIVITY HAZARD ANALYSIS
Site Mobilization/Demobilization
Page 3 of 3

I have read and understand this AHA:

Name (Printed)	Signature	Date

FIGURE 2-1 (Continued)
Activity Hazard Analysis (AHA)

Activity/Work Task: Monitoring well installation and soil sampling from a Hollow Stem Auger Drill Rig and DPT Rig		Overall Risk Assessment Code (RAC) (Use highest code)				M	
Project Location: Site 7 Rubble Disposal Area Gulfport, Mississippi		Risk Assessment Code (RAC) Matrix					
Contract Number: JM23		Severity	Probability				
Date Prepared: December 6, 2011			Frequent	Likely	Occasional	Seldom	Unlikely
Prepared by: J.K. Laffey		Catastrophic	E	E	H	H	M
Reviewed by: Jennifer Carothers, PhD		Critical	E	H	H	M	L
		Marginal	H	M	M	L	L
Notes: (Field Notes, Review Comments, etc.)		Negligible	M	L	L	L	L
		Step 1: Review each "Hazard" with identified safety "Controls" and determine RAC (See above) "Probability" is the likelihood to cause an incident, near miss, or accident and Identified as: Frequent, Likely, Occasional, Seldom, or Unlikely. "Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.					RAC Chart E= Extremely High Risk H= High Risk M= Moderate Risk L= Low Risk
JOB STEPS	HAZARDS	CONTROLS				RAC	
HSA/DPT Rig set up and operation • Positioning Unit (engaging outriggers, etc.) • Assembling equipment and supplies	1. Struck By	1. Hard hats and high visibility vests for personnel in work area. 2. Control work area (use flaggers, signage, barricades, and/or other means) and restrict non-essential personnel from the area. 3. Inspect rig and ensure that the equipment, augers, rods and tools will be properly secured during transport.				M	
	2. Tip Over	1. Do not permit rig to attempt to traverse severely sloping terrain. 2. Use a ground guide along with a functioning back-up alarm during equipment backing. 3. Once rig is sited, deploy outriggers to properly block and level the rig and secure parking brake.				M	
	5. Intermittent high noise levels	1. Site personnel are to wear hearing protection if noise levels are such that they must raise their voice in order to communicate with someone who is within arm's reach (approx. 2') of them. 2. SSO is responsible for determining and designating when hearing protection is required. 3. Hearing protection is to consist of either ear muffs or plugs that have a noise reduction rating (NRR) of at least 25 dB.				M	
	6. Slips, Trips, Falls	1. Clear trees, roots, weeds, limbs and other ground hazards from the drill				M	

ACTIVITY HAZARD ANALYSIS
Monitoring Well Installation and Soil Sampling from a Hollow Stem Auger Drill Rig
 Page 2 of 4

JOB STEPS	HAZARDS	CONTROLS	RAC
		location. 2. Practice good housekeeping to keep the ground around the drill site clear of obstructions, equipment and other tripping hazards. 3. Wear appropriate foot protection to prevent slips and trips. Use caution when working on uneven and wet ground surfaces.	
	7. Minor cuts, or abrasions	1. When handling equipment and tools wear cut-resistant gloves when handling items with sharp or rough edges.	M
	8. Heavy lifting (muscle strains and pulls)	1. Practice safe lifting techniques (use mechanical lifting devices such as a dolly whenever possible). 2. Ensure clear path of travel, good grasp on object, perform "test lift" to gauge ability to safely make the lift 3. Lift with legs, obtain help to lift large, bulky, or heavy items.	L
	9. Insect bites	1. Shake out boots before donning. 2. Use insect repellants (products containing DEET should be applied to exposed skin, products containing Permethrin should be applied to clothing only. Follow manufacturer's recommendations for application). 3. Tape up pants leg to work boot joints with duct tape. 4. Wear light-colored clothing to better see and remove any insects. 5. Perform close body inspections at least daily upon leaving the site.	L
	10. Inclement weather	1. The FOL and/or the SSO will temporarily suspend outside activities in the event of electrical storms or high winds. 2. It is preferred that supported systems such as lightning detection devices or emergency weather broadcasts are employed. 3. However, when this is not possible field personnel should use the 30/30 Rule: <i>"If there is less than 30 seconds between thunder and lightning go inside and stay inside for at least 30 minutes after the last thunder."</i>	M
HSA/DPT Operations and Subsurface soil sampling from DPT Micro core tubes	1. Auger start up and operation	1. Auger will be engaged only when the work area is cleared and site personnel notified. 2. Site personnel will not approach a rotating auger. 3. Use a long handled flat head shovel when removing auger cuttings. Stay away from the augers when rotating. 4. Prevent shovel from lodging into the augers and kicking out. 5. Do not wear loose clothing when working with augers.	M

ACTIVITY HAZARD ANALYSIS
Monitoring Well Installation and Soil Sampling from a Hollow Stem Auger Drill Rig
 Page 3 of 4

JOB STEPS	HAZARDS	CONTROLS	RAC
	2. Cleaning augers	1. Augers will be cleaned only when they are stopped and in neutral. 2. They will not be restarted until the worker has given a verbal “all clear” to the operator, and the operator has visually determined that the worker is clear of the auger. 3. Only long-handled shovels will be used to remove cuttings from the auger.	M
	3. Exposure to contaminants of concern (metals, VOCs, and dioxins)	1. Wear surgeons gloves when handling potentially-contaminated media and samples. 2. Avoid contact with potentially-contaminated media to the extent possible. 3. Follow good decontamination and practice good personal hygiene (hands and face washing) when exiting work area. 4. Hand-to-mouth activities in the work area will be prohibited (eating, drinking, smoking, etc.). 5. Exposure via dermal contact and ingestion represent some limited concern during this task. 6. As a precaution VOCs will be monitored periodically by screening samples with a FID/GEM Landtek 2000. 7. If readings above daily-established background levels (BGLs) are noted in borehole, monitor worker breathing zone (BZ) areas. 8. If readings in worker BZ areas exceed: <ul style="list-style-type: none"> • FID/GEM Landtek 2000 Action Level: 9 ppm above BG in BZ areas for no more than 4 exposures of 5 minutes in one work day. 9. After at least 5 minutes, SSO will approach from upwind direction screening BZ areas. 10. Work may resume when readings in the BZ return to BGLs.	L
	4. Cuts and lacerations – when cutting acetate liners without the proper material handling devices.	1. Always cut away from yourself and others. Do not place items to be cut in your hand or on your knee. 2. Change blades as necessary to maintain a sharp cutting edge as many accidents result dull cutting attachments. 3. Wear cut-resistant gloves (leather or heavy cotton) at least on the non-knife/saw hand, where possible. When cutting acetate liners use the tubing retention tub to secure the tube. 4. Use the knife intended for that purpose. Geoprobe® makes a kit for this purpose.	

ACTIVITY HAZARD ANALYSIS

Monitoring Well Installation and Soil Sampling from a Hollow Stem Auger Drill Rig

Page 4 of 4

Equipment To Be Used	Training Requirements/Competent or Qualified Personnel name(s)	Inspection Requirements
<p>HSA Drill Rig, bore rods, auger flights, sharp knives, hand tools (dollies, hand carts, etc.), ventilation fan</p> <p>Safety Equipment:</p> <ul style="list-style-type: none"> • A 20-pound dry chemical ABC fire extinguisher readily available. • Spill-control kit available at drilling location. • First-aid kit, eyewash, and an emergency air horn nearby. • Portable eye wash bottle <p>Monitoring Instruments: FID/GEM Landtek 2000 with calibration gasses.</p>	<ol style="list-style-type: none"> 1. Review of AHA during pre-task tailgate safety briefing with the intended task participants. 2. Personnel must be trained in use of drilling equipment. 3. The drill operator must have current certifications to operate the equipment. 4. Review operating manuals of monitoring instruments. <p>Competent or Qualified Personnel name(s): Bill Olsen</p>	<p>Visual inspection prior to use by user. FID/GEM Landtek 2000 must be calibrated as per the manufacturer's recommendations and documented on each use.</p>
<p>Personal Protective Equipment: Minimum: Safety toe boots, safety glasses, work gloves. Optional items: Hardhat, hearing protection, nitrile surgeon's style gloves and Tyvek if there is a change to soil clothing. HTRW: see above</p>	<p>PPE training in proper use, care, storage, and limitations. It is anticipated that this has been covered in employees' 40 hour HAZWOPER training, which is to be verified by the SSO through initial training documentation and review prior to permitting personnel to participate in any onsite activities, and will be confirmed by visual observations of worker activities.</p>	<p>Initial PPE inspection performed by SSO. Ongoing (prior to each use) inspections responsibilities of PPE users.</p>

I have read and understand this AHA:

Name (Printed)	Signature	Date

FIGURE 2-1 (Continued)
Activity Hazard Analysis (AHA)

Activity/Work Task: Soil and groundwater sampling and monitoring well purging and development		Overall Risk Assessment Code (RAC) (Use highest code)				M	
Project Location: Site 7 Rubble Disposal Area Gulfport, Mississippi		Risk Assessment Code (RAC) Matrix					
Contract Number: JM23		Severity	Probability				
Date Prepared: December 6, 2011			Frequent	Likely	Occasional	Seldom	Unlikely
Prepared by: J.K. Laffey		Catastrophic	E	E	H	H	M
Reviewed by: Jennifer Carothers, PhD		Critical	E	H	H	M	L
		Marginal	H	M	M	L	L
Notes: (Field Notes, Review Comments, etc.)		Negligible	M	L	L	L	L
		Step 1: Review each "Hazard" with identified safety "Controls" and determine RAC (See above) "Probability" is the likelihood to cause an incident, near miss, or accident and Identified as: Frequent, Likely, Occasional, Seldom, or Unlikely. "Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.					RAC Chart E= Extremely High Risk H= High Risk M= Moderate Risk L= Low Risk
JOB STEPS	HAZARDS	CONTROLS					RAC
Groundwater site set up	1. Minor cuts abrasions handling equipment and tools	1. Wear cut-resistant gloves when handling items with sharp or rough edges.					L
	2. Slips, Trips, Falls	1. Clear intended work areas and walking paths of roots, weeds, limbs and other ground hazards. 2. Practice good housekeeping to keep the site clear of obstructions, materials, equipment and other tripping hazards. 3. Ensure that work boots have adequately-aggressive sole design. 4. Use caution when working on uneven and wet ground.					L
	3. Insect bites, snake bites, and contact with poisonous plants.	1. Shake out boots before donning. 2. Use insect repellants. Products containing DEET should be applied to exposed skin. Products containing Permethrin should be applied to clothing only. Follow manufacturer's recommendations. 3. Tape up pants leg to work boot joints with duct tape and wear light-colored clothing to better see and remove any insects. 4. Avoid potential nesting areas (brush, deadfall, etc.) where insects or snakes may be present. Perform close body inspections at least daily upon leaving the site. Review Natural Hazards information in section 4.0 of the Tetra Tech H&S Guidance Manual with field team as appropriate based on site observations and					M

ACTIVITY HAZARD ANALYSIS
Soil and Groundwater Sampling and Monitoring Well Purging and Development
 Page 2 of 4

JOB STEPS	HAZARDS	CONTROLS	RAC
Taking samples using a small battery-operated pump and placing into sample containers	5. Exposure to contaminants of concern (metals, VOCs, and dioxins)	conditions. 1. Wear surgeons gloves when handling potentially-contaminated media and samples. 2. Avoid contact with potentially-contaminated media to the extent possible. 3. Follow good decontamination and practice good personal hygiene (hands and face washing) when exiting work area. 4. Hand-to-mouth activities in the work area will be prohibited (eating, drinking, smoking, etc.). 5. Exposure via dermal contact and ingestion represent some limited concern during this task. 6. As a precaution VOCs will be monitored periodically by screening samples with a FID/GEM Landtek 2000. 7. If readings above daily-established background levels (BGLs) are noted in borehole, monitor worker breathing zone (BZ) areas. 8. If readings in worker BZ areas exceed: • FID/GEM Landtek 2000 Action Level: 9 ppm above BG in BZ areas for no more than 4 exposures of 5 minutes in one work day. 9. After at least 5 minutes, SSO will approach from upwind direction screening BZ areas. 10. Work may resume when readings in the BZ return to BGLs.	L
Surface soil sampling via hand or power augering	1. Muscle strains, tendon or ligament sprains, back or other soft-tissue injuries	1. Operating a hand and power auger can be physically demanding depending on the conditions of the soil, the auger tools, and the physical capabilities of the operator. 2. Only personnel who are confident that they can physically perform this activity without injury should operate a hand auger. 3. Allow at least 2 feet for error. 4. Dig pilot holes with a spade or a hand-held posthole digger. 5. Rent the power auger from your local rental store. 6. Make sure you use the proper fuel for the engine (the rental company should provide the premixed fuel) 7. Get all the necessary shear pins and attachments that come with the power auger. 8. Read the manufacturer's instructions for the particular model you are using. 9. Before digging the holes with the power auger, don safety equipment. 10. One person should hold the auger upright while the other person starts the machine.	M

ACTIVITY HAZARD ANALYSIS
Soil and Groundwater Sampling and Monitoring Well Purging and Development
Page 3 of 4

JOB STEPS	HAZARDS	CONTROLS	RAC
		11. To counteract the torque of the auger, brace yourself on the left side of the auger. 12. Dig no more than 12 inches at a time. 13. Bring the auger back up and dump the dirt along the side of the hole. 14. Move on to the next hole when you finish the first one. 15. Shut the machine off between holes. 16. Leave the auger upright in the hole when you need to rest. 17. Prevent the machine from lying on its side, as the spark plug may foul or the gas may leak out through the gas cap.	
	2. Bruises, abrasions, cuts, foot or eye injuries,	1. Ensure that the hand auger tool is properly maintained. 2. Avoid injury by stopping if strong resistance is encountered (such as if impassable rocky conditions are encountered). 3. Secure assistance when needed. 4. Wear appropriate PPE (work gloves, safety toe shoes, and safety impact eye protection)	M
	3. Contact with utilities	1. Inspect for buried and overhead utilities in the vicinity of the augering location. 2. Verify the location of utility lines in accordance with Tetra Tech SOP Utility Location and Excavation Clearance (see Attachment V).	L
Equipment To Be Used		Training Requirements/Competent or Qualified Personnel name(s)	Inspection Requirements
Peristaltic pump, tubing, sample collection tools and containers (jars, spatulas, spoons, etc.) Safety Equipment: Portable eye wash bottle Monitoring Instruments: FID/GEM Landtek 2000		Training/experience in proper sample collection, handling and chain of custody requirements. Competent or Qualified Personnel name(s): Bill Olsen	Visual inspection prior to use by user..
Personal Protective Equipment: Minimum: nitrile surgeon's type gloves, leather or cotton work gloves, safety toe boots, safety glasses. Optional items: Hardhat and hearing protection (for use with power auger). If sampling done concurrently with HSA,		OSHA 40 HAZWOPER training, plus appropriate 8-hour annual refresher training for the task participants. Supervisors must have completed additional 8 hours of HAZWOPER training. ALSO: Review of AHA during pre-task tailgate safety briefing with the intended task participants.	Initial PPE inspection performed by SSO. Ongoing (prior to each use) inspections responsibilities of PPE users. FID/GEM Landtek 2000 to be subjected to calibration and operational checks in accordance with manufacturer's

ACTIVITY HAZARD ANALYSIS
Soil and Groundwater Sampling and Monitoring Well Purging and Development
 Page 4 of 4

Equipment To Be Used	Training Requirements/Competent or Qualified Personnel name(s)	Inspection Requirements
observe HSA AHA PPE as well. If contact with contaminants is likely, wear chemical-resistant coveralls (e.g., Tyvek) or aprons and surgeon's nitrile gloves under leather/cotton work gloves. <u>HTRW</u> : see above	PPE training in proper use, care, storage, and limitations. It is anticipated that this has been covered in employees' 40 hour HAZWOPER training, which is to be verified by the SSO through initial training documentation and review prior to permitting personnel to participate in site activities, and will be confirmed by visual observations of worker activities. SSO trained in proper calibration, use, and care of air monitoring devices used (FID/GEM Landtek 2000). This is a general component of 40 hour HAZWOPER training, and SSO must become very familiar with the Operator's Manual for any instrument used.	recommendations (but not less than daily).

I have read and understand this AHA:

Name (Printed)	Signature	Date

**FIGURE 2-1
Activity Hazard Analysis (AHA)**

Activity/Work Task: Passive Gas and Landfill Gas Survey	Overall Risk Assessment Code (RAC) (Use highest code)					M
Project Location: Site 7 Rubble Disposal Area Gulfport, Mississippi	Risk Assessment Code (RAC) Matrix					
Contract Number: JM23	Severity	Probability				
Date Prepared: December 8, 2011		Frequent	Likely	Occasional	Seldom	Unlikely
Prepared by: J.K. Laffey	Catastrophic	E	E	H	H	M
	Critical	E	H	H	M	L
Reviewed by: Jennifer Carothers, PhD	Marginal	H	M	M	L	L
	Negligible	M	L	L	L	L
Notes: (Field Notes, Review Comments, etc.)	Step 1: Review each "Hazard" with identified safety "Controls" and determine RAC (See above)					
	"Probability" is the likelihood to cause an incident, near miss, or accident and Identified as: Frequent, Likely, Occasional, Seldom, or Unlikely.				RAC Chart	
	"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible				E= Extremely High Risk	
	Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.				H= High Risk	
				M= Moderate Risk		
				L= Low Risk		

JOB STEPS	HAZARDS	CONTROLS	RAC
Conducting site surveys	1. Exposure to passive gas and landfill gas including methylene chloride and methane	1. Use the FID/Landtec 2000 to monitor sampling points and breathing zone. 2. For ambient breathing zone levels site personnel may be exposed to 90 ppm for four 5 minute exposures in any one work day. 3. If levels exceed this amount then suspend site activities and retreat to an unaffected area. 4. Allow at least 5 minutes to pass so that the work area can ventilate, and will then re-approach the work area while continuously monitoring the BZ areas. 5. Outside air methane concentrations do NOT pose an inhalation or explosion hazard.	M
	2. Vehicular traffic when moving large equipment to the support area	1. Designate and mark vehicle and equipment staging areas. Inform the site personnel of heavy equipment areas and of their responsibility to stay clear of moving vehicles. 2. In high traffic areas, wear a high-visibility vest, shirt or jacket.	M
	3. Slips, Trips, Falls	1. Watch for tree branches, roots, weeds, limbs and other ground hazards. 2. Wear appropriate foot protection to prevent slips and trips. 3. Use caution when working on uneven and wet ground surfaces.	M

ACTIVITY HAZARD ANALYSIS
Site Mobilization/Demobilization
Page 2 of 2

JOB STEPS	HAZARDS	CONTROLS	RAC
	4. Inclement weather	1. The FOL and/or the SSHO will temporarily suspend outside activities in the event of electrical storms or high winds. 2. It is preferred that supported systems such as lightning detection devices or emergency weather broadcasts are employed. 3. However, when this is not possible field personnel should use the 30/30 Rule: <i>"If there is less than 30 seconds between thunder and lightning go inside and stay inside for at least 30 minutes after the last thunder."</i>	L
Equipment To Be Used	Training Requirements/Competent or Qualified Personnel name(s)	Inspection Requirements	
FID/GEM Landtek 2000	Review of AHA during pre-task tailgate safety briefing with the intended task participants. Competent or Qualified Personnel name(s): Bill Olsen	Visual inspection prior to use by user.	
Personal Protective Equipment Minimum: Safety toe boots, safety glasses. Optional items: Hardhat, hearing protection. HTRW: See above	PPE training in proper use, care, storage, and limitations. It is anticipated that this has been covered in employees' 40 hour HAZWOPER training, which is to be verified by the SSO through initial training documentation and review prior to permitting personnel to participate in any onsite activities, and will be confirmed by visual observations of worker activities.	Initial PPE inspection performed by SSO. Ongoing (prior to each use) inspections responsibilities of PPE users.	

I have read and understand this AHA:

Name (Printed)	Signature	Date

**FIGURE 2-1
Activity Hazard Analysis (AHA)**

Activity/Work Task: Decontamination		Overall Risk Assessment Code (RAC) (Use highest code)			M		
Project Location: Site 7 Rubble Disposal Area Gulfport, Mississippi		Risk Assessment Code (RAC) Matrix					
Contract Number: JM23		Severity	Probability				
Date Prepared: December 6, 2011			Frequent	Likely	Occasional	Seldom	Unlikely
Prepared by: J.K. Laffey		Catastrophic	E	E	H	H	M
Reviewed by: Jennifer Carothers, PhD		Critical	E	H	H	M	L
		Marginal	H	M	M	L	L
Notes: (Field Notes, Review Comments, etc.)		Negligible	M	L	L	L	L
		Step 1: Review each "Hazard" with identified safety "Controls" and determine RAC (See above) "Probability" is the likelihood to cause an incident, near miss, or accident and Identified as: Frequent, Likely, Occasional, Seldom, or Unlikely. "Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.					RAC Chart E= Extremely High Risk H= High Risk M= Moderate Risk L= Low Risk
JOB STEPS	HAZARDS	CONTROLS					RAC
Personal Decontamination Equipment drop Segregated removal of PPE (wash and rinse reusable items, dispose of non-reusable items)	1. Slips, Trips, Falls	1. Clear intended decon area location of ground hazards. 2. Practice good housekeeping to keep the site clear of obstructions, materials, equipment and other tripping hazards. 3. Wear appropriate foot protection to prevent slips and trips. 4. Use caution when working on uneven and wet surfaces.					L
	2. Exposure to contaminated media	1. Follow good decontamination practices (work from top down and outside in). 2. Nitrile gloves are to be the last item of PPE removed. 3. Wash hands and face following personal decontamination and prior to performing any hand-to-mouth activity.					L
Decontamination of drilling equipment and large tooling (e.g., vehicles, etc.) using pressure washer	1. Noise	1. Pressure washer operator must wear hearing protection (muffs or plugs with NRR of at least 25 dB). 1. Restrict other personnel from decon pad during pressure washing operations.					M
	2. Flying projectiles	1. Pressure washer operator must exercise care when directing the wand so that it is not pointing at himself/herself or at any other worker. 2. Pressure washer operator must wear full face shield over safety glasses with side shields and brow protection.					L

ACTIVITY HAZARD ANALYSIS
Decontamination
Page 2 of 3

JOB STEPS	HAZARDS	CONTROLS	RAC
		3. At SSO discretion, additional PPE consisting of hardhat, rainsuit, apron, and or boot covers may be required during decon operations - depending on observations indicating that significant contact with decon overspray and/or windy conditions during washing activities.	
	3. Falling objects	1. Place items to be decontaminated on ground or on washing/drying racks in a manner that they are secure and will not fall. 2. Wear safety toe safety footwear.	L
	4. Strains/sprains from heavy lifting	1. Practice safe lifting techniques (use mechanical lifting devices such as a dolly whenever possible, ensure clear path of travel, good grasp on object, perform "test lift" to gauge ability to safely make the lift, lift with legs not back, obtain help when needed to lift large, bulky, or heavy items).	L
	5. Slips/trips/falls	1. Keep decon areas orderly, maintain good housekeeping, spread light coating of sand on decon pad liner to increase traction.	L
	6. Exposure to contaminated media	1. Follow good decontamination practices (work from top down and outside in). Surgeon's gloves are to be the last item of PPE removed. 2. Wash hands and face following personal decontamination and prior to performing any hand-to-mouth activity.	L
Equipment To Be Used		Training Requirements/Competent or Qualified Personnel name(s)	Inspection Requirements
Hand tools (hand brushes, garden sprayers, etc.) Pressure washer		None required. Review manufacturer's instructions and safety guidelines prior to use. Competent or Qualified Personnel name(s): Bill Olsen	Visual inspection prior to use by user. Check wooden handles for cracks or splinters. Inspect pressure washer prior to putting into service to ensure that it is in good working order, and ensure that fittings are secure.
Personal Protective Equipment: Minimum: Safety toe boots, safety glasses. Optional items: Hardhat, hearing protection. Decontamination		Initial PPE inspection performed by SSO. Ongoing (prior to each use) inspections responsibilities of PPE users.	Initial site specific H&S training to cover review of the APP and SSHP. Daily tail-gate and pre-task briefings to review appropriate AHAs and other relevant topics. OSHA 40 HAZWOPER training,

ACTIVITY HAZARD ANALYSIS

Decontamination

Page 3 of 3

Equipment To Be Used	Training Requirements/Competent or Qualified Personnel name(s)	Inspection Requirements
<p>pad pressure washer operators are to wear full face shield over safety glasses with side shields and brow protection, hearing protection, and nitrile gloves. If contact with overspray cannot be avoided, rain suit or moisture-repellant disposable coveralls may be specified by the SSO. HTRW: see above</p>		<p>plus appropriate 8-hour annual refresher training for the task participants. Supervisors must have completed additional 8 hours of HAZWOPER training. Also Review of AHA during tailgate safety briefing with the intended task participants.</p> <p>PPE training in proper use, care, storage, and limitations. It is anticipated that this has been covered in employees' 40 hour HAZWOPER training, which is to be verified by the SSO through initial training documentation and review prior to permitting personnel to participate in site activities, and will be confirmed by visual observations of worker activities.</p>

I have read and understand this AHA:

Name (Printed)	Signature	Date

**FIGURE 2-1 (Continued)
Activity Hazard Analysis (AHA)**

Activity/Work Task: IDW Management		Overall Risk Assessment Code (RAC) (Use highest code)				L	
Project Location: Site 7 Rubble Disposal Area Gulfport, Mississippi		Risk Assessment Code (RAC) Matrix					
Contract Number: JM23		Severity	Probability				
Date Prepared: December 6, 2011			Frequent	Likely	Occasional	Seldom	Unlikely
Prepared by: J.K. Laffey		Catastrophic	E	E	H	H	M
Reviewed by: Jennifer Carothers, PhD		Critical	E	H	H	M	L
		Marginal	H	M	M	L	L
Notes: (Field Notes, Review Comments, etc.)		Negligible	M	L	L	L	L
		Step 1: Review each "Hazard" with identified safety "Controls" and determine RAC (See above)					RAC Chart
"Probability" is the likelihood to cause an incident, near miss, or accident and Identified as: Frequent, Likely, Occasional, Seldom, or Unlikely.					E= Extremely High Risk		
"Severity" is the outcome/degree if an incident, near miss, or accident did occur and identified as: Catastrophic, Critical, Marginal, or Negligible					H= High Risk		
		Step 2: Identify the RAC (Probability/Severity) as E, H, M, or L for each "Hazard" on AHA. Annotate the overall highest RAC at the top of AHA.					M= Moderate Risk
JOB STEPS	HAZARDS	CONTROLS				RAC	
Filling, moving 55-gallon drums of IDW	1. Heavy lifting	1. Practice safe lifting techniques (use mechanical lifting devices such as a dolly whenever possible, ensure clear path of travel, good grasp on object, perform "test lift" to gauge ability to safely make the lift, lift with legs not back, obtain help when needed to lift large, bulky, or heavy items).				L	
	2. Struck by/pinches compressions	1. Exercise caution when handling drums. 2. Position drums so that there is adequate room between them for placement and repositioning.				L	
	3. Falling objects (drums)	1. Do not stack drums on top of each other. 2. Do not place more than 4 drums to a pallet. 3. Leave at least 4 ft. of clearance between pallets for clear access.				L	
	4. Slips, Trips, Falls	1. Maintain good housekeeping in IDW storage areas, keeping it clear of loose debris and other potential tripping hazards. 2. Wear appropriate foot protection to prevent slips and trips. Use caution when working on uneven and wet ground surfaces.				L	
	5. Foot hazards	1. Safety toe foot protection will be required for IDW container handling activities				L	
	6. Strains/sprains due to heavy lifting	1. Practice safe lifting techniques (use mechanical lifting devices such as a dolly whenever possible, ensure clear path of travel, good grasp on object, lift with legs not back, and obtain help when needed to lift large, bulky, or				L	

ACTIVITY HAZARD ANALYSIS
IDW Management
Page 2 of 2

JOB STEPS	HAZARDS	CONTROLS	RAC
		heavy items)	
	7. Minor contusions, abrasions, cuts	1. Wear cut-resistant gloves when handling items with sharp or rough edges.	L
Equipment To Be Used	Training Requirements/Competent or Qualified Personnel name(s)	Inspection Requirements	
Hand tools (drum dollies, wrenches, etc.)	Site personnel participating in this activity must be current with HAZWOPER training requirements. Competent or Qualified Personnel name(s): Bill Olsen	Visual inspection prior to use by user. Check wooden handles for cracks or splinters.	
Personal Protective Equipment: Minimum: Safety toe boots, safety glasses Optional items: Hardhat, cotton or leather work gloves. HTRW: If contact with IDW is likely, wear chemical-resistant coveralls (e.g., surgeon's nitrile gloves under leather/cotton work gloves.	Initial site specific H&S training to cover review of the APP and SSHP. Daily tail-gate and pre-task briefings to review appropriate AHAs and other relevant topics. PPE training in proper use, care, storage, and limitations. It is anticipated that this has been covered in employees 40 hour HAZWOPER training, which is to be verified by the SSO through initial training documentation and review prior to permitting personnel to participate in site activities, and will be confirmed by visual observations of worker activities.	Initial PPE inspection performed by SSO. Ongoing (prior to each use) inspections responsibilities of PPE users.	

I have read and understand this AHA:

Name (Printed)	Signature	Date

3.0 TRAINING, GENERAL AND PROJECT-SPECIFIC

3.1 GENERAL

Tetra Tech personnel must complete 40 hours of introductory hazardous waste site training prior to performing work at Site 7 Rubble Disposal Area. Tetra Tech personnel who have had introductory training more than 12 months prior to site work must have completed 8 hours of refresher training within the previous 12 months before being cleared for site work. In addition, 8-hour supervisory training in accordance with 29 CFR 199.120(e)(4) will be required for site supervisory personnel. At least two personnel on site must be trained in Basic First Aid, CPR, and blood borne pathogen (BBP) control and response. Documentation of Tetra Tech introductory, supervisory, and refresher training as well as site-specific training will be maintained at the site. Copies of certificates or other official documentation will be used to fulfill this requirement.

3.2 SITE SPECIFIC

The Tetra Tech SSO will provide site-specific training to Tetra Tech employees who will perform work on this project. Attachment I will be used to document the provision and content of the project-specific and associated training. Site personnel will be required to sign this form prior to commencement of site activities.

This training documentation will identify personnel who through record review and attendance of the site-specific training are cleared for participation in site activities. This document shall be maintained at the site to identify and maintain an active list of trained and cleared site personnel.

The Tetra Tech SSO will also conduct a pre-activities training session prior to initiating site work. This session will cover the APP and SSHP and provide an opportunity for participants to ask questions.

The SSO will also hold a brief meeting (tailgate session) at the beginning of each day to discuss operations planned for that day, and a review of the appropriate AHAs with the planned task participants. A short meeting may also be held at the end of the day to discuss the operations completed and any problems encountered.

Prior to accessing active work areas of the sites or participating in any intrusive activities, site personnel and visitors will first be required to undergo a site-specific safety and health training session conducted by the FOL, which will include a review of the APP and SSHP and signing of the Site-Specific Training Documentation form.

Before site activities begin, the Tetra Tech FOL and SSO will present a briefing for site personnel who will participate in on-site activities. The following topics will be addressed during the pre-work briefing:

- Names of the personnel listed in the organizational chart (Figure 4-1 of the APP) and designated alternates
- Site history
- Work tasks
- Hazardous chemicals that may be encountered
- Physical hazards that may be encountered
- PPE, including types of respiratory and hearing protection to be used for work tasks
- Mandatory training and certification requirements (e.g., HAZWOPER)
- Environmental surveillance (air monitoring) equipment use and maintenance
- Action levels and situations requiring an upgrade or downgrade of level of protection
- Site control measures including site communications and control zones
- Decontamination procedures
- Emergency communication signals and codes, including incident reporting procedures
- Environmental accident/emergency procedures
- Personnel exposure and accident emergency procedures
- Fire and explosion emergency procedures
- Emergency telephone numbers
- Emergency routes

Any other health and safety-related issues that may arise before site activities begin will be covered during the pre-work briefing.

4.0 PERSONAL PROTECTIVE EQUIPMENT

The levels of personal protection to be used for work tasks at the Site 7 Rubble Disposal Area site have been selected based on the nature of the planned work activities and on the known or anticipated hazards; types and concentrations of contaminants that may be encountered on site; and contaminant properties, toxicity, exposure routes, and matrixes.

PPE is selected by the PHSO when writing the SSHP, and is confirmed through a rigorous review process by the Tetra Tech HSM. To assure proper PPE has been selected, both the physical and chemical hazards present at the job site are taken into account in both developing and reviewing safety-related documents.

The anticipated levels of protection selected for use by field personnel during site activities is Level D. If site conditions or the results of air monitoring performed during site activities warrant a higher level of protection, the field personnel will withdraw from the site, immediately notify the Tetra Tech PHSO, and obtain further instructions.

PPE levels can be upgraded or downgraded based on a change in site conditions or investigation findings. When a significant change in site conditions occurs, hazards will be reassessed.

PPE has been selected based on the results of task-specific hazard assessments. Through the completion of employee training (e.g., introductory 40-hour hazardous waste training, annual refresher training, etc.), Tetra Tech employees have been informed of the proper selection, use, and care of PPE items provided to them. After PPE is provided to an employee, the responsibility for using and caring for it appropriately is the responsibility of that employee. The SSO is responsible for assuring that these responsibilities are fulfilled through daily observations and work area inspections at the sites. The SSO is also responsible for assuring that appropriate and adequate supplies of PPE are maintained such that they are readily available for issuance/replacement and in a clean and sanitary manner and location. The site personnel will use the procedures presented in the SSHP to obtain optimum performance from PPE.

The levels of personal protection to be used for work tasks have been selected based on the nature of the planned work activities and on the known or anticipated hazards. Specific selected for this project is listed, by task, in the AHAs located in Section 2.0 of the SSHP. The PPE minimum is as follows:

- Safety glasses with side shields
- Hard hat when near overhead hazards
- Long sleeve shirts and pants

- Water resistant shoe/boots with slip-resistant soles
- Tyvek® coverall type suits if a chance of soiling clothing

5.0 MEDICAL SURVEILLANCE

Personnel performing onsite work that will result in exposure to contaminant-related health and safety hazards shall be enrolled in a medical surveillance program that complies with OSHA standards 29 CFR 199.120 (f) and 29 CFR 1926.65 (f). Certification of medical surveillance program participation is appended to the SSHP. The certification shall include:

- Employee name
- Date of last examination
- Name of examining physician(s).

The required written certified occupational physician's opinion shall be made available upon request to the Navy COR. The medical records shall be maintained in accordance with 29 CFR 199.920. Attachment III of the APP contains the certification of participation in a medical surveillance program.

6.0 EXPOSURE MONITORING/AIR SAMPLING PROGRAM

None of the chemical contaminants are expected to be present in significant concentrations to present an inhalation hazard during planned site activities. Contaminants of concern are the non-volatile and were previously detected at low concentrations that are unlikely to pose a significant exposure threat to site personnel via inhalation, negating the need to monitor airborne concentration.

Additionally, several site activities will involve collecting samples that will be wet and/or saturated with water which will further minimize the exposure potential. However, as a precaution, air monitoring will be performed as part of the activities being performed under this SSHP. Changes in the air monitoring strategy shall be coordinated with the PHSO.

6.1 INSTRUMENTS AND USE

For this project, based on the properties of the primary contaminant of concern, a Flame Ionization Detector (FID) may be used to monitor the air.

Instruments will be used primarily to monitor source points and worker breathing zone areas, while observing instrument action levels. The SSO shall obtain and document the daily background (BG) reading at an upwind, unaffected area and observe for readings above that BG level. The SSO shall monitor source areas (e.g., monitoring wells) for the presence of any reading above the daily-established BG level. If elevated readings are observed, the SSO shall monitor the workers breathing zone (BZ) areas with the FID/GEM Landtek 2000. If the appropriate instrument Action Level is exceeded (see below), the following process will be followed:

- The SSO shall order site personnel to stop work and retreat upwind to a safe, unaffected area, where they will remain until further directed by the SSO.
- The SSO shall allow at least 5 minutes to pass so that the work area can ventilate, and will then re-approach the work area while continuously monitoring the BZ areas.
- Only when BG levels are regained in BZ areas will work be permitted to resume.
- If BG levels are not regained, the SSO will contact the HSM for additional direction.

6.1.1 FID Action Level

- Any reading above 90 ppm above BG in BZ areas sustained for 4 exposures of 5 minutes in any one work day.

6.2 LANDTEC GEM 2000

During this project, the Landtec GEM 2000 gas analyzer and extraction monitor is used to conduct passive and landfill gas surveys. This portable instrument is used to monitor landfill gas extraction systems where for H₂S and CO. It analyzes landfill gas composition, calculates flow and it is intrinsically safe. It also measures and displays british thermal unit content, temperature, relative and atmospheric pressures as well as CH₄ Lower Explosive Limit.

The manufacturer publishes an extensive Operation Manual which is available on-line at <http://www.landtecnica.com>. Prior to the beginning of work, field technicians will read this document. In addition to operational information, important safety information is also covered.

6.3 INSTRUMENT MAINTENANCE AND CALIBRATION

Operational checks and field calibration will be performed on instruments each day prior to their use. Field calibration will be performed on instruments according to manufacturer's recommendations (for example, the FID/GEM Landtek 2000 must be field calibrated daily and an additional field calibration must be performed at the end of each day to determine any significant instrument drift). These operational checks and calibration efforts will be performed in a manner that complies with the employees health and safety training, the manufacturer's recommendations, and with the applicable manufacturer standard operating procedure (copies of which are to be maintained at the site for reference). Calibration efforts must be documented. Figure 6-1 is provided for documenting these calibration efforts. This information may instead be recorded in a field operations logbook, provided that the information specified in Figure 6-1 is recorded. This required information includes the following:

- Date calibration was performed
- Individual calibrating the instrument
- Instrument name, model, and serial number
- Any relevant instrument settings and resultant readings (before and after) calibration
- Identification of the calibration standard (lot no., source concentration, supplier)
- Any relevant comments or remarks

6.4 DOCUMENTING INSTRUMENT READINGS

The SSO is responsible for ensuring that air monitoring instruments are used in accordance with the specifications of this SSHP and with manufacturer's specifications/recommendations. In addition, the SSO is also responsible for ensuring that the instrument use is documented. This requirement can be satisfied either by recording instrument readings on pre-printed sampling log sheets or in a field log book. **This includes the requirement for documenting instrument readings that indicate no elevated readings above noted daily background levels (i.e., no-exposure readings).** At a minimum, the SSO must document the following information for each use of an air monitoring device:

- Date, time, and duration of the reading
- Site location where the reading was obtained
- Instrument used (e.g., FID/GEM Landtek 2000)
- Personnel present at the area where the reading was noted
- Other conditions that are considered relevant to the SSO (such as weather conditions, possible instrument interferences, etc.)

7.0 TEMPERATURE EXTREMES

Because of the geographical location of the planned work, the seasonal weather conditions, and the physical exertion that can be anticipated with some of the planned tasks, it is necessary for the field team to be aware of the signs and symptoms and the measures appropriate to prevent heat and cold stress. While it is unlikely, if such conditions are encountered use the following information on heat and cold stress recognition, prevention and control.

Ambient temperature extremes (hot or cold working environments) may occur during performance of hazardous waste work depending on the project schedule. Work performed when ambient air temperatures are below 50°F may result in varying levels of cold stress (frost nip, frost bite, and/or hypothermia) depending on environmental factors such as temperature, wind speed, and humidity; physiological factors such as metabolic rate and moisture content of the skin; and other factors such as work load and the protective clothing being worn. Work performed when ambient temperatures exceed 70°F may result in varying levels of heat stress (heat rash, heat cramps, heat exhaustion, and/or heat stroke) depending on factors similar to those presented above for cold stress.

In either case, these conditions can be debilitating and, when extreme, they can be fatal. An understanding of the importance in preventing heat/cold stress, coupled with the worker's awareness of the signs and symptoms of overexposure, can significantly reduce the potential for adverse health effects. If this hazard is present during site operations, each worker will be provided with information necessary to protect themselves, and site management will be instructed to permit frequent breaks in mild temperature rest areas having hot/cold fluids available for consumption. When site personnel are required to wear semi-permeable (Saranex, Tyvek) or impermeable protective clothing to perform their assigned tasks and ambient temperatures are 70° F or higher, biological monitoring may be performed and data compared to the most recent recommendations of the American Conference of Governmental Industrial Hygienists (ACGIH).

7.1 HEAT RELATED DISORDERS

There are four heat related disorders to monitor while performing work on site.

7.1.1 Heat Rash

Also known as prickly heat, this condition affects the skin. It occurs in situations where the skin remains wet most of the time. The sweat ducts become plugged and a skin rash soon appears.

Signs and Symptoms

- Skin rash will appear on affected areas of the body.
- Tingling or prickling sensation will be felt on the affected areas.

7.1.2 Heat Cramps

Heat cramps are muscle pains, usually in the lower extremities, the abdomen, or both, that occur after profuse sweating with accompanying salt depletion. Heat cramps most often afflict people in good physical condition, who overwork in conditions of high temperature and humidity. Untreated, heat cramps may progress to heat exhaustion.

Signs and Symptoms

- Cramps in the extremities and abdomen that begin suddenly during vigorous activity.
- Heat cramps can be mild with only slight abdominal cramping and tingling in the extremities, but more commonly present intense and incapacitating pain in the abdomen and extremities.
- Respiration rate will increase, decreasing after the pain subsides.
- Pulse rate will increase
- Skin will be pale and moist.
- Body temperature will be normal
- Generalized weakness will be noted as the pain subsides.
- Loss of consciousness and airway maintenance are seldom problems with this condition.

Treatment for heat cramps is aimed at eliminating the exposure and restoring the loss of salt and water.

7.1.3 Heat Exhaustion

Heat exhaustion is a more severe response to salt and water loss, as well as an initial disturbance in the body's heat-regulations system. Like heat cramps, heat exhaustion tends to occur in people working in hot environments. Heat exhaustion may progress to heat stroke. Treatment for heat exhaustion is similar in principle to that for heat cramps.

Signs and Symptoms

- Heat exhaustion may be accompanied present by a headache, fatigue, dizziness, or nausea with occasional abdominal cramping.

- More severe cases of heat exhaustion may result in partial or complete temporary loss of respiration and circulation due to cerebral ischemia.
- Sweating will be profuse.
- Pulse rate will be rapid and weak.
- Respiration rate will be rapid and shallow.
- The skin will be pale and clammy
- The body temperature will be normal or decreased.
- The person could be irritable and restless.

7.1.4 Heat Stroke

Heat stroke is caused by a severe disturbance in the body's heat-regulating system and is a profound emergency: The mortality rate ranges from 25 to 50 percent. It can also occur from having too much exposure to the sun or prolonged confinement in a hot atmosphere. Heat stroke comes on suddenly. As the sweating mechanism fails, the body temperature begins to rise precipitously, reaching 96° F (41° C) or higher within 9 to 15 minutes. If the situation is not corrected rapidly, the body cells -- especially the very vulnerable cells to the brain--are literally cooked, and the central nervous system is irreversibly damaged. The treatment for heat stroke is aimed at maintaining vital functions and causing as rapid a decrease of body temperature as possible.

Signs and Symptoms

- The person's pulse will be strong and bounding.
- The skin will be hot, dry, and flushed.
- The worker may experience headache, dizziness, and dryness of mouth
- Seizures and coma can occur.
- Loss of consciousness and airway maintenance problems can occur.

7.1.5 Controlling Heat Stress

The following control measures are only guidelines for heat related emergencies. Actual training in emergency medical care or basic first aid is recommended. Employees will monitor one another for signs of heat stress. If indications of heat stress occur, the following corrective measures will be performed:

- Inform affected workers of the signs and symptoms of heat stress and encourage co-worker observations.

- Schedule tasks that are physically-demanding in early morning and late afternoon timeframes when heavy loads would be less of an issue.
- Notify the SSO who may perform biological monitoring to determine the extent of the heat related condition.
- The SSO may alter the work regime that will provide adequate rest periods for cooling down. This may require additional shifts of workers.
- The SSO may also recommend cooling devices such as vortex tubes or cooling vests be worn beneath protective garments.
- When conditions where heat related disorders may be experienced, the SSO through site-specific training and safety briefing will inform site personnel of the importance of adequate rest, acclimation, and proper diet in the prevention of heat stress.
- Provide adequate liquids to replace lost body fluids.
- Personnel must replace water and salt lost from sweating.
- Personnel must be encouraged to drink more than the amount required to satisfy thirst.
- Thirst satisfaction is not an accurate indicator of adequate salt and fluid replacement.
- Approximately 1 cup of cool water every 20 minutes is recommended.
- Replacement fluids can be commercial mixes such as Gatorade®.
- Move affected persons into a shaded cool rest area (below 77°F is best).
- Personnel shall remove impermeable protective garments during rest periods.
- Personnel shall not be assigned other tasks during rest periods.

One of the following biological monitoring procedures may be utilized by the SSO to monitor heat stress concerns.

- Heart rate (HR) shall be measured by the pulse for 30 seconds as early as possible in the resting period. The HR at the beginning of the rest period should not exceed 19 beats/minute.
- If the HR is higher, the next work period should be shortened by 9 minutes (or 33%), while the length of rest period stays the same.
- If the pulse rate is 90 beats/minute at the beginning of the next rest period, the following work cycle should be shortened by 33%.
- The length of the initial work period will be determined by using the table below.

TABLE 7-1
PERMISSIBLE HEAT EXPOSURE THRESHOLD LIMIT VALUES

<u>Work-Rest Regimen</u>	<u>Work Load</u>		
	<u>Light</u>	<u>Moderate</u>	<u>Heavy</u>
Continuous	80.0°F	80.0°F	77.0°F
75% Work - 25% Rest, Each Hour	87.0°F	82.4°F	78.6°F
50% Work - 50% Rest, Each Hour	88.5°F	85.0°F	82.2°F
25% Work - 75% Rest, Each Hour	90.0°F	88.0°F	86.0°F

Body temperature shall be measured orally with a digital thermometer with disposable probe covers or an aural/temporal temperature sensor as early as possible in the resting period. Oral temperature (OT) at the beginning of the rest period should not exceed 99°F. If it does, the next work period should be shortened by 9 minutes (or 33%), while the length of the rest period stays the same. However, if the oral temperature exceeds 99.7°F at the beginning of the next rest period, the following work cycle shall be further shortened by 33%. OT should be measured at the end of the rest period to make sure that it has dropped below 99°F. At no time shall work begin with the oral temperature above 99°F.

NOTE: External temperatures in excess of those stated above shall be regarded as inclement weather.

7.1.6 Temperature Extremes – Heat Stress Indication

Temperature extremes are considered inclement weather. Steps should be taken to the extent possible protect site personnel from the effects of heat stress and the sun. Control measures include:

- Watch for signs of heat stress/exhaustion, see Table 7-2.
- Provide fluid replacement.
- Provide adequate number of breaks within a cooler environment.

Care should be exercised when working outdoors due to harmful effects of the sun. To reduce the potential for sunburn and melanoma use the following measures:

- Wear a hat that shades the face, neck, and ears.
- Apply sunscreen with a SPF of 15 or higher liberally on any exposed skin at least 15 minutes before going outside, then at least every two hours, more if you are sweating a lot.
- Plan/provide suitable equipment to offer shade to avoid the midday sun since the sun's ultraviolet rays are most intense between 9 A.M. and 4 P.M. and can damage your skin even on hazy days. Portable canopies over the sample station are an example of this.
- Wear wrap-around sunglasses to protect the eyes and delicate skin around them.

TABLE 7-2

**HEAT STRAIN SYMPTOMS
Stop Work If Any Worker Demonstrates Any Of The Following**

Heart Rate	Sustained (several minutes) heart rate minus worker's age > than 180 beats per minute (bpm) measured at any time.
Body Core Temperature	> 91.3°F (38.5° C)
Recovery Heart Rate	> 19 bpm (Measured 1 minute after peak work effort)
Other symptoms	Sudden and sever fatigue, nausea, dizziness, or headache

Individuals May Be at Greater Risk of Heat Stress If:

Profuse sweating is sustained over hours
Weight loss over a shift is > 1.5% of beginning body weight
24-hour urinary sodium excretion is less than 50 nmoles

7.1.7 Heat Stress Treatment and Field Management

7.1.7.1 First Aid for Heat Stroke

Take the following steps to treat a worker with heat stroke:

- Call Site 7 Rubble Disposal Area Emergency Dispatch Center and notify FOL/SSO.
- Move the affected individual to a cool shaded area.
- Cool the worker using methods such as:
 - Soaking their clothes with water.
 - Spraying, sponging, or showering them with water.
 - Fanning their body.

7.1.7.2 First Aid for Heat Exhaustion

Treat victim suffering from heat exhaustion with the following:

- Have them rest in a cool, shaded or air-conditioned area.
- Have them drink plenty of water or other cool, nonalcoholic beverages.
- Have them take a cool shower, bath, or sponge bath.

7.1.7.3 First Aid for Heat Cramps

Individuals with heat cramps should:

- Stop all activity, and sit in a cool place.
- Drink clear water, juice or a sports beverage.
- Do not return to strenuous work for a few hours after the cramps subside because further exertion may lead to heat exhaustion or heat stroke.
- Seek medical attention if any of the following apply:
 - The person has heart problems.
 - The person is on a low-sodium diet.
 - The cramps do not subside within one hour.

7.1.7.4 First Aid for Heat Rash

Workers experiencing heat rash should:

- Try to work in a cooler, less humid environment when possible.
- Keep the affected area dry.
- Dusting powder may be used to increase comfort.

7.2 COLD STRESS RELATED DISORDERS

Just as heat can present a problem for on-site personnel during certain activities, so can cold temperatures. Just as the heat related disorders are magnified by environmental conditions and the tasks to be completed, so are the cold related disorders. As above the focus is on recognizing conditions contributing to cold related disorders and selecting the most appropriate control measure.

The ACGIH cold stress Threshold Limit Values (TLVs) are recommended to protect workers from the severest effects of cold stress (hypothermia) and cold injury and to describe exposures to cold working conditions under which it is believed that nearly all workers can be repeatedly exposed without adverse health effects. The TLV objective is to prevent the deep body temperature from falling below 36°C (96.8°F) and to prevent cold injury to body extremities (deep body temperature is the core temperature of the body determined by conventional methods for rectal temperature measurements). For a single, occasional exposure to a cold environment, a drop in core temperature to no lower than 35°C (95°F) should be permitted. In addition to provisions for total body protection, the TLV objective is to protect all parts of the body with emphasis on hands, feet, and head from cold injury.

Fatal exposures to cold among workers have almost always resulted from accidental exposures involving failure to escape from low environmental air temperatures or from immersion in low temperature water. The single most important aspect of life-threatening hypothermia is the fall in the deep core temperature of the body. The clinical presentations of victims of hypothermia are shown in Table 7-3. Workers should be protected from exposure to cold so that the deep core temperature does not fall below 36°C (96.8°F); lower body temperatures will very likely result in reduced mental alertness, reduction in rational decision making, or loss of consciousness with the threat of fatal consequences.

7.2.1 Signs and Symptoms

Pain in the extremities may be the first early warning of danger to cold stress.

During exposure to cold, maximum severe shivering occurs when the body temperature has fallen to 35°C (95°F). This must be taken as a sign of danger and exposure to cold should be immediately terminated when severe shivering becomes evident. Useful physical or mental work is limited when severe shivering occurs.

7.2.2 Control Measures

Since prolonged exposure to cold air, or to immersion in cold water, at temperatures well above freezing can lead to dangerous hypothermia. Whole body protection must be provided.

- Adequate insulating dry clothing to maintain core temperatures above 36°C (96.8°F) must be provided to workers if work is performed in air temperatures below 4°C (40°F). Wind chill cooling rate and the cooling power of air are critical factors. [Wind chill cooling rate is defined as heat loss from a body expressed in watts per meter squared which is a function of the air temperature and wind velocity upon the exposed body.] The higher the wind speed and the lower the temperature in the work area, the greater the insulation value of the protective clothing required. An equivalent chill temperature chart relating the actual dry bulb air temperature and the wind velocity is presented in Table 7-4. The equivalent chill temperature should be used when estimating the combined cooling effect of wind and low air temperatures on exposed skin or when determining clothing insulation requirements to maintain the deep body core temperature.
- Unless there are unusual or extenuating circumstances, cold injury to other than hands, feet, and head is not likely to occur without the development of the initial signs of hypothermia. Older workers or workers with circulatory problems require special precautionary protection against cold injury. The use of extra insulating clothing and/or a reduction in the duration of the exposure period are among the special precautions which should be considered. The precautionary actions to be taken will depend upon the physical condition of the worker and should be determined with the advice of a physician with knowledge of the cold stress factors and the medical condition of the worker.
- Acclimatization – With exposure the body does undergo changes that will permit it to adjust to the cold weather better.
- Dehydration – Water and salt loss magnifies conditions associated with hypothermia. Warm, sweet nonalcoholic fluids should be employed for fluid replacement. Soup, non-caffeinated drinks including decaffeinated teas, coffees, etc. are suitable for this purpose.
- Diet – A balanced diet can provide the body with the necessary nutrients to aid in combating cold stress. Restrictive diets avoiding salts, carbohydrates, etc. may rob you of certain elements that you need. It should however be noted that the avoidance of caffeine and alcoholic drinks may increase the effects of a cold environment through the loss of water and salts.

- Engineering Controls such as wind shields/barriers may be used to control the potential affects of cold stress.
- Administrative controls such as worker rotation; work/warm regimens; required fluid intake; scheduling the work for warmer weather; assigning more workers to the task to complete it quicker.
- Overall physical condition should always be considered when combating cold stress. Older persons, those on certain medications (blood pressure control) are vulnerable to cold environment and cold stress disorders.
- Environmental monitoring results will tell you if the conditions are such that cold related disorders can occur. Biological monitoring will provide real time information as to the progression of the cold related disorders within your field crew.

7.2.3 Monitoring

- Core temperature
 - Ensure that it does not drop below 96.8°F
- Weight Loss
 - Monitoring weight loss may be indicative of water and salt loss through dehydration.
 - >2% changes in body weight are indicative of water loss.
- Visual observation of signs and symptoms of overexposure.

7.2.4 Special Conditions - Evaluation and Control

For exposed skin, continuous exposure should not be permitted when the air speed and temperature results in an equivalent chill temperature of -32°C (-25.6°F). Superficial or deep local tissue freezing will occur only at temperatures below -1°C (30.2°F) regardless of wind speed.

At air temperatures of 2°C (35.6°F) or less, it is imperative that workers who become immersed in water or whose clothing becomes wet be immediately provided a change of clothing and be treated for hypothermia.

TLVs recommended for properly clothed workers for periods of work at temperatures below freezing are shown in Table 7-5.

Special protection of the hands is required to maintain manual dexterity for the prevention of accidents:

- If fine work is to be performed with bare hands for more than 9-20 minutes in an environment below 16°C (60.8°F), special provisions should be established for keeping the workers' hands warm.
- For this purpose, warm air jets, radiant heaters (fuel burner or electric radiator), or contact warm plates may be utilized.
- Metal handles of tools and control bars should be covered by thermal insulating material at temperatures below -1°C (30.2°F).
- If the air temperature falls below 16°C (60.8°F) for sedentary, 4°C (39.2°F) for light, -7°C (19.4°F) for moderate work and fine manual dexterity is not required, then gloves should be used by the workers.

To prevent contact frostbite, the workers should wear anti-contact gloves.

- When cold surfaces below -7°C (19.4°F) are within reach, a warning should be given to each worker by the supervisor to prevent inadvertent contact by bare skin.
- If the air temperature is -17.5°C (0°F) or less, the hands should be protected by mittens.
- Machine controls and tools for use in cold conditions should be designed so that they can be handled without removing the mittens.

Provisions for additional total body protection are required if work is performed in an environment at or below 4°C (39.2°F). The workers should wear cold protective clothing appropriate for the level of cold and physical activity:

- If the air velocity at the job site is increased by wind, draft, or artificial ventilating equipment, the cooling effect of the wind should be reduced by shielding the work area or by wearing an easily removable windbreak garment.
- If only light work is involved and if the clothing on the worker may become wet on the job site, the outer layer of the clothing in use may be of a type impermeable to water.

- With more severe work under such conditions, the outer layer should be water repellent, and the outerwear should be changed as it becomes wetted.
- The outer garments should include provisions for easy ventilation in order to prevent wetting of inner layers of sweat.
- If work is done at normal temperatures or in a hot environment before entering the cold area, the employee should make sure that clothing is not wet as a consequence of sweating.
- If clothing is wet, the employee should change into dry clothes before entering the cold area.
- The workers should change socks and any removable felt insoles at regular daily intervals or use vapor barrier boots.
- The optimal frequency of change should be determined empirically and will vary individually and according to the type of shoe worn and how much the individual's feet sweat.
- If exposed areas of the body cannot be protected sufficiently to prevent sensation of excessive cold or frostbite, protective items should be supplied in auxiliary heated versions.

If the available clothing does not give adequate protection to prevent hypothermia or frostbite, work should be modified or suspended until adequate clothing is made available or until weather conditions improve.

7.2.5 Work - Warming Regimen

If work is performed continuously in the cold at an equivalent chill temperature (ECT) or below -7°C (19.4°F), heated warming shelters (tents, cabins, rest rooms, etc.) should be made available nearby. The workers should be encouraged to use these shelters at regular intervals, the frequency depending on the severity of the environmental exposure. The onset of heavy shivering, frostnip, the feeling of excessive fatigue, drowsiness, irritability, or euphoria are indications for immediate return to the shelter. When entering the heated shelter, the outer layer of clothing should be removed and the remainder of the clothing loosened to permit sweat evaporation or a change of dry work clothing provided. A change of dry work clothing should be provided as necessary to prevent workers from returning to work with wet clothing. Dehydration, or the loss of body fluids, occurs insidiously in the cold environment and may increase the susceptibility of the worker to cold injury due to a significant change in blood flow to the extremities. Warm

sweet drinks and soups should be provided at the work site to provide caloric intake and fluid volume. The intake of coffee should be limited because of the diuretic and circulatory effects.

For work practices at or below -12°C (9.4°F) ECT, the following should apply:

- The worker should be under constant protective observation (buddy system or supervision).
- The work rate should not be so high as to cause heavy sweating that will result in wet clothing; if heavy work must be done, rest periods should be taken in heated shelters and opportunity for changing into dry clothing should be provided.
- New employees should not be required to work full time in the cold during the first days of employment until they become accustomed to the working conditions and required protective clothing.
- The weight and bulkiness of clothing should be included in estimating the required work performance and weights to be lifted by the worker.
- The work should be arranged in such a way that sitting still or standing still for long periods is minimized.
- Unprotected metal chair seats should not be used.
- The worker should be protected from drafts to the greatest extent possible.
- The workers should be instructed in safety and health procedures.
- The training program should include as a minimum instruction in:
 - Proper rewarming procedures and appropriate first aid treatment.
 - Proper clothing practices.
 - Proper eating and drinking habits.
 - Recognition of impending frostbite.
 - Recognition of signs and symptoms of impending hypothermia or excessive cooling of the body even when shivering does not occur.
 - Safe work practices.

Note: This information has been adopted from the 209-911 "Threshold Limit Values for Chemical Substances and Physical Agents and Biological Indices" by the American Conference of Governmental Industrial Hygienists (ACGIH).

As conditions may vary, it will be at the discretion of the Field Operations Leader and the Site Safety Officer representative to temporarily suspend or terminate activities as conditions dictate. All site activities will be terminated in the advent of electrical storms, tornadoes, and other hazardous weather conditions.

**TABLE 7-3
PROGRESSIVE CLINICAL PRESENTATIONS OF HYPOTHERMIA***

Core Temperature		Clinical Signs
°C	°F	
37.6	99.6	"Normal" rectal temperature
37	98.6	"Normal" oral temperature
36	96.8	Metabolic rate increases in an attempt to compensate for heat loss
35	95.0	Maximum shivering
34	93.2	Victim conscious and responsive, with normal blood pressure
33	91.4	Severe hypothermia below this temperature
32	89.6	Consciousness clouded; blood pressure becomes difficult to obtain; pupils dilated but react to light; shivering ceases
31	87.8	
30	86.0	Progressive loss of consciousness; muscular rigidity increases; pulse and blood pressure difficult to obtain; respiratory rate decreases
29	84.2	
28	82.4	Ventricular fibrillation possible with myocardial irritability
27	80.6	Voluntary motion ceases; pupils nonreactive to light; deep tendon and superficial reflexes absent
26	78.8	Victim seldom conscious
25	77.0	Ventricular fibrillation may occur spontaneously
24	75.2	Pulmonary edema
22	71.6	Maximum risk of ventricular fibrillation
21	69.8	
20	68.0	Cardiac standstill
18	64.4	Lowest accidental hypothermia victim to recover
17	62.6	Isoelectric electroencephalogram
9	48.2	Lowest artificially cooled hypothermia patient to recover

* Presentations approximately related to core temperature. Reprinted from the American Family Physician, published by the American Academy of Family Physicians.

TABLE 7-4
COOLING POWER OF WIND ON EXPOSED FLESH EXPRESSED AS EQUIVALENT TEMPERATURE
(under calm conditions)*

Estimated Wind Speed (in mph)	Actual Temperature Reading (°F)											
	50	40	30	20	9	0	-9	-20	-30	-40	-50	-60
	Equivalent Temperature (°F)											
Calm	50	40	30	20	9	0	-9	-20	-30	-40	-50	-60
5	48	37	27	16	6	-5	-15	-26	-36	-47	-57	-68
9	40	28	16	4	-9	-24	-33	-46	-58	-70	-83	-95
15	36	22	9	-5	-18	-32	-45	-58	-72	-85	-99	-112
20	32	18	4	-9	-25	-39	-53	-67	-82	-96	-119	-133
25	30	16	0	-15	-29	-44	-59	-74	-88	-94	-118	-133
30	28	13	-2	-18	-33	-48	-63	-79	-94	-99	-125	-140
35	27	11	-4	-20	-35	-51	-67	-82	-98	-113	-129	-145
40	26	9	-6	-21	-37	-53	-69	-85	-90	-116	-132	-148
(Wind speeds greater than 40 mph have little additional effect)	LITTLE DANGER In < hr with dry skin. Maximum danger of false sense of security				INCREASING DANGER Danger from freezing of exposed flesh within one minute.				GREAT DANGER Flesh may freeze within 30 seconds.			
	Trenchfoot and immersion foot may occur at any point on this chart.											

TABLE 7-5

THRESHOLD LIMIT VALUES WORK/WARM-UP SCHEDULE FOR FOUR-HOUR SHIFT*

Air Temperature - Sunny Sky		No Noticeable Wind		5 mph Wind		9 mph Wind		15 mph Wind		20 mph Wind	
°C(approx)	°F(approx)	Max. Work Period	No. of Breaks								
-26° to -28°	-15° to -19°	(Norm Breaks)	1	(Norm Breaks)	1	75 min	2	55 min	3	40 min	4
-29° to -31°	-20° to -24°	(Norm Breaks)	1	75 min	2	55 min	3	40 min	4	30 min	5
-32° to -34°	-25° to -29°	75 min	2	55 min	3	40 min	4	30 min	5	Non-emergency work should cease	
-35° to -37°	-30° to -34°	55 min	3	40 min	2	30 min	5	Non-emergency work should cease			
-38° to -39°	-35° to -39°	40 min	4	30 min	1	Non-emergency work should cease					
-40° to -42°	-40° to -44°	30 min	5	Non-emergency work should cease							
-43° & below	-45° & below	Non-emergency work should cease									

NOTES:

- Schedule applies to moderate to heavy work activity with warm-up breaks of 9 minutes in a warm location. For Light-to-Moderate Work (limited physical movement): apply the schedule one step lower. For example, at 35°C (-30°F) with no noticeable wind (Step 4), a worker at a job with little physical movement should have a maximum work period of 40 minutes with 4 breaks in a 4-hour period (Step 5).
 - The following is suggested as a guide for estimating wind velocity if accurate information is not available: 5 mph: light flag moves; 9 mph: light flag fully extended; 15 mph: raises newspaper sheet; 20 mph: blowing and drifting snow.
 - If only the wind chill cooling rate is available, a rough rule of thumb for applying it rather than the temperature and wind velocity factors given above would be: (1) special warm-up breaks should be initiated at a wind chill cooling rate of about 1750 W/M²; (2) all non-emergency work should have ceased at or before a wind chill of 2250 W/m². In general, the warm-up schedule provided above slightly under-compensates for the wind at the warmer temperatures, assuming acclimatization and clothing appropriate for winter work. On the other hand, the chart slightly over-compensates for the actual temperatures in the colder ranges, since windy conditions rarely prevail at extremely low temperatures.
 - TLVs apply only for workers in dry clothing.
- * Adapted from Occupational Health & Safety Division, Saskatchewan Department of Labor.

8.0 STANDARD OPERATING PROCEDURES, ENGINEERING CONTROLS AND WORK PRACTICES

In addition to the task-specific work practices and restrictions identified in the AHAs found in Section 2.0 of the SSHP, the following general safe work practices are to be followed when conducting work on-site.

8.1 SITE RULES/PROHIBITIONS

- Personnel engaged in on site activities will practice the "buddy system" to ensure the safety of personnel involved in this operation.
- Buddies should maintain visual contact with each other and with other on-site team members by remaining in close proximity to assist each other in case of emergency.
- Eating, drinking, chewing gum or tobacco, taking medication, or smoking in contaminated or potentially contaminated areas or where the possibility for the transfer of contamination exists is prohibited.
- Wash hands and face thoroughly upon leaving a contaminated or suspected contaminated area.
- The use of waterless hand cleaning products is acceptable if followed by actual hand-washing as soon as practicable upon exiting the site.
- Avoid contact with potentially contaminated substances including puddles, pools, mud, or other such areas.
- Avoid, kneeling on the ground or leaning or sitting on equipment.
- Keep monitoring equipment away from potentially contaminated surfaces.
- Plan and mark entrance, exit, and emergency evacuation routes.
- Rehearse unfamiliar operations prior to implementation.
- Establish appropriate safety zones including support, contamination reduction, and exclusion zones.

- Minimize the number of personnel and equipment in contaminated areas (such as the exclusion zone). Non-essential vehicles and equipment should remain within the support zone.
- Establish appropriate decontamination procedures for leaving the site.
- Immediately report injuries, illnesses, and unsafe conditions, practices, and equipment to the SSO.
- Observe co-workers for signs of toxic exposure and heat or cold stress.
- Inform co-workers of potential symptoms of illness, such as headaches, dizziness, nausea, or blurred vision.

8.2 MATERIAL HANDLING PROCEDURES

Handling and storing materials involve many operations including handling drums and moving equipment. Improper handling and storing of materials often result in injuries. Whether moving materials manually or mechanically, know and understand the potential hazards associated with the task at hand and how to control the workplace to minimize danger.

Hazards include lifting heavy objects, falling objects, improperly stacked materials, and various types of equipment. Potential injuries that can occur when manually moving materials include the following:

- Strains and sprains from lifting loads improperly or from carrying loads that are either too large or too heavy.
- Fractures and bruises caused by being struck by materials or by being caught in pinch points.
- Cuts and bruises caused by falling materials that have been improperly stored or by incorrectly cutting ties or other securing devices.
- Manual lifting is likely to occur during many phases of the project. Personnel conducting assigned tasks where manual lifting is required should use the following procedures to help reduce the potential for personal injury.

Tetra Tech personnel should notify supervisors or designated safety representatives of pre-existing medical conditions that may be aggravated or re-injured by lifting activities, such that the Tetra Tech may evaluate safe operational procedures with regard to the required task.

- Proper lifting techniques (use of knees and not back) must be used when lifting any object:
- Plan storage and staging to minimize lifting or carrying distances.
- Use drum dollies/carts with a latching mechanism when handling full/loaded drums.
- Split heavy loads into smaller loads.
- Use mechanical lifting aids whenever possible.
- Have someone assist with the lift especially for heavy (>40 lbs.) or awkward loads.
 - If site personnel are not capable of lifting 40 lbs., seek assistance from a team member to split the load.
- Make sure the path of travel is clear prior to the lift.

8.2.1 Spill Contingency

It is anticipated that quantities of bulk potentially hazardous materials (greater than 55-gallons) will not be handled during the site activities. It is possible, however, that as the job progresses disposable PPE and other non-reusable items may be generated. As needed, 55-gallon drums will be used to contain unwanted items generated during sampling activities. The drum(s) will be labeled with the site name and address, the type of contents, and the date the container was filled as well as an identified contact person. As warranted, samples will be collected and analyzed to characterize the material and determine appropriate disposal measures, as described in the Project-Specific SAP. Once characterized the drum(s) will be removed from the staging area and disposed of in accordance with Federal, State and local regulations.

8.2.2 Potential Spill Areas

Should drums contain liquid wastes, potential spill areas will be monitored in an ongoing attempt to prevent and control further potential contamination of the environment. Areas designated for handling, loading, and unloading of potentially contaminated waters and debris present limited potential for leaks or spills. Liquid waste is not anticipated outside of expected decontamination materials.

8.2.3 Leak and Spill Detection

To establish an early detection of potential spills or leaks, periodic inspections by the SSO will be conducted during working hours to visually determine that containers are not leaking. If a leak is detected, the first approach will be to transfer the container contents using a hand pump into a new container. Other provisions for the transfer of container contents will be made and appropriate emergency contacts will be notified, if necessary. In most instances, leaks will be collected and contained

using absorbents such as Oil-dry, vermiculite, and/or sand, which may be stored at the staging area in a conspicuously marked drum. This material too, will be containerized for disposal pending analyses. Inspections will be documented in the Project Logbook.

8.2.4 Personnel Training and Spill Prevention

Personnel will be instructed on the procedures for spill prevention, containment, and collection of hazardous materials in the site-specific training. The FOL and/or the SSO will serve as the Spill Response Coordinator for this operation should the need arise.

8.2.5 Spill Control Plan

This section describes the procedures the Tetra Tech field crewmembers will employ upon the detection of a spill or leak.

- Notify the FOL/SSO immediately.
- The FOL/SSO will notify Site 7 Rubble Disposal Area POC immediately.
- Take immediate actions to stop the leak or to control the spill.
- Avoid contacting container contents.
- Spread the absorbent material in the area of the spill covering completely.

It is not anticipated that a spill will occur in which the field crews cannot handle. Should this occur; however, the FOL/SSO will notify appropriate emergency response agencies.

The following represents the types of equipment that may be maintained at the staging area for the purpose of supporting this Spill Containment Program (depending on the likelihood that drums and/or liquid wastes are generated).

- Sand, clean fill, vermiculite, or other noncombustible absorbent (oil-dry)
- Drums (55-gallon U.S. DOT 1A1 and/or 1A2)
- Shovels, rakes, and brooms
- Labels

8.3 DRUM/CONTAINER/TANK HANDLING

During the execution of the contract, various types and quantities of generated waste materials will be generated and may include, but not be limited to, PPE excess soil, and limited quantities of

decontamination fluids. Personnel are permitted to handle and/or sample drums containing known waste sources/materials, but handling or sampling of other drums (unknowns) requires an APP/HSP revision or amendment approved by the Tetra Tech HSM. The following control measures must be taken when managing drums containing waste sources/materials:

- Minimize transportation of drums or other containers with generated waste materials. However, where this is deemed necessary appropriate drum dollies, hand trucks or other suitable material handling equipment shall be used to transfer drums of generated waste materials.
- Sample or open only labeled drums or drums known to contain generated waste materials.
- Unknown drums or drums that show evidence of excessive buckling/ bulging, corrosion, vapors, crystallization, unusual discoloration or other abnormalities may only be sampled with
 - Evaluation of engineering controls,
 - Proper PPE air monitoring equipment and
 - Use of properly trained personnel familiar with the sampling of unknown drum contents.
- Use caution when sampling bulging or swollen drums.
 - Relieve pressure slowly and step away from the drum as pressure is being released.
- If drums contain, or potentially contain, flammable materials, use non-sparking (i.e., brass) tools to open the drum.
 - Picks, chisels, and firearms may not be used to open drums.
- Reseal bung holes or plugs whenever possible.
- Avoid mixing incompatible drum contents.
- Sample drums without leaning over the drum opening.
- Transfer the content of drums using a method that minimizes contact with material.
- PPE worn to minimize potential dermal to identified contaminants of concern.
- Good personal hygiene practices and procedures must be maintained.

9.0 SITE CONTROL MEASURES

This section outlines the means to delineate work zones and use these work zones in conjunction with decontamination procedures to prevent the spread of contaminants into previously unaffected areas.

9.1 CONTROL ZONES

It is anticipated that a three-zone approach will be used during work at this site. This approach will be comprised of an exclusion zone, a contamination reduction zone, and a support zone. It is also anticipated that this approach will control access to site work areas, restricting access by the general public, minimizing the potential for the spread of contaminants, and protecting individuals who are not cleared to enter work areas. Site personnel entering the exclusion zone and contamination reduction corridor will log-in and log-out with the FOL/SSO on a daily basis. This information will be kept in the FOL/SSO project log book.

9.1.1 Exclusion Zone

The exclusion zone will be considered those areas of active operations plus an established safety zone depending on the task. The following represent the exclusion zone boundaries for the following identified tasks:

- Monitoring well installation – height of mast plus 25 feet
- Groundwater sampling – 9 feet from point of sampling
- Low pressure decontamination activities – 9-feet
- High Pressure washing and heavy equipment decontamination operations – 35-feet
- IDW Storage area – Authorized personnel only

Exclusion zones will be delineated using barrier tape, cones and/or drive poles, and postings to inform and direct facility site personnel and visitors, as necessary.

A pre-startup site visit will be conducted to identify proposed subsurface investigation locations, conduct utility clearances, and provide notices concerning scheduled activities.

9.1.2 Contamination Reduction Zone

The contamination reduction zone (CRZ) will be a buffer area between the exclusion zone and any area of the site where contamination is not suspected. This area will also serve as a focal point in supporting

exclusion zone activities. This area will be marked using barrier tape, cones, and postings to inform and direct facility personnel. Decontamination will be conducted at a central location. Equipment potentially contaminated will be bagged and taken to that location for decontamination.

9.1.3 Support Zone

The support zone for this project will include a staging area where site vehicles will be parked, equipment will be unloaded, and where food and drink containers will be maintained. The support zones will be established at areas of the site where away from potential exposure to site contaminants during normal working conditions or foreseeable emergencies.

9.2 SITE VISITORS

Site visitors for the purpose of this document are identified as representing the following groups of individuals:

- Personnel invited to observe or participate in operations by Tetra Tech
- Regulatory personnel (i.e., DoD, EPA, OSHA)
- Authorized Navy Personnel
- Other authorized visitors

Non-Tetra Tech personnel working on this project are required to gain initial access to the base by coordinating with the Tetra Tech FOL or designee and following established base access procedures.

Site visitors will be escorted and restricted from approaching any work areas where they could potentially be exposed to hazardous chemicals. If a visitor has authorization from the client and from the Tetra Tech PM to approach our work areas, the FOL must assure that the visitor first provides documentation indicating that he/she/they have successfully completed the necessary OSHA introductory training, receive site-specific training from the SSO, and that they have been physically cleared to work on hazardous waste sites.

9.3 SITE SECURITY

Site security will be accomplished using Tetra Tech field personnel. Tetra Tech will retain complete control over active operational areas. As this activity takes place at a Navy facility open to public access, the first line of security will take place at the base boundaries restricting the general public. The second line of security will take place at the work site referring interested parties to the Base Contact. The Base

Contact will serve as a focal point for base personnel, interested parties, and serve as the final line of security and the primary enforcement contact.

9.4 MATERIAL SAFETY DATA SHEET (MSDS) REQUIREMENTS

Tetra Tech and subcontractor personnel will provide MSDSs for chemicals brought on site. The contents of these documents will be reviewed by the SSO with the user(s) of the chemical substances prior to any actual use or application of the substances on site. A chemical inventory of the chemicals used on site will be developed using the HSGM. The MSDSs will then be maintained in a central location (i.e., temporary office) and will be available for anyone to review upon request.

9.5 COMMUNICATION

As personnel will be working in proximity to one another during field activities, a supported means of communication between field crew members will not be necessary.

External communication will be accomplished by using cell phones. Workers should enter the emergency and important phone numbers from Table 13-1 into their cell phones prior to beginning work.

9.6 CONFINED SPACE ENTRY

It is not anticipated, under the proposed scope of work, that confined space and permit-required confined space activities will be conducted. **Therefore, personnel under the provisions of this SSHP are not allowed, under any circumstances, to enter confined spaces.** If confined space operations are to be performed as part of the scope of work, detailed procedures and training requirements will have to be addressed.

9.7 DRILL/INCIDENT AFTER-ACTION CRITIQUE

The FOL will conduct a drill or exercise to test the Emergency Action Plan. A critique with the site personnel after each drill or incident will be conducted. This critique provides a mechanism to review the incidents and exercises or drills to determine where improvements can be made. For incidents recorded in TOTAL, the FOL will utilize the Lessons Learned component for the critique.

10.0 PERSONAL HYGIENE AND DECONTAMINATION

This section provides decontamination procedures and guidelines for developing site and activity specific decontamination procedures.

10.1 RESPONSIBILITIES

The PHSO shall ensure that decontamination measures are adequately addressed in the Site Specific Health and Safety Plan. The SSO is responsible for establishing a decontamination area. The SSO also ensures that adequate decontamination procedures are followed to prevent contamination of individuals or the environment beyond the exclusion zone. The PM will ensure that sufficient information has been provided to the PHSO to prepare adequate decontamination procedures for inclusion in the SSHP.

10.2 DECONTAMINATION

Decontamination involves physically removing contaminants and/or converting them chemically into harmless substances. Decontamination, proper PPE donning procedures, and safety zones minimize the chance of cross-contamination from protective clothing to wearer, equipment to personnel, and one area to another.

The decontamination will consist of a soap/water wash and rinse for outer protective equipment (e.g., boots, gloves, PVC splash suits, etc.). This function will take place at an area adjacent to the drilling operations bordering the support zone.

This decontamination procedure will consist of:

- Equipment drop
- Soap/water wash and rinse of outer gloves and outer boots, as applicable
- Soap/water wash and rinse of the outer splash suit, as applicable
- Wash hands and face, leave contamination reduction zone

The FOL/SSO will determine the organization and materials used. Factors that are considered include (1) the extent and type of hazard expected, (2) meteorological conditions, (4) topography, (5) levels of protection selected, and (6) availability of equipment and supplies.

10.3 CONTAMINATION AVOIDANCE

Avoiding contamination is the first and best method for preventing the transfer of contamination to personnel or to uncontaminated areas. Each person involved in site operations must regularly practice the methods, listed below, for contamination reduction.

- Know the limitations of the protective equipment being used.
- Do not sit or lean against anything in a contaminated area.
- Waste containers should be checked for incompatible materials.
- Do not set sampling equipment directly on contaminated areas.
- Use the proper tools to safely conduct the job.

10.4 DECONTAMINATION GUIDANCE

Personnel Decontamination will consist of a soap/water wash and rinse for outer protective equipment (boots, gloves, splash suits, etc.). This function will take place at an area adjacent to the site activities.

Decontamination procedures will be reviewed with site personnel prior to entering the EZ. Each person will be given precise instructions and be acquainted with the procedure for moving through the decontamination line. Progress through the decontamination line will be deliberate, organized, to minimize hazard contamination for personal.

10.5 CLOSURE OF THE DECONTAMINATION LINE

When the decontamination line is no longer needed, it will be closed down by site personnel. The disposable items used and generated during the operation will be double-bagged and contained on site, or removed to an approved off-site disposal facility. Decontamination and rinse solutions may be discarded on site if approved by regulatory agencies. If not, they will be removed to an approved disposal facility. Reusable rubber clothing should be dried and prepared for future use. If gross contamination had occurred, additional decontamination or disposal of these items may be required. Cloth items must be bagged and removed from the site for final cleaning or disposal. Wash tubs, pails, containers, etc., must be thoroughly washed, rinsed, and dried before removal from the site.

Decontamination fluids will be collected, contained and disposed on site at a location selected by Site 7 Rubble Disposal Area.

11.0 EQUIPMENT DECONTAMINATION

Sampling equipment will be decontaminated as stated per the requirements in the Sampling and Analysis Plan and/or Work Plan. MSDS for any decontamination solutions (Alconox, methanol, isopropanol, hexane, etc.) will be obtained and used to determine proper handling / disposal methods and protective measures (PPE, first-aid, etc.). The sampling equipment used will require a complete decontamination between locations and prior to removal from the site.

The equipment decontamination will take place at a centralized decontamination pad utilizing steam or pressure washers. Heavy equipment such as drill rigs will have the wheels and tires cleaned along with any loose debris removed, prior to transporting to the central decontamination area. The site vehicles will be restricted access to exclusion zones, or also have their wheels/tires sprayed off as not to track mud onto the roadways servicing this installation. Roadways shall be cleared of any debris resulting from the onsite activity.

The equipment used in the exclusion zone will require a complete decontamination between locations and prior to removal from the site.

The FOL or the SSO will be responsible for evaluating equipment arriving on site and that which is to leave the site. No equipment will be authorized access or exit without this authorization.

Evaluation will consist of:

- Visual inspection
- Scanning equipment with monitoring instruments

12.0 EMERGENCY EQUIPMENT AND FIRST AID

The following emergency equipment will be strategically placed and maintained onsite:

- A first-aid kit that is labeled meeting the ANSI Z308.1 guidelines.
- Eye wash units (or bottles of disposable eyewash solution) are maintained during sampling activities due to the small quantities of corrosive preservatives and well construction activities due to the caustic nature of the cement/grout products.
 - These units are acceptable due to extremely small quantity of the corrosives (two drops per sample bottle).
 - Site workers wear protective eyewear during these tasks.
 - These will be used as adjunct support until access to a fixed unit.
 - These units will be maintained in a clean location and inspected each week.
- Fire extinguishers will be maintained onsite and shall be immediately available for use in the event of an emergency. 2A:9BC for general support activities.
- If fuel will be transferred from portable fuel cans they will be UL approved safety cans properly labeled. If greater than 25 gallons is stored onsite a 5A:60BC fire extinguisher will be mounted 50 feet from the fueling location.
- Fire extinguishers will be inspected monthly to ensure:
 - Sufficient charge
 - No physical damage
 - Tamper indicators are in place
 - Inspection tag documents inspection
- Site personnel will be trained in the use of the fire extinguisher as part of site specific training.
- Spill Pads – As the drilling equipment operates based on combustion engine driven hydraulic system, spill pads will be maintained at the operational area in order to support immediate response to a hydraulic line rupture.

12.1 FIRST AID

Tetra Tech personnel will perform rescue operations from emergency situations and may provide initial medical support for injury/illnesses requiring only "Basic First-Aid" level support, and only within the limits of training obtained by site personnel.

Basic First-Aid is considered treatment that can be rendered by a trained first aid provider at the injury location. Such care might include the management of severe bleeding, broken bones, asphyxiation, or heat related injuries.

Medical attention above First-Aid level support will require assistance from the designated emergency response agencies.

Any pertinent information regarding allergies to medications or other special conditions will be provided to medical services personnel. This information is listed on Medical Data Sheets which will be filed onsite. See Attachment II.

13.0 EMERGENCY ACTION PLAN AND CONTINGENCY PROCEDURES

In the event of an emergency during onsite work, the primary response action by onsite personnel will be to safely evacuate and assemble at an area unaffected by the emergency and notify the client and site contact, Mr. Gordon Crane. Workers who are ill or who have suffered a non-serious injury may be transported by site personnel to nearby medical facilities, provided that such transport does not aggravate or further endanger the welfare of the injured/ill person.

The Site 7 Rubble Disposal Area emergency response agencies listed in this plan are capable of providing the most effective response, and as such, will be designated as the primary responders. These agencies are located within a reasonable distance from the area of site operations, which ensures adequate emergency response time. The Navy Contact will be notified if these response agencies are contacted.

Tetra Tech personnel will provide insipient emergency prevention activities such as:

- Initial (e.g., non-structural) fire-fighting support (fire extinguisher) and prevention
- Initial spill control and containment measures and prevention
- Evacuate personnel from emergency situations
- Initial medical support for injury/illness requiring only first-aid level support

13.1 EMERGENCY PLANNING

Based on the nature of the planned activities, emergencies resulting primarily from physical hazards (contact with moving machinery, etc.) could be encountered. To minimize or eliminate the potential for these emergency situations, pre-emergency planning activities will include the following (which are the responsibility of the SSO and/or the FOL):

- Coordinating with the local Emergency Response personnel prior to the commencement of work to ensure that Tetra Tech emergency action activities are compatible with existing emergency response procedures.
- Establishing and maintaining information at the project staging area (support zone) for easy access in the event of an emergency.

- Creating and maintaining documents onsite that can be important in the event of an emergency situation, including:
 - A Chemical Inventory of hazardous chemicals onsite
 - Corresponding Material Safety Data Sheets.
 - Completed Medical Data Sheets (Attachment II) for onsite personnel.
 - A log book identifying personnel onsite each day.
 - Hospital route maps with directions.
 - Emergency Notification - phone numbers.

In the event of an onsite emergency, the Tetra Tech FOL will be responsible for the following tasks:

- Determining that an emergency situation exists, initiating a site evacuation, accounting for onsite personnel at the assembly area, and determining if/when return to work conditions resume
- With assistance from the SSO, educating site workers to the hazards and control measures associated with planned activities at the site, and providing early recognition and prevention.
- With assistance from the SSO, periodically performing practice drills to ensure site workers are familiar with incidental response measures.

13.2 PERSONNEL AND LINES OF AUTHORITY FOR EMERGENCY SITUATIONS

In the event of an emergency, personnel will evacuate and the Site 7 Rubble Disposal Area Emergency Dispatch Center will be notified. It has been determined that the majority of potential emergency situations would be better supported by Site 7 Rubble Disposal Area emergency responders. Based on this determination, Tetra Tech will not provide emergency response support beyond their on-site capabilities and their training. The emergency response agencies listed in this plan are capable of providing the most effective response, and as such, will be designated as the primary responders. These agencies are located within a reasonable distance from the area of site operations, which ensures adequate emergency response time. The Site 7 Rubble Disposal Area POC will be notified anytime emergency response agencies are contacted.

**FIGURE 13-1
MEDICAL DATA SHEET**

This Medical Data Sheet must be completed by on-site personnel and kept in the command post during the conduct of site operations. This data sheet will accompany any personnel when medical assistance is needed or if transport to hospital facilities is required.

Project _____

Name _____ Home Telephone _____

Address _____

Age _____ Height _____ Weight _____

Person to notify in the event of an emergency: Name: _____

Phone: _____

Drug or other Allergies: _____

Particular Sensitivities: _____

Do You Wear Contacts? _____

What medications are you presently using? _____

Name, Address, and Phone Number of personal physician: _____

Note: Health Insurance Portability and Accountability Act (HIPAA) Requirements

HIPAA took effect May 14, 2003. Loosely interpreted, HIPAA regulates the disclosure of Protected Health Information (PHI) by the entity collecting that information. PHI is any information about health status (such as that you may report on this Medical Data Sheet), provision of health care, or other information. HIPAA also requires Tetra Tech to ensure the confidentiality of PHI. This Act can affect the ability of the Medical Data Sheet to contain and convey information you would want a Doctor to know if you were incapacitated. So before you complete the Medical Data Sheet understand that this form will not be maintained in a secure location. It will be maintained in a file box or binder accessible to other members of the field crew so that they can accompany an injured party to the hospital.

DO NOT include information that you do not wish others to know, only information that may be pertinent in an emergency situation or treatment.

Name (Print clearly)

Signature

Date

13.3 CRITERIA AND PROCEDURES FOR EMERGENCY RECOGNITION AND SITE EVACUATION

Emergency situations may be encountered during site activities.

13.3.1 Emergency Recognition

Emergency situations that may be encountered during site activities will normally be recognized by visual observation. Emergencies involving physical hazards are generally readily apparent visually. Visual observation will also play a role in detecting potential exposure events to chemical hazards. To adequately recognize chemical exposures, site personnel must have an awareness of signs and symptoms of exposure associated with the principle site contaminant of concern. Tasks to be performed at the site, potential hazards associated with those tasks and the recommended control methods are discussed in this SSHP and APP. Additionally, early recognition of hazards will be supported by daily site surveys to eliminate any situation predisposed to an emergency. The FOL and/or the SSO will be responsible for performing surveys of work areas prior to initiating site operations and periodically while operations are being conducted. Survey findings are documented by the FOL and/or the SSO in the Site Health and Safety logbook. Site personnel are responsible for reporting perceived hazardous situations.

The above actions will provide early recognition for potential emergency situations, and allow Tetra Tech to instigate necessary control measures. However, if the FOL and the SSO determine that control measures are not sufficient to eliminate the hazard, Tetra Tech will withdraw from the site and notify the appropriate response agencies.

13.3.2 Site Evacuation

An evacuation will be initiated whenever recommended hazard controls are insufficient to protect the health, safety or welfare of site workers. Specific examples of conditions that may initiate an evacuation include, but are not limited to the following: severe weather conditions; fire or explosion; and evidence of personnel overexposure to potential site contaminants.

In the event of an emergency requiring evacuation, personnel will immediately stop activities and report to the designated safe place of refuge unless doing so would pose additional risks. See Figure 13-2. When evacuation to the primary place of refuge is not possible, personnel will proceed to a designated alternate location and remain until further notification from the Tetra Tech FOL. Safe places of refuge will be identified prior to the commencement of site activities by the SSO and will be conveyed to personnel as part of the pre-activities training session. This information will be reiterated during daily safety meetings. Whenever possible, the safe place of refuge will also serve as the telephone communications point for

that area. During an evacuation, personnel will remain at the refuge location until directed otherwise by the Tetra Tech FOL or the on-site Incident Commander of the Emergency Response Team. The FOL or the SSO will perform a head count at this location to account for and to confirm the location of site personnel. Emergency response personnel will be immediately notified of any unaccounted personnel. The SSO will document the names of personnel onsite (on a daily basis) in the site Health and Safety Logbook. This information will be utilized to perform the head count in the event of an emergency.

FIGURE 13-2
SAFE PLACE OF REFUGE



Evacuation procedures will be discussed during the pre-activities training session, prior to the initiation of project tasks. Evacuation routes from the site and safe places of refuge are dependent upon the location at which work is being performed and the circumstances under which an evacuation is required. Additionally, site location and meteorological conditions (i.e., wind speed and direction) may dictate evacuation routes. As a result, assembly points will be selected and communicated to the workers relative to the site location where work is being performed. Evacuation should always take place in an upwind direction from the site.

13.3.3 Emergency Alarm Systems

Tetra Tech personnel will be working in close proximity to each other at Site 7 Rubble Disposal Area. As a result, hand signals, two-way radio communications, voice commands, and line of site communication will be sufficient to alert site personnel of an emergency. When project tasks are performed simultaneously on different sites, vehicle horns will be used to communicate emergency situations. If an emergency warranting evacuation occurs, the following procedures are to be initiated:

- Initiate the evacuation via radio communications, hand signals, voice commands, line of site communication, or vehicle horns. The following signals shall be utilized when communication via vehicle horn is necessary:

HELP	three short blasts	(. . .)
EVACUATION	three long blasts	(- - -)

- Report to the designated refuge point.
- Once non-essential personnel are evacuated, appropriate response procedures will be enacted to control the situation.
- Describe to the FOL (FOL will serve as the Incident Coordinator) pertinent incident details.

14.3 DECONTAMINATION AND MEDICAL TREATMENT OF INJURED PERSONNEL

Based on the nature of the planned activities and on the nature and extent of contamination that may be encountered during these activities, the need for any specific personal decontamination activities in an emergency medical situation is highly unlikely. In the unlikely instance that such efforts become necessary, decontamination procedures will be performed only if doing so does not further jeopardize the welfare of the involved personnel. Decontamination will be postponed if the incident warrants immediate evacuation. As soon as possible and prior to transportation to a medical center the contaminated site worker will be:

- Washed and rinsed
- Contaminated clothing removed and disposed of as hazardous waste
- First aid treatment rendered

13.5 ROUTE MAPS AND PHONE NUMBERS FOR EMERGENCY RESPONDERS

Prior to initiating field activities, personnel will be thoroughly briefed on the emergency procedures to be followed in the event of an accident. All emergencies will be reported to the station's Emergency Services Dispatch Center. Table 13-1 provides a list of emergency contacts and telephone numbers. This table must be posted where it is readily available to site personnel.

**TABLE 13-1
EMERGENCY CONTACTS
SITE 7 RUBBLE DISPOSAL AREA**

AGENCY	TELEPHONE
EMERGENCY	9-1-1
Police	(228) 871-2222
Fire/Hazardous Materials Release	(228) 871-2333
Ambulance Services	(228) 871-2444
Base Contact Mr. Gordon Crane	(228) 871-2485 (800) 343-3472 – pager
Memorial Hospital at Gulfport	(228) 867-4000
Utilities (On Base Utility Clearances and Emergencies) Public Works Maintenance Division	(228) 871-2244
Public Utility Locating Service Mississippi One Call System Inc.	8-1-1
Chemtrec	(800) 424-9300
National Response Center	(800) 424-8802
Mississippi Regional Poison Control Center	(800) 222-1222
PM Gregory Roof, P.E.	(904) 730-4669-office (904) 955-2122-cell
FOL/SSO Bill Olsen	(850) 385-9899-office (850) 443-6855-cell
CLEAN HSM Manager Matthew Soltis, CIH, CSP	(412) 921-8912-office (412) 260-6681-cell
PHSO James K. Laffey	(412) 921-8678 –office (412) 370-6668-cell
Tetra Tech Jacksonville Office	(904) 730-4669
Tetra Tech Pittsburgh Office	(412) 921-7090
Tetra Tech Gulfport, Mississippi Office	(228) 575-6287

13.5.1 Emergency Route to Memorial Hospital


Memorial Hospital at Gulfport
4500 13th Street
Gulfport, Mississippi 39501-2569
(228) 867-4000

Directions from NCBC Gulfport are as follows. See Figure 13-3 for a route map.

Distance: 2 miles Time: 5 minutes

- Start out heading North on Colby Ave. towards 6th St. 0.1 miles.
- Turn Right onto 6th St. 0.9 miles.
- Turn Right onto Decatur Ave. 0.2 miles.
- Decatur Ave. becomes 49th Ave 0.1 miles.
- Turn Left onto Broad Ave. 0.5 miles.
- Turn Left onto 13TH St. 0.2 miles.
- Destination is on the Left

**FIGURE 13-3
MAP TO MEMORIAL HOSPITAL AT GULFPORT**

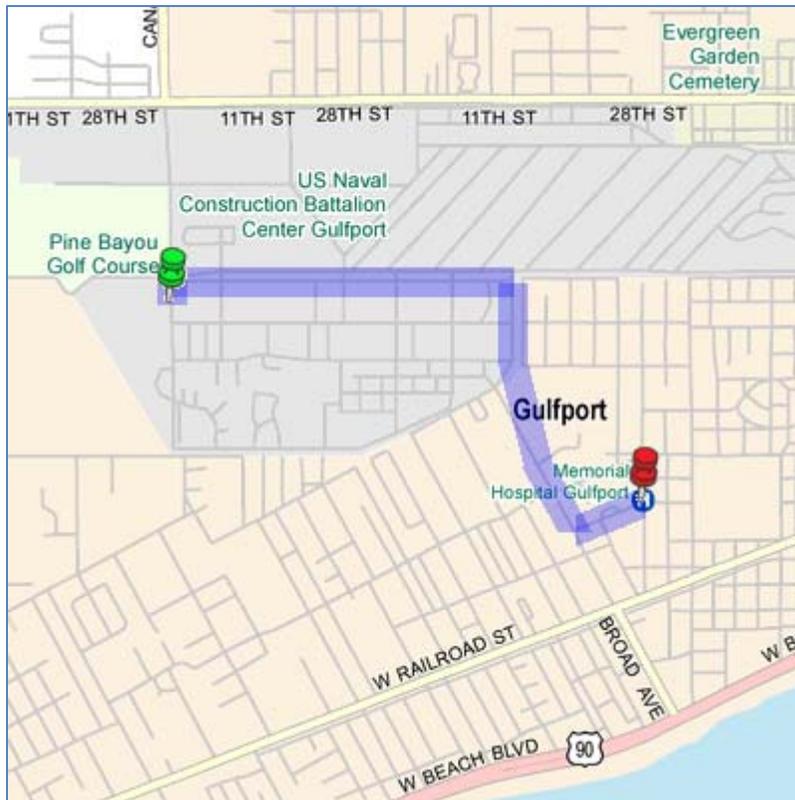

13.6 CRITERIA FOR ALERTING LOCAL COMMUNITY RESPONDERS

In the event of an emergency situation, the FOL and SSO will enact emergency notification procedures to secure additional assistance in the following manner:

- Dial 9-1-1 and call other pertinent emergency contacts listed in Table 13-1 and report the incident.

- Give the emergency operator the:
 - Location of the emergency
 - Type of emergency
 - Number of injured
 - A brief description of the incident.

- Stay on the phone and follow the instructions given by the operator.

- The operator will then notify and dispatch the proper emergency response agencies.

14.0 REFERENCES, MATERIALS AND DOCUMENTATION

United States Army Corps of Engineers (USACE). 15 October 2008. Engineer Manual (EM) 385-1-1, Safety and Health Requirements Manual.

Available online at: <http://www.usace.army.mil/inet/usace-docs/eng-manuals/em385-1-1/entire.pdf>

The Tetra Tech FOL shall ensure the following materials/documents are taken to the project site and used when required. The following documentation is to be posted or maintained at the site for quick reference purposes. For this project, the items so noted below will be maintained in the Tetra Tech work trailer, located on Defense Highway, one mile north of the site.

Chemical Inventory Listing (posted) - This list represents the chemicals brought onsite, including decontamination solutions, sample preservations, fuel, etc. This list will be maintained in the Tetra Tech Work Trailer.

Material Safety Data Sheets (MSDSs) (maintained) - The MSDSs will be maintained in the Tetra Tech Work trailer. These documents should match the listings on the chemical inventory list for substances used onsite. It is acceptable to have these documents within a central folder and the chemical inventory as the table of contents.

Placards and Labels (maintained) - Where chemical inventories have been separated because of quantities and incompatibilities, these areas will be conspicuously marked using Department of Transportation (DOT) placards and acceptable (Hazard Communication 29 CFR 199.1200(f)) labels.

The OSHA Job Safety & Health Protection Poster (posted) - This poster, as directed by 29 CFR 1903.2 (a)(1), should be conspicuously posted in places where notices to employees are normally posted. Each FOL shall ensure that this poster is not defaced, altered, or covered by other material. See Attachment VI.

Site Clearance (maintained) - This list is found within the training section of the SSHP (see Attachment I). This list identifies site personnel, dates of training (including site-specific training), and medical surveillance. The list indicates not only clearance but also status. If personnel do not meet these requirements, they do not enter the site while site personnel are engaged in activities. This list will be maintained in a vehicle on site during operations.

Emergency Phone Numbers and Directions to the Hospital(s) (posted) - This list of numbers and directions will be maintained at phone communications points and in each site vehicle.

Medical Data Sheets/Cards (maintained) - Medical Data Sheets will be completed by onsite personnel and filed in the Tetra Tech Work Trailer. The Medical Data Sheet will accompany any injury or illness requiring medical attention to the medical facility. A copy of this sheet or a wallet card will be given to personnel to carry at times. See Attachment II.

Hearing Conservation Standard (29 CFR 199.95) (posted) - This standard will be posted any time hearing protection or other noise abatement procedures are used.

Personnel Monitoring (maintained) - Results generated through personnel sampling (levels of airborne toxins, noise levels, etc.) will be posted to inform individuals of the results of that effort.

ATTACHMENT I
SITE-SPECIFIC TRAINING DOCUMENTATION

ATTACHMENT II
MEDICAL DATA SHEET

MEDICAL DATA SHEET

This Medical Data Sheet must be completed by on-site personnel and kept in a secured location or on your person during site operations. This data sheet will accompany any personnel when medical assistance is needed or if transport to hospital facilities is required.

Project: _____

Name: _____ Home Telephone _____

Address: _____

Age: _____ Height: _____ Weight: _____

Person to notify in the event of an emergency: Name _____

(Relationship): _____ Phone: _____

Drug or other Allergies: _____

Doctor Prescribed Antidotes: _____ Prescription Expiration date: _____

Particular Sensitivities (Previous Medical Conditions): _____

Do You Wear Contacts? _____

What medications are you presently using? _____

Name, Address, and Phone Number of your personal physician: _____

Note: Health Insurance Portability and Accountability Act (HIPAA) Requirements

HIPAA took effect in 1996 then was amended in April 14, 2003. Loosely interpreted, HIPAA regulates the disclosure of Protected Health Information (PHI) by the entity collecting that information. PHI is any information about health status (such as that you may report on this Medical Data Sheet), provision of health care, or other information. HIPAA also requires Tetra Tech to ensure the confidentiality of PHI. This Act can affect the ability of the Medical Data Sheet to contain and convey information you would want a Doctor to know if you were incapacitated. So before you complete the Medical Data Sheet understand that this form may not be maintained in a secure location. It will be maintained in a file box or binder accessible to other members of the field crew so that they can access this form so it may accompany an injured party to the hospital.

DO NOT include information that you do not wish others to know, only information that may be pertinent in an emergency situation or treatment.

Name (Print clearly)

Signature

Date

**ATTACHMENT III
EMPLOYEE TRAINING/QUALIFICATIONS/MEDICAL CLEARANCE TO
BE ATTACHED BY PM/FOL**

**(40-Hour HAZWOPER Certificates; 8-Hour HAZWOPER Refresher
Certificates; First Aid/CPR Certificates;
Employee Resumes as required)**

ATTACHMENT IV
DPT/Drill Rig INSPECTION CHECKLIST

Equipment Inspection Checklist for Drill Rigs

Company: _____

Unit/Serial No#: _____

Inspection Date: ____ / ____ / ____ Time: ____ :

Equipment Type: _____
(e.g, Drill Rigs Hollow Stem, Mud Rotary, Direct Push, HDD)

Project Name: _____

Project No#: _____

Yes	No	NA	Requirement	Comments
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Emergency Stop Devices	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Emergency Stop Devices (At points of operation) 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Have all emergency shut offs identified been communicated to the field crew? 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Has a person been designated as the Emergency Stop Device Operator? 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	Highway Use	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Cab, mirrors, safety glass? 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Turn signals, lights, brake lights, etc. (front/rear) for equipment approved for highway use? 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Seat Belts? 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Is the equipment equipped with audible back-up alarms and back-up lights? 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Horn and gauges 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Brake condition (dynamic, park, etc.) 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Tires (Tread) or tracks 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Windshield wipers 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Exhaust system 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Steering (standard and emergency) 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Wheel Chocks? 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Are tools and material secured to prevent movement during transport? Especially those within the cab? 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Are there flammables or solvents or other prohibited substances stored within the cab? 	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> • Are tools or debris in the cab that may adversely influence operation of the vehicle (in and around brakes, clutch, gas pedals) 	

Yes	No	NA	Requirement	Comments
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Fluid Levels: <ul style="list-style-type: none"> • Engine oil • Transmission fluid • Brake fluid • Cooling system fluid • Hoses and belts • Hydraulic oil 	
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	High Pressure Hydraulic Lines <ul style="list-style-type: none"> • Obvious damage • Operator protected from accidental release • Coupling devices, connectors, retention cables/pins are in good condition and in place 	
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Mast Condition <ul style="list-style-type: none"> • Structural components/tubing • Connection points • Pins • Welds • Outriggers • Operational • Plumb (when raised) 	
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Hooks <ul style="list-style-type: none"> • Are the hooks equipped with Safety Latches? • Does it appear that the hook is showing signs of wear in excess of 9% original dimension? • Is there a bend or twist exceeding 9% from the plane of an unbent hook? • Increase in throat opening exceeding 15% from new condition • Excessive nicks and/or gouges • Clips • Number of U-Type (Crosby) Clips (cable size 5/16 – 5/8 = 3 clips minimum) (cable size 3/4 – 1 inch = 4 clips minimum) (cable size 1 1/8 – 1 3/8 inch = 5 clips minimum) 	

Yes	No	NA	Requirement	Comments
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	PPE Required for Drill Rig Exclusion Zone <ul style="list-style-type: none"> • Hardhat • Safety glasses • Work gloves • Chemical resistant gloves _____ • Steel toed Work Boots • Chemical resistant Boot Covers • Apron • Coveralls Tyvek, Saranex, cotton) _____ 	
<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	Other Hazards <ul style="list-style-type: none"> • Excessive Noise Levels? _____ dBA • Chemical hazards (Drilling supplies - Sand, bentonite, grout, fuel, etc.) <ul style="list-style-type: none"> - MSDSs available? • Will On-site fueling occur <ul style="list-style-type: none"> - Safety cans available? - Fire extinguisher (Type/Rating - _____) 	


Approved for Use Yes No See Comments

Site Health and Safety Officer

Operator

ATTACHMENT V

**TETRA TECH STANDARD OPERATING PROCEDURES (SOP) UTILITY
LOCATION AND EXCAVATION CLEARANCE**



TETRA TECH

STANDARD OPERATING PROCEDURES

Number	HS-1.0	Page	1 of 15
Effective Date	01/2012	Revision	3
Applicability	Tetra Tech, Inc.		
Prepared	Health & Safety		
Approved	J. Zimmerly		

Subject
UTILITY LOCATING AND EXCAVATION CLEARANCE

TABLE OF CONTENTS

<u>SECTION</u>	<u>PAGE</u>
1.0 PURPOSE.....	2
2.0 SCOPE.....	2
3.0 GLOSSARY	2
4.0 RESPONSIBILITIES.....	3
5.0 PROCEDURES.....	3
5.1 BURIED UTILITIES.....	3
5.2 OVERHEAD POWER LINES.....	5
6.0 UNDERGROUND LOCATING TECHNIQUES.....	5
6.1 GEOPHYSICAL METHODS.....	5
6.2 PASSIVE DETECTION SURVEYS.....	6
6.3 INTRUSIVE DETECTION SURVEYS.....	6
7.0 INTRUSIVE ACTIVITIES SUMMARY.....	7
8.0 REFERENCES.....	8

ATTACHMENTS

1	Listing of Underground Utility Clearance Resources.....	9
2	Frost Line Penetration Depths by Geographic Location.....	11
3	Utility Clearance Form.....	12
4	OSHA Letter of Interpretation	13

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 2 of 15
	Revision 3	Effective Date 01/2012

1.0 PURPOSE

Utilities such as electric service lines, natural or propane gas lines, water and sewage lines, telecommunications, and steam lines are very often in the immediate vicinity of work locations. Contact with underground or overhead utilities can have serious consequences including employee injury/fatality, property and equipment damage, substantial financial impacts, and loss of utility service to users.

The purpose of this procedure is to provide minimum requirements and technical guidelines regarding the appropriate procedures to be followed when performing subsurface and overhead utility locating services. It is the policy of Tetra Tech NUS, Inc. (TtNUS) to provide a safe and healthful work environment for the protection of our employees. The purpose of this Standard Operating Procedure (SOP) is to aid in achieving the objectives of this policy, to present the acceptable procedures pertaining to utility locating and excavation clearance activities, and to present requirements and restrictions relevant to these types of activities. This SOP must be reviewed by any employee potentially involved with underground or overhead utility locating and avoidance activities.

2.0 SCOPE

This procedure applies to all TtNUS field activities where there may be potential contact with underground or overhead utilities. This procedure provides a description of the principles of operation, instrumentation, applicability, and implementability of typical methods used to determine the presence and avoidance of contact with utility services. This procedure is intended to assist with work planning and scheduling, resource planning, field implementation, and subcontractor procurement. Utility locating and excavation clearance requires site-specific information prior to the initiation of any such activities on a specific project. This SOP is not intended to provide a detailed description of methodology and instrument operation. Specialized expertise during both planning and execution of several of the methods presented may also be required.

3.0 GLOSSARY

Electromagnetic Induction (EMI) Survey - A geophysical exploration method whereby electromagnetic fields are induced in the ground and the resultant secondary electromagnetic fields are detected as a measure of ground conductivity.

Magnetometer – A device used for precise and sensitive measurements of magnetic fields.

Magnetic Survey – A geophysical survey method that depends on detection of magnetic anomalies caused by the presence of buried ferromagnetic objects.

Metal Detection – A geophysical survey method that is based on electromagnetic coupling caused by underground conductive objects.

Vertical Gradiometer – A magnetometer equipped with two sensors that are vertically separated by a fixed distance. It is best suited to map near surface features and is less susceptible to deep geologic features.

Ground Penetrating Radar – Ground Penetrating Radar (GPR) involves specialized radar equipment whereby a signal is sent into the ground via a transmitter. Some portion of the signal will be reflected from the subsurface material, which is then recorded with a receiver and electronically converted into a graphic picture.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 3 of 15
	Revision 3	Effective Date 01/2012

4.0 RESPONSIBILITIES

Project Manager (PM)/Task Order Manager (TOM) - Responsible for ensuring that all field activities are conducted in accordance with this procedure.

Site Manager (SM)/Field Operations Leader (FOL) - Responsible for the onsite verification that all field activities are performed in compliance with approved SOPs or as otherwise directed by the approved project plan(s).

Site Health & Safety Officer (SHSO) – Responsible to provide technical assistance and verify full compliance with this SOP. The SHSO is also responsible for reporting any deficiencies to the Corporate Health and Safety Manager (HSM) and to the PM/TOM.

Health & Safety Manager (HSM) – Responsible for preparing, implementing, and modifying corporate health and safety policy and this SOP.

Site Personnel – Responsible for performing their work activities in accordance with this SOP and the TtNUS Health and Safety Policy.

5.0 PROCEDURES

This procedure addresses the requirements and technical procedures that must be performed to minimize the potential for contact with underground and overhead utility services. These procedures are addressed individually from a buried and overhead standpoint.

5.1 Buried Utilities

Buried utilities present a heightened concern because their location is not typically obvious by visual observation, and it is common that their presence and/or location is unknown or incorrectly known on client properties. This procedure must be followed prior to beginning any subsurface probing or excavation that might potentially be in the vicinity of underground utility services. In addition, the Utility Clearance Form (Attachment 3) must be completed for every location or cluster of locations where intrusive activities will occur.

Where the positive identification and de-energizing of underground utilities cannot be obtained and confirmed using the following steps, the PM/TOM is responsible for arranging for the procurement of a qualified, experienced, utility locating subcontractor who will accomplish the utility location and demarcation duties specified herein.

1. A comprehensive review must be made of any available property maps, blue lines, or as-builts prior to site activities. Interviews with local personnel familiar with the area should be performed to provide additional information concerning the location of potential underground utilities. Information regarding utility locations shall be added to project maps upon completion of this exercise.
- 2., A visual site inspection must be performed to compare the site plan information to actual field conditions. Any findings must be documented and the site plan/maps revised. The area(s) of proposed excavation or other subsurface activities must be marked at the site in white paint or pin flags to identify those locations of the proposed intrusive activities. The site inspection should focus on locating surface indications of potential underground utilities. Items of interest include the presence of nearby area lights, telephone service, drainage grates, fire hydrants, electrical service vaults/panels, asphalt/concrete scapes and patches, and topographical depressions. Note the location of any emergency shut off switches. Any additional information regarding utility

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 4 of 15
	Revision 3	Effective Date 01/2012

locations shall be added to project maps upon completion of this exercise and returned to the PM/TOM.

3. If the planned work is to be conducted on private property (e.g., military installations, manufacturing facilities, etc.) the FOL must identify and contact appropriate facility personnel (e.g., public works or facility engineering) before any intrusive work begins to inquire about (and comply with) property owner requirements. It is important to note that private property owners may require several days to several weeks advance notice prior to locating utilities.
4. If the work location is on public property, the state agency that performs utility clearances must be notified (see Attachment 1). State "one-call" services must be notified prior to commencing fieldwork per their requirements. Most one-call services require, by law, 48- to 72-hour advance notice prior to beginning any excavation. Such services typically assign a "ticket" number to the particular site. This ticket number must be recorded for future reference and is valid for a specific period of time, but may be extended by contacting the service again. The utility service will notify utility representatives who then mark their respective lines within the specified time frame. It should be noted that most military installations own their own utilities but may lease service and maintenance from area providers. Given this situation, "one call" systems may still be required to provide location services on military installations.
5. Utilities must be identified and their locations plainly marked using pin flags, spray paint, or other accepted means. The location of all utilities must be noted on a field sketch for future inclusion on project maps. Utility locations are to be identified using the following industry-standard color code scheme, unless the property owner or utility locator service uses a different color code:

white	excavation/subsurface investigation location
red	electrical
yellow	gas, oil, steam
orange	telephone, communications
blue	water, irrigation, slurry
green	sewer, drain
6. Where utility locations are not confirmed with a high degree of confidence through drawings, schematics, location services, etc., the work area must be thoroughly investigated prior to beginning the excavation. In these situations, utilities must be identified using safe and effective methods such as passive and intrusive surveys, or the use of non-conductive hand tools. Also, in situations where such hand tools are used, they should always be used in conjunction with suitable detection equipment, such as the items described in Section 6.0 of this SOP. Each method has advantages and disadvantages including complexity, applicability, and price. It also should be noted that in some states, initial excavation is required by hand to a specified depth.
7. At each location where trenching or excavating will occur using a backhoe or other heavy equipment, and where utility identifications and locations cannot be confirmed prior to groundbreaking, the soil must be probed using a device such as a tile probe which is made of non-conductive material such as fiberglass. If these efforts are not successful in clearing the excavation area of suspect utilities, hand shoveling must be performed for the perimeter of the intended excavation.
8. All utilities uncovered or undermined during excavation must be structurally supported to prevent potential damage. Unless necessary as an emergency corrective measure, TtNUS shall not make any repairs or modifications to existing utility lines without prior permission of the utility owner, property owner, and Corporate HSM. All repairs require that the line be locked-out/tagged-out prior to work.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 5 of 15
	Revision 3	Effective Date 01/2012

5.2 Overhead Power Lines

If it is necessary to work within the minimum clearance distance of an overhead power line, the overhead line must be de-energized and grounded, or re-routed by the utility company or a registered electrician. If protective measures such as guarding, isolating, or insulating are provided, these precautions must be adequate to prevent employees from contacting such lines directly with any part of their body or indirectly through conductive materials, tools, or equipment.

The following table provides the required minimum clearances for working in proximity to overhead power lines.

<u>Nominal Voltage</u>	<u>Minimum Clearance</u>
0 -50 kV	10 feet, or one mast length; whichever is greater
50+ kV	10 feet plus 4 inches for every 10 kV over 50 kV or 1.5 mast lengths; whichever is greater

6.0 UNDERGROUND LOCATING TECHNIQUES

A variety of supplemental utility locating approaches are available and can be applied when additional assurance is needed. The selection of the appropriate method(s) to employ is site-specific and should be tailored to the anticipated conditions, site and project constraints, and personnel capabilities.

6.1 Geophysical Methods

Geophysical methods include electromagnetic induction, magnetics, and ground penetrating radar. Additional details concerning the design and implementation of electromagnetic induction, magnetics, and ground penetrating radar surveys can be found in one or more of the TtNUS SOPs included in the References (Section 8.0).

Electromagnetic Induction

Electromagnetic Induction (EMI) line locators operate either by locating a background signal or by locating a signal introduced into the utility line using a transmitter. A utility line acts like a radio antenna, producing electrons, which can be picked up with a radiofrequency receiver. Electrical current carrying conductors have a 60HZ signal associated with them. This signal occurs in all power lines regardless of voltage. Utilities in close proximity to power lines or used as grounds may also have a 60HZ signal, which can be picked up with an EM receiver. A typical example of this type of geophysical equipment is an EM-61.

EMI locators specifically designed for utility locating use a special signal that is either indirectly induced onto a utility line by placing the transmitter above the line or directly induced using an induction clamp. The clamp induces a signal on the specific utility and is the preferred method of tracing since there is little chance of the resulting signals being interfered with. A good example of this type of equipment is the Schonstedt® MAC-51B locator. The MAC-51B performs inductively traced surveys, simple magnetic locating, and traced nonmetallic surveys.

When access can be gained inside a conduit to be traced, a flexible insulated trace wire can be used. This is very useful for non-metallic conduits but is limited by the availability of gaining access inside the pipe.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 6 of 15
	Revision 3	Effective Date 01/2012

Magnetics

Magnetic locators operate by detecting the relative amounts of buried ferrous metal. They are incapable of locating or identifying nonferrous utility lines but can be very useful for locating underground storage tanks (UST's), steel utility lines, and buried electrical lines. A typical example of this type of equipment is the Schonstedt® GA-52Cx locator. The GA-52Cx is capable of locating 4-inch steel pipe up to 8 feet deep.

Non-ferrous lines are often located by using a typical plumbing tool (snake) fed through the line. A signal is then introduced to the snake that is then traced.

Ground Penetrating Radar

Ground Penetrating Radar (GPR) involves specialized radar equipment whereby a signal is sent into the ground via a transmitter. Some portion of the signal will be reflected from the subsurface material, which is then recorded with a receiver and electronically converted into a graphic picture. In general, an object which is harder than the surrounding soil will reflect a stronger signal. Utilities, tunnels, UST's, and footings will reflect a stronger signal than the surrounding soil. Although this surface detection method may determine the location of a utility, this method does not specifically identify utilities (i.e., water vs. gas, electrical vs. telephone); hence, verification may be necessary using other methods. This method is somewhat limited when used in areas with clay soil types or with a high water table.

6.2 Passive Detection Surveys

Acoustic Surveys

Acoustic location methods are generally most applicable to waterlines or gas lines. A highly sensitive Acoustic Receiver listens for background sounds of water flowing (at joints, leaks, etc.) or to sounds introduced into the water main using a transducer. Acoustics may also be applicable to determine the location of plastic gas lines.

Thermal Imaging

Thermal (i.e., infrared) imaging is a passive method for detecting the heat emitted by an object. Electronics in the infrared camera convert subtle heat differentials into a visual image on the viewfinder or a monitor. The operator does not look for an exact temperature; rather they look for heat anomalies (either elevated or suppressed temperatures) characteristic of a potential utility line.

The thermal fingerprint of underground utilities results from differences in temperature between the atmosphere and the fluid present in a pipe or the heat generated by electrical resistance. In addition, infrared scanners may be capable of detecting differences in the compaction, temperature and moisture content of underground utility trenches. High-performance thermal imagery can detect temperature differences to hundredths of a degree.

6.3 Intrusive Detection Surveys

Vacuum Excavation

Vacuum excavation is used to physically expose utility services. The process involves removing the surface material over approximately a 1' x 1' area at the site location. The air-vacuum process proceeds with the simultaneous action of compressed air-jets to loosen soil and vacuum extraction of the resulting

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 7 of 15
	Revision 3	Effective Date 01/2012

debris. This process ensures the integrity of the utility line during the excavation process, as no hammers, blades, or heavy mechanical equipment comes into contact with the utility line, eliminating the risk of damage to utilities. The process continues until the utility is uncovered. Vacuum excavation can be used at the proposed site location to excavate below the "utility window" which is usually 8 feet.

Hand Excavation

When the identification and location of underground utilities cannot be positively confirmed through document reviews and/or other methods, borings and excavations may be cleared via the use of non-conductive hand tools. This should always be done in conjunction with the use of detection equipment. This would be required for all locations where there is a potential to impact buried utilities. The minimum hand-excavation depth that must be reached is to be determined considering the geographical location of the work site. This approach recognizes that the placement of buried utilities is influenced by frost line depths that vary by geographical region. Attachment 2 presents frost line depths for the regions of the contiguous United States. At a minimum, hand excavation depths must be at least to the frost line depth (see Attachment 2) plus two (2) feet, but never less than 4 feet below ground surface (bgs). For hand excavation, the hole created must be reamed large enough to be at least the diameter of the drill rig auger or bit prior to drilling. For soil gas surveys, the survey probe shall be placed as close as possible to the cleared hand excavation. It is important to note that a post-hole digger must not be used in this type of hand excavation activity.

Tile Probe Surveys

For some soil types, site conditions, and excavation requirements, non-conductive tile probes may be used. A tile probe is a "T"-handled rod of varying lengths that can be pushed into the soil to determine if any obstructions exist at that location. Tile probes constructed of fiberglass or other nonconductive material are readily-available from numerous vendors. Tile probes must be performed to the same depth requirements as previously specified. As with other types of hand excavating activities, the use of a non-conductive tile probe, should always be in conjunction with suitable utility locating detection equipment.

7.0 INTRUSIVE ACTIVITIES SUMMARY

The following list summarizes the activities that must be performed prior to beginning subsurface activities:

1. Map and mark all subsurface locations and excavation boundaries using white paint or markers specified by the client or property owner.
2. Notify the property owner and/or client that the locations are marked. At this point, drawings of locations or excavation boundaries shall be provided to the property owner and/or client so they may initiate (if applicable) utility clearance.

Note: Drawings with confirmed locations should be provided to the property owner and/or client as soon as possible to reduce potential time delays.

3. Notify "One Call" service. If possible, arrange for an appointment to show the One Call representative the surface locations or excavation boundaries in person. This will provide a better location designation to the utilities they represent. You should have additional drawings should you need to provide plot plans to the One Call service.
4. Implement supplemental utility detection techniques as necessary and appropriate to conform utility locations or the absence thereof.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 8 of 15
	Revision 3	Effective Date 01/2012

5. Complete Attachment 3, Utility Clearance Form. This form should be completed for each excavation location. In situations where multiple subsurface locations exist within the close proximity of one another, one form may be used for multiple locations provided those locations are noted on the Utility Clearance Form. Upon completion, the Utility Clearance Form and revised/annotated utility location map becomes part of the project file.

8.0 REFERENCES

OSHA Letter of Interpretation, Mr. Joseph Caldwell, Attachment 4
 OSHA 29 CFR 1926(b)(2)
 OSHA 29 CFR 1926(b)(3)
 Tt Utility Locating and Clearance Policy
 Tt SOP GH-3.1; Resistivity and Electromagnetic Induction
 Tt SOP GH-3.2; Magnetic and Metal Detection Surveys
 Tt SOP GH-3.4; Ground-penetrating Radar Surveys

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 9 of 15
	Revision 3	Effective Date 01/2012

**ATTACHMENT 1
LISTING OF UNDERGROUND UTILITY CLEARANCE RESOURCES**



American Public Works Association
2345 Grand Boulevard, Suite 500, Kansas City, MO 64108-2625
Phone (816) 472-6100 • Fax (816) 472-1610
Web www.apwa.net • E-mail apwa@apwa.net

**ONE-CALL SYSTEMS INTERNATIONAL
CONDENSED DIRECTORY**

Alabama Alabama One-Call 1-800-292-8525	Iowa Iowa One-Call 1-800-292-8989	New Jersey New Jersey One Call 1-800-272-1000
Alaska Locate Call Center of Alaska, Inc. 1-800-478-3121	Kansas Kansas One-Call System, Inc. 1-800-344-7233	New Mexico New Mexico One Call System, Inc. 1-800-321-2537 Las Cruces- Dona Ana Blue Stakes 1-888-526-0400
Arizona Arizona Blue Stake 1-800-782-5348	Kentucky Kentucky Underground Protection Inc. 1-800-752-6007	New York Dig Safely New York 1-800-962-7962 New York City- Long Island One Call Center 1-800-272-4480
Arkansas Arkansas One Call System, Inc. 1-800-482-8998	Louisiana Louisiana One Call System, Inc. 1-800-272-3020	North Carolina The North Carolina One-Call Center, Inc. 1-800-632-4949
California Underground Service Alert North 1-800-227-2600 Underground Service Alert of Southern California 1-800-227-2600	Maine Dig Safe System, Inc. 1-888-344-7233	North Dakota North Dakota One-Call 1-800-795-0555
Colorado Utility Notification Center of Colorado 1-800-922-1987	Maryland Miss Utility 1-800-257-7777 Miss Utility of Delmarva 1-800-282-8555	Ohio Ohio Utilities Protection Service 1-800-362-2764 Oil & Gas Producers Underground Protect'n Svc 1-800-925-0988
Connecticut Call Before You Dig 1-800-922-4455	Massachusetts Dig Safe System, Inc. 1-888-344-7233	Oklahoma Call Okie 1-800-522-6543
Delaware Miss Utility of Delmarva 1-800-282-8555	Michigan Miss Dig System, Inc. 1-800-482-7171	Oregon Oregon Utility Notification Center/One Call Concepts 1-800-332-2344
Florida Sunshine State One-Call of Florida, Inc. 1-800-432-4770	Minnesota Gopher State One Call 1-800-252-1166	Pennsylvania Pennsylvania One Call System, Inc. 1-800-242-1776
Georgia Underground Protection Center, Inc. 1-800-282-7411	Mississippi Mississippi One-Call System, Inc 1-800-227-6477	Rhode Island Dig Safe System, Inc. 1-888-344-7233
Hawaii Underground Service Alert North 1-800-227-2600	Missouri Missouri One-Call System, Inc. 1-800-344-7483	South Carolina Palmetto Utility Protection Service Inc. 1-888-721-7877
Idaho Dig Line Inc. 1-800-342-1585 Kootenai County One-Call 1-800-428-4950 Shoshone - Benewah One-Call 1-800-398-3285	Montana Utilities Underground Protection Center 1-800-424-5555 Montana One Call Center 1-800-551-8344	South Dakota South Dakota One Call 1-800-781-7474
Illinois JULIE, Inc. 1-800-892-0123 Digger (Chicago Utility Alert Network) 312-744-7000	Nebraska Diggers Hotline of Nebraska 1-800-331-5666	Tennessee Tennessee One-Call System, Inc. 1-800-351-1111
Indiana Indiana Underground Plant Protection Service 1-800-382-5544	Nevada Underground Service Alert North 1-800-227-2600	
	New Hampshire Dig Safe System, Inc. 1-888-344-7233	

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 10 of 15
	Revision 3	Effective Date 01/2012

ATTACHMENT 1 (Continued)

Texas

Texas One Call System
1-800-245-4545
Texas Excavation Safety System, Inc.
1-800-344-8377
Lone Star Notification Center
1-800-669-8344

Utah

Blue Stakes of Utah
1-800-662-4111

Vermont

Dig Safe System, Inc.
1-888-344-7233

Virginia

Miss Utility of Virginia
1-800-552-7001
Miss Utility (Northern Virginia)
1-800-257-7777

Washington

Utilities Underground Location Center
1-800-424-5555
Northwest Utility Notification Center
1-800-553-4344
Inland Empire Utility Coordinating
Council
509-456-8000

West Virginia

Miss Utility of West Virginia, Inc.
1-800-245-4848

Wisconsin

Diggers Hotline, Inc.
1-800-242-8511

Wyoming

Wyoming One-Call System, Inc.
1-800-348-1030
Call Before You Dig of Wyoming
1-800-849-2476

District of Columbia

Miss Utility
1-800-257-7777

Alberta

Alberta One-Call Corporation
1-800-242-3447

British Columbia

BC One Call
1-800-474-6886

Ontario


Ontario One-Call System
1-800-400-2255

Quebec

Info-Excavation
1-800-663-9228

ATTACHMENT 2

FROST LINE PENETRATION DEPTHS BY GEOGRAPHIC LOCATION

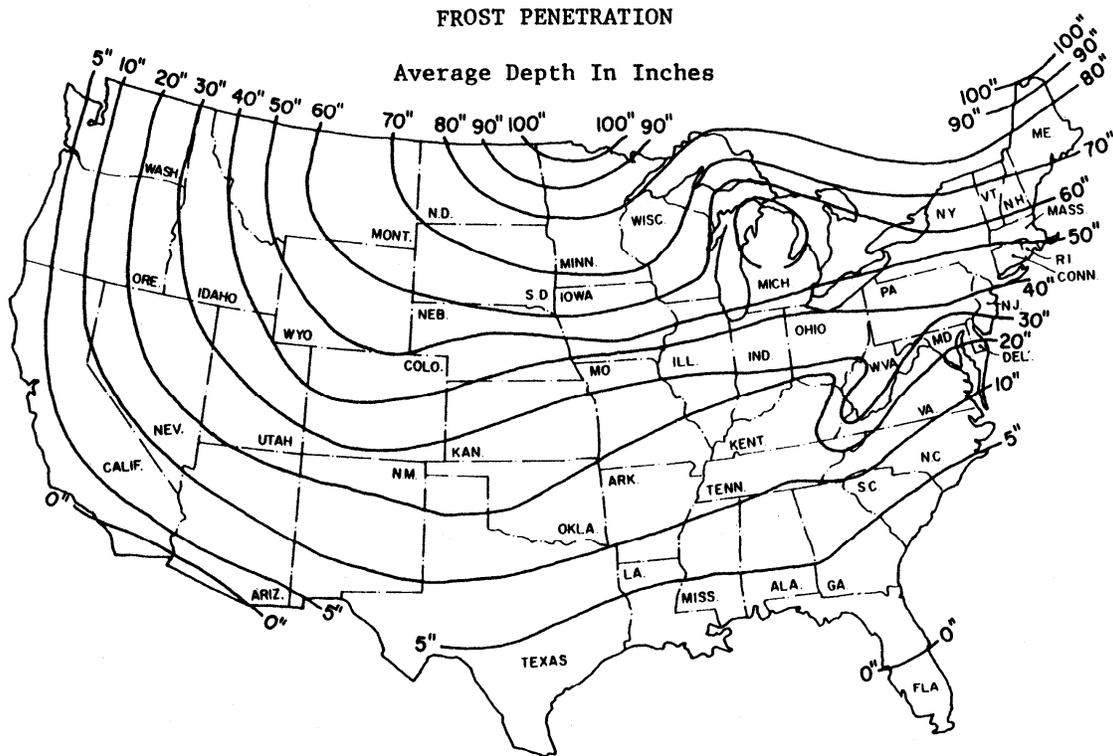

Courtesy U.S. Department Of Commerce

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 12 of 15
	Revision 3	Effective Date 01/2012

**ATTACHMENT 3
UTILITY CLEARANCE FORM**

Client: _____ Project Name: _____
Project No.: _____ Completed By: _____
Location Name: _____ Work Date: _____
Excavation Method/Overhead Equipment: _____

1. **Underground Utilities** Circle One
- a) Review of existing maps? yes no N/A
 - b) Interview local personnel? yes no N/A
 - c) Site visit and inspection? yes no N/A
 - d) Excavation areas marked in the field? yes no N/A
 - e) Utilities located in the field? yes no N/A
 - f) Located utilities marked/added to site maps? yes no N/A
 - g) Client contact notified yes no N/A
Name _____ Telephone: _____ Date: _____
 - g) State One-Call agency called? yes no N/A
Caller: _____
Ticket Number: _____ Date: _____
 - h) Geophysical survey performed? yes no N/A
Survey performed by: _____
Method: _____ Date: _____
 - i) Hand excavation performed (with concurrent use of utility
detection device)? yes no N/A
Completed by: _____
Total depth: _____ feet Date: _____
 - j) Trench/excavation probed? yes no N/A
Probing completed by: _____
Depth/frequency: _____ Date: _____

2. **Overhead Utilities** Present Absent
- a) Determination of nominal voltage yes no N/A
 - b) Marked on site maps yes no N/A
 - c) Necessary to lockout/insulate/re-route yes no N/A
 - d) Document procedures used to lockout/insulate/re-route yes no N/A
 - e) Minimum acceptable clearance (SOP Section 5.2): _____

3. **Notes:**

Approval:

Site Manager/Field Operations Leader Date

c: PM/Project File
Program File

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 13 of 15
	Revision 3	Effective Date 01/2012

**ATTACHMENT 4
OSHA LETTER OF INTERPRETATION**

Mr. Joseph Caldwell
Consultant
Governmental Liaison
Pipeline Safety Regulations
211 Wilson Boulevard
Suite 700
Arlington, Virginia 22201

Re: Use of hydro-vacuum or non-conductive hand tools to locate underground utilities.

Dear Mr. Caldwell:

In a letter dated July 7, 2003, we responded to your inquiry of September 18, 2002, regarding the use of hydro-vacuum equipment to locate underground utilities by excavation. After our letter to you was posted on the OSHA website, we received numerous inquiries that make it apparent that aspects of our July 7 letter are being misunderstood. In addition, a number of industry stakeholders, including the National Utility Contractors Association (NUCA), have provided new information regarding equipment that is available for this work.

To clarify these issues, we are withdrawing our July 7 letter and issuing this replacement response to your inquiry.

***Question:** Section 1926.651 contains several requirements that relate to the safety of employees engaged in excavation work. Specifically, paragraphs (b)(2) and (b)(3) relate in part to the safety of the means used to locate underground utility installations that, if damaged during an uncovering operation, could pose serious hazards to employees.*

Under these provisions, what constitutes an acceptable method of uncovering underground utility lines, and further, would the use of hydro-vacuum excavation be acceptable under the standard?

Answer

Background

Two sections of 29 CFR 1926 Subpart P (Excavations), 1926.651(Specific excavation requirements), govern methods for uncovering underground utility installations. Specifically, paragraph (b)(2) states:

When utility companies or owners cannot respond to a request to locate underground utility installations within 24 hours * * * or cannot establish the exact location of these installations, the employer may proceed, provided the employer does so with caution, and provided detection equipment or other acceptable means to locate utility installations are used. (emphasis added).

Paragraph (b)(3) provides:

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 14 of 15
	Revision 3	Effective Date 01/2012

ATTACHMENT 4 (Continued)

When excavation operations approach the estimated location of underground installations, the exact location of the installations shall be determined by safe and acceptable means. (emphasis added).

Therefore, “acceptable means” must be used where the location of the underground utilities have not been identified by the utility companies and detection equipment is not used.

Subpart P does not contain a definition of either “other acceptable means” or “safe and acceptable means.” The preambles to both the proposed rule and the final rule discussed the rationale behind the wording at issue. For example, the preamble to the proposed rule, 52 Fed. Reg. 12301 (April 15, 1987), noted that a 1972 version of this standard contained language that specified “careful probing or hand digging” as the means to uncover utilities. The preamble then noted that an amendment to the 1972 standard later deleted that language “to allow other, *equally effective means* of locating such installations.” The preamble continued that in the 1987 proposed rule, OSHA again proposed using language in section (b)(3) that would provide another example of an acceptable method of uncovering utilities that could be used where the utilities have not been marked and detection equipment is not being used – “probing with hand-held tools.” This method was rejected in the final version of 29 CFR 1926. As OSHA explained in the preamble to the final rule, 54 Fed. Reg. 45916 (October 31, 1989):

OSHA received two comments * * * and input from ACCSH [OSHA’s Advisory Committee on Construction Safety and Health] * * * on this provision. All commenters recommended dropping ‘such as probing with hand-held tools’ from the proposed provision, because this could create a hazard to employees by damaging the installation or its insulation.

In other words, the commenters objected to the use of hand tools being used unless detection equipment was used in conjunction with them. OSHA then concluded its discussion relative to this provision by agreeing with the commentators and ultimately not including any examples of “acceptable means” in the final provision.

Non-conductive hand tools are permitted

This raises the question of whether the standard permits the use of hand tools alone -- without also using detection equipment. NUCA and other industry stakeholders have recently informed us that non-conductive hand tools that are appropriate to be used to locate underground utilities are now commonly available.

Such tools, such as a “shooter” (which has a non-conductive handle and a snub nose) and non-conductive or insulated probes were not discussed in the rulemaking. Since they were not considered at that time, they were not part of the class of equipment that was thought to be unsafe for this purpose. Therefore, we conclude that the use of these types of hand tools, when used with appropriate caution, is an “acceptable means” for locating underground utilities.

Subject UTILITY LOCATING AND EXCAVATION CLEARANCE	Number HS-1.0	Page 15 of 15
	Revision 3	Effective Date 01/2012

ATTACHMENT 4 (Continued)

Hydro-vacuum excavation

It is our understanding that some hydro-vacuum excavation equipment can be adjusted to use a minimum amount of water and suction pressure. When appropriately adjusted so that the equipment will not damage underground utilities (especially utilities that are particularly vulnerable to damage, such as electrical lines), use of such equipment would be considered a “acceptable means” of locating underground utilities. However, if the equipment cannot be sufficiently adjusted, then this method would not be acceptable under the standard.

Other technologies

We are not suggesting that these are the only devices that would be “acceptable means” under the standard. Industry stakeholders have informed us that there are other types of special excavation equipment designed for safely locating utilities as well.

We apologize for any confusion our July 7 letter may have caused. If you have further concerns or questions, please feel free to contact us again by fax at: U.S. Department of Labor, OSHA, Directorate of Construction, Office of Construction Standards and Compliance Assistance, fax # 202-693-1689. You can also contact us by mail at the above office, Room N3468, 200 Constitution Avenue, N.W., Washington, D.C. 20210, although there will be a delay in our receiving correspondence by mail.

Sincerely,

Russell B. Swanson, Director
Directorate of Construction

NOTE: OSHA requirements are set by statute, standards and regulations. Our interpretation letters explain these requirements and how they apply to particular circumstances, but they cannot create additional employer obligations. This letter constitutes OSHA’s interpretation of the requirements discussed. Note that our enforcement guidance may be affected by changes to OSHA rules. Also, from time to time we update our guidance in response to new information. To keep apprised of such developments, you can consult OSHA’s website at <http://www.osha.gov>.

ATTACHMENT VI

OSHA POSTER

Job Safety and Health

It's the law!

OSHA

Occupational Safety and Health Administration
U.S. Department of Labor



EMPLOYEES:

- You have the right to notify your employer or OSHA about workplace hazards. You may ask OSHA to keep your name confidential.
- You have the right to request an OSHA inspection if you believe that there are unsafe and unhealthful conditions in your workplace. You or your representative may participate in that inspection.
- You can file a complaint with OSHA within 30 days of retaliation or discrimination by your employer for making safety and health complaints or for exercising your rights under the *OSH Act*.
- You have the right to see OSHA citations issued to your employer. Your employer must post the citations at or near the place of the alleged violations.
- Your employer must correct workplace hazards by the date indicated on the citation and must certify that these hazards have been reduced or eliminated.
- You have the right to copies of your medical records and records of your exposures to toxic and harmful substances or conditions.
- Your employer must post this notice in your workplace.
- You must comply with all occupational safety and health standards issued under the *OSH Act* that apply to your own actions and conduct on the job.

EMPLOYERS:

- You must furnish your employees a place of employment free from recognized hazards.
- You must comply with the occupational safety and health standards issued under the *OSH Act*.

This free poster available from OSHA –
The Best Resource for Safety and Health

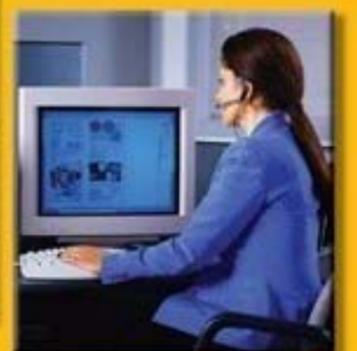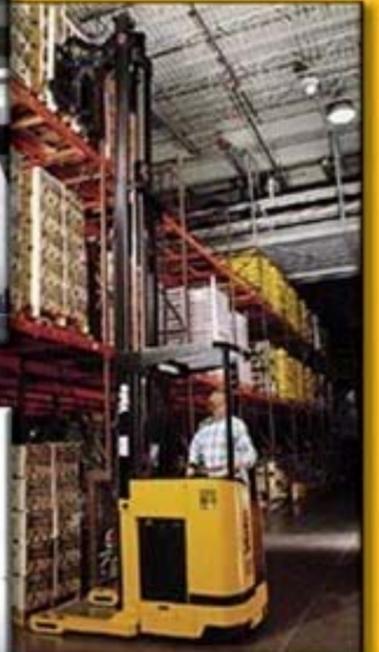

Free assistance in identifying and correcting hazards or complying with standards is available to employers, without citation or penalty, through OSHA-supported consultation programs in each state.

1-800-321-OSHA
www.osha.gov

OSHA 3165-12-06R