N60201.AR.002554
NS MAYPORT
5090.3a

SITE SPECIFIC HEALTH AND SAFETY PLAN FOR BACHELOR ENLISTED QUARTERS BUILDING 1586 NS MAYPORT FL

6/1/1993

ABB ENVIRONMENTAL

SITE-SPECIFIC HEALTH AND SAFETY PLAN

BACHELOR ENLISTED QUARTERS, BUILDING 1586

NAVAL STATION MAYPORT
MAYPORT, FLORIDA

CTO No. 077

Contract No. N62467-89-D-0317

Prepared by:

ABB Environmental Services, Inc.
2590 Executive Center Circle, East
Tallahassee, Florida 32301

Prepared for:

Department of the Navy, Southern Division
Naval Facilities Engineering Command
2155 Eagle Drive
North Charleston, South Carolina 29418

Carl Loop, Engineer-in-Charge

June 1993

TABLE OF CONTENTS

Site-Specific Health and Safety Plan
Bachelor Enlisted Quarters, Building 1586
NAVSTA Mayport, Mayport, Florida

TABLE OF CONTENTS (Continued)

Site-Specific Health and Safety Plan
Bachelor Enlisted Quarters, Building 1586
NAVSTA Mayport, Mayport, Florida

LIST OF FIGURES

Site-Specific Health and Safety Plan
Bachelor Enlisted Quarters, Building 1586
NAVSTA Mayport, Mayport, Florida

LIST OF TABLES

REFERENCES

The following chapters of the Comprehensive Long-term Environmental Action Navy (CLEAN) Program District I Generic Health and Safety Plan (HASP) are applicable for the work anticipated at the site.

- ✓ 2.0 AUTHORITY AND RESPONSIBILITY OF HEALTH AND SAFETY PERSONNEL
- ✓ 3.0 TRAINING PROGRAM
- ✓ 4.0 MEDICAL SURVEILLANCE PROGRAM
- ✓ 5.0 ENGINEERING CONTROLS
- ✓ 6.0 PERSONAL PROTECTIVE LEVEL DETERMINATION
- ✓ 7.0 MONITORING EQUIPMENT
- ___ 8.0 ZONATION
- ✓ 9.0 WORK PRACTICES
- ___ 10.0 CONFINED SPACE ENTRY PROCEDURES
- ___ 11.0 EXCAVATION AND TRENCHING
- ✓ 12.0 TEMPERATURE EXTREMES
  - ✓ HEAT STRESS
  - ___ COLD STRESS
- ✓ 13.0 DECONTAMINATION
- ✓ 14.0 EMERGENCY PLANNING
- ✓ 15.0 HEALTH AND SAFETY FORMS AND DATA SHEETS
  - ___ HEALTH AND SAFETY AUDIT FORM
  - ✓ ACCIDENT REPORT FORM
  - ✓ HEALTH AND SAFETY OFFICER (HSO) CHECKLIST FOR FIELD OPERATIONS
  - ✓ MATERIAL SAFETY DATA SHEETS
  - ___ LIQUI-NOX
  - ___ ETHYL ALCOHOL (denatured)
  - ___ TRISODIUM PHOSPHATE
  - ✓ OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA) POSTER
  - ✓ DAILY HEALTH AND SAFETY AUDIT FORM
- ___ 16.0 RESPIRATORY PROTECTION PROGRAM
- ___ 17.0 OTHER
  - ___ ILLUMINATION
  - ___ SANITATION
  - ___ HEALTH AND SAFETY AUDIT PROCEDURES

1.0 GENERAL

1.1 SCOPE AND PURPOSE. This Health and Safety Plan (HASP) has been prepared in conformance with the Comprehensive Long-Term Environmental Action, Navy (CLEAN) Program District I CLEAN HASP and is intended to meet the requirements of the Code of Federal Regulations (CFR), Title 29, Part 1910.120 (Title 29 CFR 1910.120). As such, the HASP addresses those activities associated with field operations for this project. Compliance with this HASP is required for all ABB Environmental Services, Inc. (ABB-ES), personnel, contractor personnel, or third parties entering the contamination assessment site area.

1.2 PROJECT PERSONNEL.

1.2.1 Project Manager The project manager (PM) is the individual with overall project management responsibilities. Those responsibilities as they relate to health and safety include provision for the development of this site-specific HASP, the necessary resources to meet requirements of this HASP, the coordination of staff assignments to ensure that personnel assigned to the project meet medical and training requirements, and the means and materials necessary to resolve any health and safety issues that are identified or that develop on the project.

1.2.2 General Site Supervisor The General Site Supervisor is either the PM or the PM's designee who is onsite and vested with the authority by the PM to carry out day-to-day site operations, including interfacing with the site Health and Safety Officer (HSO).

1.2.3 Health and Safety Officer The HSO for this project has been designated by the PM with concurrence of the Health and Safety Supervisor (HSS) or Health and Safety Manager (HSM). The HSO will have at least an indirect line of reporting to the HSM through the HSS for the duration of his/her assignment as project HSO. The HSO is responsible for developing and implementing this site-specific HASP in accordance with the CLEAN HASP. The HSO will investigate all accidents, illnesses, and incidents occurring onsite. The HSO will also conduct safety briefings and site-specific training for onsite personnel. As necessary, the HSO will accompany all U.S. Environmental Protection Agency (USEPA), Occupational Safety and Health Administration (OSHA), or other governmental agency personnel visiting an ABB-ES site in response to health and safety issues. The HSO, in consultation with the HSS or HSM, is responsible for updating and modifying this HASP as site or environmental conditions change.

1.3 TRAINING. Training is defined under the CLEAN HASP, and all personnel entering potentially contaminated areas of this site must meet the requirements of Title 29 CFR 1910.120. Personnel without the required training **will not be permitted** in any area with potential for exposure to toxic substances or harmful physical agents (i.e., downrange). Refer to Chapter 3.0 of the CLEAN HASP for further information.

1.4 MEDICAL SURVEILLANCE. All personnel entering potentially contaminated areas of this site will be medically qualified for site assignment through a medical surveillance program outlined in the CLEAN HASP. Personnel who have not received medical clearance **will not be permitted** in any area with potential for exposure to toxic substances or harmful physical agents (i.e., downrange). Refer to Chapter 4.0 of the CLEAN HASP for further information.

2.0 SITE CHARACTERIZATION AND ANALYSIS

2.1 SITE NAME, LOCATION, AND SIZE. The U.S. Naval Station (NAVSTA) at Mayport, Florida, is located about 15 miles east-northeast of downtown Jacksonville, Duval County, Florida. The Naval Station was established in 1942 on approximately 700 acres of land. The original mission of the station included use of patrol craft, target, and rescue boats. The station was placed in caretaker status in 1946, reopened in 1948, and in 1952 was assigned an aircraft carrier. Today NAVSTA Mayport is primarily involved in intermediate level maintenance of equipment, ships, aircraft, and also houses other support units assigned to that part of the Second Fleet stationed at the facility.

The Bachelor Enlisted Quarters (BEQ) study area is located at Building 1586 at NAVSTA Mayport.

2.2 SITE HISTORY AND LAYOUT. Approximately 3,000 gallons of diesel fuel No. 2 leaked from the heating fuel pipeline outside the BEQ in the fall of 1991. The boiler fuel system leak was detected September 6, 1991, during a check of the weekly fuel inventory records. The leak in the pipeline was reportedly caused by galvanic corrosion of the boiler fuel system pipeline. According to base personnel, the pipeline and associated 4,000-gallon underground storage tank (UST) has never been tested for leaks or tightness. The UST was installed in 1985 and is constructed of asphalt coated steel. The system has steel piping and no leak detection systems.

Using information provided by the Base Environmental Coordinator, the initial site assessment was conducted by Enviropact, Inc., in September 1991. Soil samples were collected and soil headspace was screened with a field organic vapor analyzer (OVA).

The corroded section of the fuel supply pipeline was replaced in September 1992. In addition, two 24-inch inside diameter (ID) by 48-inch perforated and corrugated metal pipes were installed to act as recovery wells to remove any remaining free product from the groundwater at the site. The Base Operations and Support Services (BOSS) contracted for services to implement initial remedial action at the site, which included removal of approximately 800 gallons of free product, 2,000 gallons of contaminated groundwater, and 270 cubic yards of contaminated soil. The excavated area was reportedly backfilled with 4 feet of gravel, covered with a plastic Visqueen™ liner to act as a vapor barrier, then covered with an additional 2 feet of topsoil.

Environmental Recovery Group (ERG), under contract with the Navy, performed the initial remedial action at the BEQ site. The methods used included excavation of contaminated soil and removal of free product using vacuum trucks. During the excavation, RSDI Environmental, Inc., conducted onsite screening of soils. Soil borings were completed to an average depth of 4.0 feet below land surface (bls). From September 10, 1991, through September 24, 1991, soil samples were collected using a stainless-steel hand auger and were screened with an OVA equipped with a flame ionization detector (FID).

2.3 SCOPE OF WORK (WORKPLAN). ABB-ES will conduct a preliminary contamination assessment investigation at the BEQ. The preliminary assessment will include soil and water sampling using the Terraprobe. Work will be conducted in Level D personal protective equipment. Soil and groundwater samples will be collected and screened for petroleum constituents with an organic vapor analyzer (OVA) or portable gas chromatograph (GC).

3.0 TASK ANALYSIS

3.1 HAZARDOUS SUBSTANCES. The contaminants of concern known or suspected to be present onsite, along with established exposure limits for those substances, are listed in Table 3-1.

3.2 SITE RISKS. The following are the health hazards and safety hazards that are expected to be encountered at the site.

3.2.1 Health Hazards Contaminants to which personnel may be exposed is fuel oil and its constituents. The primary constituents of petroleum products are expected to be encountered and represent potential health hazards are described below and summarized in Table 3-1.

All activities at this site will be conducted in unconfined areas. This will minimize the chances of exposure of onsite personnel to either high vapor concentrations or strong liquid concentrations of any of the substances described below.

BENZENE is a colorless liquid with a pleasant aromatic odor. It is a moderate irritant in small amounts both as a gas and as a liquid. If inhaled in large amounts it attacks the central nervous system, possibly resulting in coma and/or respiratory arrest. Chronic poisoning causes leukemia.

ETHYL BENZENE is a colorless aromatic liquid. It is a moderate skin irritant in gaseous form. Inhalation of high concentrations of the gas may cause temporary irritation of the nose, dizziness, and depression. The liquid form can blister the skin if not washed off immediately.

TOLUENE is a colorless liquid with a pleasant aromatic odor. It is a mild skin irritant. Inhalation of high concentrations of the gas can cause temporary smarting of the eyes or irritation of the respiratory system. If the liquid form is allowed to remain on the skin for a long period of time, smarting and reddening of the skin may occur. Ingestion or aspiration of the liquid causes depressed respiration and pulmonary edema, and can result in kidney or liver damage.

XYLENE is a colorless, liquid with a sweet odor. It is a moderate skin irritant. When present as a gas in high concentrations, it can cause temporary slight smarting of the eyes or irritation of the respiratory system, headache, and dizziness. The liquid form may cause smarting or reddening of the skin if not washed off immediately. If the liquid is aspirated into the lungs it can result in severe coughing, distress, and rapidly developing pulmonary edema. If ingested, nausea, vomiting, cramps, headache, and coma can occur and may be fatal. Ingestion may also result in kidney and liver damage.

POLYNUCLEAR AROMATIC HYDROCARBONS (PAHs), for the purposes of this plan and study, include those listed as parameters for USEPA Method 610. Some of the more notable PAHs from this method include acenaphthene, anthracene, chrysene, fluorene, naphthalene, phenanthrene, and pyrene. Details of these compounds are listed in Section 4.0.

Table 3-1
Contaminants of Concern

Site-Specific Health and Safety Plan
Naval Air Station Mayport
Mayport, Florida

Chemical	Approximate odor threshold (ppm)	Permissible Exposure Limits (ppm)	Threshold Limit Value (ppm)	Physical Characteristics	Dermal Toxicity	Remarks
Benzene	4.7	1	1	Colorless liquid, pleasant aromatic odor.	Moderate skin irritant.	Inhalation of large amounts attacks central nervous system (CNS); chronic poisoning causes leukemia.
Ethyl benzene	140	100	100	Colorless liquid, aromatic odor.	Moderate skin irritant.	Liquid blisters skin; inhalation results in dizziness, depression.
Toluene	0.17	100	100	Colorless liquid, pleasant aromatic odor.	Mild skin irritant.	Ingestion or aspiration can cause pulmonary edema, depressed respiration, and kidney and liver damage.
Xylene	0.05	100	100	Colorless liquid, aromatic odor.	Moderate skin irritant.	Inhalation causes headache and dizziness; vapors irritate eyes; can be fatal if ingested.
Naphthalene	--	10	10	Colorless to brown solid with an odor of mothballs.	Moderate skin irritant	Inhalation causes headache and confusion; vapors irritate eyes.
Tetraethyl lead	No data	0.006 (skin)	0.007 (skin)	Colorless liquid with a pleasant, sweet odor.	Contact with the skin may cause itching, burning, and skin redness. The chemical can be absorbed through the skin into the body.	Symptoms of tetraethyl lead exposure include headache, anxiety, nausea, loss of appetite, and tremors.

Notes: ppm = parts per million.

MINERAL SPIRITS are colorless liquids that have a strong gasoline odor. Inhalation of mineral spirit vapors causes mild irritation to the respiratory tract. Although this site investigation is not testing for this contaminant, it is understood that it may be encountered at some of the site. Mineral spirits are in the principle constituent of PD680, which is mixed with some of the waste oil that is being investigated.

3.2.2 Safety Hazards Safety hazards include those hazards that personnel may be exposed to that are unrelated to hazardous wastes; for example, heat stress, operation and presence around heavy equipment, lifting of objects, vehicle traffic, and snake bites. Extreme caution should be taken by all personnel while conducting work around drill rigs, backhoes, and other heavy equipment. During hot weather, personnel should take time to drink fluids and cool off to avoid overheating and symptoms related to heat stress.

Lifting of heavy objects should be done with caution. Personnel should assist one another with moving heavy objects or use the appropriate equipment to accomplish these tasks. During all site activities, personnel should be aware of the possibility of an encounter with poisonous snakes, particularly rattlesnakes in pine woods and water moccasins around water.

Power substations, powerlines, underground utilities, and underground pipelines are to be avoided during drilling operations. Prior to performing soil boring and monitoring well installation, a survey will be conducted to locate subsurface utilities in the area. ABB-ES will conduct the survey for gas and phone lines and the Navy will locate water, sewage, and electrical lines.

3.2.3 Conclusions and Risk Assessment Based on the available information (nature of the work, potential onsite chemicals and their properties, exposure limits, etc.), hazards associated with conducting the described field work are considered to be low, assuming appropriate health and safety practices are maintained.

3.3 PROTECTIVE MEASURES. The following are the protective measures that will be used at the site.

3.3.1 Engineering Controls Whenever needed, engineering controls (i.e., fans to blow volatilized chemicals away from the work area) will be used.

3.3.2 Levels of Protection A level D work uniform will be used at the site when organic vapor concentrations of petroleum and gasoline constituents in the breathing zone are less than 25 ppm and benzene concentrations are less than 0.5 ppm during sustained drilling or sampling operations. Organic vapor concentrations will be monitored in the breathing zone using an OVA or other FID device. Benzene concentrations in the breathing zone will be monitored using a Benzene 0.5/a Dräger tube. Level D Protection should only be used when the atmosphere contains no known hazard, all potential airborne contaminants can be monitored for, and work functions preclude splash, immersion, or the potential for unexpected inhalation or contact with hazardous levels of any chemical.

Level C personal protective equipment will be used by all personnel working in the contaminated zone if FID monitoring of organic vapor concentrations in the breathing zone are greater than or equal to 25 ppm but less than 170 ppm and/or

benzene levels are greater than or equal to 0.5 ppm (0.5/a tube) but less than 50 ppm (5/b tube). Benzene concentrations in the breathing zone will be monitored using Benzene Dräger tubes (0.5/a and 5/b).

Level B personal protective equipment will be used by all personnel working in the contaminated zone if FID monitoring in the breathing zone is greater than or equal to 170 ppm or Dräger tube (5/b) monitoring indicates greater than or equal to 50 ppm benzene.

Procedures for using level B and level C personal protective equipment, heat and cold stress monitoring associated with upgrading levels of protection, and other relevant factors associated with the respiratory protection program are described in the CLEAN HASP.

3.4 MONITORING. It is intended that real time monitoring instrumentation will be used to monitor the work environment in order to ensure the appropriate level of protection for the site team.

3.4.1 Air Sampling To the extent feasible, the presence of airborne contaminants will be evaluated through the use of direct reading instrumentation. Information gathered will be used to ensure the adequacy of the levels of protection being used at the site, and may be used as the basis for upgrading or downgrading the levels of protection in conformance with action levels provided in this HASP and at the direction of the site HSO.

The following sampling equipment will be used at the site. Refer to Chapter 7.0 of the CLEAN HASP for information on the calibration and maintenance of the equipment.

1. OVA with FID

2. Porta-FID™

3. Dräger Tubes:

    - Benzene 0.5/a
    - Benzene 5/b

3.4.2 Personal Monitoring Personal monitoring will be undertaken to characterize the personal exposure of high risk employees to the hazardous substances they may encounter onsite. Personal monitoring will be conducted on a representative basis. Personnel who are represented by the sampling will be noted in field logs.

The following personal monitoring equipment will be used at the site. Refer to Chapter 7.0 of the CLEAN HASP for information on the maintenance and calibration of the equipment.

1. Thermoluminescent Dosimetry Body Badge

4.0 DATA SHEETS

BENZENE

BNZ

Common Symptoms	Watery liquid Colorless Gasoline-like odor
Benzol Benzole	Floats on water. Flammable, irritating vapor is produced. Freezing point is 42°F.

Avoid contact with liquid and vapor. Keep people away.
Wear goggles and self-contained breathing apparatus.
Shut off ignition sources and call fire department.
Stop discharge if possible.
Stay upwind and use water spray to "knock down" vapor.
Isolate and remove discharged material.
Notify local health and pollution control agencies.

Fire

FLAMMABLE.
Flashback along vapor trail may occur.
Vapor may explode if ignited in an enclosed area.
Wear goggles and self-contained breathing apparatus.
Extinguish with dry chemical, foam, or carbon dioxide.
Water may be ineffective on fire.
Cool exposed containers with water.

Exposure

CALL FOR MEDICAL AID.

VAPOR
Irritating to eyes, nose, and throat.
If inhaled, will cause headache, difficult breathing, or loss of consciousness.
Move to fresh air.
If breathing has stopped, give artificial respiration.
If breathing is difficult, give oxygen.

LIQUID
Irritating to skin and eyes.
Harmful if swallowed.
Remove contaminated clothing and shoes.
Flush affected area with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED and victim is CONSCIOUS, have victim drink water or milk.

Water Pollution

HARMFUL TO AQUATIC LIFE IN VERY LOW CONCENTRATIONS.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)
Issue warning-high flammability
Restrict access

2. LABEL

2.1 **Category:** Flammable liquid
2.2 **Class:** 3

3. CHEMICAL DESIGNATIONS

3.1 **CG Compatibility Class:** Aromatic Hydrocarbon
3.2 **Formula:** C_6H_6
3.3 **IMO/UN Designation:** 3.2/1114
3.4 **DOT ID No.:** 1114
3.5 **CAS Registry No.:** 71-43-2

4. OBSERVABLE CHARACTERISTICS

4.1 **Physical State (as shipped):** Liquid
4.2 **Color:** Colorless
4.3 **Odor:** Aromatic; rather pleasant aromatic odor; characteristic odor

5. HEALTH HAZARDS

5.1 **Personal Protective Equipment:** Hydrocarbon vapor canister, supplied air or a hose mask; hydrocarbon-insoluble rubber or plastic gloves; chemical goggles or face splash shield; hydrocarbon-insoluble arpon such as neoprene.
5.2 **Symptoms Following Exposure:** Dizziness, excitation, pallor, followed by flushing, weakness, headache, breathlessness, chest constriction. Coma and possible death.
5.3 **Treatment of Exposure:** SKIN: flush with water followed by soap and water; remove contaminated clothing and wash skin. EYES: flush with plenty of water until irritation subsides. INHALATION: remove from exposure immediately. Call a physician. IF breathing is irregular or stopped, start resuscitation, administer oxygen.
5.4 **Threshold Limit Value:** 10 ppm
5.5 **Short Term Inhalation Limits:** 75 ppm for 30 min.
5.6 **Toxicity by Ingestion:** Grade 3; LD_{50} = 50 to 500 mg/kg
5.7 **Late Toxicity:** Leukemia
5.8 **Vapor (Gas) Irritant Characteristics:** If present in high concentrations, vapors may cause irritation of eyes or respiratory system. The effect is temporary.
5.9 **Liquid or Solid Irritant Characteristics:** Minimum hazard. If spilled on clothing and allowed to remain, may cause smarting and reddening of the skin.
5.10 **Odor Threshold:** 4.68 ppm
5.11 **IDLH Value:** 2,000 ppm

6. FIRE HAZARDS

6.1 **Flash Point:** 12°F C.C.
6.2 **Flammable Limits in Air:** 1.3%-7.9%
6.3 **Fire Extinguishing Agents:** Dry chemical, foam, or carbon dioxide
6.4 **Fire Extinguishing Agents Not to be Used:** Water may be ineffective
6.5 **Special Hazards of Combustion Products:** Not pertinent
6.6 **Behavior in Fire:** Vapor is heavier than air and may travel considerable distance to a source of ignition and flash back
6.7 **Ignition Temperature:** 1097°F
6.8 **Electrical Hazard:** Class I,Group D
6.9 **Burning Rate:** 6.0 mm/min
6.10 **Adiabatic Flame Temperature:** Data not available
6.11 **Stoichiometric Air to Fuel Ratio:** Data not available
6.12 **Flame Temperature:** Data not available

7. CHEMICAL REACTIVITY

7.1 **Reactivity with Water:** No reaction
7.2 **Reactivity with Common Materials:** No reaction
7.3 **Stability During Transport:** Stable
7.4 **Neutralizing Agents for Acids and Caustics:** Not pertinent
7.5 **Polymerization:** Not pertinent
7.6 **Inhibitor of Polymerization:** Not pertinent
7.7 **Molar Ratio (Reactant to Product):** Data not available
7.8 **Reactivity Group:** 32

8. WATER POLLUTION

8.1 **Aquatic Toxicity:**
5 ppm/6 hr/minnow/lethal/distilled water
20 ppm/24 hr/sunfish/TL_m/tap water
8.2 **Waterfowl Toxicity:** Data not available
8.3 **Biological Oxygen Demand (BOD):** 1.2 lb/lb, 10 days
8.4 **Food Concentration Potential:** None

9. SHIPPING INFORMATION

9.1 **Grades of Purity:**

Industrial pure	99+%
Thiophene-free	99+%
Nitration	99+%
Industrial 90%	85+%
Reagent	99+%

9.2 **Storage Temperature:** Open
9.3 **Inert Atmosphere:** No requirement
9.4 **Venting:** Pressure-vacuum

10. HAZARD ASSESSMENT CODE
(See Hazard Assessment Handbook)

A-T-U-V-W

11. HAZARD CLASSIFICATIONS

11.1 **Code of Federal Regulations:** Flammable liquid
11.2 **NAS Hazard Rating for Bulk Water Transportation:**

Category	Rating
Fire	3
Health	
Vapor Irritant	1
Liquid or Solid Irritant	1
Poisons	3
Water Pollution	
Human Toxicity	3
Aquatic Toxicity	1
Aesthetic Affect	3
Reactivity	
Other Chemicals	2
Water	1
Self Reaction	0

11.3 **NFPA Hazard Classification:**

Category	Classification
Health Hazard (Blue)	2
Flammability (Red)	3
Reactivity (Yellow)	0

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 **Physical State at 15°C and 1 atm:** Liquid
12.2 **Molecular Weight:** 78.11
12.3 **Boiling Point at 1 atm:** 176°F = 80.1°C = 353.3°K
12.4 **Freezing Point:** 42.0°F = 5.5°C = 278.7°K
12.5 **Critical Temperature:** 552.0°F = 288.9°C = 562.1°K
12.6 **Critical Pressure:** 710 psia = 48.3 atm = 4.89 MN/m^2
12.7 **Specific Gravity:** 0.879 at 20°C (liquid)
12.8 **Liquid Surface Tension:** 28.9 dynes/cm = 0.289 N/m at 20°C
12.9 **Liquid Water Interfacial Tension:** 35 dynes/cm = 0.035 N/m at 20°C
12.10 **Vapor (Gas) Specific Gravity:** 2.7
12.11 **Ratio of Specific Heats of Vapor (Gas):** 1.061
12.12 **Latent Heat of Vaporization:** 169 Btu/lb = 94.1 cal/g = 3.94 X 10^5 J/kg
12.13 **Heat of Combustion:** --17,460 Btu/lb = --9698 cal/g = --406.0 X 10^5 J/kg
12.14 **Heat of Decomposition:** Not pertinent
12.15 **Heat of Solution:** Not pertinent
12.16 **Heat of Polymerization:** Not pertinent
12.25 **Heat of Fusion:** 30.45 cal/g
12.26 **Limiting Value:** Data not available
12.27 **Reid Vapor Pressure:** 3.22 psia

NOTES

BNZ	BENZENE

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot
55	55.330
60	55.140
65	54.960
70	54.770
75	54.580
80	54.400
85	54.210
90	54.030
95	53.840
100	53.660
105	53.470
110	53.290
115	53.100
120	52.920
125	52.730
130	52.540
135	52.360
140	52.170
145	51.990
150	51.800
155	51.620
160	51.430
165	51.250
170	51.060
175	50.870

12.18 LIQUID HEAT CAPAICTY

Temperature (degrees F)	British thermal unit per pound-F
45	.394
50	.396
55	.398
60	.400
65	.403
70	.405
75	.407
80	.409
85	.411
90	.414
95	.416
100	.418

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
75	.988
80	.981
85	.975
90	.969
95	.962
100	.956
105	.950
110	.944
115	.937
120	.931
125	.925
130	.919
135	.912
140	.906
145	.900
150	.893
155	.887
160	.881
165	.875
170	.868

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise
55	.724
60	.693
65	.665
70	.638
75	.612
80	.588
85	.566
90	.544
95	.524
100	.505
105	.487
110	.470
115	.453
120	.438

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
77.02	.180

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch
50	.881
60	1.171
70	1.535
80	1.989
90	2.547
100	3.227
110	4.049
120	5.033
130	6.201
140	7.577
150	9.187
160	11.060
170	13.220
180	15.700
190	18.520
200	21.740
210	25.360

12.23 SATURATED VAPOR DENSITY

Temprature (degrees F)	Pounds per cubic foot
50	.01258
60	.01639
70	.02109
80	.02681
90	.03371
100	.04196
110	.05172
120	.06317
130	.07652
140	.09194
150	.10960
160	.12980
170	.15270
180	.17850
190	.20750
200	.23970
210	.27560

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
0	.204
25	.219
50	.234
75	.248
100	.261
125	.275
150	.288
175	.301
200	.313
225	.325
250	.337
275	.349
300	.360
325	.371
350	.381
375	.392
400	.402
425	.412
450	.421
475	.431
500	.440
525	.449
550	.457
575	.465
600	.474

o-CRESOL

CRO

Common Synonyms	Solid crystals or liquid Colorless to yellow Sweet tarry odor
o-Hydroxytoluene 2-Methylphenol o-Toluol 2-Cresol	Sinks and mixes slowly with water.

Avoid contact with liquid or solid. Keep people away.
Wear goggles, self-contained breathing apparatus, and rubber overclothing (including gloves).
Stop discharge if possible.
Call fire department.
Notify local health and pollution control agencies.
Isolate and remove discharged material.

Fire

COMBUSTIBLE
POISONOUS GASES MAY BE PRODUCED IN FIRE.
Wear goggles and self-contained breathing apparatus.
Extinguish with water fog, dry chemical, foam or carbon dioxide.
Cool exposed containers with water.

Exposure

CALL FOR MEDICAL AID.

LIQUID OR SOLID
Will burn skin and eyes.
Poisonous if swallowed, inhaled or if skin is exposed.
Remove contaminated clothing and shoes.
Flush affected areas with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED, and victim is CONSCIOUS, have victim drink water or milk and have victim induce vomiting.

Water Pollution

HARMFUL TO AQUATIC LIFE IN VERY LOW CONCENTRATIONS.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)

Issue warning-water contaminant, poison.
Restrict access
Should be removed.
Chemical and physical treatment

2. LABEL

2.1 Category: Corrosive
2.2 Class: 8

3. CHEMICAL DESIGNATIONS

3.1 CG Compatibility Class: Phenols, cresols
3.2 Formula: $CH_3C_6H_4OH$
3.3 IMO/UN Designation: 6.1/2076
3.4 DOT ID No.: 2076
3.5 CAS Registry No.: 95-48-7

4. OBSERVABLE CHARACTERISTICS

4.1 Physical State (as shipped): Solid or liquid
4.2 Color: Colorless to yellow.
4.3 Odor: Phenolic, tarry

5. HEALTH HAZARDS

5.1 Personal Protective Equipment: Chemical goggles or face shields, full protective clothing including boots and gloves, and respiratory protective apparatus.
5.2 Symptoms Following Exposure: INHALATION, INGESTION OR SKIN ABSORPTION: Central nervous system depression, muscular weakness, gastroenteric disturbances, convulsions and death. EYES: can cause burns. SKIN: Corrosive action may produce severe burns.
5.3 Treatment of Exposure: Call a doctor. INHALATION: Move to fresh air. Oxygen inhalation for respiratory distress. If needed, give artificial respiration. EYES: Irrigate with copious quantities of running water for 15 min. Hold eyelids open. If physician not available irrigate for an additional 15 min. SKIN: Remove all contaminated clothing. Wash with soap and water until all odor is gone. Then wash contaminated areas with alcohol or glycerin. Then use more water. INGESTION: Drink large quantities of liquid (salt water, weak sodium bicarbonate solution, milk or gruel) followed by demulcent such as raw egg white or corn starch paste. Induce vomiting, if not spontaneous. Keep up until vomitus is free of Cresol odor.
5.4 Threshold Limit Value: 5 ppm. Skin absorption can contribute to exposure.
5.5 Short Term Inhalation Limits: 10 ppm.
5.6 Toxicity by Ingestion: Grade 3; LD_{50} = 50 - 500 mg/kg.
5.7 Late Toxicity: May produce neoplasms or act as tumor promotors. Central nervous system damage. Chronic gastritis, possible liver and kidney damage, and lesions of heart and brain. Dermatitis may result.
5.8 Vapor (Gas) Irritant Characteristics: Vapors cause moderate irritation such that personnel will find high concentrations unpleasant. The effect is temporary.
5.9 Liquid or Solid Irritant Characteristics: Fairly severe skin irritant. May cause pain and second-degree burns after a few minutes contact.
5.10 Odor Threshold: 0.65 ppm detection in water 0.26 ppm recognition in air.
5.11 IDLH Value: 250 ppm

6. FIRE HAZARDS

6.1 Flash Point: 178°F C.C.
6.2 Flammable Limits in Air: 1.35%
6.3 Fire Extinguishing Agents: Water may be used to blanket fire, CO_2, dry chemical, foam, water spray.
6.4 Fire Extinguishing Agents Not to be Used: Not pertinent
6.5 Special Hazards of Combustion Products: Emits highly toxic fumes.
6.6 Behavior in Fire: Vapors form explosive mixtures with air.
6.7 Ignition Temperature: 1110°F.
6.8 Electrical Hazard: Data not available
6.9 Burning Rate: Data not available
6.10 Adiabatic Flame Temperature: Data not available
6.11 Stoichiometric Air to Fuel Ratio: Data not available
6.12 Flame Temperature: Data not available

7. CHEMICAL REACTIVITY

7.1 Reactivity With Water: No reaction
7.2 Reactivity with Common Materials: No reaction
7.3 Stability During Transport: Stable
7.4 Neutralizing Agents for Acids and Caustics: Not pertinent
7.5 Polymerization: Will not occur.
7.6 Inhibitor of Polymerization: Not pertinent
7.7 Molar Ratio (Reactant to Product): Data not available
7.8 Reactivity Group: 21

8. WATER POLLUTION

8.1 Aquatic Toxicity: 49.1-19 ppm/24-96 hr/goldfish/TL_m/soft water
22.2-20.8 ppm/24-96 hr/bluegill/TL_m/soft water
18-13.4 ppm/24-96 hr/fathead minnow/TL_m/hard water
18-50 ppm/24-96 hr/guppy/TL_m/hard water
8.2 Waterfowl Toxicity: Chronic water fowl toxic limit is 25 ppm.
8.3 Biological Oxygen Demand (BOD): 1.64 lb/lb, 5 days.
8.4 Food Chain Concentration Potential: None

9. SHIPPING INFORMATION

9.1 Grades of Purity: 80-98% containing 2-20% phenol. 99.2% with 0.2% phenol and 0.6% meta and para isomers.
9.2 Storage Temperature: Ambient
9.3 Inert Atmosphere: No requirement
9.4 Venting: Open

10. HAZARD ASSESSMENT CODE

(See Hazard Assessment Handbook)

SS

11. HAZARD CLASSIFICATIONS

11.1 Code of Federal Regulations: Corrosive material
11.2 NAS Hazard Rating for Bulk Water Transportation: Not listed
11.3 NFPA Hazard Classification:

Category	Classification
Health Hazard (Blue)	3
Flammability (Red)	2
Reactivity (Yellow)	0

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 Physical State at 15°C and 1 atm: Solid
12.2 Molecular Weight: 108.134.
12.3 Boiling Point at 1 atm: 376°F = 191°C = 464.2°K
12.4 Freezing Point: 88°F = 31°C = 304.2°K
12.5 Critical Temperature: 795.9°F = 424.4°C = 697.6°K
12.6 Critical Pressure: 726.0 psia = 49.4 atm = 5.00 MN/m²
12.7 Specific Gravity: 1.05 at 20°C.
12.8 Liquid Surface Tension: 40.3 dynes/cm = 0.0403 N/m at 20°C.
12.9 Liquid Water Interfacial Tension: 32.7 dynes/cm = 0.0327 N/m at 20°C.
12.10 Vapor (Gas) Specific Gravity: 3.72.
12.11 Ratio of Specific Heats of Vapor (Gas): >1.
12.12 Latent Heat of Vaporization: 178.4 Btu/lb = 99.12 cal/g = 4.15 X 10^5 J/kg.
12.13 Heat of Combustion: −13994 Btu/lb = −7774 cal/g = −325 X 10^5 J/kg.
12.14 Heat of Decomposition: Not pertinent
12.15 Heat of Solution: Not pertinent
12.16 Heat of Polymerization: Not pertinent
12.25 Heat of Fusion: Data not available
12.26 Limiting Value: Data not available
12.27 Reid Vapor Pressure: Data not available

NOTES

o- CRESOL

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot
70	65.459
75	65.235
80	65.025
85	64.829
90	64.643
95	64.466
100	64.301
105	64.141
110	63.991
115	63.846
120	63.708

12.18 LIQUID HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
20	555

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
90	1.055
95	1.052
100	1.050
105	1.047
110	1.045
115	1.042
120	1.040
125	1.037
130	1.035
135	1.032
140	1.030

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise
104	4.490
105	4.380
106	4.270
107	4.160
108	4.050
109	3.940
110	3.830
111	3.720
112	3.610
113	3.500

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
	M
	I
	S
	C
	I
	B
	L
	E

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch
100	.020
120	.048
140	.101
160	.192
180	.340
200	.566
220	.899
240	1.370
260	2.018
280	2.890
300	4.036
320	5.518
340	7.401
360	9.761

12.23 SATURATED VAPOR DENSITY

Temperature (degrees F)	Pounds per cubic foot (estimate)
90	.00024
95	.00030
100	.00037
105	.00044
110	.00053
115	.00063
120	.00074
125	.00087
130	.00101

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
80	.290
100	.298
120	.306
140	.315
160	.323
180	.331
200	.339
220	.347
240	.355
260	.363
280	.371
300	.379
320	.387
340	.395
360	.403
380	.411
400	.420
420	.428
440	.436

ETHYLENE DIBROMIDE

EDB

Common Synonyms	Liquid	Colorless	Sweet odor
1, 2-Dibromoethane Ethylene bromide Bromofume sym-Dibromoethane Dow-fume 40, W-10, W-15, W-40 Glycol dibromide	Sinks in water. Poisonous vapor is produced. Freezing point is 50°F.		

Stop discharge if possible. Keep people away.
Avoid contact with liquid and vapor.
Isolate and remove discharged material.
Notify local health and pollution control agencies.

Fire

Not flammable.
POISONOUS GASES ARE PRODUCED WHEN HEATED.
Wear goggles, self-contained breathing apparatus, and rubber overclothing including gloves.
Cool exposed containers with water.

Exposure

CALL FOR MEDICAL AID.

VAPOR
POISONOUS IF INHALED.
Irritating to eyes, nose and throat.
Move to fresh air.
If breathing has stopped, give artificial respiration.
If breathing is difficult, give oxygen.

LIQUID
POISONOUS IF SWALLOWED OR IF SKIN IS EXPOSED.
Irritating to skin and eyes.
Remove contaminated clothing and shoes.
Flush affected areas with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED and victim is CONSCIOUS, have victim drink water or milk.

Water Pollution

HARMFUL TO AQUATIC LIFE IN VERY LOW CONCENTRATIONS.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)

Should be removed
Chemical and physical treatment

2. LABEL

2.1 Category: None
2.2 Class: Not pertinent

3. CHEMICAL DESIGNATIONS

3.1 CG Compatibility Class: Halogenated hydrocarbon
3.2 Formula: $BrCH_2CH_2Br$
3.3 IMO/UN Designation: 6.1/1605
3.4 DOT ID No.: 1605
3.5 CAS Registry No.: 106-93-4

4. OBSERVABLE CHARACTERISTICS

4.1 Physical State (as shipped): Liquid
4.2 Color: Colorless
4.3 Odor: Mildly sweet; like chloroform

5. HEALTH HAZARDS

5.1 Personal Protective Equipment: Canister type mask or self-contained air mask; neoprene gloves; chemical safety goggles.
5.2 Symptoms Following Exposure: Local inflammation, blisters and ulcers on skin; irritation in lungs and organic injury to liver and kidneys; may be absorbed through skin.
5.3 Treatment of Exposure: Remove from exposure. Remove contaminated clothing. Wash skin with soap and water. Flush eyes with plenty of water. Consult physician.
5.4 Threshold Limit Value: 2 ppm
5.5 Short Term Inhalation Limits: 50 ppm for 5 min.
5.6 Toxicity by Ingestion: Grade 3; LD_{50} = 50 to 500 mg/kg
5.7 Late Toxicity: Data not available
5.8 Vapor (Gas) Irritant Characteristics: Vapors cause a slight smarting of the eyes or respiratory system if present in high concentrations. The effect is temporary.
5.9 Liquid or Solid Irritant Characteristics: Minimum hazard. If spilled on clothing and allowed to remain, may cause smarting and reddening of the skin.
5.10 Odor Threshold: Data not available
5.11 IDLH Value: 400 ppm

6. FIRE HAZARDS

6.1 Flash Point: Not flammable
6.2 Flammable Limits in Air: Not flammable
6.3 Fire Extinguishing Agents: Not pertinent
6.4 Fire Extinguishing Agents Not to be Used: Not pertinent
6.5 Special Hazards of Combustion Products: Decomposition gases are toxic and irritating.
6.6 Behavior in Fire: Decomposes into toxic irritating gases. Reacts with hot metals such as aluminum and magnesium.
6.7 Ignition Temperature: Not flammable
6.8 Electrical Hazard: Not pertinent
6.9 Burning Rate: Not flammable
6.10 Adiabatic Flame Temperature: Data Not Available
6.11 Stoichiometric Air to Fuel Ratio: Data Not Available
6.12 Flame Temperature: Data Not Available

7. CHEMICAL REACTIVITY

7.1 Reactivity With Water: No reaction
7.2 Reactivity with Common Materials: No reaction
7.3 Stability During Transport: Stable
7.4 Neutralizing Agents for Acids and Caustics: Not pertinent
7.5 Polymerization: Not pertinent
7.6 Inhibitor of Polymerization: Not pertinent
7.7 Molar Ratio (Reactant to Product): Data Not Available
7.8 Reactivity Group: 36

8. WATER POLLUTION

8.1 Aquatic Toxicity: 18 mg/l/48 hr/bluegill/fresh water
8.2 Waterfowl Toxicity: Data not available
8.3 Biological Oxygen Demand (BOD): Data not available
8.4 Food Chain Concentration Potential: None

9. SHIPPING INFORMATION

9.1 Grades of Purity: Commercial
9.2 Storage Temperature: Ambient
9.3 Inert Atmosphere: No requirement
9.4 Venting: Pressure-vacuum

10. HAZARD ASSESSMENT CODE

(See Hazard Assessment Handbook)

A-X

11. HAZARD CLASSIFICATIONS

11.1 Code of Federal Regulations: ORM-A

11.2 NAS Hazard Rating for Bulk Water Transportation:

Category	Rating
Fire	0
Health	
Vapor Irritant	1
Liquid or Solid Irritant	1
Poisons	3
Water Pollution	
Human Toxicity	3
Aquatic Toxicity	3
Aesthetic Effect	2
Reactivity	
Other Chemicals	1
Water	0
Self Reaction	0

11.3 NFPA Hazard Classification:

Category	Classification
Health Hazard (Blue)	3
Flammability (Red)	0
Reactivity (Yellow)	0

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 Physical State at 15°C and 1 atm: Liquid
12.2 Molecular Weight: 187.86
12.3 Boiling Point at 1 atm: 268°F = 131°C = 404°K
12.4 Freezing Point: 49.6°F = 9.8°C = 283.0°K
12.5 Critical Temperature: Not pertinent
12.6 Critical Pressure: Not pertinent
12.7 Specific Gravity: 2.180 at 20°C (liquid)
12.8 Liquid Surface Tension: 38.75 dynes/cm = 0.03875 N/m at 20°C
12.9 Liquid Water Interfacial Tension: 36.54 dynes/cm = 0.03654 N/m at 20°C
12.10 Vapor (Gas) Specific Gravity: Not pertinent
12.11 Ratio of Specific Heats of Vapor (Gas): 1.109
12.12 Latent Heat of Vaporization: 82.1 Btu/lb = 45.6 cal/g = 1.91 X 10^5 J/kg
12.13 Heat of Combustion: Not pertinent
12.14 Heat of Decomposition: Not pertinent
12.15 Heat of Solution: Not pertinent
12.16 Heat of Polymerization: Not pertinent
12.25 Heat of Fusion: 13.79 cal/g
12.26 Limiting Value: Data Not Available
12.27 Reid Vapor Pressure: 0.4 psia

NOTES

EDB ETHYLENE DIBROMIDE

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot
55	135.900
60	135.900
65	135.900
70	135.799
75	135.799
80	135.699
85	135.699
90	135.699
95	135.599
100	135.599
105	135.599
110	135.500
115	135.500
120	135.500

12.18 LIQUID HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
60	.173
70	.173
80	.174
90	.174
100	.175
110	.175
120	.176
130	.176
140	.177
150	.178
160	.178
170	.179
180	.179
190	.180
200	.180
210	.181

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
50	.776
55	.771
60	.767
65	.763
70	.758
75	.754
80	.750
85	.745
90	.741
95	.737
100	.732
105	.728
110	.724
115	.719
120	.715
125	.711
130	.706
135	.702
140	.698
145	.693
150	.689

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise
60	1.818
70	1.676
80	1.549
90	1.436
100	1.335
110	1.244
120	1.162
130	1.088
140	1.021
150	.960
160	.905
170	.854
180	.808
190	.765
200	.726
210	.690

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
77.02	.270

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch
60	.155
70	.209
80	.279
90	.368
100	.481
110	.623
120	.799
130	1.018
140	1.285
150	1.609
160	2.002
170	2.473
180	3.034
190	3.700
200	4.484
210	5.404
220	6.476
230	7.722
240	9.160
250	10.810
260	12.710
270	14.870
280	17.320
290	20.100
300	23.220

12.23 SATURATED VAPOR DENSITY

Temperature (degrees F)	Pounds per cubic foot
60	.00521
70	.00690
80	.00904
90	.01172
100	.01504
110	.01914
120	.02414
130	.03020
140	.03749
150	.04620
160	.05653
170	.06872
180	.08301
190	.09966
200	.11900
210	.14120
220	.16680
230	.19590
240	.22910
250	.26670
260	.30900
270	.35660
280	.40980
290	.46910
300	.53500

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
0	.100
25	.103
50	.105
75	.108
100	.111
125	.113
150	.116
175	.118
200	.121
225	.123
250	.126
275	.128
300	.130
325	.132
350	.135
375	.137
400	.139
425	.141
450	.143
475	.145
500	.147
525	.149
550	.150
575	.152
600	.154

ETHYLBENZENE

ETB

Common Symptoms	Liquid	Colorless	Sweet, gasoline-like odor
Phenylethane EB	Floats on water. Flammable, irritating vapor is produced.		

Avoid contact with liquid and vapor.
Wear goggles, self-contained breathing apparatus, and rubber overclothing (including gloves).
Shut off ignition sources and call fire department.
Stop discharge if possible. Keep people away.
Stay upwind and use water spray to "knock down" vapor.
Isolate and remove discharged material.
Notify local health and pollution control agencies.

Fire

FLAMMABLE
Flashback along vapor trail may occur.
Vapor may explode if ignited in an enclosed area.
Wear goggles, self-contained breathing apparatus and rubber overclothing (including gloves).
Extinguish with dry chemical, foam, or carbon dioxide.
Water may be ineffective on fire.
Cook exposed containers with water.

Exposure

CALL FOR MEDICAL AID.

VAPOR
Irritating to eyes, nose, and throat.
If inhaled, will cause dizziness and/or difficult breathing.
Move to fresh air.
If breathing has stopped, give artificial respiration.
If breathing is difficult, give oxygen.

LIQUID
Will burn skin and eyes.
Harmful if swallowed.
Remove contaminated clothing and shoes.
Flush affected areas with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED and victim is CONSCIOUS, have victim drink water or milk.
DO NOT INDUCE VOMITING.

Water Pollution

HARMFUL TO AQUATIC LIFE IN VERY LOW CONCENTRATIONS.
Fouling to shoreline.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)
Mechanical containment
Should be removed
Chemical and physical treatment

2. LABEL

2.1 **Category:** Flammable liquid
2.2 **Class:** 3

3. CHEMICAL DESIGNATIONS

3.1 **CG Compatibility Class:** Aromatic Hydrocarbon
3.2 **Formula:** $C_6H_5CH_2CH_3$
3.3 **IMO/UN Designation:** 3.3/1175
3.4 **DOT ID No.:** 1175
3.5 **CAS Registry No.:** 100-41-4

4. OBSERVABLE CHARACTERISTICS

4.1 **Physical State (as shipped):** Liquid
4.2 **Color:** Colorless
4.3 **Odor:** Aromatic

5. HEALTH HAZARDS

5.1 **Personal Protective Equipment:** Self-contained breathing apparatus; safety goggles.
5.2 **Symptoms Following Exposure:** Inhalation may cause irritation of nose, dizziness, depression. Moderate irritation of eye with corneal injury possible. Irritates skin and may cause blisters.
5.3 **Treatment of Exposure:** INHALATION: If ill effects occur, remove to fresh air, keep him warm and quiet, and get medical help promptly; if breathing stops, give artificial respiration. INGESTION: induce vomiting only upon physician's approval; material in lung may cause chemical pneumonia. SKIN AND EYES: promptly flush with plenty of water (15 min. for eyes) and get medical attention; remove and wash contaminated clothing before reuse.
5.4 **Threshold Limit Value:** 100 ppm
5.5 **Short Term Inhalation Limits:** 200 ppm for 30 min.
5.6 **Toxicity by Ingestion:** Grade 2; LD_{50} = 0.5 to 5 g/kg (rat)
5.7 **Late Toxicity:** Data not available
5.8 **Vapor (Gas) Irritant Characteristics:** Vapors cause moderate irritation such that personnel will find high concentrations unpleasant. The effect is temporary.
5.9 **Liquid or Solid Irritant Characteristics:** Causes smarting of the skin and first-degree burns on short exposure; may cause secondary burns on long exposure.
5.10 **Odor Threshold:** 140 ppm
5.11 **IDLH Value:** 2,000 ppm

6. FIRE HAZARDS

6.1 **Flash Point:** 80°F O.C.; 59°F. C.C.
6.2 **Flammable Limits in Air:** 1.0%-6.7%
6.3 **Fire Extinguishing Agents:** Foam (most effective), water fog, carbon dioxide or dry chemical.
6.4 **Fire Extinguishing Agents Not to be Used:** Not pertinent
6.5 **Special Hazards of Combustion Products:** Irritating vapors are generated when heated.
6.6 **Behavior in Fire:** Vapor is heavier than air and may travel considerable distance to the source of ignition and flash back.
6.7 **Ignition Temperature:** 860°F
6.8 **Electrical Hazard:** Not pertinent
6.9 **Burning Rate:** 5.8 mm/min.
6.10 **Adiabatic Flame Temperature:** Data not available
6.11 **Stoichiometric Air to Fuel Ratio:** Data not available
6.12 **Flame Temperature:** Data not available

7. CHEMICAL REACTIVITY

7.1 **Reactivity with Water:** No reaction
7.2 **Reactivity with Common Materials:** No reaction
7.3 **Stability During Transport:** Stable
7.4 **Neutralizing Agents for Acids and Caustics:** Not pertinent
7.5 **Polymerization:** Not pertinent
7.6 **Inhibitor of Polymerization:** Not pertinent
7.7 **Molar Ratio (Reactant to Product):** Data not available
7.8 **Reactivity Group:** 32

8. WATER POLLUTION

8.1 **Aquatic Toxicity:** 29 ppm/96 hr/bluegill/TL_m/fresh water
8.2 **Waterfowl Toxicity:** Data not available
8.3 **Biological Oxygen Demand (BOD):** 2.8% (theor.), 5 days
8.4 **Food Concentration Potential:** None

9. SHIPPING INFORMATION

9.1 **Grades of Purity:** Research grade:99.98%; pure grade: 99.5%; technical grade: 99.0%
9.2 **Storage Temperature:** Ambient
9.3 **Inert Atmosphere:** No requirement
9.4 **Venting:** Open (flame arrester) or pressure-vacuum.

10. HAZARD ASSESSMENT CODE
(See Hazard Assessment Handbook)

A-T-U

11. HAZARD CLASSIFICATIONS

11.1 **Code of Federal Regulations:** Flammable liquid.
11.2 **NAS Hazard Rating for Bulk Water Transportation:**

Category	Rating
Fire	3
Health	
Vapor Irritant	2
Liquid or Solid Irritant	2
Poisons	2
Water Pollution	
Human Toxicity	1
Aquatic Toxicity	3
Aesthetic Affect	2
Reactivity	
Other Chemicals	1
Water	0
Self Reaction	0

11.3 **NFPA Hazard Classification:**

Category	Classification
Health Hazard (Blue)	2
Flammability (Red)	3
Reactivity (Yellow)	0

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 **Physical State at 15°C and 1 atm:** Liquid
12.2 **Molecular Weight:** 106.17
12.3 **Boiling Point at 1 atm:** 277.2°F = 136.2°C = 409.4°K
12.4 **Freezing Point:** -139°F = -95.0°C = 178°K
12.5 **Critical Temperature:** 651.0°F = 343.9°C = 617.1°K
12.6 **Critical Pressure:** 523 psia = 35.6 atm = 3.61 MN/m^2
12.7 **Specific Gravity:** 0.867 at 20°C (liquid)
12.8 **Liquid Surface Tension:** 29.2 dynes/cm = 0.0292 N/m at 20°C
12.9 **Liquid Water Interfacial Tension:** 36.48 dynes/cm = 0.03648 N/m at 20°C
12.10 **Vapor (Gas) Specific Gravity:** Not pertinent
12.11 **Ratio of Specific Heats of Vapor (Gas):** 1.071
12.12 **Latent Heat of Vaporization:** 144 Btu/lb = 80.1 cal/g = 3.35×10^5 J/kg
12.13 **Heat of Combustion:** -17,780 Btu/lb = -9877 cal/g = -413.5×10^5 J/kg
12.14 **Heat of Decomposition:** Not pertinent
12.15 **Heat of Solution:** Not pertinent
12.16 **Heat of Polymerization:** Not pertinent
12.25 **Heat of Fusion:** Data not available
12.26 **Limiting Value:** Data not available
12.27 **Reid Vapor Pressure:** 0.4 psia

NOTES

ETB	ETHYLBENZENE

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot
40	54.990
50	54.680
60	54.370
70	54.060
80	53.750
90	53.430
100	53.120
110	52.610
120	52.500
130	52.190
140	51.870
150	51.560
160	51.250
170	50.940
180	50.620
190	50.310
200	50.000
210	49.690

12.18 LIQUID HEAT CAPAICTY

Temperature (degrees F)	British thermal unit per pound-F
40	.402
50	.404
60	.407
70	.409
80	.412
90	.414
100	.417
110	.419
120	.421
130	.424
140	.426
150	.429
160	.431
170	.434
180	.436
190	.439
200	.441
210	.443

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
-90	1.065
-80	1.056
-70	1.047
-60	1.037
-50	1.028
-40	1.018
-30	1.009
-20	1.000
-10	.990
0	.981
10	.971
20	.962
30	.953
40	.943
50	.934
60	.924
70	.915
80	.906
90	.896
100	.887
110	.877
120	.868
130	.859
140	.849
150	.840
160	.830

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise
40	.835
50	.774
60	.719
70	.670
80	.626
90	.586
100	.550
110	.518
120	.488
130	.461
140	.436
150	.414
160	.393
170	.374
180	.356
190	.340
200	.325
210	.311

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
68.02	.020

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch
80	.202
100	.370
120	.644
140	1.071
160	1.713
180	2.643
200	3.953
220	5.747
240	8.147
260	11.290
280	15.320
300	20.410
320	26.730
340	34.460
360	43.800
380	54.950

12.23 SATURATED VAPOR DENSITY

Temprature (degrees F)	Pounds per cubic foot
80	.00370
100	.00654
120	.01099
140	.01767
160	.02734
180	.04087
200	.05926
220	.08363
240	.11520
260	.15510
280	.20490
300	.26570
320	.33910
340	.42620
360	.52850
380	.64720

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
-400	-.007
-350	.026
-300	.060
-250	.093
-200	.125
-150	.157
-100	.187
-50	.217
0	.246
50	.274
100	.301
150	.327
200	.353
250	.377
300	.401
350	.424
400	.446
450	.467
500	.487
550	.507
600	.525

MINERAL SPIRITS

MNS

Common Synonyms	Watery liquid	Colorless	Gasoline-like odor
Petroleum spirits Naphtha	Floats on water.		

Stop discharge if possible.
Call fire department.
Avoid contact with liquid.
Isolate and remove discharged material.
Notify local health and pollution control agencies.

Fire

Combustible.
Extinguish with water, dry chemical, foam, or carbon dioxide.
Cool exposed containers with water.

Exposure

CALL FOR MEDICAL AID

LIQUID
Irritating to skin and eyes.
Harmful if swallowed.
Remove contaminated clothing and shoes.
Flush affected areas with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED and victim is CONSCIOUS, have victim drink water.
DO NOT INDUCE VOMITING.

Water Pollution

Effect of low concentrations on aquatic life is unknown.
Fouling to shoreline.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)

Mechanical containment
Should be removed
Chemical and physical treatment

2. LABEL

2.1 Category: None
2.2 Class: Not pertinent

3. CHEMICAL DESIGNATIONS

3.1 CG Compatibility Class: Miscellaneous Hydrocarbon Mixtures
3.2 Formula: Not applicable
3.3 IMO/UN Designation: 3.3/1300
3.4 DOT ID No.: 1300
3.5 CAS Registry No.: Data not available

4. OBSERVABLE CHARACTERISTICS

4.1 Physical State (as shipped): Liquid
4.2 Color: Colorless
4.3 Odor: Like gasoline

5. HEALTH HAZARDS

5.1 Personal Protective Equipment: Plastic gloves; goggles or face shield (as for gasoline).
5.2 Symptoms Following Exposure: INHALATION: mild irritation of respiratory tract. ASPIRATION: severe lung irritation and rapidly developing pulmonary edema; central nervous system excitement followed by depression. INGESTION: irritation of stomach.
5.3 Treatment of Exposure: INHALATION: remove victim to fresh air. ASPIRATION: enforce bed rest; give oxygen; call a doctor. INGESTION: do NOT induce vomiting; guard against aspiration into lungs. EYES: wash with copious amounts of water. SKIN: wipe off and wash with soap and water.
5.4 Threshold Limit Value: Data not available
5.5 Short Term Inhalation Limits: 4000-7000 ppm for 60 min.
5.6 Toxicity by Ingestion: Grade 2; LD_{50} = 0.5 to 5 g/kg
5.7 Late Toxicity: Data not available
5.8 Vapor (Gas) Irritant Characteristics: Vapors are nonirritating to the eyes and throat.
5.9 Liquid or Solid Irritant Characteristics: Minimum hazard. If spilled on clothing and allowed to remain, may cause smarting and reddening of the skin.
5.10 Odor Threshold: Data not available
5.11 IDLH Value: Data not available

6. FIRE HAZARDS

6.1 Flash Point: 105—140°F C.C., depending on grade
6.2 Flammable Limits in Air: 0.8%-5.0%
6.3 Fire Extinguishing Agents: Foam, carbon dioxide, dry chemical
6.4 Fire Extinguishing Agents Not to be Used: Do not use straight hose water stream.
6.5 Special Hazards of Combustion Products: Not pertinent
6.6 Behavior in Fire: Not pertinent
6.7 Ignition Temperature: 540°F
6.8 Electrical Hazard: Not pertinent
6.9 Burning Rate: 4 mm/min.
6.10 Adiabatic Flame Temperature: Data not available
6.11 Stoichiometric Air to Fuel Ratio: Data not available
6.12 Flame Temperature: Data not available

7. CHEMICAL REACTIVITY

7.1 Reactivity With Water: No reaction
7.2 Reactivity with Common Materials: No reaction
7.3 Stability During Transport: Stable
7.4 Neutralizing Agents for Acids and Caustics: Not pertinent
7.5 Polymerization: Not pertinent
7.6 Inhibitor of Polymerization: Not pertinent
7.7 Molar Ratio (Reactant to Product): Data not available
7.8 Reactivity Group: 33

8. WATER POLLUTION

8.1 Aquatic Toxicity: Data not available
8.2 Waterfowl Toxicity: Data not available
8.3 Biological Oxygen Demand (BOD): 8%, 5 days
8.4 Food Chain Concentration Potential: None

9. SHIPPING INFORMATION

9.1 Grades of Purity: Various grades available. 70-100% of the materials are derived from petroleum, and 0-30% are aromatic hydrocarbons like benzene and toluene. Flash points vary with the exact composition but are usually above 100°F.
9.2 Storage Temperature: Ambient
9.3 Inert Atmosphere: No requirement
9.4 Venting: Open (flame arrester)

10. HAZARD ASSESSMENT CODE

(See Hazard Assessment Handbook)

A-T-U

11. HAZARD CLASSIFICATIONS

11.1 Code of Federal Regulations: Combustible liquid
11.2 NAS Hazard Rating for Bulk Water Transportation: Not listed
11.3 NFPA Hazard Classification:

Category	Classification
Health Hazard (Blue)	0
Flammability (Red)	2
Reactivity (Yellow)	0

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 Physical State at 15°C and 1 atm: Liquid
12.2 Molecular Weight: Not pertinent
12.3 Boiling Point at 1 atm: 310—395°F = 154—202°C = 428—475°K
12.4 Freezing Point: Not pertinent
12.5 Critical Temperature: Not pertinent
12.6 Critical Pressure: Not pertinent
12.7 Specific Gravity: 0.76 at 20°C (liquid)
12.8 Liquid Surface Tension: Data not available
12.9 Liquid Water Interfacial Tension: Data not available
12.10 Vapor (Gas) Specific Gravity: Not pertinent
12.11 Ratio of Specific Heats of Vapor (Gas): (est.) 1.030
12.12 Latent Heat of Vaporization: Data not available
12.13 Heat of Combustion: Data not available
12.14 Heat of Decomposition: Not pertinent
12.15 Heat of Solution: Not pertinent
12.16 Heat of Polymerization: Not pertinent
12.25 Heat of Fusion: Data not available
12.26 Limiting Value: Data not available
12.27 Reid Vapor Pressure: 0.13 psia

NOTES

MINERAL SPIRITS

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot (estimate)
50	48.690
52	48.690
54	48.690
56	48.690
58	48.690
60	48.690
62	48.690
64	48.690
66	48.690
68	48.690
70	48.690
72	48.690
74	48.690
76	48.690
78	48.690
80	48.690
82	48.690
84	48.690
86	48.690
88	48.690
90	48.690
92	48.690
94	48.690
96	48.690
98	48.690
100	48.690

12.18 LIQUID HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
10	.433
15	.435
20	.438
25	.440
30	.443
35	.445
40	.448
45	.450
50	.453
55	.455
60	.458
65	.460
70	.462
75	.465
80	.467
85	.470
90	.472
95	.475
100	.477
105	.480

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
10	.925
20	.919
30	.914
40	.908
50	.903
60	.897
70	.892
80	.886
90	.881
100	.875
110	.869
120	.864
130	.858
140	.853
150	.847
160	.842
170	.836
180	.831
190	.825
200	.820
210	.814
220	.808
230	.803
240	.797
250	.792
260	.786

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise (estimate)
50	9.343
52	8.841
54	8.370
56	7.927
58	7.511
60	7.119
62	6.751
64	6.404
66	6.078
68	5.770
70	5.481
72	5.207
74	4.950
76	4.707
78	4.477
80	4.260
82	4.056
84	3.862
86	3.679
88	3.506
90	3.342
92	3.187
94	3.040
96	2.901
98	2.770
100	2.645

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
	I
	N
	S
	O
	L
	U
	B
	L
	E

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch (estimate)
90	.094
100	.124
110	.163
120	.211
130	.272
140	.347
150	.440
160	.553
170	.691
180	.856
190	1.054
200	1.290
210	1.569
220	1.897
230	2.281
240	2.728
250	3.247
260	3.846
270	4.535
280	5.323
290	6.221
300	7.241
310	8.394
320	9.695
330	11.160
340	12.790

12.23 SATURATED VAPOR DENSITY

Temperature (degrees F)	Pounds per cubic foot
	N
	O
	T
	P
	E
	R
	T
	I
	N
	E
	N
	T

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
	N
	O
	T
	P
	E
	R
	T
	I
	N
	E
	N
	T

TETRAETHYL LEAD

TEL

Common Symptoms	Oily liquid	Colorless, but generally dyed red	Fruity odor
TEL Lead tetraethyl	Sinks in water. Poisonous, flammable vapor is produced.		

AVOID CONTACT WITH LIQUID AND VAPOR. Keep people away.
Wear goggles, self-contained breathing apparatus, and rubber overclothing.
Stop discharge if possible.
Call fire department.
Stay upwind and use water spray to "knock down" vapor.
Isolate and remove discharged material.
Notify local health and pollution control agencies.

Fire

Combustible.
POISONOUS GASSES ARE PRODUCED IN FIRE.
Containers may explode in fire.
Vapor may explode if ignited in an enclosed area.
Wear goggles, self-contained breathing apparatus, and rubber overclothing, including gloves.
Combat fires from behind barrier or protected location.
Flood discharge area with water.
Extinguish with water, dry chemicals, foam, or carbon dioxide.
Cool exposed containers with water.

Exposure

CALL FOR MEDICAL AID.

VAPOR
POISONOUS IF INHALED OR IF SKIN IS EXPOSED.
Irritating to eyes.
Move to fresh air.
If breathing has stopped, give artificial respiration.

LIQUID
POISONOUS IF SWALLOWED OR IF SKIN IS EXPOSED.
Will burn eyes.
Remove contaminated clothing and shoes.
Flush affected area with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED and victim is CONSCIOUS, have victim drink water or milk and have victim induce vomiting.
IF SWALLOWED and victim is UNCONSCIOUS OR HAVING CONVULSIONS, do nothing except keep victim warm.

Water Pollution

HARMFUL TO AQUATIC LIFE IN VERY LOW CONCENTRATIONS.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)
Issue warning-poison, water contaminant
Restrict access
Should be removed
Chemical and physical treatment

2. LABEL

2.1 Category: Poison
2.2 Class: 6

3. CHEMICAL DESIGNATIONS

3.1 CG Compatibility Class: Not listed
3.2 Formula: $Pb(C_3H_5)_4$
3.3 IMO/UN Designation: 6.1/1649
3.4 DOT ID No.: 1649
3.5 CAS Registry No.: 78-00-2

4. OBSERVABLE CHARACTERISTICS

4.1 Physical State (as shipped): Liquid
4.2 Color: Dyed red or other distinctive color.
4.3 Odor: Sweet

5. HEALTH HAZARDS

5.1 Personal Protective Equipment: Organic vapor type canister face mask for short periods; air line type for longer periods; neoprene-coated, liquid-proof gloves; protective goggles or face shield; white or light-colored clothing; rubber shoes or boots.
5.2 Symptoms Following Exposure: Increased urinary output of lead. If a large degree of absorption from inhalation or skin contact, may cause insomnia, excitability, delirium, coma, and death. Do not confuse with inorganic lead.
5.3 Treatment of Exposure: Remove victim from contaminated area and consult physician immediately. INGESTION: induce vomiting. SKIN: wash immediately with kerosene or similar petroleum distillate followed by soap and water.
5.4 Threshold Limit Value: 0.1 mg/m³
5.5 Short Term Inhalation Limits: 0.15 mg PB/m³ for 30 min.
5.6 Toxicity by Ingestion: Oral rate LD_{LO} = 17 mg/kg
5.7 Late Toxicity: Lead poisoning
5.8 Vapor (Gas) Irritant Characteristics: Vapors cause a slight smarting of the eyes or respiratory system if present in high concentrations. The effect is temporary.
5.9 Liquid or Solid Irritant Characteristics: Causes smarting of the skin and first-degree burns on short exposure; may cause secondary burns on long exposure.
5.10 Odor Threshold: Data not available
5.11 IDLH Value: 40 mg/m³

6. FIRE HAZARDS

6.1 Flash Point: 200°F C.C.; 285°F O.C.
6.2 Flammable Limits in Air: Data not available
6.3 Fire Extinguishing Agents: Water, foam, dry chemical, or carbon dioxide.
6.4 Fire Extinguishing Agents Not to be Used: Not pertinent
6.5 Special Hazards of Combustion Products: Toxic gases are generated in fires.
6.6 Behavior in Fire: May explode in fire.
6.7 Ignition Temperature: Decomposes above 230°F
6.8 Electrical Hazard: Not pertinent
6.9 Burning Rate: Data not available
6.10 Adiabatic Flame Temperature: Data not available.
6.11 Stoichiometric Air to Fuel Ratio: Data not available
6.12 Flame Temperature: Data not available

7. CHEMICAL REACTIVITY

7.1 Reactivity with Water: No reaction
7.2 Reactivity with Common Materials: Rust and some metals cause decomposition.
7.3 Stability During Transport: Stable below 230°F. At higher temperatures, may detonate or explode when confined.
7.4 Neutralizing Agents for Acids and Caustics: Not pertinent
7.5 Polymerization: Not pertinent
7.6 Inhibitor of Polymerization: Not pertinent
7.7 Molar Ratio (Reactant to Product): Data not available
7.8 Reactivity Group: Data not available

8. WATER POLLUTION

8.1 Aquatic Toxicity: 0.20 mg/l/96 hr/bluegill/TL_m/fresh water
8.2 Waterfowl Toxicity: Data not available
8.3 Biological Oxygen Demand (BOD): Data not available
8.4 Food Concentration Potential: Data not available

9. SHIPPING INFORMATION

9.1 Grades of Purity: Technical
9.2 Storage Temperature: Ambient
9.3 Inert Atmosphere: No requirement
9.4 Venting: Pressure-vacuum

10. HAZARD ASSESSMENT CODE
(See Hazard Assessment Handbook)

A-X-Y

11. HAZARD CLASSIFICATIONS

11.1 Code of Federal Regulations: Poison B
11.2 NAS Hazard Rating for Bulk Water Transportation: Not listed
11.3 NFPA Hazard Classification:

Category	Classification
Health Hazard (Blue)	3
Flammability (Red)	2
Reactivity (Yellow)	3

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 Physical State at 15°C and 1 atm: Liquid
12.2 Molecular Weight: 323.44
12.3 Boiling Point at 1 atm: Decomposes
12.4 Freezing Point: −215°F = −137°C = 136°K
12.5 Critical Temperature: Not pertinent
12.6 Critical Pressure: Not pertinent
12.7 Specific Gravity: 1.633 at 20°C (liquid)
12.8 Liquid Surface Tension: 28.5 dynes/cm = 0.285 N/m at (est. 25°C
12.9 Liquid Water Interfacial Tension: (est.) 40 dynes/cm = 0.04 N/m at 20°C
12.10 Vapor (Gas) Specific Gravity: Not pertinent
12.11 Ratio of Specific Heats of Vapor (Gas): Not pertinent
12.12 Latent Heat of Vaporization: Not pertinent
12.13 Heat of Combustion: (est.) −7,870 Btu/lb = −4,380 cal/g = -183×10^6 J/kg
12.14 Heat of Decomposition: Not pertinent
12.15 Heat of Solution: Not pertinent
12.16 Heat of Polymerization: Not pertinent
12.25 Heat of Fusion: Data not available
12.26 Limiting Value: Data not available
12.27 Reid Vapor Pressure: Data not available

NOTES

TEL	TETRAETHYL LEAD

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot
46	103.400
48	103.200
50	103.099
52	102.900
54	102.799
56	102.599
58	102.500
60	102.299
62	102.200
64	102.000
66	101.900
68	101.700
70	101.599
72	101.400
74	101.299
76	101.099
78	101.000
80	100.799
82	100.700
84	100.500
86	100.400
88	100.200
90	100.099
92	99.929
94	99.780
96	99.629

12.18 LIQUID HEAT CAPAICTY

Temperature (degrees F)	British thermal unit per pound-F
50	.597
52	.597
54	.597
56	.597
58	.597
60	.597
62	.597
64	.597
66	.597
68	.597
70	.597
72	.597
74	.597
76	.597
78	.597
80	.597
82	.597
84	.597
86	.597
88	.597
90	.597
92	.597
94	.597
96	.597
98	.597
100	.597

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
	N
	O
	T
	P
	E
	R
	T
	I
	N
	E
	N
	T

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise
28	1.247
30	1.222
32	1.199
34	1.175
36	1.153
38	1.131
40	1.109
42	1.088
44	1.068
46	1.048
48	1.029
50	1.010
52	.992
54	.974
56	.957
58	.940
60	.924
62	.908
64	.892
66	.877
68	.862
70	.847
72	.833
74	.819
76	.806
78	.793

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
	I
	N
	S
	O
	L
	U
	B
	L
	E

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch
35	.001
40	.001
45	.002
50	.002
55	.003
60	.003
65	.004
70	.005
75	.007
80	.008
85	.010
90	.012
95	.015
100	.018
105	.022
110	.027
115	.032
120	.039
125	.047
130	.056
135	.066
140	.079
145	.093
150	.110
155	.129

12.23 SATURATED VAPOR DENSITY

Temprature (degrees F)	Pounds per cubic foot
35	.00000
40	.00001
45	.00001
50	.00001
55	.00001
60	.00001
65	.00002
70	.00002
75	.00003
80	.00003
85	.00004
90	.00005
95	.00006
100	.00007
105	.00009
110	.00010
115	.00012
120	.00015
125	.00017
130	.00021
135	.00024
140	.00029
145	.00034
150	.00039
155	.00046

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
	N
	O
	T
	P
	E
	R
	T
	I
	N
	E
	N
	T

TOLUENE

TOL

Common Symptoms	Watery liquid	Colorless	Pleasant odor
Toluol Methylbenzene Methylbenzol	Floats on water. Flammable, irritating vapor is produced.		

Stop discharge if possible. Keep people away.
Shut off ignition sources and call fire department.
Stay upwind and use water spray to "knock down" vapor.
Avoid contact with liquid and vapor.
Isolate and remove discharged material.
Notify local health and pollution control agencies.

Fire

FLAMMABLE
Flashback along vapor trail may occur.
Vapor may explode if ignited in an enclosed area.
Wear goggles and self-contained breathing apparatus.
Extinguish with dry chemical, foam, or carbon dioxide.
Water may be ineffective on fire.
Cook exposed containers with water.

Exposure

CALL FOR MEDICAL AID.

VAPOR
Irritating to eyes, nose, and throat.
If inhaled, will cause nausea, vomiting, headache, dizziness, difficult breathing, or loss of consciousness.
Move to fresh air.
If breathing has stopped, give artificial respiration.
If breathing is difficult, give oxygen.

LIQUID
Irritating to skin and eyes.
If swallowed, will cause nausea, vomiting, or loss of consciousness.
Remove contaminated clothing and shoes.
Flush affected areas with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED and victim is CONSCIOUS, have victim drink water or milk.
DO NOT INDUCE VOMITING.

Water Pollution

Dangerous to aquatic life in high concentrations.
Fouling to shoreline.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)
Issue warning-high flammability
Evacuate area

2. LABEL

2.1 Category: Flammable liquid
2.2 Class: 3

3. CHEMICAL DESIGNATIONS

3.1 CG Compatibility Class: Aromatic Hydrocarbon
3.2 Formula: $C_6H_5CH_3$
3.3 IMO/UN Designation: 3.2/1294
3.4 DOT ID No.: 1294
3.5 CAS Registry No.: 108-88-3

4. OBSERVABLE CHARACTERISTICS

4.1 Physical State (as shipped): Liquid
4.2 Color: Colorless
4.3 Odor: Pungent, aromatic, benzene-like; distinct, pleasant

5. HEALTH HAZARDS

5.1 Personal Protective Equipment: Air-supplied mask; goggles or face shield; plastic gloves.
5.2 Symptoms Following Exposure: Vapors irritate eyes and upper respiratory tract; cause dizziness, headache, anesthesia, respiratory arrest. Liquid irritates eyes and causes drying of skin. If aspirated, causes coughing, gagging, distress, and rapidly developing pulmonary edema. If ingested, causes vomiting, griping, diarrhea, depressed respiration.
5.3 Treatment of Exposure: INHALATION: remove to fresh air, give artificial respiration and oxygen if needed; call a doctor. INGESTION: do NOT induce vomiting; call a doctor. EYES: flush with water for at least 15 min. SKIN: wipe off, wash with soap and water.
5.4 Threshold Limit Value: 100 ppm
5.5 Short Term Inhalation Limits: 600 ppm for 30 min.
5.6 Toxicity by Ingestion: Grade 2; LD_{50} = 0.5 to 5 g/kg
5.7 Late Toxicity: Kidney and liver damage may follow ingestion.
5.8 Vapor (Gas) Irritant Characteristics: Vapors cause a slight smarting of the eyes or respiratory system if present in high concentrations. The effect is temporary.
5.9 Liquid or Solid Irritant Characteristics: Minimum hazard. If spilled on clothing and allowed to remain, may cause smarting and reddening of the skin.
5.10 Odor Threshold: 0.17 ppm
5.11 IDLH Value: 2,000 ppm

6. FIRE HAZARDS

6.1 Flash Point: 40°F C.C.; 55° F. O.C.
6.2 Flammable Limits in Air: 1.27%-7%
6.3 Fire Extinguishing Agents: Carbon dioxide or dry chemical for small fires, ordinary foam for large fires.
6.4 Fire Extinguishing Agents Not to be Used: Water may be ineffective.
6.5 Special Hazards of Combustion Products: Not pertinent
6.6 Behavior in Fire: Vapor is heavier than air and may travel a considerable distance to a source of ignition and flash back.
6.7 Ignition Temperature: 997°F
6.8 Electrical Hazard: Class I, Group D
6.9 Burning Rate: 5.7 mm/min.
6.10 Adiabatic Flame Temperature: Data not available.
6.11 Stoichiometric Air to Fuel Ratio: Data not available.
6.12 Flame Temperature: Data not available.

7. CHEMICAL REACTIVITY

7.1 Reactivity with Water: No reaction
7.2 Reactivity with Common Materials: No reaction
7.3 Stability During Transport: Stable
7.4 Neutralizing Agents for Acids and Caustics: Not pertinent
7.5 Polymerization: Not pertinent
7.6 Inhibitor of Polymerization: Not pertinent
7.7 Molar Ratio (Reactant to Product): Data not available
7.8 Reactivity Group: 32

8. WATER POLLUTION

8.1 Aquatic Toxicity: 1180 mg/l/96 hr/sunfish/TL_m/fresh water
8.2 Waterfowl Toxicity: Data not available
8.3 Biological Oxygen Demand (BOD): 0%, 5 days; 38% (theor.), 8 days
8.4 Food Concentration Potential: None

9. SHIPPING INFORMATION

9.1 Grades of Purity: Research, reagent, nitration-all 99.8 + %; industrial: contains 94 + %, with 5% xylene and small amounts of benzene and nonaromatic hydrocarbons; 90/120: less pure than industrial.
9.2 Storage Temperature: Ambient
9.3 Inert Atmosphere: No requirement
9.4 Venting: Open (flame arrester) or pressure-vacuum.

10. HAZARD ASSESSMENT CODE
(See Hazard Assessment Handbook)

A-T-U

11. HAZARD CLASSIFICATIONS

11.1 Code of Federal Regulations: Flammable liquid.
11.2 NAS Hazard Rating for Bulk Water Transportation:

Category	Rating
Fire	3
Health	
Vapor Irritant	1
Liquid or Solid Irritant	1
Poisons	2
Water Pollution	
Human Toxicity	1
Aquatic Toxicity	3
Aesthetic Affect	2
Reactivity	
Other Chemicals	1
Water	0
Self Reaction	0

11.3 NFPA Hazard Classification:

Category	Classification
Health Hazard (Blue)	2
Flammability (Red)	3
Reactivity (Yellow)	0

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 Physical State at 15°C and 1 atm: Liquid
12.2 Molecular Weight: 92.14
12.3 Boiling Point at 1 atm: 231.1°F = 110.6°C = 383.8°K
12.4 Freezing Point: -139°F = -95.0°C = 178.2°K
12.5 Critical Temperature: 605.4°F = 318.6°C = 591.8°K
12.6 Critical Pressure: 596.1 psia = 40.55 atm = 4.108 MN/m^2
12.7 Specific Gravity: 0.867 at 20°C (liquid)
12.8 Liquid Surface Tension: 29.0 dynes/cm = 0.0290 N/m at 20°C
12.9 Liquid Water Interfacial Tension: 36.1 dynes/cm = 0.0361 N/m at 25°C
12.10 Vapor (Gas) Specific Gravity: Not pertinent
12.11 Ratio of Specific Heats of Vapor (Gas): 1.089
12.12 Latent Heat of Vaporization: 155 Btu/lb = 86.1 cal/g = 3.61 X 10^5 J/kg
12.13 Heat of Combustion: -17,430 Btu/lb = 9686 cal/g = -4.056 X 10^5 J/kg
12.14 Heat of Decomposition: Not pertinent
12.15 Heat of Solution: Not pertinent
12.16 Heat of Polymerization: Not pertinent
12.25 Heat of Fusion: 17.17 cal/g
12.26 Limiting Value: Data not available
12.27 Reid Vapor Pressure: 1.1 psia

NOTES

TOL — TOLUENE

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot
−30	57.180
−20	56.870
−10	56.550
0	56.240
10	55.930
20	55.620
30	55.310
40	54.990
50	54.680
60	54.370
70	54.060
80	53.750
90	53.430
100	53.120
110	52.810
120	52.500

12.18 LIQUID HEAT CAPAICTY

Temperature (degrees F)	British thermal unit per pound-F
0	.396
5	.397
10	.399
15	.400
20	.402
25	.403
30	.404
35	.406
40	.407
45	.409
50	.410
55	.411
60	.413
65	.414
70	.415
75	.417
80	.418
85	.420
90	.421
95	.422
100	.424
105	.425
110	.427
115	.428
120	.429
125	.431

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
0	1.026
10	1.015
20	1.005
30	.994
40	.983
50	.972
60	.962
70	.951
80	.940
90	.929
100	.919
110	.908
120	.897
130	.886
140	.876
150	.865
160	.854
170	.843
180	.833
190	.822
200	.811
210	.800

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise
0	1.024
5	.978
10	.935
15	.894
20	.857
25	.821
30	.788
35	.757
40	.727
45	.700
50	.673
55	.649
60	.625
65	.603
70	.582
75	.562
80	.544
85	.526
90	.509
95	.493
100	.477

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
68.02	.050

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch
0	.038
10	.057
20	.084
30	.121
40	.172
50	.241
60	.331
70	.449
80	.600
90	.792
100	1.033
110	1.332
120	1.700
130	2.148
140	2.690
150	3.338
160	4.109
170	5.018
180	6.083
190	7.323
200	8.758
210	10.410

12.23 SATURATED VAPOR DENSITY

Temprature (degrees F)	Pounds per cubic foot
0	.00070
10	.00103
20	.00150
30	.00212
40	.00296
50	.00405
60	.00547
70	.00727
80	.00954
90	.01237
100	.01584
110	.02007
120	.02518
130	.03127
140	.03850
150	.04700
160	.05691
170	.06840
180	.08162
190	.09675
200	.11400
210	.13340

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
0	.228
25	.241
50	.255
75	.268
100	.281
125	.294
150	.306
175	.319
200	.331
225	.343
250	.355
275	.367
300	.378
325	.389
350	.400
375	.411
400	.422
425	.432
450	.443
475	.453
500	.462
525	.472
550	.482
575	.491
600	.500

m-XYLENE

XLM

Common Symptoms	Watery liquid	Colorless	Sweet odor
1,3-Dimethylbenzene Xylol	Floats on water. Flammable, irritating vapor is produced.		

Stop discharge if possible. Keep people away.
Call fire department.
Avoid contact with liquid and vapor.
Isolate and remove discharged material.
Notify local health and pollution control agencies.

Fire

FLAMMABLE
Flashback along vapor trail may occur.
Vapor may explode if ignited in an enclosed area.
Wear self-contained breathing apparatus.
Extinguish with foam, dry chemical, or carbon dioxide.
Water may be ineffective on fire.
Cool exposed containers with water.

Exposure

CALL FOR MEDICAL AID.

VAPOR
Irritating to eyes, nose, and throat.
If inhaled, will cause headache, difficult breathing, or loss of consciousness.
Move to fresh air.
If breathing has stopped, give artificial respiration.
If breathing is difficult, give oxygen.

LIQUID
Irritating to skin and eyes.
If swallowed, will cause nausea, vomiting, or loss of consciousness.
Remove contaminated clothing and shoes.
Flush affected areas with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED and victim is CONSCIOUS, have victim drink water or milk.
DO NOT INDUCE VOMITING.

Water Pollution

HARMFUL TO AQUATIC LIFE IN VERY LOW CONCENTRATIONS.
Fouling to shoreline.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)
Issue warning-high flammability
Evacuate area
Should be removed
Chemical and physical treatment

2. LABEL

2.1 Category: Flammable liquid
2.2 Class: 3

3. CHEMICAL DESIGNATIONS

3.1 CG Compatibility Class: Aromatic Hydrocarbon
3.2 Formula: m-$C_6H_4(CH_3)_2$
3.3 IMO/UN Designation: 3.2/1307
3.4 DOT ID No.: 1307
3.5 CAS Registry No.: 108-38-3

4. OBSERVABLE CHARACTERISTICS

4.1 Physical State (as shipped): Liquid
4.2 Color: Colorless
4.3 Odor: Like benzene; characteristic aromatic

5. HEALTH HAZARDS

5.1 Personal Protective Equipment: Approved canister or air-supplied mask; goggles or face shield; plastic gloves and boots.
5.2 Symptoms Following Exposure: Vapors cause headache and dizziness. Liquid irritates eyes and skin. If taken into lungs, causes severe coughing, distress, and rapidly developing pulmonary edema. If ingested, causes nausea, vomiting, cramps, headache, and coma; can be fatal. Kidney and liver damage can occur.
5.3 Treatment of Exposure: INHALATION: remove to fresh air; administer artificial respiration and oxygen if required; call a doctor. INGESTION: do NOT induce vomiting; call a doctor. EYES: flush with water for at least 15 min. SKIN: wipe off, wash with soap and water.
5.4 Threshold Limit Value: 100 ppm
5.5 Short Term Inhalation Limits: 300 ppm for 30 min.
5.6 Toxicity by Ingestion: Grade 3; LD_{50} = 50 to 500 g/kg
5.7 Late Toxicity: Kidney and liver damage
5.8 Vapor (Gas) Irritant Characteristics: Vapors cause a slight smarting of the eyes or respiratory system if present in high concentrations. The effect is temporary.
5.9 Liquid or Solid Irritant Characteristics: Minimum hazard. If spilled or clothing and allowed to remain, may cause smarting and reddening of the skin.
5.10 Odor Threshold: 0.05 ppm
5.11 IDLH Value: 10,000 ppm

6. FIRE HAZARDS

6.1 Flash Point: 84°F C.C.
6.2 Flammable Limits in Air: 1.1%-6.4%
6.3 Fire Extinguishing Agents: Foam, dry chemical, or carbon dioxide
6.4 Fire Extinguishing Agents Not to be Used: Water be ineffective.
6.5 Special Hazards of Combustion Products: Not pertinent
6.6 Behavior in Fire: Vapor is heavier than air and may travel considerable distance to a source of ignition and flash back.
6.7 Ignition Temperature: 986°F
6.8 Electrical Hazard: Class I, Group D
6.9 Burning Rate: 5.8 mm/min.
6.10 Adiabatic Flame Temperature: Data not available
6.11 Stoichiometric Air to Fuel Ratio: Data not available
6.12 Flame Temperature: Data not available

7. CHEMICAL REACTIVITY

7.1 Reactivity with Water: No reaction
7.2 Reactivity with Common Materials: No reaction
7.3 Stability During Transport: Stable
7.4 Neutralizing Agents for Acids and Caustics: Not pertinent
7.5 Polymerization: Not pertinent
7.6 Inhibitor of Polymerization: Not pertinent
7.7 Molar Ratio (Reactant to Product): Data not available
7.8 Reactivity Group: 32

8. WATER POLLUTION

8.1 Aquatic Toxicity: 22 ppm/96 hr/bluegill/TL_m/fresh water
8.2 Waterfowl Toxicity: Data not available
8.3 Biological Oxygen Demand (BOD): 0 lb/lb, 5 days; 0% (theor.), 8 days
8.4 Food Concentration Potential: Data not available

9. SHIPPING INFORMATION

9.1 Grades of Purity: Research: 99.99%; Pure: 99.9%; Technical: 99.2%
9.2 Storage Temperature: Ambient
9.3 Inert Atmosphere: No requirement
9.4 Venting: Open (flame arrester) or pressure-vacuum

10. HAZARD ASSESSMENT CODE
(See Hazard Assessment Handbook)

A-T-U

11. HAZARD CLASSIFICATIONS

11.1 Code of Federal Regulations: Flammable liquid
11.2 NAS Hazard Rating for Bulk Water Transportation:

Category	Rating
Fire	3
Health	
Vapor Irritant	1
Liquid or Solid Irritant	1
Poisons	2
Water Pollution	
Human Toxicity	1
Aquatic Toxicity	3
Aesthetic Affect	2
Reactivity	
Other Chemicals	1
Water	0
Self Reaction	0

11.3 NFPA Hazard Classification:

Category	Classification
Health Hazard (Blue)	2
Flammability (Red)	3
Reactivity (Yellow)	0

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 Physical State at 15°C and 1 atm: Liquid
12.2 Molecular Weight: 106.16
12.3 Boiling Point at 1 atm: 269.4°F = 131.9° = 405.1°K
12.4 Freezing Point: --54.2°F = --47.9°C = 225.3°K
12.5 Critical Temperature: 650.8°F = 343.8°C = 617.0°K
12.6 Critical Pressure: 513.8 atm = 34.95 psia = 3,540 MN/m^2
12.7 Specific Gravity: 0.864 at 20°C (liquid)
12.8 Liquid Surface Tension: 28.6 dynes/cm = 0.0286 N/m at 20°C
12.9 Liquid Water Interfacial Tension: 36.4 dynes/cm = 0.0364 N/m at 30°C
12.10 Vapor (Gas) Specific Gravity: Not pertinent
12.11 Ratio of Specific Heats of Vapor (Gas): 1.071
12.12 Latent Heat of Vaporization: 147 Btu/lb = 81.9 cal/g = 3.43×10^5 J/kg
12.13 Heat of Combustion: --17.554 Btu/lb = --9762.4 cal/g = -408.31×10^5 J/kg
12.14 Heat of Decomposition: Not pertinent
12.15 Heat of Solution: Not pertinent
12.16 Heat of Polymerization: Not pertinent
12.25 Heat of Fusion: 26.01 cal/g
12.26 Limiting Value: Data not available
12.27 Reid Vapor Pressure: 0.34 psia

NOTES

XLM	m-XYLENE

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot
15	55.400
20	55.260
25	55.130
30	54.990
35	54.850
40	54.710
45	54.570
50	54.430
55	54.290
60	54.160
65	54.020
70	53.880
75	53.740
80	53.600
85	53.460
90	53.320
95	53.180
100	53.050

12.18 LIQUID HEAT CAPAICTY

Temperature (degrees F)	British thermal unit per pound-F
40	.387
50	.393
60	.398
70	.404
80	.410
90	.415
100	.421
110	.426
120	.432
130	.437
140	.443
150	.448
160	.454
170	.460
180	.465
190	.471
200	.476
210	.482

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
35	.962
40	.953
45	.944
50	.935
55	.926
60	.917
65	.908
70	.899
75	.890
80	.881
85	.873
90	.864
95	.855
100	.846

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise
15	.938
20	.898
25	.862
30	.827
35	.794
40	.764
45	.735
50	.708
55	.682
60	.658
65	.635
70	.613
75	.592
80	.572
85	.554

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
	K
	N
	S
	O
	L
	U
	B
	L
	E

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch
60	.090
70	.127
80	.177
90	.242
100	.326
110	.434
120	.571
130	.743
140	.956
150	1.219
160	1.538
170	1.924
180	2.388
190	2.939
200	3.590
210	4.355
220	5.247
230	6.282
240	7.476
250	8.846
260	10.410

12.23 SATURATED VAPOR DENSITY

Temprature (degrees F)	Pounds per cubic foot
60	.00172
70	.00238
80	.00324
90	.00435
100	.00577
110	.00754
120	.00975
130	.01247
140	.01577
150	.01977
160	.02455
170	.03023
180	.03691
190	.04473
200	.05382
210	.06431
220	.07635
230	.09009
240	.10570
250	.12330
260	.14310

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
0	.247
25	.260
50	.273
75	.286
100	.299
125	.311
150	.324
175	.336
200	.348
225	.360
250	.371
275	.383
300	.394
325	.406
350	.417
375	.427
400	.438
425	.449
450	.459
475	.469
500	.479
525	.489
550	.499
575	.508
600	.517

o-XYLENE

XLO

Common Symptoms	Watery liquid	Colorless	Sweet odor
1,2-Dimethylbenzene Xylol	Floats on water. Flammable, irritating vapor is produced.		

Stop discharge if possible. Keep people away.
Call fire department.
Avoid contact with liquid and vapor.
Isolate and remove discharged material.
Notify local health and pollution control agencies.

Fire

FLAMMABLE
Flashback along vapor trail may occur.
Vapor may explode if ignited in an enclosed area.
Wear self-contained breathing apparatus.
Extinguish with foam, dry chemical, or carbon dioxide.
Water may be ineffective on fire.
Cool exposed containers with water.

Exposure

CALL FOR MEDICAL AID.

VAPOR
Irritating to eyes, nose, and throat.
If inhaled, will cause headache, difficult breathing, or loss of consciousness.
Move to fresh air.
If breathing has stopped, give artificial respiration.
If breathing is difficult, give oxygen.

LIQUID
Irritating to skin and eyes.
If swallowed, will cause nausea, vomiting, or loss of consciousness.
Remove contaminated clothing and shoes.
Flush affected areas with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED and victim is CONSCIOUS, have victim drink water or milk.
DO NOT INDUCE VOMITING.

Water Pollution

Dangerous to aquatic life in high concentrations.
Fouling to shoreline.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)
Issue warning-high flammability
Evacuate area
Should be removed
Chemical and physical treatment

2. LABEL

2.1 Category: Flammable liquid
2.2 Class: 3

3. CHEMICAL DESIGNATIONS

3.1 CG Compatibility Class: Aromatic Hydrocarbon
3.2 Formula: o-$C_6H_4(CH_3)_2$
3.3 IMO/UN Designation: 3.2/1307
3.4 DOT ID No.: 1307
3.5 CAS Registry No.: 95-47.8

4. OBSERVABLE CHARACTERISTICS

4.1 Physical State (as shipped): Liquid
4.2 Color: Colorless
4.3 Odor: Benzene-like; characteristic aromatic

5. HEALTH HAZARDS

5.1 Personal Protective Equipment: Approved canister or air-supplied mask; goggles or face shield; plastic gloves and boots.
5.2 Symptoms Following Exposure: Vapors cause headache and dizziness. Liquid irritates eyes and skin. If taken into lungs, causes severe coughing, distress, and rapidly developing pulmonary edema. If ingested, causes nausea, vomiting, cramps, headache, and coma; can be fatal. Kidney and liver damage can occur.
5.3 Treatment of Exposure: INHALATION: remove to fresh air; administer artificial respiration and oxygen if required; call a doctor. INGESTION: do NOT induce vomiting; call a doctor. EYES: flush with water for at least 15 min. SKIN: wipe off, wash with soap and water.
5.4 Threshold Limit Value: 100 ppm
5.5 Short Term Inhalation Limits: 300 ppm for 30 min.
5.6 Toxicity by Ingestion: Grade 3; LD50 = 50 to 500 g/kg
5.7 Late Toxicity: Kidney and liver damage
5.8 Vapor (Gas) Irritant Characteristics: Vapors cause a slight smarting of the eyes or respiratory system if present in high concentrations. The effect is temporary.
5.9 Liquid or Solid Irritant Characteristics: Minimum hazard. If spilled or clothing and allowed to remain, may cause smarting and reddening of the skin.
5.10 Odor Threshold: 0.05 ppm
5.11 IDLH Value: 10,000 ppm

6. FIRE HAZARDS

6.1 Flash Point: 63°F C.C.; 75°f O.C.
6.2 Flammable Limits in Air: 1.1%-7.0%
6.3 Fire Extinguishing Agents: Foam, dry chemical, or carbon dioxide
6.4 Fire Extinguishing Agents Not to be Used: Water be ineffective.
6.5 Special Hazards of Combustion Products: Not pertinent
6.6 Behavior in Fire: Vapor is heavier than air and may travel considerable distance to a source of ignition and flash back.
6.7 Ignition Temperature: 869°F
6.8 Electrical Hazard: Class I, Group D
6.9 Burning Rate: 6.8 mm/min.
6.10 Adiabatic Flame Temperature: Data not available
6.11 Stoichiometric Air to Fuel Ratio: Data not available
6.12 Flame Temperature: Data not available

7. CHEMICAL REACTIVITY

7.1 Reactivity with Water: No reaction
7.2 Reactivity with Common Materials: No reaction
7.3 Stability During Transport: Stable
7.4 Neutralizing Agents for Acids and Caustics: Not pertinent
7.5 Polymerization: Not pertinent
7.6 Inhibitor of Polymerization: Not pertinent
7.7 Molar Ratio (Reactant to Product): Data not available
7.8 Reactivity Group: 32

8. WATER POLLUTION

8.1 Aquatic Toxicity: >100 mg/l/96 hr/D. magna/TL^m/fresh water
8.2 Waterfowl Toxicity: Data not available
8.3 Biological Oxygen Demand (BOD): 0 lb/lb, 5 days; 2.5% (theor.), 8 days
8.4 Food Concentration Potential: Data not available

9. SHIPPING INFORMATION

9.1 Grades of Purity:
Research: 99.99%;
Pure: 99.7%;
Commercial: 95+%
9.2 Storage Temperature: Ambient
9.3 Inert Atmosphere: No action
9.4 Venting: Open (flame arrester) or pressure-vacuum

10. HAZARD ASSESSMENT CODE
(See Hazard Assessment Handbook)

A-T-U

11. HAZARD CLASSIFICATIONS

11.1 Code of Federal Regulations: Flammable liquid
11.2 NAS Hazard Rating for Bulk Water Transportation:

Category	Rating
Fire	3
Health	
Vapor Irritant	1
Liquid or Solid Irritant	1
Poisons	2
Water Pollution	
Human Toxicity	1
Aquatic Toxicity	3
Aesthetic Affect	2
Reactivity	
Other Chemicals	1
Water	0
Self Reaction	0

11.3 NFPA Hazard Classification:

Category	Classification
Health Hazard (Blue)	2
Flammability (Red)	3
Reactivity (Yellow)	0

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 Physical State at 15°C and 1 atm: Liquid
12.2 Molecular Weight: 106.16
12.3 Boiling Point at 1 atm: 291.9°F = 144.4°C = 417.6°K
12.4 Freezing Point: −13.3°F = −25.2°C = 248.0°K
12.5 Critical Temperature: 674.8°F = 357.1°C = 630.3°K
12.6 Critical Pressure: 541.6 atm = 36.84 psia = 3.732 MN/m^2
12.7 Specific Gravity: 0.880 at 20°C (liquid)
12.8 Liquid Surface Tension: 30.53 dynes/cm = 0.03053 N/m at 15.6°C
12.9 Liquid Water Interfacial Tension: 36.06 dynes/cm = 0.03606 N/m at 20°C
12.10 Vapor (Gas) Specific Gravity: Not pertinent
12.11 Ratio of Specific Heats of Vapor (Gas): 1.068
12.12 Latent Heat of Vaporization: 149 Btu/lb = 82.9 cal/g = 3.47 x 10^5 J/kg
12.13 Heat of Combustion: −17,658 Btu/lb = −9754.7 cal/g = −408.41 x 10^5 J/kg
12.14 Heat of Decomposition: Not pertinent
12.15 Heat of Solution: Not pertinent
12.16 Heat of Polymerization: Not pertinent
12.25 Heat of Fusion: 30.64 cal/g
12.26 Limiting Value: Data not available
12.27 Reid Vapor Pressure: 0.28 psia

NOTES

XLO	o-XYLENE

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot
15	56.460
20	56.330
25	56.190
30	56.050
35	55.910
40	55.770
45	55.630
50	55.490
55	55.360
60	55.220
65	55.080
70	54.940
75	54.800
80	54.660
85	54.520
90	54.380
95	54.250
100	54.110

12.18 LIQUID HEAT CAPAICTY

Temperature (degrees F)	British thermal unit per pound-F
35	.389
40	.391
45	.394
50	.396
55	.398
60	.400
65	.402
70	.404
75	.406
80	.408
85	.411
90	.413
95	.415
100	.417

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
35	1.043
40	1.035
45	1.027
50	1.018
55	1.010
60	1.002
65	.993
70	.985
75	.977
80	.969
85	.960
90	.952
95	.944
100	.935

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise
15	1.328
20	1.263
25	1.202
30	1.145
35	1.092
40	1.042
45	.995
50	.952
55	.911
60	.873
65	.836
70	.802
75	.770
80	.740
85	.712

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
	I
	N
	S
	O
	L
	U
	B
	L
	E

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch
60	.071
70	.101
80	.141
90	.194
100	.263
110	.352
120	.465
130	.609
140	.787
150	1.007
160	1.227
170	1.605
180	1.999
190	2.469
200	3.028
210	3.686
220	4.456
230	5.352
240	6.389
250	7.581
260	8.947

12.23 SATURATED VAPOR DENSITY

Temprature (degrees F)	Pounds per cubic foot
60	.00135
70	.00188
80	.00258
90	.00349
100	.00464
110	.00611
120	.00794
130	.01021
140	.01298
150	.01634
160	.02038
170	.02520
180	.03090
190	.03759
200	.04539
210	.05443
220	.06484
230	.07674
240	.09030
250	.10560
260	.12290

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
0	.261
25	.274
50	.287
75	.299
100	.311
125	.323
150	.335
175	.347
200	.358
225	.370
250	.381
275	.392
300	.403
325	.414
350	.424
375	.435
400	.445
425	.455
450	.465
475	.475
500	.485
525	.494
550	.504
575	.513
600	.522

p-XYLENE

XLP

Common Symptoms	Watery liquid	Colorless	Sweet odor
1,4-Dimethylbenzene Xylol	Floats on water. Flammable, irritating vapor is produced. Freezing point is 56°F.		

Stop discharge if possible. Keep people away.
Call fire department.
Avoid contact with liquid and vapor.
Isolate and remove discharged material.
Notify local health and pollution control agencies.

Fire

FLAMMABLE
Flashback along vapor trail may occur.
Vapor may explode if ignited in an enclosed area.
Wear self-contained breathing apparatus.
Extinguish with foam, dry chemical, or carbon dioxide.
Water may be ineffective on fire.
Cool exposed containers with water.

Exposure

CALL FOR MEDICAL AID.

VAPOR
Irritating to eyes, nose, and throat.
If inhaled, will cause dizziness, difficult breathing, or loss of consciousness.
Move to fresh air.
If breathing has stopped, give artificial respiration.
If breathing is difficult, give oxygen.

LIQUID
Irritating to skin and eyes.
If swallowed, will cause nausea, vomiting, loss of consciousness.
Remove contaminated clothing and shoes.
Flush affected areas with plenty of water.
IF IN EYES, hold eyelids open and flush with plenty of water.
IF SWALLOWED and victim is CONSCIOUS, have victim drink water or milk.
DO NOT INDUCE VOMITING.

Water Pollution

HARMFUL TO AQUATIC LIFE IN VERY LOW CONCENTRATIONS.
Fouling to shoreline.
May be dangerous if it enters water intakes.

Notify local health and wildlife officials.
Notify operators of nearby water intakes.

1. RESPONSE TO DISCHARGE

(See Response Methods Handbook)
Issue warning-high flammability
Evacuate area
Should be removed
Chemical and physical treatment

2. LABEL

2.1 Category: Flammable liquid
2.2 Class: 3

3. CHEMICAL DESIGNATIONS

3.1 CG Compatibility Class: Aromatic Hydrocarbon
3.2 Formula: p-$C_6H_4(CH_3)_2$
3.3 IMO/UN Designation: 3.2/1307
3.4 DOT ID No.: 1307
3.5 CAS Registry No.: 106-42-3

4. OBSERVABLE CHARACTERISTICS

4.1 Physical State (as shipped): Liquid
4.2 Color: Colorless
4.3 Odor: Like benzene; characteristic aromatic

5. HEALTH HAZARDS

5.1 Personal Protective Equipment: Approved canister or air-supplied mask; goggles or face shield; plastic gloves and boots.
5.2 Symptoms Following Exposure: Vapors cause headache and dizziness. Liquid irritates eyes and skin. If taken into lungs, causes severe coughing, distress, and rapidly developing pulmonary edema. If ingested, causes nausea, vomiting, cramps, headache, and coma. Can be fatal. Kidney and liver damage can occur.
5.3 Treatment of Exposure: INHALATION: remove to fresh air; administer artificial respiration and oxygen if required; call a doctor. INGESTION: do NOT induce vomiting; call a doctor. EYES: flush with water for at least 15 min. SKIN: wipe off, wash with soap and water.
5.4 Threshold Limit Value: 100 ppm
5.5 Short Term Inhalation Limits: 300 ppm for 30 min.
5.6 Toxicity by Ingestion: Grade 3; LD_{50} = 50 to 500 mg/kg
5.7 Late Toxicity: Kidney and liver damage.
5.8 Vapor (Gas) Irritant Characteristics: Vapors cause a slight smarting of the eyes or respiratory system if present in high concentrations. The effect is temporary.
5.9 Liquid or Solid Irritant Characteristics: Minimum hazard. If spilled on clothing and allowed to remain, may cause smarting and reddening of the skin.
5.10 Odor Threshold: 0.05 ppm
5.11 IDLH Value: 10,000 ppm

6. FIRE HAZARDS

6.1 Flash Point: 81°F C.C.
6.2 Flammable Limits in Air: 1.1%-6.6%
6.3 Fire Extinguishing Agents: Foam, dry chemical, or carbon dioxide.
6.4 Fire Extinguishing Agents Not to be Used: Water may be ineffective.
6.5 Special Hazards of Combustion Products: Not pertinent
6.6 Behavior in Fire: Vapor is heavier than air and may travel considerable distance to a source of ignition and flash back.
6.7 Ignition Temperature: 870°F
6.8 Electrical Hazard: Class I, Group D
6.9 Burning Rate: 5.8 mm/min.
6.10 Adiabatic Flame Temperature: Data not available
6.11 Stoichiometric Air to Fuel Ratio: Data not available
6.12 Flame Temperature: Data not available

7. CHEMICAL REACTIVITY

7.1 Reactivity with Water: No reaction
7.2 Reactivity with Common Materials: No reaction
7.3 Stability During Transport: Stable
7.4 Neutralizing Agents for Acids and Caustics: Not pertinent
7.5 Polymerization: Not pertinent
7.6 Inhibitor of Polymerization: Not pertinent
7.7 Molar Ratio (Reactant to Product): Data not available
7.8 Reactivity Group: 32

8. WATER POLLUTION

8.1 Aquatic Toxicity: 22 ppm/96/hr/bluegill/TL_m/fresh water
8.2 Waterfowl Toxicity: Data not available
8.3 Biological Oxygen Demand (BOD): 0 lb/lb in 5 days
8.4 Food Concentration Potential: Data not available

9. SHIPPING INFORMATION

9.1 Grades of Purity:
Research: 99.99%;
Pure: 99.8%; Technical: 99.0%
9.2 Storage Temperature: Ambient
9.3 Inert Atmosphere: No requirement
9.4 Venting: Open (flame arrester) or pressure-vacuum

10. HAZARD ASSESSMENT CODE
(See Hazard Assessment Handbook)

A-T-U

11. HAZARD CLASSIFICATIONS

11.1 Code of Federal Regulations: Flammable liquid
11.2 NAS Hazard Rating for Bulk Water Transportation:

Category	Rating
Fire	3
Health	
Vapor Irritant	1
Liquid or Solid Irritant	1
Poisons	2
Water Pollution	
Human Toxicity	1
Aquatic Toxicity	3
Aesthetic Affect	2
Reactivity	
Other Chemicals	1
Water	0
Self Reaction	0

11.3 NFPA Hazard Classification:

Category	Classification
Health Hazard (Blue)	2
Flammability (Red)	3
Reactivity (Yellow)	0

12. PHYSICAL AND CHEMICAL PROPERTIES

12.1 Physical State at 15°C and 1 atm: Liquid
12.2 Molecular Weight: 106.16
12.3 Boiling Point at 1 atm: 280.9°F = 138.3°C = 411.5°K
12.4 Freezing Point: 55.9°F = 13.3°C = 286.5°K
12.5 Critical Temperature: 649.4°F = 343.0°C = 616.2°K
12.6 Critical Pressure: 609.4 atm = 34.65 psia = 3.510 MN/m^2
12.7 Specific Gravity: 0.861 at 20°C (liquid)
12.8 Liquid Surface Tension: 28.3 dynes/cm = 0.0283 N/m at 20°C
12.9 Liquid Water Interfacial Tension: 37.8 dynes/cm = 0.0378 N/m at 20°C
12.10 Vapor (Gas) Specific Gravity: Not pertinent
12.11 Ratio of Specific Heats of Vapor (Gas): 1.071
12.12 Latent Heat of Vaporization: 150 Btu/lb = 81 cal/g = 3.4×10^5 J/kg
12.13 Heat of Combustion: −17,669 Btu/lb = −9764.7 cal/g = -406.41×10^5 J/kg
12.14 Heat of Decomposition: Not pertinent
12.15 Heat of Solution: Not pertinent
12.16 Heat of Polymerization: Not pertinent
12.25 Heat of Fusion: 37.63 cal/g
12.26 Limiting Value: Data not available
12.27 Reid Vapor Pressure: 0.34 psia

NOTES

XLP	p-XYLENE

12.17 SATURATED LIQUID DENSITY

Temperature (degrees F)	Pounds per cubic foot
60	53.970
65	53.830
70	53.690
75	53.550
80	53.410
85	53.270
90	53.140
95	53.000
100	52.860
105	52.720
110	52.580
115	52.440
120	52.300

12.18 LIQUID HEAT CAPAICTY

Temperature (degrees F)	British thermal unit per pound-F
60	.412
70	.418
80	.424
90	.429
100	.435
110	.440
120	.446
130	.451
140	.457
150	.462
160	.468
170	.474
180	.479
190	.485
200	.490
210	.496
220	.501
230	.507
240	.512
250	.518
260	.524
270	.529
280	.535

12.19 LIQUID THERMAL CONDUCTIVITY

Temperature (degrees F)	British thermal unit-inch per hour-square foot-F
60	.935
65	.928
70	.921
75	.914
80	.907
85	.900
90	.892
95	.885
100	.878

12.20 LIQUID VISCOSITY

Temperature (degrees F)	Centipoise
60	.678
65	.654
70	.631
75	.610
80	.590
85	.571
90	.552
95	.535
100	.519
105	.503
110	.488
115	.474
120	.460

12.21 SOLUBILITY IN WATER

Temperature (degrees F)	Pounds per 100 pounds of water
	I
	N
	S
	O
	L
	U
	B
	L
	E

12.22 SATURATED VAPOR PRESSURE

Temperature (degrees F)	Pounds per square inch
60	.096
70	.135
80	.187
90	.255
100	.343
110	.456
120	.599
130	.777
140	.998
150	1.270
160	1.600
170	1.998
180	2.475
190	3.041
200	3.710
210	4.493
220	5.407
230	6.465
240	7.683
250	9.080
260	10.670

12.23 SATURATED VAPOR DENSITY

Temprature (degrees F)	Pounds per cubic foot
60	.00183
70	.00252
80	.00343
90	.00459
100	.00607
110	.00792
120	.01022
130	.01303
140	.01646
150	.02059
160	.02553
170	.03138
180	.03826
190	.04629
200	.05561
210	.06636
220	.07867
230	.09270
240	.10860
250	.12650
260	.14670

12.24 IDEAL GAS HEAT CAPACITY

Temperature (degrees F)	British thermal unit per pound-F
0	.246
25	.259
50	.272
75	.285
100	.297
125	.309
150	.321
175	.333
200	.345
225	.357
250	.368
275	.380
300	.391
325	.402
350	.413
375	.424
400	.435
425	.445
450	.456
475	.466
500	.476
525	.486
550	.496
575	.505
600	.515

5.0 SITE CONTROL

5.1 ZONATION. Due to the nature of the work (multiple soil borings and monitoring well sampling throughout the study area) and the properties of the potential chemicals found onsite, typical exclusion, contamination reduction, and support zones are not necessary or practical at all locations. Therefore, where appropriate, a "floating" exclusion zone in the perimeter of the sampling site will be established to eliminate access to the area by individuals not working on the project or involved in the assessment work. The perimeter will be at least 20 feet in radius and moved accordingly as the assessment points are moved.

5.2 COMMUNICATIONS. When radio communication is not used, the following air horn signals will be employed:

Help	three short blasts	(. . .)
Evacuation	three long blasts	(_ _ _)
All clear	alternating long and short blasts	(_ . _ .)

5.3 WORK PRACTICES. General work practices to be used during ABB-ES projects are described in Chapter 9.0 of the CLEAN HASP. Work at the site will be conducted according to these established protocol and guidelines for the safety and health of all involved. Specific work practices necessary for this project or those that are of significant concern are described as follows.

- Work and sampling will be conducted in Level D clothing and equipment.

6.0 DECONTAMINATION AND DISPOSAL

All personnel and/or equipment leaving contaminated areas of the site will be subject to decontamination, which will take place in the exclusion zone. General decontamination practices used during ABB-ES projects are described in Chapter 13.0 of the CLEAN HASP.

6.1 PERSONNEL DECONTAMINATION. All personnel leaving the study area are subject to decontamination (as necessary). The decontamination procedure required will be determined by the nature and level of contamination found at the sites. At a minimum, site personnel will remove loose soils from boots and clothing before leaving the site. More thorough decontamination procedures will be observed as dictated by site conditions. These procedures are described in Chapter 13.0 of the CLEAN HASP.

6.1.1 Small Equipment Decontamination Small equipment will be protected from contamination as much as possible by keeping the equipment covered when at the site and placing the equipment on plastic sheeting, not the ground. Sampling equipment used at the site will be used only once or will be field cleaned between samples with soapy water (Alconox™), rinsed with clean water, rinsed with an approved Quality Assurance/Quality Control solvent, and final rinsed with organic free water.

6.1.2 Heavy Equipment Decontamination Drilling equipment will be protected from contamination as much as possible by placing the equipment on plastic sheeting, not the ground. The drill rig and associated drilling equipment will be cleaned with high pressure water or high pressure steam followed by a soap and water wash and rinse. Loose material will be removed by brush. The person performing this activity will be at the level of protection used during the field investigation.

6.2 COLLECTION AND DISPOSAL OF DECONTAMINATION PRODUCTS. All disposable protective gear, decontamination fluids (for both personnel and equipment), and other disposable materials will be disposed of at the site. Decontamination fluids (e.g., isopropanol from split spoons and groundwater sampling pumps) will be stored in amber glass bottles. Disposable materials (e.g., gloves and Tyveks™) will be bagged and disposed of properly.

7.0 EMERGENCY AND CONTINGENCY PLANNING

This section identifies emergency and contingency planning that has been undertaken for operations at this site. Most sections of the CLEAN HASP provide information that would be used under emergency conditions. General emergency planning information is addressed in Chapter 14.0 of the CLEAN HASP. The following subsections present site-specific emergency and contingency planning information.

7.1 PERSONNEL ROLES, LINES OF AUTHORITY, AND COMMUNICATIONS. The site HSO or the Health and Safety designee is the primary authority for directing operations at the site under emergency conditions. All communications both on- and off-site will be directed through the HSO or designee.

7.2 EVACUATION. Evacuation procedures at the site will follow those procedures discussed in Chapter 14.5 of the CLEAN HASP for upwind withdrawal, site evacuation, and evacuation of the surrounding area. Evacuation from the base will be conducted by travelling out the main gate.

7.3 EMERGENCY MEDICAL TREATMENT AND FIRST AID. Any personnel injured onsite will be rendered first aid as appropriate and transported to competent medical facilities for further examination and/or treatment. The preferred method of transport would be through professional emergency transportation means; however, when this is not readily available or would result in excessive delay, other transport will be authorized. Under no circumstances will injured persons transport themselves to a medical facility for emergency treatment.

8.0 ADMINISTRATION

8.1 PERSONNEL AUTHORIZED DOWNRANGE. Personnel authorized to participate in downrange activities at this site have been reviewed and certified for site operations by the Project Manager and the HSS. Certification involves the completion of appropriate training, a medical examination, and a review of this site-specific HASP. All persons entering the site must use the buddy system, and check in with the Site Manager and/or HSO before going downrange.

CERTIFIED ABB ENVIRONMENTAL TEAM PERSONNEL:

*+ Lisa Routhier	
*+ Kelly Murray	
*+ James Huffman	

OTHER CERTIFIED PERSONNEL:

* FIRST-AID-TRAINED
\+ CPR-TRAINED

8.2 HEALTH AND SAFETY PLAN (HASP) APPROVALS. By their signatures, the undersigned certify that this HASP will be used for the protection of the health and safety of all persons entering this site.

Michael J. Will
FOR: LISA ROUTHIER — 6-7-93
Health and Safety Officer — Date

Edward Watson — 6/7/93
Project Manager — Date

David Kay Daniel — 6/7/93
Health and Safety Manager/Supervisor — Date

8.3 FIELD TEAM REVIEW. I have read and reviewed the health and safety information in the HASP. I understand the information and will comply with the requirements of the HASP.

NAME: _____

DATE: _____

SITE/PROJECT: _____

8.4 MEDICAL DATA SHEET. This Medical Data Sheet will be completed by all on-site personnel and kept in the Support Zone during site operations. It is not a substitute for the Medical Surveillance Program requirements consistent with the CLEAN HASP. This data sheet will accompany any personnel when medical assistance or transport to hospital facilities is required. If more space is required, use the back of this sheet.

Project: _____

Name: _____

Address: _____

Home Telephone: Area Code (___) _____

Age: _____ Height: _____ Weight: _____

In case of emergency, contact: _____

Address: _____

Telephone: Area Code (___) _____

Do you wear contact lenses? Yes ( ) No ( )

Allergies: _____

List medication(s) taken regularly: _____

Particular sensitivities: _____

Previous/current medical conditions or exposures to hazardous chemicals:

_____

Name of Personal Physician: _____

Telephone: Area Code (___) _____

8.5 EMERGENCY TELEPHONE NUMBERS.

Base Security	(904) 246-7331
Base Dispensary	(904) 270-5333
Primary Hospital (Baptist Medical Center Beaches)	(904) 247-2900
Alternate Hospital (St. Luke's Hospital)	(904) 296-3700
Local Fire Department	9-911
Poison Control Center	(800)-492-2414
National Response Center	(800) 424-8802
Regional USEPA Emergency Response	(800) 414-8802
Site HSO: Lisa Routhier	(904) 269-7012
General Site Supervisor: Lisa Routhier	(904) 269-7012
Project Manager: Eddie Watson	(904) 656-1293
ABB Environmental HSM: C.E. Sundquist	(207) 775-5401 x101
HSS Officer: David Daniel, DABT	(904) 656-1293

8.6 ROUTES TO EMERGENCY MEDICAL FACILITIES. The primary source of medical assistance for the site is:

Baptist Medical Center Beaches
1350 13th Ave. South
Jacksonville, Florida
(904) 247-2900

DIRECTIONS TO PRIMARY HOSPITAL: Travel approximately 7.8 miles south on Highway 101, which becomes A1A, from the NAVSTA Mayport to 13th Avenue, turn right then travel approximately 0.6 mile, the hospital will be on the left. See Figure 8-1.

The alternate source of medical assistance for the site is:

St. Luke's Hospital
4201 Belfort Road
Jacksonville, FL
(904) 296-3700

DIRECTIONS TO ALTERNATE HOSPITAL: Travel south from NAVSTA Mayport to Atlantic Blvd., turn west (right) on Atlantic Blvd. Travel to St. John's Bluff Road and turn south (left) then travel to Belfort Road. St. Luke's Hospital is on the corner of Butler and Belfort. See Figure 8-1.

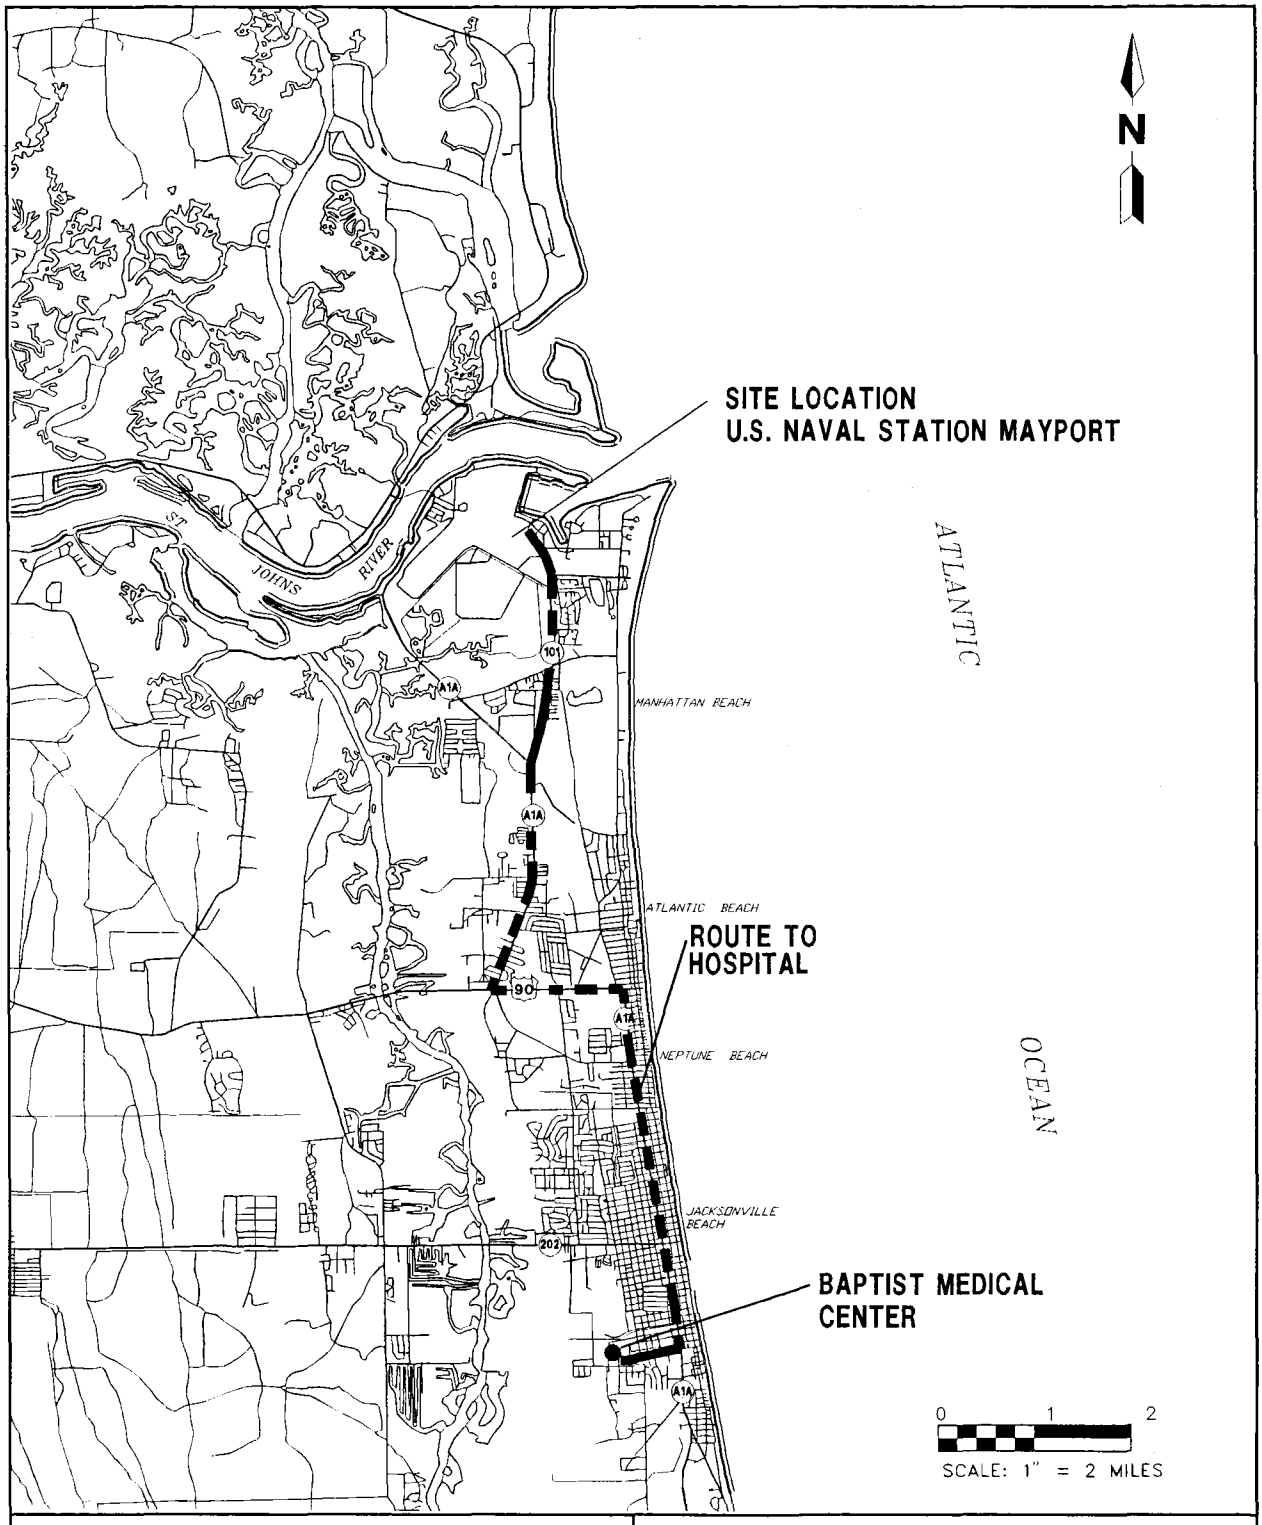

FIGURE 8-1
ROUTE TO BAPTIST MEDICAL CENTER

SITE SPECIFIC HEALTH AND SAFETY PLAN

U.S. NAVAL STATION MAYPORT, FLORIDA

APPENDIX A

OCCUPATIONAL HEALTH AND SAFETY ADMINISTRATION POSTER

JOB SAFETY & HEALTH PROTECTION

The Occupational Safety and Health Act of 1970 provides job safety and health protection for workers by promoting safe and healthful working conditions throughout the Nation. Requirements of the Act include the following:

EMPLOYERS

All employers must furnish to employees employment and a place of employment free from recognized hazards that are causing or are likely to cause death or serious harm or employees. Employers must comply with occupational safety and health standards issued under the Act.

EMPLOYEES

Employees must comply with all occupational safety and health standards, rules, regulations and orders issued under the Act that apply to their own actions and conduct on the job.

The Occupational Safety and Health Administration (OSHA) of the U.S. Department of Labor has the primary responsibility for administering the Act. OSHA issues occupational safety and health standards, and its Compliance Safety and Health Officers conduct jobsite inspections to help ensure compliance with the Act.

INSPECTION

The Act requires that a representative of the employer and a representative authorized by the employees be given an opportunity to accompany the OSHA inspector for the purpose of aiding the inspection.

Where there is no authorized employee representative, the OSHA Compliance Officer must consult with a reasonable number of employees concerning safety and health conditions in the workplace.

COMPLAINT

Employees or their representatives have the right to file a complaint with the nearest OSHA office requesting an inspection if they believe unsafe or unhealthful conditions exist in their workplace. OSHA will withhold, on request, names of employees complaining.

The Act provides the employees may not be discharged or discriminated against in any way for filing safety and health complaints or for otherwise exercising their rights under the Act.

Employees who believe they have been discriminated against may file a complaint with their nearest OSHA office within 30 days of the alleged discriminatory action.

CITATION

If upon inspection OSHA believes an employer has violated the Act, a citation alleging such violations will be issued to the employer. Each citation will specify a time period within which the alleged violation must be corrected.

The OSHA citation must be prominently displayed at or near the place of alleged violation for three days, or until it is corrected, whichever is later, to warn employees of dangers that may exist there.

PROPOSED PENALTY

The Act provides for mandatory civil penalties against employers of up to $7,000 for each serious violation and for optional penalties of up to $7,000 for each nonserious violation. Penalties of up to $7,000 per day may be proposed for failure to correct violations within the proposed time period and for each day the violation continues beyond the prescribed abatement date. Also, any employer who willfully or repeatedly violates the Act may be assessed penalties of up to $70,000 for each such violation. A violation of posting requirements can bring a penalty of up to $7,000.

There are also provisions for criminal penalties. Any willful violation resulting in the death of any employee, upon conviction, is punishable by a fine of up to $250,000 (or $500,000 if the employer is a corporation), or by imprisonment for up to six months, or both. A second conviction of an employer doubles the possible term of imprisonment. Falsifying records, reports, or applications is punishable by a fine of $10,000 or up to six months in jail or both.

VOLUNTARY ACTIVITY

While providing penalties for violations, the Act also encourages efforts by labor and management, before an OSHA inspection, to reduce workplace hazards voluntarily and to develop and improve safety and health programs in all workplaces and industries. OSHA's Voluntary Protection Programs recognize outstanding efforts of this nature.

OSHA has published Safety and Health Program Management Guidelines to assist employers in establishing or perfecting programs to prevent or control employee exposure to workplace hazards. There are many public and private organizations that can provide information and assistance in this effort, if requested. Also, your local OSHA office can provide considerable help and advice on solving safety and health problems or can refer you to other sources for health such as training.

VOLUNTARY ACTIVITY

Free assistance in identifying and correcting hazards and in improving safety and health management is available to employers, without citation or penalty, through OSHA-supported programs in each State. These programs are usually administered by the State labor or Health department or a State university.

POSTING INSTRUCTIONS

Employees in States operating OSHA approved State Plans should obtain and post the State's equivalent poster.

Under provisions of Title 29, Code of Federal Regulations, Part 1903.2(a)(1) employers must post this notice (or facsimile) in a conspicuous place where notices to employees are customarily posted.

More Information

Additional information and copies of the Act, specific OSHA safety and health standards, and other applicable regulations may be obtained from your employer or from the nearest OSHA Regional Office in the following locations:

Atlanta, Georgia	(404) 347-3573	Washington, D.C.
Boston, Massachusetts	(617) 565-7164	1991 (Reprinted)
Chicago, Illinois	(312) 353-2220	OSHA 2203
Dallas, Texas	(214) 767-4731	
Denver, Colorado	(303) 844-3061	
Kansas City, Missouri	(816) 426-5861	
New York, New York	(212) 337-2378	Lynn Martin, Secretary of Labor
Philadelphia, Pennsylvania	(215) 596-1201	**U.S. Department of Labor**
San Francisco, California	(415) 744-6670	Occupational Safety and Health Administration
Seattle, Washington	(206) 442-5930	

To report suspected fire hazards, imminent danger safety and health hazards in the workplace, or other job safety and health emergencies, such as toxic waste in the workplace, call OSHA's 24-hour hotline: 1-800-321-OSHA.