

M67001.AR.006480
MCB CAMP LEJUENE
5090.3a

FINAL SITE MANAGEMENT PLAN FISCAL YEAR 2015 MCB CAMP LEJEUNE NC
02/01/2015
CH2M HILL

Final

**Site Management Plan
Fiscal Year 2015**

**Marine Corps Installations East—Marine Corps Base Camp Lejeune
North Carolina**

Contract Task Order WE95

February 2015

Prepared for

**Department of the Navy
Naval Facilities Engineering Command
Mid-Atlantic**

Under the

**NAVFAC CLEAN 8012 Program
Contract N62470-11-D-8012**

Prepared by



CH2MHILL.

Virginia Beach, Virginia



Contents

	Acronyms and Abbreviations.....	xiii
1	Introduction.....	1-1
1.1	Site Management Plan Purpose	1-1
1.2	Site Management Plan Report Organization	1-1
2	MCIEAST-MCB CAMLEJ Description and Environmental History.....	2-1
2.1	Base Description	2-1
2.2	Environmental Restoration Program History	2-2
2.2.1	Installation Restoration Program History	2-2
2.2.2	Munitions Response History.....	2-3
2.3	CERCLA Process.....	2-4
2.3.1	Preliminary Assessment/Site Investigation or Site Inspection	2-4
2.3.2	Remedial Investigation/Feasibility Study	2-5
2.3.3	Treatability Study.....	2-6
2.3.4	Removal Action.....	2-6
2.3.5	Proposed Remedial Action Plan and Record of Decision	2-6
2.3.6	Remedial Design and Remedial Action.....	2-7
2.3.7	Remedy-in-Place and Response Complete	2-7
2.4	Current IRP and MMRP Site Status.....	2-8
3	Descriptions of PA/SI Sites	3-1
3.1	MMRP PA/SI Sites	3-1
3.1.1	UXO-27 – Gun Position Owl (ASR #2.212)	3-1
3.1.2	UXO-28—Wallace Creek Phase I Munitions Response Site.....	3-4
3.1.3	UXO-29—New River Runway Expansion Area (ASR #2.1, 2.167, and 2.29)	3-6
4	Descriptions of ESI Sites	4-1
4.1	IRP ESI Sites.....	4-1
4.1.1	Site 37—Camp Geiger Area Surface Dump	4-1
4.2	MMRP ESI Sites	4-4
4.2.1	UXO-22—Sites 6 and 82 (OU 2)	4-4
4.2.2	UXO-24—Camp Geiger Area.....	4-7
5	Descriptions of RI/FS Sites.....	5-1
5.1	IRP RI/FS Sites	5-1
5.1.1	Site 88 (OU 15)—Base Dry Cleaners	5-1
5.1.2	Site 96 (OU 22)—Building 1817 UST.....	5-7
5.2	MMRP RI/FS Sites	5-10
5.2.1	UXO-06 (OU 24)—Fortified Beach Assault Area (ASR #2.65)	5-10
5.2.2	UXO-23—D-9 Skeet Range (ASR #2.82).....	5-13
6	Descriptions of Proposed Plan and ROD Sites	6-1
6.1	IRP Proposed Plan/ROD Sites	6-1
6.1.1	Site 86 (OU 20)—Tank Area AS419-AS421 at MCAS.....	6-1
6.2	MMRP Proposed Plan/ROD Sites.....	6-7
6.2.1	UXO-19 (OU 25)—M-4, Rifle Grenade Range (ASR #2.104), K-22 Practice Hand Grenade Course (ASR #2.111), and M115 Hand Grenade Course (ASR #2.168).....	6-7

7	Descriptions of RD and RA Sites	7-1
7.1	IRP RD/RA Sites	7-1
7.1.1	Site 69 (OU 14)—Rifle Range Chemical Dump	7-1
8	Descriptions of RIP and RC Sites	8-1
8.1	IRP RIP Sites	8-1
8.1.1	Site 1 (OU 7)—French Creek Liquids Disposal Area.....	8-1
8.1.2	Site 2 (OU 5)—Former Nursery/Daycare Center	8-4
8.1.3	Site 3 (OU 12)—Old Creosote Plant.....	8-6
8.1.4	Site 6 (OU 2)—Lots 201 and 203	8-9
8.1.5	Site 10 (Pre-RI)—Original Base Dump	8-13
8.1.6	Site 15 (SWMU 46)—Montford Point Burn Landfill Area	8-15
8.1.7	Site 16 (OU 8)—Former Montford Point Burn Dump.....	8-17
8.1.8	Site 21 (OU 1) —Transformer Storage Lot 140.....	8-19
8.1.9	Site 28 (OU 7) — Hadnot Point Burn Dump	8-21
8.1.10	Site 35 (OU 10) — Camp Geiger Area Fuel Farm.....	8-23
8.1.11	Site 36 (OU 6) — Camp Geiger Dump Area Near Sewage Treatment Plant.....	8-29
8.1.12	Site 41 (OU 4) — Camp Geiger Dump near Former Trailer Park	8-33
8.1.13	Site 43 (OU 6) — Agan Street Dump.....	8-35
8.1.14	Site 44 (OU 6) — Jones Street Dump.....	8-37
8.1.15	Site 49 (OU 23) — MCAS Suspected Minor Dump	8-39
8.1.16	Site 54 (OU 6) — Crash Crew Fire Training Burn Pit	8-41
8.1.17	Site 63 (OU 13)—Verona Loop Dump.....	8-43
8.1.18	Site 68 (Pre-RI)—Rifle Range Dump.....	8-45
8.1.19	Site 73 (OU 21)—Courthouse Bay	8-47
8.1.20	Site 74 (OU 4)—Mess Hall Grease Dump Area	8-53
8.1.21	Site 78 (OU 1)—Hadnot Point Industrial Area	8-55
8.1.22	Site 80 (OU 11)—Paradise Point Golf Course Maintenance Area	8-62
8.1.23	Site 82 (OU 2)—Piney Green Road VOC Area.....	8-64
8.1.24	Site 84 (OU 19)—Building 45	8-70
8.1.25	Site 89 (OU 16)—Former DRMO.....	8-73
8.1.26	Site 93 (OU 16)—Building TC-942.....	8-81
8.2	IRP RC Sites	8-87
8.2.1	Montford Point Buildings M119 and M315.....	8-87
8.2.2	MCAS New River Buildings SAS113, AS116, and AS119	8-89
8.2.3	Hadnot Point Industrial Area Buildings 1120, 1409, and 1512.....	8-91
8.2.4	Site 4—Sawmill Road Construction Debris Dump	8-93
8.2.5	Site 7 (OU 11)—Tarawa Terrace Dump	8-94
8.2.6	Site 9 (OU 2)—Fire Fighting Training Pit at Piney Green Road	8-95
8.2.7	Site 12 (Pre-RI)—EOD Detonation Area.....	8-97
8.2.8	Site 13—Golf Course Construction Dump Site	8-98
8.2.9	Site 18—Watkins Village (E) Site	8-99
8.2.10	Site 19—Naval Research Laboratory Dump	8-100
8.2.11	Site 20—Naval Research Lab Incinerator	8-102
8.2.12	Site 23—Roads and Grounds Building 1105.....	8-104
8.2.13	Site 24 (OU 1)—Industrial Area Fly Ash Dump	8-106
8.2.14	Site 25—Base Incinerator	8-108
8.2.15	Site 30 (OU 7)—Sneads Ferry Road Fuel Tank Sludge Area.....	8-109
8.2.16	Site 38—Camp Geiger Construction Dump	8-111
8.2.17	Site 40—Camp Geiger Area Borrow Pit	8-112
8.2.18	Site 42—Building 705 Bachelor Officers’ Quarters Dump.....	8-113

8.2.19	Site 46—MCAS Main Gate Dump	8-114
8.2.20	Site 48 (OU 3)—MCAS Mercury Dump	8-115
8.2.21	Site 51—MCAS Football Field	8-117
8.2.22	Site 53—MCAS Warehouse Building 3525 Area	8-118
8.2.23	Site 55—Air Station East Perimeter Dump	8-119
8.2.24	Site 61—Rhodes Point Road Dump	8-120
8.2.25	Site 62—Race Course Area Dump	8-121
8.2.26	Site 65 (OU 9)—Engineer Area Dump.....	8-122
8.2.27	Site 66—Amphibious Tractors Landing Site and Storage Area.....	8-124
8.2.28	Site 67—Engineer’s Trinitrotoluene Burn Site.....	8-125
8.2.29	Site 75 (Pre-RI)—MCAS Basketball Court Site	8-126
8.2.30	Site 76 (Pre-RI)—MCAS Curtis Road Site	8-128
8.2.31	Site 85—Former Camp Johnson Battery Dump.....	8-130
8.2.32	Site 87 (Pre-RI)—MCAS Officers’ Housing Area.....	8-132
8.2.33	Site 90 (OU 17)—Building BB-9.....	8-133
8.2.34	Site 91 (OU 17)—Building BB-51	8-134
8.2.35	Site 92 (OU 17)—Building BB-246	8-136
8.2.36	Site 94 (OU 18)—PCX Service Station	8-137
8.2.37	Site 95—Dipping Vat Sites	8-139
8.3	MMRP RC Sites	8-141
8.3.1	UXO-01—Former Live Hand Grenade Course (ASR #2.23).....	8-141
8.3.2	UXO-01—D-6 50-Foot Indoor Rifle and Pistol Range (ASR #2.64).....	8-142
8.3.3	UXO-02—Unnamed Explosive Range (ASR #2.201).....	8-144
8.3.4	UXO-03—Practice Hand Grenade Course (ASR #2.78a and #2.78b)	8-146
8.3.5	UXO-04—Knox Trailer Park.....	8-148
8.3.6	UXO-05—Mini Anti-Tank Range (ASR #2.7a, #2.7b, and #2.7c)	8-150
8.3.7	UXO-07—Practice Hand Grenade Course (ASR #2.77a and #2.77b)	8-152
8.3.8	UXO-08—2.36-inch Bazooka Range, Base Chemical Smoke Chamber, and Nuclear, Biological, and Chemical Training Trail (ASR #2.182), and D-7 Gas Chamber (ASR #2.80)	8-153
8.3.9	UXO-09—F-9, Triangulation Range (ASR #2.83)	8-155
8.3.10	UXO-10—D-11A, Flame Tank and Flame Thrower Range (ASR #2.136).....	8-156
8.3.11	UXO-11—B-5, Practice Hand Grenade Course (ASR #2.281).....	8-157
8.3.12	UXO-12—1,000-inch Range (ASR #2.5)	8-159
8.3.13	UXO-13—Naval Regional Medical Center	8-160
8.3.14	UXO-14—Indoor Pistol Range (ASR #2.199) and Gas Chamber (ASR #2.200).....	8-161
8.3.15	UXO-15—1,000-inch Range (ASR #2.19)	8-163
8.3.16	UXO-16—Former Gun Positions 41A and 41B (ASR #2.212)	8-164
8.3.17	UXO-17—Firing Position #2 (ASR #2.212)	8-165
8.3.18	UXO-18—B-6, 50-foot Small Arms Range (ASR #2.44)	8-167
8.3.19	UXO-20—1,000-inch Range Montford Point (ASR #2.32) A-1, 50-foot .22 Caliber Range (ASR #2.87)	8-168
8.3.20	UXO-21—Gas Chamber (2nd Marine Division) (ASR #2.204)	8-169
8.3.21	UXO-25—Verona Loop	8-171
8.3.22	UXO-26—B-3 Gas Chamber (ASR #2.79a and #2.79c)	8-173

9 Additional Site Investigations.....9-1

9.1 Off-Base Surface Danger Zones 9-1

9.2 Base Boundary Survey 9-1

9.2.1 AOPC 9—Camp Knox Road and North Carolina Highway 24..... 9-2

9.2.2 AOPC 10—Tarawa Boulevard and North Carolina Highway 24..... 9-2

9.2.3 AOPC 11—Former Dogwood Variety Store 9-2

9.2.4 SWMU 350—Former ASTs STT-61 through STT-66 9-2

10 Sites Transferred.....10-1

10.1 IRP Sites Transferred..... 10-1

10.1.1 Site 22—Industrial Area Tank Farm 10-1

10.1.2 Site 45—Campbell Street Underground Aviation Gas Storage and Adjacent JP Fuel Farm 10-1

11 References.....11-1

Tables

2-1 Summary of Five-year Review Recommendations and Milestones

2-2 Summary of Sites by Operable Unit

2-3 Summary of Environmental Studies, Investigations, and Actions Completed

2-4 Sites and Status for FY 2015, FY 2016, and FY 2017

3-1 Previous Investigations Summary, MMRP UXO-27

3-2 Previous Investigations Summary, MMRP UXO-29

4-1 Previous Investigations Summary, IRP Site 37

4-2 Previous Investigations Summary, MMRP Site UXO-22

4-3 Previous Investigations Summary, MMRP Site UXO-24

5-1 Previous Investigations Summary, IRP Site 88

5-2 Previous Investigations Summary, IRP Site 96

5-3 Previous Investigations Summary, MMRP Site UXO-06 (OU 24), ASR #2.65

5-4 Previous Investigations Summary, MMRP Site UXO-23, ASR #2.82

6-1 Previous Investigations Summary, IRP Site 86

6-2 Previous Investigations Summary, MMRP Site UXO-19 (OU 25), ASR #2.104, ASR #2.111, and ASR #2.168

7-1 Previous Investigations Summary, IRP Site 69

7-2 Land Use Control Summary, IRP Site 69

8-1 Previous Investigations Summary, IRP Site 1

8-2 Land Use Control Summary, IRP Site 1

8-3 Previous Investigations Summary, IRP Site 2

8-4 Land Use Control Summary, IRP Site 2

8-5 Previous Investigations Summary, IRP Site 3

8-6 Land Use Control Summary, IRP Site 3

8-7 Previous Investigations Summary, IRP Site 6

8-8 Land Use Control Summary, IRP Site 6

8-9 Previous Investigations Summary, IRP Site 10

8-9 Previous Investigations Summary, IRP Site 10

8-10 Land Use Control Summary, IRP Site 10

8-11 Previous Investigations Summary, IRP Site 15

8-12 Land Use Control Summary, IRP Site 15

8-13	Previous Investigations Summary, IRP Site 16
8-14	Land Use Control Summary, IRP Site 16
8-15	Previous Investigations Summary, IRP Site 21
8-16	Land Use Control Summary, IRP Site 21
8-17	Previous Investigations Summary, IRP Site 28
8-18	Land Use Control Summary, IRP Site 28
8-19	Previous Investigations Summary, IRP Site 35
8-20	Land Use Control Summary, IRP Site 35
8-21	Previous Investigations Summary, IRP Site 36
8-22	Land Use Control Summary, IRP Site 36
8-23	Previous Investigations Summary, IRP Site 41
8-24	Land Use Control Summary, IRP Site 41
8-25	Previous Investigations Summary, IRP Site 43
8-26	Land Use Control Summary, IRP Site 43
8-27	Previous Investigations Summary, IRP Site 44
8-28	Land Use Control Summary, IRP Site 44
8-29	Previous Investigations Summary, IRP Site 49
8-30	Land Use Control Summary, IRP Site 49
8-31	Previous Investigations Summary, IRP Site 54
8-32	Land Use Control Summary, IRP Site 54
8-33	Previous Investigations Summary, IRP Site 63
8-34	Land Use Control Summary, IRP Site 63
8-35	Previous Investigations Summary, IRP Site 68
8-36	Land Use Control Summary, IRP Site 68
8-37	Previous Investigations Summary, IRP Site 73
8-38	Land Use Control Summary, IRP Site 73
8-39	Previous Investigations Summary, IRP Site 74
8-40	Land Use Control Summary, IRP Site 74
8-41	Previous Investigations Summary, IRP Site 78
8-42	Land Use Control Summary, IRP Site 78
8-43	Previous Investigations Summary, IRP Site 80
8-44	Land Use Control Summary, IRP Site 80
8-45	Previous Investigations Summary, IRP Site 82
8-46	Land Use Control Summary, IRP Site 82
8-47	Previous Investigations Summary, IRP Site 84
8-47	Previous Investigations Summary, IRP Site 84
8-48	Land Use Control Summary, IRP Site 84
8-49	Previous Investigations Summary, IRP Site 89
8-50	Land Use Control Summary, IRP Site 89
8-51	Previous Investigations Summary, IRP Site 93
8-52	Land Use Control Summary, IRP Site 93
8-53	Previous Investigations Summary, Montford Point (Buildings M119 and M315)
8-54	Previous Investigations Summary, MCAS New River Buildings SAS113, AS116, and AS119
8-55	Previous Investigations Summary, Hadnot Point Industrial Area (Buildings 1120, 1409, and 1512)
8-56	Previous Investigations Summary, IRP Site 4
8-57	Previous Investigations Summary, IRP Site 7
8-58	Previous Investigations Summary, IRP Site 9
8-59	Previous Investigations Summary, IRP Site 12
8-60	Previous Investigations Summary, IRP Site 13
8-61	Previous Investigations Summary, IRP Site 18
8-62	Previous Investigations Summary, IRP Site 19

- 8-63 Previous Investigations Summary, IRP Site 20
- 8-64 Previous Investigations Summary, IRP Site 23
- 8-65 Previous Investigations Summary, IRP Site 24
- 8-66 Previous Investigations Summary, IRP Site 25
- 8-67 Previous Investigations Summary, IRP Site 30
- 8-68 Previous Investigations Summary, IRP Site 38
- 8-69 Previous Investigations Summary, IRP Site 40
- 8-70 Previous Investigations Summary, IRP Site 42
- 8-71 Previous Investigations Summary, IRP Site 46
- 8-72 Previous Investigations Summary, IRP Site 48
- 8-73 Previous Investigations Summary, IRP Site 51
- 8-74 Previous Investigations Summary, IRP Site 53
- 8-75 Previous Investigations Summary, IRP Site 55
- 8-76 Previous Investigations Summary, IRP Site 61
- 8-77 Previous Investigations Summary, IRP Site 62
- 8-78 Previous Investigations Summary, IRP Site 65
- 8-79 Previous Investigations Summary, IRP Site 66
- 8-80 Previous Investigations Summary, IRP Site 67
- 8-81 Previous Investigations Summary, IRP Site 75
- 8-82 Previous Investigations Summary, IRP Site 76
- 8-83 Previous Investigations Summary, IRP Site 85
- 8-84 Previous Investigations Summary, IRP Site 87
- 8-85 Previous Investigations Summary, IRP Site 90
- 8-86 Previous Investigations Summary, IRP Site 91
- 8-87 Previous Investigations Summary, IRP Site 92
- 8-88 Previous Investigations Summary, IRP Site 94
- 8-89 Previous Investigations Summary, IRP Site 95
- 8-90 Previous Investigations Summary, MMRP Site UXO-01, ASR #2.23
- 8-91 Previous Investigations Summary, MMRP Site UXO-01, ASR #2.64
- 8-92 Previous Investigations Summary, MMRP Site UXO-02, ASR #2.201
- 8-93 Previous Investigations Summary, MMRP Site UXO-03, ASR #2.78a and #2.78b
- 8-94 Previous Investigations Summary, MMRP Site UXO-04
- 8-95 Previous Investigations Summary, MMRP Site UXO-05
- 8-96 Previous Investigations Summary, MMRP Site UXO-07, ASR #2.77a and #2.77b
- 8-97 Previous Investigations Summary, MMRP Site UXO-08, ASR #2.182 and ASR #2.80
- 8-98 Previous Investigations Summary, MMRP Site UXO-09
- 8-99 Previous Investigations Summary, MMRP Site UXO-10, ASR #2.136
- 8-100 Previous Investigations Summary, MMRP Site UXO-11, ASR #2.281
- 8-101 Previous Investigations Summary, MMRP Site UXO-12, ASR #2.5
- 8-102 Previous Investigations Summary, MMRP Site UXO-14, ASR #2.199 and #2.200
- 8-103 Previous Investigations Summary, MMRP Site UXO-15, ASR #2.19
- 8-104 Previous Investigations Summary, MMRP Site UXO-16, ASR #2.212
- 8-105 Previous Investigations Summary, MMRP Site UXO-17, ASR #2.212
- 8-106 Previous Investigations Summary, MMRP Site UXO-18, ASR #2.44
- 8-107 Previous Investigations Summary, MMRP Site UXO-20, ASR #2.32 and #2.87
- 8-108 Previous Investigations Summary, MMRP Site UXO-21, ASR #2.204
- 8-109 Previous Investigations Summary, MMRP Site UXO-25
- 8-110 Previous Investigations Summary, MMRP Site UXO-26, ASR #2.79a and #2.79c

- 10-1 Previous Investigations Summary, Site 22

Figures

- 2-1 Base Location Map
- 2-2 CERCLA Process
- 2-3 IRP and MMRP Sites
- 2-4 Active IRP Sites
- 2-5 Closed IRP Sites
- 2-6 Active MMRP Sites
- 2-7 Closed MMRP Sites
- 2-8 Additional Sites
- 2-9 Transferred IRP Sites

- 3-1 MMRP Site UXO-27
- 3-2 MMRP Site UXO-28
- 3-3 MMRP Site UXO-29

- 4-1 IRP Site 37
- 4-2 MMRP Site UXO-22
- 4-3 MMRP Site UXO-24

- 5-1 IRP Site 88, OU 15
- 5-2 Site 88 Conceptual Site Model
- 5-3 IRP Site 96, OU 22
- 5-4 MMRP Site UXO-06 (OU 24), ASR #2.65
- 5-5 MMRP Site UXO-23, ASR #2.82

- 6-1 IRP Site 86, OU 20
- 6-2 Site 86 Conceptual Site Model
- 6-3 MMRP Site UXO-19 (OU 25), ASR #2.104, ASR #2.111, and ASR #2.168

- 7-1 IRP Site 69, OU 14
- 7-2 Site 69 Conceptual Site Model

- 8-1 IRP Site 1
- 8-2 IRP Site 2, OU 5
- 8-3 IRP Site 3, OU 12
- 8-4 Site 3 Conceptual Site Model
- 8-5 IRP Site 6, OU 2
- 8-6 Site 6 Conceptual Site Model
- 8-7 IRP Site 10
- 8-8 IRP Site 15
- 8-9 IRP Site 16, OU 8
- 8-10 IRP Site 21, OU 1
- 8-11 IRP Site 28, OU 7
- 8-12 IRP Site 35, OU 10
- 8-13 Site 35 Conceptual Site Model
- 8-14 IRP Site 36, OU 6
- 8-15 Site 36 Conceptual Site Model
- 8-16 IRP Site 41, OU 4
- 8-17 IRP Site 43, OU 6
- 8-18 IRP Site 44, OU 6
- 8-19 Site IRP 49, OU 23
- 8-20 IRP Site 54, OU 6
- 8-21 IRP Site 63, OU 13
- 8-22 IRP Site 68

- 8-23 IRP Site 73, OU 21
- 8-24 Site 73 Conceptual Site Model
- 8-25 IRP Site 74, OU 4
- 8-26 IRP Site 78, OU 1
- 8-27 Site 78 Conceptual Site Model
- 8-28 IRP Site 80, OU 11
- 8-29 IRP Site 82, OU 2
- 8-30 Site 82 Conceptual Site Model
- 8-31 IRP Site 84, OU 19
- 8-32 IRP Site 89, OU 16
- 8-33 Site 89 Conceptual Site Model
- 8-34 IRP Site 93, OU 16
- 8-35 Site 93 Conceptual Site Model
- 8-36 Montford Point (Buildings M119 and M315)
- 8-37 MCAS New River Buildings SAS113, AS116, and AS119
- 8-38 Hadnot Point Industrial Area (Buildings 1120, 1409, and 1512)
- 8-39 IRP Site 4
- 8-40 IRP Site 7, OU 11
- 8-41 IRP Site 9, OU 2
- 8-42 IRP Site 12
- 8-43 IRP Site 13
- 8-44 IRP Site 18
- 8-45 IRP Site 19
- 8-46 IRP Site 20
- 8-47 IRP Site 23
- 8-48 IRP Site 24, OU 1
- 8-49 IRP Site 25
- 8-50 IRP Site 30, OU 7
- 8-51 IRP Site 38
- 8-52 IRP Site 40
- 8-53 IRP Site 42
- 8-54 IRP Site 46
- 8-55 IRP Site 48, OU 3
- 8-56 IRP Site 51
- 8-57 IRP Site 53
- 8-58 IRP Site 55
- 8-59 IRP Site 61
- 8-60 IRP Site 62
- 8-61 IRP Site 65, OU 9
- 8-62 IRP Site 66
- 8-63 IRP Site 67
- 8-64 IRP Site 75
- 8-65 IRP Site 76
- 8-66 IRP Site 85
- 8-67 IRP Site 87
- 8-68 IRP Site 90, OU 17
- 8-69 IRP Site 91, OU 17
- 8-70 IRP Site 92, OU 17
- 8-71 IRP Site 94, OU 18
- 8-72 IRP Site 95
- 8-73 MMRP Site UXO-01, ASR #2.23

- 8-74 MMRP Site UXO-01, ASR #2.64
- 8-75 MMRP Site UXO-02, ASR #2.201
- 8-76 MMRP Site UXO-03, ASR #2.78a and #2.78b
- 8-77 MMRP Site UXO-04
- 8-78 MMRP Site UXO-05, ASR #2.7a, #2.7b, and #2.7c
- 8-79 MMRP Site UXO-07, ASR #2.77a and #2.77b
- 8-80 MMRP Site UXO-08, ASR #2.182 and ASR #2.80
- 8-81 MMRP Site UXO-09, ASR #2.83
- 8-82 MMRP Site UXO-10, ASR #2.136
- 8-83 MMRP Site UXO-11, ASR #2.281
- 8-84 MMRP Site UXO-12, ASR #2.5
- 8-85 MMRP Site UXO-13
- 8-86 MMRP Site UXO-14, ASR #2.199 and ASR #2.200
- 8-87 MMRP Site UXO-15, ASR #2.19
- 8-88 MMRP Site UXO-16, ASR #2.212
- 8-89 MMRP Site UXO-17, ASR #2.212
- 8-90 MMRP Site UXO-18, ASR #2.44
- 8-91 MMRP Site UXO-20, ASR #2.32 and #2.87
- 8-92 MMRP Site UXO-21, ASR #2.204
- 8-93 MMRP Site UXO-25
- 8-94 MMRP Site UXO-26, ASR #2.79a and #2.79c

Schedules

- 3-1 MMRP Site UXO-27
- 3-2 MMRP Site UXO-28
- 3-3 MMRP Site UXO-29

- 4-1 IRP Site 37
- 4-2 MMRP Site UXO-22
- 4-3 MMRP Site UXO-24

- 5-1 IRP Site 88
- 5-2 IRP Site 96
- 5-3 MMRP Site UXO-06 (OU 24), ASR #2.65
- 5-4 MMRP Site UXO-23, ASR #2.82

- 6-1 IRP Site 86
- 6-2 MMRP Site UXO-19 (OU 25), ASR #2.104, ASR #2.111, and ASR #2.168

- 7-1 IRP Site 69

Acronyms and Abbreviations

°F	degree(s) Fahrenheit
AM	Action Memorandum
AOC	area of concern
AOPC	area of potential concern
ASR	Archival Search Record
AST	aboveground storage tank
Baker	Baker Environmental, Inc.
BEQ	Bachelor Enlisted Quarters
bgs	below ground surface
BTEX	benzene, toluene, ethylbenzene, and total xylenes
CA	chemical agent
CERCLA	Comprehensive Environmental Response, Compensation, and Liability Act
CIP	Community Involvement Plan
CMS	Corrective Measures Study
COC	constituent of concern
COPC	constituent of potential concern
CSI	Confirmatory Site Investigation
CSM	conceptual site model
CVOC	chlorinated volatile organic compound
DCE	dichloroethene
DDT	dichlorodiphenyltrichloroethane
DGM	digital geophysical mapping
DMM	discarded military munitions
DNAPL	dense non-aqueous phase liquid
DoD	Department of Defense
DRMO	Defense Reutilization and Marketing Office
EE/CA	Engineering Evaluation/Cost Analysis
EOD	Explosive Ordnance Disposal
ERA	ecological risk assessment
ERD	enhanced reductive dechlorination
ERS	ecological risk screening
ESD	Explanation of Significant Difference
ESE	Environmental Science and Engineering, Inc.
ESI	Expanded Site Investigation
ESS	Explosives Safety Submission
EVO	emulsified vegetable oil
FFA	Federal Facilities Agreement
FS	Feasibility Study
ft ²	square foot/feet
FY	fiscal year
GIS	geographic information system
HDD	horizontal directionally drilled
HHRA	human health risk assessment
HHRS	human health risk screening

HPCA	Hadnot Point Construction Area
HPIA	Hadnot Point Industrial Area
IAS	Initial Assessment Study
IM	interim measure
IRA	Interim Remedial Action
IRACR	Interim Remedial Action Completion Report
IROD	Interim Record of Decision
IRP	Installation Restoration Program
ISCO	<i>in situ</i> chemical oxidation
JP	jet propulsion
LTM	long-term monitoring
LUC	land use control
LUCIP	Land Use Control Implementation Plan
LUST	leaking underground storage tank
MARSOC	Marine Corps Forces Special Operations Command
MC	munitions constituent
MCAS	Marine Corps Air Station
MCIEAST-MCB CAMLEJ	Marine Corps Installations East-Marine Corps Base Camp Lejeune
MD	munitions debris
MDAS	material documented as safe
MEC	munitions and explosives of concern
mg/kg	milligram(s) per kilogram
MILCON	Military Construction
MIP	membrane interface probe
mm	millimeter(s)
MMRP	Military Munitions Response Program
MNA	monitored natural attenuation
MPPEH	material potentially presenting an explosive hazard
MRA	munition response area
MRS	munitions response site
NACIP	Navy Assessment and Control of Installation Pollutants
NADD	No Action Decision Document
NAE	Natural Attenuation Evaluation
NAIP	natural attenuation indication parameter
NAVFAC	Naval Facilities Engineering Command
Navy	Department of the Navy
NCDENR	North Carolina Department of Environment and Natural Resources
NCGWQS	North Carolina Groundwater Quality Standards
NCP	National Oil and Hazardous Substances Pollution Control Contingency Plan
NEESA	Naval Energy and Environmental Support Activity
NFA	no further action
NPL	National Priorities List
NTCRA	Non-time-critical Removal Action
O&G	oil and grease
OHM	OHM Remediation Corp.
OU	operable unit
OWS	oil-water separator

PA	Preliminary Assessment
PAH	polycyclic aromatic hydrocarbon
PCA	tetrachloroethane
PCB	polychlorinated biphenyl
PCE	tetrachloroethene
PCP	pentachlorophenol
POL	petroleum, oil, and lubricant
PRAP	Proposed Remedial Action Plan
PRB	permeable reactive barrier
RA	remedial action
RACR	Remedial Action Completion Report
RAO	remedial action objective
RC	response complete
RCRA	Resource Conservation and Recovery Act
RD	remedial design
RFI	Resource Conservation and Recovery Act Facility Investigation
RI	Remedial Investigation
RIP	remedy-in-place
ROD	Record of Decision
SARA	Superfund Amendments and Reauthorization Act
SC	site closeout
SDZ	surface danger zone
SEAR	surfactant enhanced aquifer remediation
Shaw	Shaw Environmental, Inc.
SI	Site Investigation
SMP	Site Management Plan
SRI	Supplemental Remedial Investigation
SSI	Supplemental Site Investigation
STP	sewage treatment plant
SVE	soil vapor extraction
SVOC	semivolatile organic compound
SWMU	Solid Waste Management Unit
TCE	trichloroethene
TCRA	Time-critical Removal Action
TDS	total dissolved solids
TNT	trinitrotoluene
TPH	total petroleum hydrocarbons
TSS	total suspended solids
USEPA	United States Environmental Protection Agency
UST	underground storage tank
UU/UE	unlimited use and unrestricted exposure
UXO	unexploded ordnance
VIMS	vapor intrusion mitigation system
VOC	volatile organic compound
WAR	Water and Air Research, Inc.
WW II	World War II
XRF	X-ray fluorescence

yd³ cubic yard(s)
ZVI zero-valent iron

Introduction

This document presents the fiscal year (FY) 2015 Site Management Plan (SMP) for Marine Corps Installations East-Marine Corps Base Camp Lejeune (MCIEAST-MCB CAMLEJ), North Carolina. This SMP presents planned environmental activities to be conducted at MCIEAST-MCB CAMLEJ during FY 2015 and provides projections for long-term progress in accordance with the Department of the Navy (Navy) Installation Restoration Program (IRP) and Military Munitions Response Program (MMRP). This document has been prepared by CH2M HILL for Naval Facilities Engineering Command (NAVFAC) Mid-Atlantic Division and MCIEAST-MCB CAMLEJ. The SMP is submitted to representatives of the United States Environmental Protection Agency (USEPA) Region 4, the North Carolina Department of Environment and Natural Resources (NCDENR), and members of the MCIEAST-MCB CAMLEJ Restoration Advisory Board.

1.1 Site Management Plan Purpose

The FY 2015 SMP is a forward-looking management tool and one of the primary documents identified in the Federal Facilities Agreement (FFA) (MCIEAST-MCB CAMLEJ, 1991). This SMP includes proposed deadlines for completion of deliverables, as specified in the FFA, to be submitted during FY 2015. The prioritization of activities and the conceptual schedules were developed by the MCIEAST-MCB CAMLEJ Partnering Team, which includes representatives from NAVFAC, MCIEAST-MCB CAMLEJ, USEPA, and NCDENR. The SMP is a working document that is updated yearly to maintain current documentation of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) process and summaries of environmental actions at MCIEAST-MCB CAMLEJ. This SMP updates and supersedes the FY 2014 SMP (CH2M HILL, 2013).

1.2 Site Management Plan Report Organization

The FY 2015 SMP is organized as follows:

- **Section 1**—Provides the SMP purpose and report organization.
- **Section 2**—Presents the description and environmental history of MCIEAST-MCB CAMLEJ and the CERCLA process for conducting site investigations and actions. Provides a Basewide summary of the IRP and MMRP. Summary figures and tables of the current site statuses are also provided.
- **Sections 3 through 10**—Provides brief IRP and MMRP site descriptions and histories, a summary of previous investigations, and planned activities for FY 2015. Each section is organized according to its corresponding phase of the CERCLA process and includes associated tables, figures, and schedules. Section 9 includes other sites that have not been assigned IRP or MMRP site designations but are being investigated following the CERCLA process. Section 10 includes sites that have been transferred from the IRP to the underground storage tank (UST) program.
- **Section 11**—Provides references to other reports and documents cited in this SMP.

MCIEAST-MCB CAMLEJ Description and Environmental History

2.1 Base Description

A brief description of MCIEAST-MCB CAMLEJ (**Figure 2-1**) and setting is provided as follows.

Commissioned: 1941

Mission: Maintain combat-ready warfighters for deployment and humanitarian missions abroad. Training facilities include Camp Geiger, Camp Johnson, Stone Bay, Greater Sandy Run Training Area, and Marine Corps Air Station (MCAS) New River. Military training operations include 80 live-fire ranges, 98 maneuver areas, 26 gun positions, 4 tactical landing zones, 4 urban terrain training facilities, and amphibious operations.

Population: More than 160,000 people including active duty, dependent, retiree, and civilian employees (including over 49,000 active duty and 6,000 civilians).

Environmental Setting: The Base comprises approximately 72,000 acres of upland forests, 49,000 acres of wetlands, 26,000 acres of water, and 7,500 acres of urban/developed land.

Geographical Setting: The Base consists of six geographical areas (Camp Geiger, Montford Point, Courthouse Bay, Mainside, the Greater Sandy Run Area, and the Rifle Range Area) located along the outer part of the Atlantic Coastal Plain Physiographic Province in southeastern North Carolina. The Base encompasses a 92-mile perimeter, including approximately 14 miles along the Atlantic Ocean in North Carolina. Elevation ranges from sea level to 70 feet above mean sea level, with much of the topography traversed by swales, wetlands, streams, and creeks that drain into the New River that bisects the Base.


Community Setting: MCIEAST-MCB CAMLEJ enjoys a close relationship with neighboring civilian communities. The Base and Onslow County work together to ensure quality living for both military and civilians throughout the area. Most of the land surrounding the facility is used for agriculture. Estuaries along the coast support commercial and recreational fishing and residential resort areas located adjacent to the Base along the Atlantic Ocean.

Weather: Short, mild winters and long, hot, and humid summers generally characterize climatic conditions. Average annual net precipitation is approximately 54 inches. Ambient air temperatures generally range from 37 to 60 degrees Fahrenheit (°F) in the winter months and 71°F to 88°F during the summer months. Winds are generally south-southwesterly in the summer and north-northwesterly in the winter.

Geology/Hydrogeology: Within MCIEAST-MCB CAMLEJ, approximately 1,500 feet of a sedimentary sequence mantles the crystalline bedrock and includes seven aquifers and their associated confining units, including the surficial, Castle Hayne, Beaufort, Peedee, Black Creek, and Upper and Lower Cape Fear aquifers.

Water Usage: Potable water is provided to the Base and surrounding area by water supply wells that pump groundwater from the deeper Castle Hayne aquifer. There are currently active water supply wells on Base that rely on groundwater as the supply source. The supply wells are included in the Base's annual wellhead monitoring program to ensure compliance with drinking water standards. Regionally, in southeastern North Carolina, the Castle Hayne aquifer may be used as a potable source of domestic water supply and for watering lawns or filling swimming pools.

FIGURE 2-1
Base Location Map

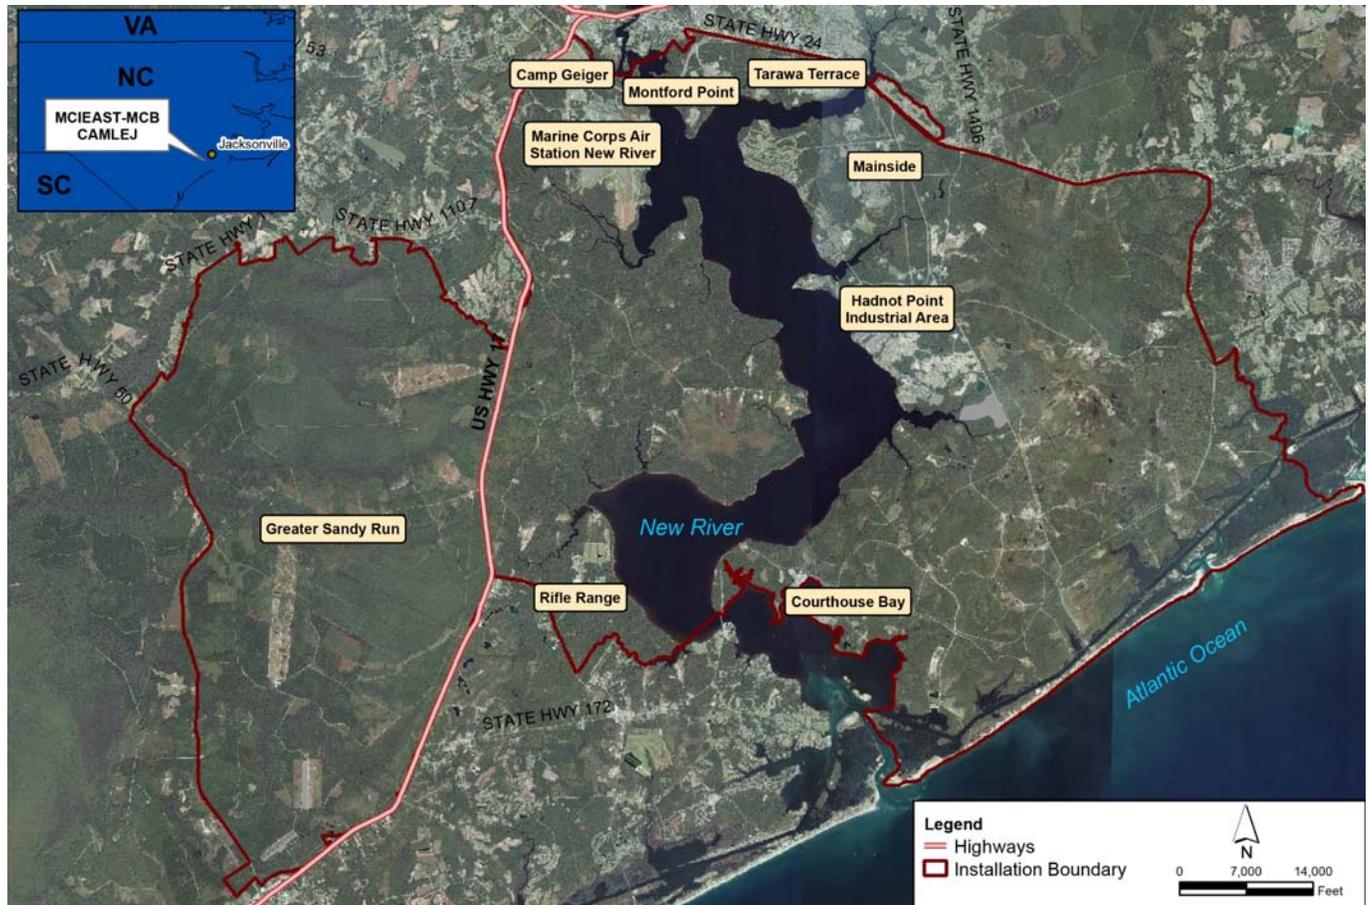

2.2 Environmental Restoration Program History

2.2.1 Installation Restoration Program History

Historical operations, storage, and disposal practices at MCIEAST-MCB CAMLEJ have resulted in environmental impacts to soil and groundwater. MCIEAST-MCB CAMLEJ has been actively engaged in environmental investigations and remediation programs since 1981, beginning with the Navy Assessment and Control of Installation Pollutants (NACIP) Program. The Initial Assessment Study (IAS) (WAR, 1983) was the first investigation of potentially hazardous sites at the Base conducted under the NACIP program. The IAS, which was initiated in 1981, identified areas of concern (AOCs) that might cause threats to human health and the environment as a result of past storage, handling, and disposal of hazardous materials.

The Navy's IRP was initiated in 1986, following enactment of the Superfund Amendments and Reauthorization Act (SARA) legislation. The IRP, which was implemented to follow the requirements of SARA, replaced the NACIP program. MCIEAST-MCB CAMLEJ was placed on the CERCLA National Priorities List (NPL) on October 4, 1989 (54 *Federal Register* 41015, October 4, 1989). Following that listing, an FFA between USEPA Region 4, the North Carolina Department of Environment, Health, and Natural Resources (now NCDENR), and the Navy was signed in February 1991. The FFA was created under CERCLA Section 120 and was prepared to fulfill the following objectives:

- To ensure that potential environmental impacts associated with past and present activities at MCIEAST-MCB CAMLEJ are thoroughly investigated and appropriate CERCLA response actions are developed and implemented as necessary to protect public health, welfare, and the environment.

- To establish a procedural framework and a schedule for developing, implementing, and monitoring appropriate response actions at MCIEAST-MCB CAMLEJ in accordance with CERCLA, the National Oil and Hazardous Substances Pollution Control Contingency Plan (NCP), and relevant USEPA remediation policy.
- To encourage public participation and to facilitate cooperation and exchange of information among parties associated with the investigation and remediation process.

The annual SMP includes the sites currently under investigation following the CERCLA process and the proposed deadlines for completion of deliverables, as specified in the FFA.

Five-year Reviews were completed in 1999 (Baker, 1999), 2005 (Baker, 2005), and 2010 (CH2M HILL, 2010). In 2010, 16 Operable Units (OUs) were identified at MCIEAST-MCB CAMLEJ for review: OUs 1, 2, 4, 5, 6, 7, 8, 10, 11, 12, 13, 14, 15, 16, 19, and 21. All ongoing remedial actions (RAs) were determined to be protective of human health and the environment. The recommendations from the 2010 Five-year Review are currently being implemented and the milestones and statuses are provided in **Table 2-1**. The next Five-year Review is scheduled for 2015.

As part of the requirements established under CERCLA, an Administrative Record file has been established for the IRP at MCIEAST-MCB CAMLEJ. The Administrative Record is a compilation of all documents that the Navy has used to select an RA or removal action for a site. The Administrative Record also serves as the basis for any future legal review of decisions made by the Navy concerning RA taken at a site. A copy of the MCIEAST-MCB CAMLEJ Administrative Record file is available for review at NAVFAC Mid-Atlantic in Norfolk, Virginia. The files can also be viewed online at: <http://go.usa.gov/Dy5T>. Access to the website is available at the Onslow County Library.

The fourth update to the Community Involvement Plan (CIP), which provides information on community participation, was completed in FY 2011 (CH2M HILL, 2011) (previous versions in FY 1990, FY 1994, and FY 2006). The CIP will be updated again in FY 2015 or when a major change occurs in the Environmental Restoration Program.

From 2007 through 2011, MCIEAST-MCB CAMLEJ conducted a Basewide Vapor Intrusion Evaluation Study in a phased approach. The objectives of the study were to: (1) identify buildings located within 100 feet of existing monitoring wells with groundwater sample volatile organic compound (VOC) concentrations exceeding generic vapor intrusion screening values or North Carolina Groundwater Quality Standards (NCGWQS); (2) determine whether a potentially complete and/or significant vapor intrusion exposure pathway was present; (3) assess whether significant vapor intrusion impacts are occurring inside the buildings at levels that could adversely affect building occupants; and (4) provide recommendations to further investigate or to mitigate the potential vapor intrusion pathway.

The results of the study indicated that there were no significant vapor intrusion pathways of concern, except at Building 3B at Site 88; however, additional monitoring was recommended every 5 years at several buildings associated with IRP Sites 35, 73, 78, 88, 89, 93, and 96 to evaluate temporal variability, screen recent groundwater data, evaluate future plume migration, and to confirm the Basewide attenuation factor every 5 years. Vapor intrusion mitigation systems (VIMS) were installed at several buildings at IRP sites, including Building 3B at IRP Site 88; at Buildings 3, 37, and 43 at Site 88; and Building 902 at Site 78 as a precautionary measure. The first 5-year monitoring event was completed in 2013 and recommended no further action (NFA) for vapor intrusion at Sites 35 and 73. Periodic monitoring will continue at Sites 78, 88, 89, 93, and 96 and VIMS operation and maintenance activities and monitoring are ongoing.

2.2.2 Munitions Response History

The Department of Defense (DoD) established the MMRP, which was shortened to Munitions Response Program by the Navy, under the Defense Environmental Restoration Program in September 2001. The purpose is to address military munitions and explosives of concern (MEC) (unexploded ordnance [UXO] and waste military munitions) and munitions constituents (MCs) (chemical residues of munitions) at locations that are not operational ranges. A requirement was established obligating the identification, characterization, and tracking of data on military munitions and military munitions responses at these locations. By September 2002, all locations

other than operational ranges requiring a military munitions response were inventoried. DoD is required by Congress to set priorities for investigating all munitions response sites (MRSs). The site prioritization is based on overall conditions at these locations and the potential risk posed to human health and the environment through evaluation of available data.

The Navy has set priorities for 29 MRSs at MCIEAST-MCB CAMLEJ. The results of this scoring will be used to sequence priorities for site remediation at MCIEAST-MCB CAMLEJ and with other Navy/Marine Corps MRSs based on relative risks and other factors, such as future land use, cultural and economic factors, and ecological impacts.

DoD and the Navy are currently establishing policy and guidance for munitions response actions under the MMRP; however, the key program drivers developed to date conclude that munitions response action will be conducted under the process outlined in NCP, as authorized by CERCLA. Therefore, the Navy and Marine Corps work with the MCIEAST-MCB CAMLEJ Partnering Team to follow the CERCLA process to address MMRP sites identified at the Base.

2.3 CERCLA Process

The objectives of the CERCLA process are to evaluate the nature and extent of contamination at a site and to identify, develop, and implement appropriate RAs to protect human health and the environment. The major elements of the CERCLA process are presented on **Figure 2-2** and discussed in further detail in the subsections below. The documents prepared for the IRP are maintained in information repositories for public review. MCIEAST-MCB CAMLEJ has developed a CIP and established a Restoration Advisory Board comprising members of the community, local environmental group members, and state and federal officials, who meet quarterly to maintain community involvement with environmental restoration activities at the Base.

2.3.1 Preliminary Assessment/Site Investigation or Site Inspection

The IRP begins with concerns about a site, area, or potential contaminant source. The Preliminary Assessment (PA)/Site Investigation (SI) phase of the CERCLA process evaluates potential sites to determine if they should be eliminated from further consideration (i.e., NFA), identified for an action to address actual or imminent threats to human health or the environment, or further evaluated through the performance of a Remedial Investigation (RI)/Feasibility Study (FS).

2.3.1.1 Preliminary Assessment

The PA is a limited-scope assessment designed to distinguish between sites that clearly pose little or no threat to human health or the environment and those that may pose a threat and require further investigation. This stage typically involves a review of historical documents and a visual site inspection. Environmental samples are rarely collected during a PA; rather, a PA is intended to be a relatively quick, low-cost compilation of existing information about a site. The PA may result in a determination of NFA; completion of an SI if there is insufficient information to reach an NFA decision; a removal action if significant threat to human health or the environment exists; or an RI/FS if remediation is deemed necessary.


2.3.1.2 Site Investigation or Site Inspection

The SI is the most common step after a PA is completed and an NFA determination cannot be made. The SI involves an onsite investigation intended to gather more information needed in determining whether there is a release or potential release, and to characterize the nature of the release and associated threats or potential threats to human health and the environment. The SI typically includes the collection of environmental samples to identify if contaminants are present at a site and a screening risk assessment to determine if they have been released at levels posing an unacceptable risk to human health to the environment. The sites that do not require further investigation or response are designated as NFA. If there is insufficient information to reach an NFA decision, a removal action or an RI/FS may be recommended.

For most sites at MCIEAST-MCB CAMLEJ, the PA and SI have been completed concurrently as a PA/SI. After completion of the PA/SI, an Expanded Site Investigation (ESI) may be conducted to confirm whether site-specific

contamination or hazards are present prior to moving forward with NFA, transfer to another regulatory program, or an RI.

FIGURE 2-2
CERCLA Process

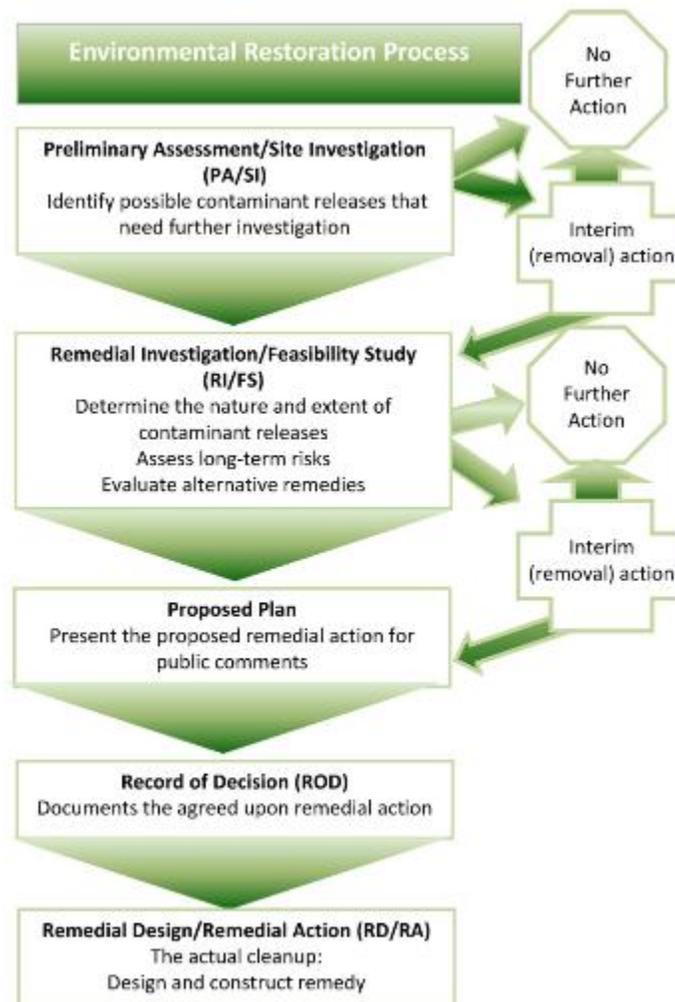

2.3.2 Remedial Investigation/Feasibility Study

The purpose of the RI/FS is to determine the nature and extent of contamination and, if sufficient need is documented by site sampling and a risk assessment, to evaluate proposed remedies. The RI and FS can be conducted concurrently; data collected in the RI influences the development of remedial alternatives in the FS, which in turn affect the data needs and scope of treatability studies and additional field investigations. This phased approach encourages the continual scoping of the site characterization, thereby minimizing the collection of unnecessary data and maximizing data quality.

2.3.2.1 Remedial Investigation

The RI is the investigative phase of the response action designed to characterize site conditions, determine the nature and extent of contamination, assess the risk to human health and the environment posed by site contamination, and provide a basis for decisions on further response actions or NFA. The RI provides information to refine the conceptual site model (CSM) and forms the basis for the development of remedial action objectives (RAOs) and remedial strategies that will comprise the FS.

2.3.2.2 Feasibility Study

The FS is the mechanism for the development, screening, and detailed evaluation of alternative RAs. The overall objectives of an FS are to develop and evaluate potential remedies that permanently and significantly reduce the threat to public health, welfare, and the environment and aid in selection of a cost-effective RA alternative that mitigates the threat(s).

2.3.3 Treatability Study

Treatability studies involve testing and evaluating a treatment technology to assess its effectiveness at a particular site or to establish site-specific design parameters. The primary objectives of treatability testing are to provide sufficient data to allow treatment alternatives to be fully developed and evaluated during the FS and to support the remedial design (RD) of a selected alternative. Treatability studies may be conducted at any time during the CERCLA process.

The need for a treatability study generally is identified during the FS. Treatability studies may be classified as either bench-scale (laboratory study) or pilot-scale (field studies). For technologies that are well-developed and tested, bench-scale studies are often sufficient to evaluate performance. For innovative technologies, pilot tests may be required to obtain the desired information. Pilot tests simulate the physical and chemical parameters of the full-scale process and are designed to bridge the gap between bench-scale and full-scale operations.

Treatability studies may also be needed during the RD/RA phase to obtain more detailed information about the unit operations, performance, and cost for designing a full-scale treatment system. Generally, a pilot-scale system is deployed onsite to collect the required information.

2.3.4 Removal Action

A removal action is a response implemented in an expedited manner to address releases or threatened releases in order to mitigate the spread of contamination. Removal actions may be implemented at any time during the CERCLA process. Removal actions are classified as either Time-critical Removal Actions (TCRAs) or Non-time-critical Removal Actions (NCRAs).

Actions taken immediately to mitigate an imminent threat to human health or the environment, such as the removal of corroded or leaking drums, are classified as TCRAs. The planning period for a TCRA is 6 months or less before field work is initiated. An Engineering Evaluation/Cost Analysis (EE/CA) is not required for a TCRA, although an Action Memorandum (AM) and Work Plan must be completed.

Removal actions that may be delayed for 6 months or more without significant additional harm to human health or the environment are classified as NCRAs. For a NCRA, an EE/CA is prepared rather than the more extensive FS. An EE/CA focuses only on the substances to be removed rather than on all contaminated substances at the site. A removal action can become the final RA if the risk assessment results indicate that NFA is required to protect human health and the environment.

A removal action can be either the final remedy or an interim action followed by a RA as the final remedy, based on the extent to which the threats are mitigated by the action. A removal action, when implemented as the final remedy, can be used for fast and significant reductions in risk and to mitigate long-term threats. In cases where the removal action is the final remedy, the removal action may lead to either response complete (RC) or site closeout (SC). If the RA was accomplished during the RI/FS phase, any final determination of RC and/or SC must be documented in the Record of Decision (ROD). If the NCP's nine criteria were not addressed as part of the EE/CA or AM, a focused FS would be needed, followed by a ROD.

2.3.5 Proposed Plan and Record of Decision

The remedy selection process involves identifying a preferred response action strategy from those alternatives evaluated in the FS. The preferred alternative is based first on each alternative's ability to satisfy the threshold criteria, and then on trade-offs among alternatives considering the primary balancing criteria. Further, results of the risk assessment need to be factored into the selection of the remedy. The remedy selection process includes a Proposed Plan and ROD.

2.3.5.1 Proposed Plan

A proposed plan presents the remedial alternatives developed in the FS and recommends a preferred remedial method. The public has an opportunity to comment on the proposed plan during an announced formal public comment period. Site information is compiled in an Administrative Record and placed in the general IRP information repositories established at local libraries for public review. A public meeting is also held to provide supporting information.

2.3.5.2 Record of Decision

At the end of the proposed plan public comment period, an appropriate remedial alternative is chosen to protect human health and the environment. The ROD document is then issued, describing the remedy selection process and the remedy selected. All parties directly involved in the IRP (Navy, USEPA, NCDENR, and public) must agree on the selected alternative. Any public comments received are addressed as part of the responsiveness summary in the ROD. A public notice is issued after the ROD is signed and available for public inspection. A public notice is also published for any significant post-ROD changes. Once the ROD has been signed, the RD/RA process is initiated.

2.3.6 Remedial Design and Remedial Action

Following signature of the ROD, the RD and RA phases are implemented. The technical specifications for cleanup remedies and technologies are designed in the RD phase. The RA is the actual construction or implementation phase of the cleanup process.

2.3.6.1 Remedial Design

The purpose of the RD phase is to convert the conceptual design for the selected remedy from the FS into a full-scale, detailed design for implementation. RD includes preparation of technical RD Work Plans, drawings, and specifications, and RA Work Plans.

2.3.6.2 Remedial Action

Upon completion of the RD, implementation of the RA (the remedy selected in the ROD) begins. The RA start date is defined as the date the contractor has mobilized and begun substantial and continuous physical onsite RA. The start date is important because it triggers the beginning of the Five-year Review cycle if one is required. The RA phase involves two main components, RA construction and RA operation.

Interim Remedial Actions (IRAs) are implemented to provide temporary mitigation of human health risks or to mitigate the spread of contamination in the environment. Similar to removal actions, IRAs may be implemented at any time during the process. Examples of IRAs include installing a pump-and-treat system for product recovery from groundwater or installing a fence to prevent direct contact with hazardous materials. For IRAs, a focused FS is prepared rather than the more-extensive FS. As with the removal action, an interim action may become the final RA if the results of the risk assessment indicate that NFA is required to protect human health and the environment.

2.3.7 Remedy-in-Place and Response Complete

2.3.7.1 Remedy-in-Place

For long-term remedies where it is anticipated that RAOs will be achieved over a long period, the remedy-in-place (RIP) milestone signifies the completion of the RA construction phase and that the remedy has been implemented and has been demonstrated to be functioning as designed. Once RIP is completed for a site, an Interim Remedial Action Completion Report (IRACR) is prepared to document that the remedy is constructed and operating successfully.

2.3.7.2 Response Complete

At any point during the CERCLA process, a decision can be made that no further response action is required; properly documented (necessary regulatory notification or application for concurrence has occurred), these decisions constitute RC and/or SC. RC is the point at which the remedy has achieved the required reduction in risk to human health and the environment (cleanup goals/RAOs have been met). Once RC is completed for a site

under a ROD, a Remedial Action Completion Report (RACR) is prepared to demonstrate that the remedy is complete and the RAOs are met. RC is followed by individual SC.

Once all RIPs and RCs have been documented for every site at the facility and the terms of the FFA have been met, SC and NPL deletion will be requested.

2.3.7.3 Five-Year Reviews

Five-year reviews are generally required by CERCLA or program policy when hazardous substances remain on a site above levels that permit unlimited use and unrestricted exposure (UU/UE). Five-year reviews provide an opportunity to evaluate the implementation and performance of a remedy and whether it still protects human health and the environment. Generally, reviews are performed 5 years after the initiation of a CERCLA response action and are repeated every 5 years as long as future uses remain restricted. USEPA or the lead agency for a site can perform these reviews, but USEPA is responsible for assessing the protectiveness of the remedy.

2.4 Current IRP and MMRP Site Status

A total of 98 sites have been identified under the Base IRP and MMRP (**Figure 2-3**). Of the 68 sites identified in the IRP, 31 are considered currently active (under investigation, remediation, long-term monitoring [LTM], or have land use controls [LUCs] implemented) (**Figure 2-4**), and 37 sites have been formally closed with NFA (**Figure 2-5**). A total of 25 OUs¹ have been identified under the IRP and MMRP to group sites based on geographic location or similar disposal histories (**Table 2-2**). Of the 30 (there are two UXO-01 sites considered in this count) sites identified in the MMRP, 8 are considered currently active (**Figure 2-6**) and 22² have been closed with NFA (**Figure 2-7**). **Table 2-3** provides a Basewide summary of the IRP and MMRP sites and previous investigations. **Table 2-4** lists the current status of each site and provides a list of primary documents and anticipated submittal dates for FY 2015, 2016, and 2017.

Descriptions of each IRP and MMRP site are provided in Sections 3 through 8 by phase in the CERCLA process (Section 3: PA/SI, Section 4: ESI, Section 5: RI/FS, Section 6: proposed plan /ROD, Section 7: RD/RA, and Section 8: RIP/RC). Section 9 includes five additional sites that have not been assigned IRP or MMRP site designations but are being investigated following the CERCLA process (**Figure 2-8**). Section 10 includes two sites that have been transferred from the IRP to the Base UST Program for further action (**Figure 2-9**).

¹ OU boundaries are generally defined during the PA/SI or RI phase of the CERCLA process for initial investigation. For sites with LUCs, the LUC boundaries become the site boundaries when instituted; however, OU boundaries are shown on figures, where applicable, for historical reference.

² UXO-26, the B-3 Gas Chamber, consists of three Archives Search Report (ASR) areas, ASR #2.79a, 2.79b, and 2.79c. ASR #2.79a and 2.79c have been closed with NFA and ASR #2.79b was reopened as an operational range.

TABLE 2-2

Summary of Sites By Operable Unit

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

OU	SITE NO.	SITE DESCRIPTION	PRIMARY REASON FOR OU SELECTION
1	21	Transformer Storage Lot 140	Geographic location of sites.
	24	Industrial Area Fly Ash Dump	
	78	Hadnot Point Industrial Area	
2	6	Storage Lots 201 and 203	Geographic location of sites.
	9	Fire Fighting Training Pit at Piney Green Road	
	82	Piney Green Road VOC Area	
3	48	MCAS Mercury Dump	Similar characteristic of suspected waste (mercury).
4	41	Camp Geiger Dump near Former Trailer Park	Similar characteristic of suspected waste (chemical warfare materials).
	74	Mess Hall Grease Dump Area	
5	2	Former Nursery/Day Care Center	Similar characteristics of material handled at site (pesticides).
6	36	Camp Geiger Dump Area Near Sewage Treatment Plant	Similar characteristics of material disposed (POL, waste oils, solvents) and contaminants detected (metals, VOCs, O&G). Geographic location of sites.
	43	Agan Street Dump	
	44	Jones Street Dump	
	54	Crash Crew Fire Training Burn Pit	
7	1	French Creek Liquids Disposal Area	Geographic location of sites. Similar characteristics of suspected waste (O&G, POL, and metals).
	28	Hadnot Point Burn Dump	
	30	Sneads Ferry Road Fuel Tank Sludge Area	
8	16	Former Montford Point Burn Dump	Geographic location of site.
9	65	Engineer Area Dump	Geographic location of site.
10	35	Camp Geiger Fuel Farm	Accelerated cleanup necessary to abate impacts to Brinson Creek.
11	7	Tarrawa Terrace Dump	Geographic location of sites.
	80	Paradise Point Golf Course Maintenance Area	
12	3	Old Creosote Plant	Isolated site with unique waste source.
13	63	Verona Loop Dump	Isolated site with unique waste source.
14	69	Rifle Range Chemical Dump	Isolated site with unique waste source.
15	88	Base Dry Cleaners	Similar characteristic of suspected waste (dry cleaning solvent).
16	89	Former DRMO	Geographic location of sites and adjacent surface water body. Similar characteristic of suspected waste (solvents).
	93	Building TC-942	
17	90	Building BB-9	Former UST sites with similar contamination detected in groundwater.
	91	Building BB-51	
	92	Building BB-46	
18	94	PCX Service Station	Geographic location of site, within Site 78, and similar contaminants in adjacent shallow groundwater plume. Former UST site.
19	84	Building 45	Isolated site with similar waste (PCBs, POL).
20	86	Tank Area AS419-AS421 at MCAS	Site 86 was originally included under OU 6. Separate OU created due to increasing levels of VOCs.
21	73	Courthouse Bay Liquids Disposal Area	Similar characteristic of suspected wastes (POL, solvents).

TABLE 2-2

Summary of Sites By Operable Unit

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

OU	SITE NO.	SITE DESCRIPTION	PRIMARY REASON FOR OU SELECTION
22	96	Building 1817 UST	Transferred to IRP from RCRA based on chlorinated VOC plume identified.
23	49	MCAS Suspected Minor Dump	Isolated site with chlorinated VOC plume.
24	UXO-06	Fortified Beach Assault Area (ASR #2.65)	Isolated site with potential MEC.
25	UXO-19	M-4, Rifle Grenade Range (ASR #2.104) K-22 Practice Hand Grenade Course (ASR #2.111) M115 Hand Grenade Course (ASR #2.168)	Isolated site with potential MEC.

Notes:

- DRMO - Defense Reutilization and Marketing Office
- O&G - oil and grease
- OU - Operable Unit
- MCAS - Marine Corps Air Station
- MEC- munitions and explosives of concern
- PCBs - polychlorinated biphenyls
- POL - petroleum, oil, lubricants
- RCRA - Resource Conservation and Recovery Act
- UST - underground storage tank
- VOCs - volatile organic compounds

TABLE 2-3

Summary of Environmental Studies, Investigations, and Actions Completed

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	HISTORIC SITE USE	PRELIMINARY STUDIES		PRELIMINARY INVESTIGATIONS	PA	SI	RI	FS	PILOT STUDY/ TREATABILITY STUDY	ADDITIONAL INVESTIGATIONS	REMOVAL ACTIONS	PRAP / Proposed Plan	SIGNED INTERIM ROD	IROD ACTION / RD/RA	SIGNED ROD	ROD ACTION / RD/RA	OU CLOSEOUT	NFA DATE
			IAS (1983)	Confirmation Study (1984-1987)															
INSTALLATION RESTORATION PROGRAM SITES																			
PA Site	--	HPIA Buildings 1102, 1409, and 1512	--	--	--	February 7, 2006		--	--	--	--	--	--	--	--	--	--	--	February 2006
PA Site	--	MCAS New River Buildings SAS113, AS116, and AS119	--	--	--	PA/SI (February 7, 2006) ESI (April 5, 2010)		--	--	--	--	--	--	--	--	--	--	--	March 26, 2010
PA Site	--	Montford Point Buildings M119 and M315	--	--	--	PA/SI (February 7, 2006) ESI (April 5, 2010)		--	--	--	--	--	--	--	--	--	--	--	March 26, 2010
1	7	Artillery units disposing liquid wastes on ground surface (1940s)	X	X	- Soil Assessment (1991) - GW Study (1993) - Project Plans (December 15, 1993)	--	--	June 29, 1995	July 13, 1995	--	- Remedial Investigation Data Review (2013)	--	July 13, 1995	--	--	May 16, 1996	- LTM (1996-2001) - LUCs (2001, 2002)	September 6, 2002	May 16, 1996
2	5	Bldg. 712 used for storing, handling, and dispensing pesticides (1945-1958)	X	X	- Geophysical Invest.(1992-1994) - Limited GW Sampling (1992) - Project Plans (March 11, 1993)	--	--	June 14, 1994	June 23, 1994	--	--	--	June 23, 1994	--	--	September 15, 1994	- LTM (1995-2007) - LUCs (2001, 2002, 2008)	--	--
3	12	Creosote plant (1951-1952)	X	--	- Project Plans (October 2, 1994)	--	June 1991	June 12, 1996	August 14, 1996	--	--	--	October 23, 1996	--	--	- April 3, 1997 - Amended June 20, 2000	- Soil removal & off-site disposal (2000) - LTM (1997-present) - LUCs (2001)	--	--
4	--	Surface disposal of construction debris including asphalt, old bricks, and cement (Unknown)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	August 11, 2011
6	2	Lot 201 stored pesticides & transformers containing PCBs. Lot 203 served as a waste disposal area (1940s-1980s)	X	X	- Lot 203 soil gas survey (1989) - Project Plans (May 18, 1992)	--	--	August 20, 1993	August 20, 1993	--	- Chlorobenzene Investigation (June 2010-2012) - Vapor Intrusion Evaluation (2009, 2011, and 2014)	- TCRA (1994) - TCRA (1995/96) - TCRA (2011)	August 20, 1993	--	--	September 24, 1993	- Excavation & off-site disposal (1994) - LTM (1996-present) - LUCs (2001&2002)	--	--
7	11	Tarawa Terrace dump used during construction of Base housing (Closed 1972)	X	--	- Project Plans (October 2, 1994)	--	June 1991	February 6, 1996	--	--	--	--	November 27, 1996	--	--	August 21, 1997	- NFA	--	August 21, 1997
9	2	Fire fighting training exercises using flammable liquids conducted in an unlined pit (1960s-1981), asphalt-lined pit (1981-2000), & concrete-lined pit (2002-present)	X	X	- Project Plans (May 18, 1992)	--	--	August 20, 1993	August 20, 1993	--	--	--	RA (2000)	August 20, 1993	--	--	September 24, 1993	- NFA	September 24, 1993
10	--	Original Base dump used for construction debris and burn dump (prior to the 1950s)	X	--	- Project Plans (January 20, 1998) - Groundwater Investigation (2001)	--	July 13, 2001	--	--	--	--	--	--	--	--	--	--	- NFA (LUCs implemented for conservativeness 2012)	May 12, 2005
12	--	Explosive ordnance disposal by burning or detonating (early 1960s)	X	--	- Project Plans (January 21, 1995) - Pre-RI Screening Study (November 1998)	--	--	--	--	--	--	--	--	--	--	--	--	--	August 18, 1997
13	--	Surface disposal of construction debris including clippings, branches, and asphalt (1944)	X	--	- Limited Site Assessment (March 20, 2008)	--	--	--	--	--	--	--	--	--	--	--	--	--	November 3, 2011
15	22	Burn landfill area for disposal of sewage treatment sludge, litter, metal, asphalt, sand, etc. (1948-1958)	--	--	--	PA/SI (April 2011) ESI (May 2012)		--	--	--	Surface wastes were investigated under the RCRA program (SWMU 46), during which a CSI, RFI, and IM were conducted. (1997-2007)	--	--	--	--	--	--	- NFA (LUCs implemented for conservativeness 2012)	March 26, 2012
16	8	Burn dump for trash from surrounding housing area and disposal of small amounts of waste oil (suspected 1958-1972)	X	--	- Project Plans (October 2, 1994)	--	--	January 31, 1996	--	--	--	--	February 15, 1996	--	--	- September 30, 1996 - ESD (November 16, 2012)	- NFA (LUCs implemented for conservativeness 2001, updated in 2002, and documented in 2012)	--	--
18	--	Disposal of construction materials and debris (1976-1978)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	June 14, 2011

TABLE 2-3

Summary of Environmental Studies, Investigations, and Actions Completed

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	HISTORIC SITE USE	PRELIMINARY STUDIES		PRELIMINARY INVESTIGATIONS	PA	SI	RI	FS	PILOT STUDY/ TREATABILITY STUDY	ADDITIONAL INVESTIGATIONS	REMOVAL ACTIONS	PRAP / Proposed Plan	SIGNED INTERIM ROD	IROD ACTION / RD/RA	SIGNED ROD	ROD ACTION / RD/RA	OU CLOSEOUT	NFA DATE		
			IAS (1983)	Confirmation Study (1984-1987)																	
19	--	Naval Research Lab used radionuclides for metabolic studies on animals (1947-1976)	X	--	--															July 29, 2010	
																					Focused Site Inspection Report (February 2008) ESI (October 2010)
20	--	Incineration of burnable wastes associated with Naval Research Lab (1956-1960)	X	--	--																July 29, 2010
																					Focused Site Inspection Report (February 2008) ESI (October 2010)
21	1	Pit in northern portion of site used as drainage receptor for oil from transformers (1950-1951). Pesticide mixing and washdown area for equipment used for pesticide application (1958-1977)	X	X	- Project Plans (March 11, 1993)	--	--	June 23, 1994	July 22, 1994	--	--	--	July 22, 1994	--	--	September 15, 1994	- Excavation & off-site treatment (1995) - LUCs (2001)	--	--	--	
23	--	Storage of insecticides and herbicides (1958-1977)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	August 11, 2011
24	1	Disposal of fly ash, cinders, solvents, used paint stripping compounds, sewage sludge, and water treatment spiractor sludge (late 1940s-1980)	X	X	- Project Plans (March 11, 1993)	--	--	June 23, 1994	July 22, 1994	--	--	--	July 22, 1994	--	--	September 15, 1994	- LTM (1996-1998)	--	--	--	September 15, 1994
25	--	Base incinerator burning trash and classified materials (1940-1960)	X	--	--																July 29, 2010
																					Focused Site Inspection Report (February 2008) ESI (October 2010)
28	7	Burn area for disposal of a variety of solid wastes (industrial waste, trash, oil-based paint, and construction debris) generated on Base and covered with soil (1945-1971)	X	X	- Groundwater Study (1993) - Project Plans (December 15, 1993)	--	--	June 29, 1995	July 13, 1995	--	- Additional delineation (2001)	--	July 13, 1995	--	--	May 16, 1996	- LTM (1996-2001) - LUCs (2001)	September 6, 2002	--	--	
30	7	Used by a private contractor as a cleaning area for emptied fuel storage tanks from other locations. Tanks stored leaded gasoline. (1970s)	X	X	- Groundwater Study (1993) - Project Plans (December 15, 1993)	--	--	June 29, 1995	--	--	--	--	July 13, 1995	--	--	May 16, 1996	- NFA	--	--	--	December 14, 1995
35	10	Camp Geiger Fuel Farm housing five 15,000-gallon ASTs, underground distribution lines, pump house, fueling pad, distribution island, & OWS (1945-1995)	X	X	- UST Site Characterization (1992) - Project Plans (December 20, 1993)	--	--	- IRA RI for Soil (July 20, 1994) - Comprehensive RI (May 31, 1996) - Final Supplemental RI (March 31, 2009)	- IRA FS for Soil (July 20, 1994) - IRA FS for Surficial GW (June 13, 1995) - Final FS (March 31, 2009)	- Air sparge trench (April 14, 1997) - Modified Fenton's/Permanganate Pilot Study (2003-2005) - Pilot Study Report (March 29, 2006)	- Groundwater Investigations (1997-2007) - LTM (1999-2004) - Technology Evaluation (February 3, 2004) - EE/CA for GW (January 23, 2007) - Vapor Intrusion Evaluation (2009, 2011, and 2014)	- NTCRA (2007)	- PRAP for Soil (July 20, 1994) - PRAP for GW (June 8, 1995) - Final PRAP (April 14, 2009)	- September 15, 1994 (soil) - September 22, 1995 (shallow gw)	- Soil removal and disposal (1995-1997) - In-situ air sparging (1998)	November, 2009	- In situ air sparging (2010-2013) - LUCs (2010) - LTM (2011)	IRACR (May 2011)	--	--	
36	6	Disposal area for mixed industrial wastes including trash, waste oils, solvents, and hydraulic fluids. Some materials burned before burial. (1940s-1950s).	X	X	- Project Plans (December 2, 1994)	--	--	August 22, 1996	- FS (June 24, 1998) - Revised FS (June 19, 2002)	--	- Additional GW Sampling (2000) - EE/CA (October 22, 2002) - Action Memo (November 20, 2002) - Response Action WP (February 2003) - Response Action Closeout Report (October 2004)	- TCRA Design (April 1997) - TCRA (June 1997) - NTCRA (2003)	- PRAP (June 18, 1998) - Revised PRAP (June 18, 2002)	--	--	July 6, 2005	- LTM (1998-present) - LUCs (September 2005)	IRACR (August 2007)	--	--	
37	--	Surface disposal of wastes including motor parts, garbage, and wood (1950-1951)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
38	--	Surface disposal of construction debris and branches (Unknown)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	August 11, 2011
40	--	Disposal of auto parts and metal (1969-unknown)	X	--	--																February 28, 2009
																					February 28, 2009

TABLE 2-3

Summary of Environmental Studies, Investigations, and Actions Completed

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	HISTORIC SITE USE	PRELIMINARY STUDIES		PRELIMINARY INVESTIGATIONS	PA	SI	RI	FS	PILOT STUDY/ TREATABILITY STUDY	ADDITIONAL INVESTIGATIONS	REMOVAL ACTIONS	PRAP / Proposed Plan	SIGNED INTERIM ROD	IROD ACTION / RD/RA	SIGNED ROD	ROD ACTION / RD/RA	OU CLOSEOUT	NFA DATE
			IAS (1983)	Confirmation Study (1984-1987)															
41	4	Open burn dump containing construction debris, POL wastes, mirex, solvents, batteries, ordnance, and chemical training agents. (1946-1970)	X	X	- Project Plans (December 2, 1993)	--	--	May 8, 1995	May 8, 1995	--	--	--	May 8, 1995	--	--	December 5, 1995	- LTM (1997-2004) - LUCs (2001&2002)	RACR (July 2006)	--
42	--	Surface disposal of debris including trees, tree stumps, and boards (1950-1960)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	August 11, 2011
43	6	Dump receiving inert material (i.e., construction debris and trash) and sludge from a former sewage disposal facility. (Unknown)	X	--	- Project Plans (December 2, 1994)	--	1991	August 22, 1996	- Draft FS (June 24, 1998) - Revised FS (June 19, 2002)	--	- EE/CA (October 22, 2002) - Action Memo (November 20, 2002) - Response Action WP (February 2003) - Response Action Closeout Report (October 2004)	- IRA (2003)	- PRAP (June 18, 1998) - Revised PRAP (June 18, 2002)	--	--	July 6, 2005	- LUCs (2005)	IRACR (August 2007)	--
44	6	Active dump site receiving debris, cloth, lumber, and paint cans (1950s)	X	--	- Project Plans (December 2, 1994)	--	1991	August 22, 1996	- FS (June 24, 1998) - Revised FS (June 19, 2002)	--	--	--	- PRAP (June 18, 1998) - Revised PRAP (June 18, 2002)	--	--	July 6, 2005	- LUCs (2007)	IRACR (August 2007)	--
46	--	Disposal of construction and demolition debris (1958-1962)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	June 14, 2011
48	3	Mercury drained from radar units and disposed in small quantities in wooded area near Bldg. AS-804 (1956-1966)	X	X	- Supplemental Characterization (1991) - Project Plans (December 2, 1993)	--	--	June 21, 1993	--	--	--	--	June 21, 1993	--	--	September 10, 1993	- NFA	--	September 10, 1993
49	23	Disposal of paint cans (Unknown)	X	--	- Confirmatory Site Assessment (Draft 2010)	March 2011	March 2011	August 2012	--	--	--	--	February 14, 2013	--	--	April 24, 2014	- LTM (2014-present) - LUCs (2014)	--	--
51	--	Empty container disposal, including paint cans and hydraulic fluid (1967-1968)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	June 14, 2011
53	--	Liquid wastes sprayed on unimproved dirt roads to control dust. Waste mixture reportedly contained crankcase waste oil, JP fuels, and paint thinners (1970-1975)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	August 11, 2011
54	6	Fire training burn pit using JP-fuel, stored in a nearby UST. Nearby OWS used for temporary storage and collection of spent fuel. (mid 1950s-1975).	X	X	- Project Plans (December 2, 1994)	--	--	August 22, 1996	- FS (June 24, 1998) - Revised FS (June 19, 2002)	--	- LTM (1998-2002)	- Burn pit and contaminated soil removed (2000)	- PRAP (June 18, 1998) - Revised PRAP (June 18, 2002)	--	--	July 6, 2005	- LUCs (2005)	IRACR (August 2007)	--
55	--	Disposal area for barrels, tires, trash, metal planking, and telephone poles (1950s-1960s)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	August 11, 2011
61	--	Disposal area for wastes generated during bivouac exercises (Unknown)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	August 11, 2011
62	--	Disposal area for wastes generated during bivouac exercises (Unknown)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	August 11, 2011
63	13	Waste disposal generated during training exercises (Unknown)	X	--	- Project Plans (September 1, 1995)	--	January 31, 1994	October 18, 1996	--	--	--	--	November 1, 1996	--	--	- April 3, 1997 - ESD (November 16, 2012)	- NFA (LUCs implemented for conservativeness, 2001, updated in 2002, and documented in 2012)	--	--
65	9	Battery acid and POL disposal, burning construction debris (1958-1972)	X	--	- Project Plans (March 7, 1995)	--	1991	November 7, 1997	--	--	- Post-RI Sampling (2001)	--	July 11, 2001	--	--	- September 30, 2001 - June 25, 2013	- NFA	--	September 28, 2001
66	--	Vehicle maintenance area during training exercises (Unknown)	X	--	- Confirmatory Site Assessment (April 1, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	--	August 11, 2011

TABLE 2-3

Summary of Environmental Studies, Investigations, and Actions Completed

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	HISTORIC SITE USE	PRELIMINARY STUDIES		PRELIMINARY INVESTIGATIONS	PA	SI	RI	FS	PILOT STUDY/ TREATABILITY STUDY	ADDITIONAL INVESTIGATIONS	REMOVAL ACTIONS	PRAP / Proposed Plan	SIGNED INTERIM ROD	IROD ACTION / RD/RA	SIGNED ROD	ROD ACTION / RD/RA	OU CLOSEOUT	NFA DATE
			IAS (1983)	Confirmation Study (1984-1987)															
67	--	TNT disposal by burning in 2-3 foot deep pits (1951)	X	--	- Confirmatory Site Assessment (November 2010)	--	--	--	--	--	--	--	--	--	--	--	--	--	November 15, 2010
68	--	Garbage, building debris, waste treatment sludge disposal. (1942-1972).	X	--	- Project Plans (January 21, 1995) - Pre-RI Screening Study (November 1998)	--	--	--	--	--	--	--	--	--	--	May 8, 2001	- LUCs implemented for conservativeness (2001&2002)	--	--
69	14	Chemical waste disposal including PCBs, solvents, pesticides, calcium hypochlorite. Possible drums containing cyanide and other training agents known as CWM. (1950-1976)	X	X	- Project Plans (December 2, 1993)	--	--	October 4, 1999	April 25, 2012	- In-well Aeration Pilot Study (1996-1998) - Treatability Study Report (January 30, 1998)	- Supplemental Investigation (2011)	--	May 1998 August 2012	June 29, 2000	- LTM (1998-2005) - LUCs (2001)	June 25, 2013	- LUCs -MNA	--	--
73	21	Waste oil disposal approximately 400,000 gallons. Waste battery acid disposal approximately 20,000 gallons. (1946-1977)	X	X	- UST Investigations (1991-1993) - Preliminary Investigation (1994) - Project Plans (March 7, 1995)	--	--	-RI (November 7, 1997) - Amended RI (October 30, 2006) - Supplemental RI (March 31, 2009)	March 31, 2009	- Air sparging (2002) - Hydrogen Sparging (2003-2006) - Air/ozone Sparging (2007)	- GW modeling (April 1998) - LTM (2000-2005) - NAE (January 7, 2002) - Tech Eval (May 8, 2003) - Vapor Intrusion Evaluation (2009, 2011, and 2014)	--	April 14, 2009	--	--	November 2009	- in situ air sparging - ERD injections (2011) - LTM (2011) - LUCs (2010)	--	--
74	4	Grease, pesticide, chemical training agents disposal (Early 1950s to early 1960s)	X	X	- Project Plans (December 2, 1993)	--	--	May 8, 1995	May 8, 1995	--	--	--	May 8, 1995	--	--	December 5, 1995	- LTM (1997-1998) - LUCs (2001&2002)	RACR (July 2006)	--
75	--	Estimated 75-100 buried drums thought to contain tear gas. Chloroform, carbon tetrachloride, benzene, and chloropicrin may also be present. (Early 1950s)	X	--	- Project Plans (January 21, 1995) - Pre-RI Screening Study (November 24, 1998)	--	--	--	--	--	--	--	--	--	--	--	--	--	August 18, 1997
76	--	Approximately 25-75 buried drums likely containing tear gas, chloroform, carbon tetrachloride, benzene, and chloropicrin. (1949)	X	--	- Project Plans (January 21, 1995) - Pre-RI Screening Study (November 24, 1998)	--	--	--	--	--	--	--	--	--	--	--	--	--	July 26, 2001
78	1	Petroleum and solvent related spills and leaks (Beginning in 1940s)	X	X	- GW Study at Hadnot Point Fuel Farm (1990) - Supplemental Characterization Study (1990/1991) - Project Plans (March 11, 1993)	--	--	-IRA RI (April 16, 1992) - RI (June 23, 1994)	-IRA FS (April 16, 1992) - FS (July 22, 1994)	- ORC/HRC GW Pilot Study (2003-2005)	- NAE (2002) - Supplemental Investigation (June 2002) - Technology Evaluation (April 16, 2002) - Vapor Intrusion Evaluation (2009, 2011, and 2014) - Historical Metals Evaluation (2012) - Groundwater Delineation (2014)	--	-IRA PRAP (May 8, 1992) - PRAP (July 22, 1994)	September 23, 1992	- GW Pump & Treat	September 15, 1994	- Continued pump & treat (1995-present) - LTM (1995-present) - LUCs (2001, 2002, & 2015)	--	--
80	11	Golf course maintenance, pesticides (Unknown to present)	--	--	- Project plans (October 2, 1994)	--	June 1991	April 5, 1996	--	--	--	- TCRA WP Soils (April 10, 1996) - Closeout Report (September 9, 1996)	November, 1996	--	--	- August 21, 1997 - ESD (November 16, 2012)	- NFA (LUCs implemented for conservativeness in 2007 and documented in 2012)	--	--
82	2	Storage, disposal, and handling of potentially hazardous waste and material. (prior to late 1980s).	--	--	- Project Plans (May 18, 1992)	--	June 1991	August 20, 1993	August 20, 1993	- ERD Pilot Study (2007)	- Vapor Intrusion Evaluation (2009, 2011, and 2014) - Supplemental Source Investigation (2011)	--	August 20, 1993	--	--	September 24, 1993	- Soil excavation (1994 & 1995) - SVE System (1996) - GW Pump & treat (1996-present) - LTM (1996-present) - LUCs (2001)	--	--

TABLE 2-3

Summary of Environmental Studies, Investigations, and Actions Completed

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	HISTORIC SITE USE	PRELIMINARY STUDIES		PRELIMINARY INVESTIGATIONS	PA	SI	RI	FS	PILOT STUDY/ TREATABILITY STUDY	ADDITIONAL INVESTIGATIONS	REMOVAL ACTIONS	PRAP / Proposed Plan	SIGNED INTERIM ROD	IROD ACTION / RD/RA	SIGNED ROD	ROD ACTION / RD/RA	OU CLOSEOUT	NFA DATE
			IAS (1983)	Confirmation Study (1984-1987)															
84	19	Electrical powerhouse, transformers containing PCBs (possible buried), PCB dielectric oil (Unknown) Building 45 maintenance facility (1965-early 1990s)	--	--	- Pre-RI Screening Study (November 24, 1998) - Concrete and SW sampling (1999) - Preliminary EE/CA (1999) - UST Removal (1999) - Project Plans (June 1, 2001)	--	--	June 4, 2002	- FS (June 18, 2002) - Amended FS (March 31, 2008)	--	- Final EE/CA (October 22, 2002) - Action Memo (October 2002) - CAP (October 10, 2003)	- Phase I NTCRA (2002) - Phase I Closeout Report (January 15, 2003) - Phase II NTCRA (2003/2004) - Phase II Closeout Report (2005) - Phase III NTCRA (2006) - Final Construction Closeout Report (November 30, 2007)	March 31, 2008	--	--	January 21, 2009	- Soil Removal (2002-2007) - LUCs (2009)	--	--
85	--	Battery disposal (1950s)	--	--	- Project Plans (January 21, 1995) - Pre-RI Screening Study (November 24, 1998)	--	--	--	--	--	- EE/CA (September 10, 1999) - Action Memo (September 17, 1999) - Groundwater Monitoring (2001-2005) - ESI (2011)	- TCRA (2000) - Final Closeout Report (December 2000)	--	--	--	--	--	--	August 11, 2011
86	20	Petroleum products storage (1954-1988). Three 25,000 gallon AST used for No. 6 fuel/waste oil storage (1954-1979)	--	--	- Preliminary Site Investigation (November 1990) - AST Removed (1992) - Site Assessment (1992) - Project Plans (December 12, 1994)	--	--	- RI (August 22, 1996) - Amended RI (May 21, 2003) - Expanded SRI (February 24, 2011)	June 24, 1998 October 2013	- Air sparge pilot study (2005-2006) - Pilot Study Report (September 5, 2006) - ISCO and ERD Injections Pilot Study (2012)	- LTM (1998-2005)	--	- June 18, 1998 - Final (January 2014)	--	--	October 29, 2014	--	--	--
87	--	Hospital waste materials including hypodermic needles and chlorine-based white powder (1986)	--	--	- Project Plans (January 21, 1995) - Pre-RI Screening Study (November 24, 1998)	--	--	--	--	--	--	--	--	--	--	--	--	--	May 8, 2001
88	15	- Base Dry Cleaners (1940s-2004) - Varsol stored in USTs (1940s-1970s) - PCE stored in ASTs (1970-1980s)	--	--	- Project Plans (February 21, 1997)	--	--	- Focused RI (May 15, 1998) - RI (March 2008)	- Draft FS (February 2008) - Draft FS (March 2012)	- SEAR Pilot Study (1999) - RABITT Pilot Study (2001) - ISCO and ERD Treatability Study (2010) - ISCO and ERD Pilot Study Monitoring (2011)	- DNAPL Investigation (1998) - SEAR Investigation Report (January 25, 2000) - Supplemental Site Investigation (2002/2003) - EE/CA (September 24, 2004) - Vapor Intrusion Evaluation (2009, 2011, and 2014)	- NTCRA (2005)	--	--	--	--	--	--	--
89	16	- Base Motor Pool (until 1988) - DRMO storing scrap and surplus metals, electronic equipment, vehicles, rubber tires, and fuel bladders (1988-2000)	--	--	- Project Plans (February 20, 1997)	--	--	- RI (June 15, 1998) - Comprehensive RI (May 29, 2008) - BERA Addendum (December 17, 2008)	February 7, 2012	- ERH Pilot Study (2003/2004) - Pilot Study Report (July 2005) - Treatability Study (February, 2008)	- Action Memo (June 9, 2000) - Remedial Design (June 16, 2000) - Supplemental Inv. (2002/2003) - EE/CA - GW (December 18, 2002) - LTM (1999-2005) - Vapor Intrusion Evaluation (2009, 2011, and 2014)	- TCRA (2000) - EE/CA (July 2007) and Action Memo (May 2008) - EE/CA (July 2009) - Source Area NTCRA (March 2010) - Ecological NTCRA (July 2010)	May 7, 2012	--	--	December 6, 2012	-horizontal well air sparging -PRB -aerators - MNA (for groundwater) - LUCs (for aquifer use and vapor intrusion control)	--	--
90	17	Three heating oil USTs, toluene (Unknown)	--	--	- UST Removal (1993) - Project Plans (June 31, 1996)	--	--	April 27, 2001	--	--	--	--	July 11, 2001	--	--	September 30, 2001	- NFA	--	September 28, 2001
91	17	Two waste oil USTs (unknown-1992)	--	--	- UST Removal (1992) - Project Plans (June 31, 1996)	--	--	April 27, 2001	--	--	- Post-RI Monitoring (2000/2001) - Supplemental GW Report (2001)	--	July 11, 2001	--	--	September 30, 2001	- NFA	--	September 28, 2001
92	17	Gasoline UST (1980-1994)	--	--	- UST Removal (1994) - Project Plans (June 31, 1996)	--	--	April 27, 2001	--	--	- Post-RI Monitoring (2000/2001)	--	July 11, 2001	--	--	September 30, 2001	- NFA	--	September 28, 2001
93	16	Heating oil UST (unknown to 1993)	--	--	- UST Investigation (1995) - Geotechnical Investigation (1995/1996) - Project Plans (February 20, 1997)	--	--	June 15, 1998	November 14, 2005	--	- Additional Plume Char. (April 2, 2002) - LTM (1999-2005) - NAE (2001) - Supplemental Site Investigation (2005) - Vapor Intrusion Evaluation (November, 2009)	--	February 9, 2006	--	--	October 2, 2006	- Permanganate injection (2006/2007) - LTM (2008 present) - LUCs (2006)	IRACR (2009)	--

TABLE 2-3

Summary of Environmental Studies, Investigations, and Actions Completed

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	HISTORIC SITE USE	PRELIMINARY STUDIES		PRELIMINARY INVESTIGATIONS	PA	SI	RI	FS	PILOT STUDY/ TREATABILITY STUDY	ADDITIONAL INVESTIGATIONS	REMOVAL ACTIONS	PRAP / Proposed Plan	SIGNED INTERIM ROD	IROD ACTION / RD/RA	SIGNED ROD	ROD ACTION / RD/RA	OU CLOSEOUT	NFA DATE
			IAS (1983)	Confirmation Study (1984-1987)															
94	18	PCX Service Station containing two 10,000-gallon and two 30,000-gallon gasoline USTs (1950s-1995)	--	--	- USTs/contaminated soil removed (1995) - GW Investigation (September 2000) - Project Plans (April 16, 2004)	--	--	September 9, 2005	--	--	--	--	January 30, 2006	--	--	August 26, 2006	- NFA	--	August 26, 2006
95	--	Livestock dipping vats (1906-1961)	--	--	- Initial Assessment (2004) - Site Investigation WP (February 6, 2006)	--	June 2007	--	--	--	--	--	--	--	--	--	--	--	August 24, 2010
96	--	Former 300-gallon waste oil UST	--	--	-	UST removal and investigations (1997) Confirmatory Sampling Investigation (2005)	--	RFI and Amended RFI (2005 & 2006)	- CMS (2007)	--	-Additional groundwater delineation (2009) -Vapor Intrusion Evaluation (2009, 2011 and 2014)	--	--	--	--	--	--	--	--
MILITARY MUNITIONS RESPONSE PROGRAM SITES																			
UXO-01	--	Former Live Hand Grenade Course (1945-1946)	--	--	--	PA/SI (March 2009) ESI (January 2012)	--	--	--	--	--	--	--	--	--	--	--	--	November 30, 2011
UXO-01	--	D-6 50-ft Indoor Rifle and Pistol Range (before 1954)	--	--	--	October 2009	--	--	--	--	--	--	--	--	--	--	--	--	May 9, 2013
UXO-02	--	Explosive range (1973-2002)	--	--	--	PA/SI (January 2012) ESI (October 2012)	--	--	--	--	--	--	--	--	--	--	--	--	May 31, 2012
UXO-03	--	Practice hand grenade course (1953-1959)	--	--	--	Focused SI (2008) ESI (2011) PA/SI (December, 2011)	--	--	--	--	--	--	--	--	--	--	--	--	November 15, 2011
UXO-04	--	Bulldozer uncovered a live WWII MK-II high-explosive hand grenade during excavation (between 1974 and 1976)	--	--	- ESI Work Plan (October 2005) - MEC Work Plan (November 2006) - Phase II ESI Work Plan (August 2007)	February 2009	--	--	--	--	--	--	--	--	--	--	--	--	January 27, 2009
UXO-05	--	Miniature Anti-Tank range using .22 caliber small arms to fire at a moving target (1942-1944) Gas chamber using chemical warfare training agents (1953-1958)	--	--	--	July 2009	--	--	--	--	--	--	--	--	--	--	--	--	June 16, 2009
UXO-06	24	Range using small arms, 3.5-in practice rockets, rifle grenades, hand grenades (1953-1977)	--	--	--	Focused PA/SI (May 2007) Focused SI (2008) Focused SI (January 2012) PA/SI (February 2012)	--	Draft (August 2014)	--	--	--	--	--	--	--	--	--	--	--
UXO-07	--	Practice hand grenade course (1953)	--	--	--	PA/SI (June 2011) ESI (December 2011)	--	--	--	--	--	--	--	--	--	--	--	--	December 6, 2011
UXO-08	--	Bazooka range (1970s-1990s). Gas chamber using tear gas (1953-1961).	--	--	--	Focused PA/SI (2010) PA/SI (December 2011)	--	--	--	--	--	--	--	--	--	--	--	--	November 28, 2011
UXO-09	--	Triangulation range using service munitions and automatic rifles (~1953)	--	--	--	July 2009	--	--	--	--	--	--	--	--	--	--	--	--	June 23, 2009
UXO-10	--	Range using flame throwers and small arms blank ammunition (1970-1977)	--	--	--	PA/SI (July 2011) ESI (March 2012)	--	--	--	--	--	--	--	--	--	--	--	--	March 12, 2012
UXO-11	--	Practice hand grenade course (1953)	--	--	--	PA/SI (June 2011) ESI (2012)	--	--	--	--	--	--	--	--	--	--	--	--	December 7, 2011
UXO-12	--	Small arms range, including .33 caliber weapons (1945-1946)	--	--	--	April 2011	--	--	--	--	--	--	--	--	--	--	--	--	March 10, 2011
UXO-13	--	Maneuver training area used to train troops in non-live fire operations (Unknown)	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	March 24, 2004

TABLE 2-3

Summary of Environmental Studies, Investigations, and Actions Completed

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	HISTORIC SITE USE	PRELIMINARY STUDIES		PRELIMINARY INVESTIGATIONS	PA	SI	RI	FS	PILOT STUDY/ TREATABILITY STUDY	ADDITIONAL INVESTIGATIONS	REMOVAL ACTIONS	PRAP / Proposed Plan	SIGNED INTERIM ROD	IROD ACTION / RD/RA	SIGNED ROD	ROD ACTION / RD/RA	OU CLOSEOUT	NFA DATE	
			IAS (1983)	Confirmation Study (1984-1987)																
UXO-14	--	Indoor pistol range using small caliber weapons (1950-1996), and gas chamber using tear gas (1950-1954)	--	--	--	PA/SI (April 2011) ESI (February 2012)	--	--	--	--	--	- EE/CA (August 2012) - Action Memorandum (February 2013) - NTCRA (2013)	--	--	--	--	--	--	September 4, 2013	
UXO-15	--	1000-inch small arms range used for service and target practice (1945-1946)	--	--	--	March 2010	--	--	--	--	--	--	--	--	--	--	--	--	--	February 9, 2010
UXO-16	--	Gun position training ground for 8-inch Howitzers, 4.2 inch mortars, 175 mm guns, and 120 mm mortars. (Unknown)	--	--	--	August 2009	--	--	--	--	--	--	--	--	--	--	--	--	--	May 27, 2009
UXO-17	--	Firing Position used for military training (1950-1985)	--	--	--	February 2012	--	--	--	--	--	--	--	--	--	--	--	--	--	February 16, 2012
UXO-18	--	Small arms ranges (1950-1961)	--	--	--	April 2011	--	--	--	--	--	--	--	--	--	--	--	--	--	March 10, 2011
UXO-19	25	Grenade ranges (1950s-1970s)	--	--	--	October 2010	March 2014		--	--	--	--	--	--	--	--	--	--	--	--
UXO-20	--	1,000-inch and A-1, 50-foot .22 caliber ranges (1940s-1950s)	--	--	--	April 2011	--	--	--	--	--	--	--	--	--	--	--	--	--	March 22, 2011
UXO-21	--	Gas Chamber (2nd Marine Division) (1970s)	--	--	--	PA/SI (November 2011) ESI (February 2012) Phase II ESI (July 2014)	--	--	--	--	--	--	--	--	--	--	--	--	--	July 15, 2014
UXO-22	--	Possible disposal trenches (unknown)	--	--	--	PA/SI (April 2013)	--	--	--	--	--	--	--	--	--	--	--	--	--	--
UXO-23	--	D-9 skeet range (1953-2011)	--	--	--	Focused SI (February 2008) Focused PA/SI (April 2010) Expanded SI (October 2010)	--	--	--	--	-Wallace Creek Confirmation Sampling (2012) -Action Memorandum (March 2012) -Environmental Update (2011)	- Draft EE/CA (2010) - EE/CA (2012) - NTCRA (2013/2014)	--	--	--	--	--	--	--	--
UXO-24	--	Ammunition Burial Site (2010)	--	--	--	Draft PA/SI (July 2014)	--	--	--	--	--	--	--	--	--	--	--	--	--	--
UXO-25	--	Impact Area "M" range (1941 - 1945) and M-16, Outdoor Classroom range (unknown)	--	--	--	February 2013	--	--	--	--	--	--	--	--	--	--	--	--	--	February 12, 2013
UXO-26	--	B-3 Gas Chamber (1953-1958)	--	--	--	July 2009 ESI (October 2012)	--	--	--	--	--	--	--	--	--	--	--	--	--	September 11, 2012
UXO-27	--	Gun Position Owl	--	--	--	Draft PA/SI (August 2014)	--	--	--	--	--	--	--	--	--	--	--	--	--	--
UXO-28	--	Wallace Creek Phase I Munitions Response Site	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
UXO-29	--	New River Runway Expansion Area	--	--	- Munitions Response Investigation (June 2014)	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

'X' indicates the site was included in the specified report or has achieved the specified status.

'--' indicates the specified report was not completed for the site.

AST = aboveground storage tank
 BERA = baseline ecological risk assessment
 Bldg = building
 CAP = Corrective Action Plan
 CSI = Confirmatory Site Investigation
 CWM = chemical warfare material
 DNAPL = dense non-aqueous phase liquid
 DRMO = Defense Reutilization and Marketing Office
 EE/CA = Engineering Evaluation/Cost Analysis
 ERD = enhanced reductive dechlorination
 ERH = electrical resistance heating

ESD = Explanation of Significant Differences
 ESI = Expanded Site Investigation
 FS = Feasibility Study
 ft = foot, feet
 GW = groundwater
 HPIA = Hadnot Point Industrial Area
 HRC = Hydrogen Release Compound
 IM = interim measure
 IRA = Interim Remedial Action
 IRACR = Interim Remedial Action Completion Report
 ISCO = *in situ* chemical oxidation

JP = jet propulsion
 MCAS = Marine Corps Air Station
 MEC = munitions and explosives of concern
 Mk = Mark
 mm = millimeter
 NAE = natural attenuation evaluation
 NCDENR = North Carolina Department of Environment and Natural Resources
 NFA = No Further Action
 NTCRA = Non-time-critical Removal Action
 ORC = Oxygen Release Compound
 OWS = oil-water separator

PA = preliminary assessment
 PCB = polychlorinated biphenyl
 PCE = tetrachloroethene
 POL = petroleum, oil, and lubricants
 PRAP = Proposed Remedial Action Plan
 RA = Remedial Action
 RABITT = Reductive Anaerobic Bioremediation *In Situ* Treatment Technology
 RACR = Remedial Action Completion Report
 RCRA = Resource Conservation and Recovery Act
 RFI = Resource Conservation and Recovery Act Facility Investigation
 RI = Remedial Investigation

ROD = Record of Decision
 SEAR = surfactant enhanced aquifer remediation
 SI = Site Inspection
 SW = surface water
 SWMU = solid waste management unit
 TCRA = Time-critical Removal Action
 TNT = trinitrotoluene
 UST = underground storage tank
 UXO = unexploded ordnance
 WP = work plan
 WWII = World War II

TABLE 2-4

Sites and Status for FY 2015, FY 2016, and FY 2017

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	SITE DESCRIPTION	CURRENT SITE STATUS	FY 2015 Reports		FY 2016 Reports		FY 2017 Reports	
				Document	Anticipated Submittal Date	Document	Anticipated Submittal Date	Document	Anticipated Submittal Date
INSTALLATION RESTORATION PROGRAM SITES									
PA Site	--	HPIA Bldgs 1120 (Auto Hobby Shop), 1409 (Carpenter/Boat Repair), & 1512 (Auto Repair Shop)	NFA	--	--	--	--	--	--
PA Site	--	MCAS New River Buildings SAS113 (Auto Hobby Shop), AS116 (Vehicle Maintenance Shop), & AS119 (Vehicle Maintenance Shop)	NFA	--	--	--	--	--	--
PA Site	--	Montford Point Buildings M119 (Weapons/Auto Maintenance) & M315 (Laundry Pickup Facility)	NFA	--	--	--	--	--	--
1	7	French Creek Liquids Disposal Area	RIP (LUC)	RACR 2015 Five-Year Review	November 2014 March 2015	--	--	--	--
2	5	Former Nursery/Day Care Center	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
3	12	Old Creosote Plant	RIP (LTM and LUC)	2015 Five-Year Review FY 2014 Annual LTM Report	March 2015 July 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
4	--	Sawmill Road Construction Debris Dump	NFA	--	--	--	--	--	--
6	2	Storage Lots 201 and 203	RIP (LTM and LUC)	2015 Five-Year Review FY 2014 Annual LTM Report	March 2015 July 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
7	11	Tarrawa Terrace Dump	NFA	--	--	--	--	--	--
9	2	Fire Fighting Training Pit at Piney Green Road	NFA	--	--	--	--	--	--
10	--	Original Base Dump	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
12	--	Explosive Ordnance Disposal	NFA	--	--	--	--	--	--
13	--	Golf Course Construction Debris Dump	NFA	--	--	--	--	--	--
15	22	Montford Point Burn Landfill Area	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
16	8	Former Montford Point Burn Dump	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
18	--	Watkins Village (E) Site	NFA	--	--	--	--	--	--
19	--	Naval Research Lab Dump	NFA	--	--	--	--	--	--
20	--	Naval Research Lab Incinerator	NFA	--	--	--	--	--	--
21	1	Transformer Storage Lot 140	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
23	--	Roads and Grounds Building 1105	NFA	--	--	--	--	--	--
24	1	Industrial Area Fly Ash Dump	NFA	--	--	--	--	--	--
25	--	Base Incinerator	NFA	--	--	--	--	--	--
28	7	Hadnot Point Burn Dump	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
30	7	Sneads Ferry Road Fuel Tank Sludge Area	NFA	--	--	--	--	--	--
35	10	Camp Geiger Fuel Farm	RIP (AS, MNA, and LUC)	2015 Five-Year Review FY 2014 Annual LTM Report	March 2015 July 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
36	6	Camp Geiger Dump Area Near Sewage Treatment Plant	RIP (MNA and LUC)	2015 Five-Year Review FY 2014 Annual LTM Report	March 2015 July 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
37	--	Camp Geiger Area Surface Dump	ESI	PA/SI	October 2014	ESI	April 2016	--	--
38	--	Camp Geiger Construction Dump	NFA	--	--	--	--	--	--
40	--	Camp Geiger Area Borrow Pit	NFA	--	--	--	--	--	--
41	4	Camp Geiger Dump near Former Trailer Park	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
42	--	Building 705 BOQ Dump	NFA	--	--	--	--	--	--
43	6	Agan Street Dump	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
44	6	Jones Street Dump	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
46	--	MCAS Main Gate Dump	NFA	--	--	--	--	--	--
48	3	MCAS Mercury Dump	NFA	--	--	--	--	--	--
49	23	MCAS Suspected Minor Dump	RIP (MNA and LUC)	2015 Five-Year Review	March 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
51	--	MCAS Football Field	NFA	--	--	--	--	--	--
53	--	MCAS Warehouse Building 3525 Area	NFA	--	--	--	--	--	--
54	6	Crash Crew Fire Training Burn Pit	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
55	--	Air Station East Perimeter Dump	NFA	--	--	--	--	--	--
61	--	Rhodes Point Road Dump	NFA	--	--	--	--	--	--
62	--	Race Course Area Dump	NFA	--	--	--	--	--	--

TABLE 2-4

Sites and Status for FY 2015, FY 2016, and FY 2017

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	SITE DESCRIPTION	CURRENT SITE STATUS	FY 2015 Reports		FY 2016 Reports		FY 2017 Reports	
				Document	Anticipated Submittal Date	Document	Anticipated Submittal Date	Document	Anticipated Submittal Date
63	13	Verona Loop Dump	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
65	9	Engineer Area Dump	NFA	--	--	--	--	--	--
66	--	AMTRAC Landing Site and Storage Area	NFA	--	--	--	--	--	--
67	--	Engineer's TNT Burn Site	NFA	--	--	--	--	--	--
68	--	Rifle Range Dump	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
69	14	Rifle Range Chemical Dump	RD/RA	IRACR	September 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
73	21	Courthouse Bay Liquids Disposal Area	RIP (MNA and LUC)	2015 Five-Year Review	March 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
				FY 2014 Annual LTM Report	July 2015	--	--	--	--
74	4	Mess Hall Grease Dump Area	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
75	--	MCAS Basketball Court Site	NFA	--	--	--	--	--	--
76	--	MCAS Curtis Road Site	NFA	--	--	--	--	--	--
78	1	Hadnot Point Industrial Area	RIP (Groundwater Treatment, LTM, and LUC)	2015 Five-Year Review	March 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
				FY 2014 Annual LTM Report	July 2015	--	--	--	--
80	11	Paradise Point Golf Course Maintenance Area	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
82	2	Piney Green Road VOC Area	RIP (Groundwater Treatment, LTM, and LUC)	2015 Five-Year Review	March 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
				FY 2014 Annual LTM Report	July 2015	--	--	--	--
84	19	Building 45	RIP (LUC)	2015 Five-Year Review	March 2015	--	--	--	--
85	--	Camp Johnson Battery Dump	NFA	--	--	--	--	--	--
86	20	Tank Area AS419-AS421 at MCAS	Proposed Plan/ROD	IRACR	July 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
87	--	MCAS Officers' Housing Area	NFA	--	--	--	--	--	--
88	15	Base Dry Cleaners	RI/FS	--	--	FS	May 2016	ROD	April 2017
				--	--	Proposed Plan	September 2016	--	--
89	16	Former DRMO	RIP (AS, PRB, Aerator, MNA, and LUC)	--	--	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
90	17	Building BB-9	NFA	--	--	--	--	--	--
91	17	Building BB-51	NFA	--	--	--	--	--	--
92	17	Building BB-246	NFA	--	--	--	--	--	--
93	16	Building TC-942	RIP (LTM and LUC)	2015 Five-Year Review	March 2015	FY 2015 Annual LTM Report	July 2016	FY 2016 Annual LTM Report	July 2017
				FY 2014 Annual LTM Report	July 2015	--	--	--	--
94	18	PCX Service Station	NFA	--	--	--	--	--	--
95	--	Dipping Vat Sites	NFA	--	--	--	--	--	--
96	22	Building 1817 UST	RI/FS	--	--	RI/FS	June 2016	Proposed Plan ROD	October 2016 April 2017
				--	--	--	--	--	--
MILITARY MUNITIONS RESPONSE PROGRAM SITES									
UXO-01	--	Former Live Hand Grenade Course (ASR #2.23)	NFA	--	--	--	--	--	--
UXO-01	--	D-6, 50-ft Indoor Rifle and Pistol Range (ASR #2.64)	NFA	--	--	--	--	--	--
UXO-02	--	Unnamed Explosive Range (ASR #2.201)	NFA	--	--	--	--	--	--
UXO-03	--	Practice Hand Grenade Course (ASR #2.78a and 2.78b)	NFA	--	--	--	--	--	--
UXO-04	--	Knox Trailer Park	NFA	--	--	--	--	--	--
UXO-05	--	Miniature Anti-Tank Range (ASR #2.7a, 2.7b, and 2.7c)	NFA	--	--	--	--	--	--
UXO-06	24	Fortified Beach Assault Area (ASR #2.65)	RI/FS	RI	March 2015	Proposed Plan	February 2016	RD	December 2016
				FS	September 2015	ROD	June 2016	--	--
UXO-07	--	Practice Hand Grenade Course (ASR #2.77a and 2.77b)	NFA	--	--	--	--	--	--
UXO-08	--	2.36-inch Bazooka Range, Base CS Chamber and NBC Training Trail (ASR #2.182), and D-7 Gas Chamber (ASR #2.80)	NFA	--	--	--	--	--	--
UXO-09	--	F-9, Triangulation Range (ASR #2.83)	NFA	--	--	--	--	--	--
UXO-10	--	D-11A, Flame Tank and Flame Thrower Range (ASR #2.136)	NFA	--	--	--	--	--	--
UXO-11	--	B-5, Practice Hand Grenade Course (ASR #2.81)	NFA	--	--	--	--	--	--
UXO-12	--	1,000-inch Range (ASR #2.5)	NFA	--	--	--	--	--	--
UXO-13	--	Naval Regional Medical Center	NFA	--	--	--	--	--	--
UXO-14	--	Indoor Pistol Range (ASR #2.199) and Gas Chamber (ASR #2.200)	NFA	--	--	--	--	--	--

TABLE 2-4

Sites and Status for FY 2015, FY 2016, and FY 2017

FY 2015 Site Management Plan

MCIEAST-MCB CAMLEJ

SITE NO.	OU	SITE DESCRIPTION	CURRENT SITE STATUS	FY 2015 Reports		FY 2016 Reports		FY 2017 Reports	
				Document	Anticipated Submittal Date	Document	Anticipated Submittal Date	Document	Anticipated Submittal Date
UXO-15	--	1000-inch Range (ASR #2.19)	NFA	--	--	--	--	--	--
UXO-16	--	Former Gun Positions 41A and 41B (ASR #2.212)	NFA	--	--	--	--	--	--
UXO-17	--	Firing Position #2 (ASR #2.212)	NFA	--	--	--	--	--	--
UXO-18	--	B-6, 50-foot Small Arms Range (ASR #2.44)	NFA	--	--	--	--	--	--
UXO-19	25	M-4, Rifle Grenade Range (ASR #2.104) K-22 Practice Hand Grenade Course (ASR #2.111) M115 Hand Grenade Course (ASR #2.168)	Proposed Plan/ROD	Proposed Plan	February 2015	RD	February 2016	--	--
				ROD	September 2015	--	--	--	--
UXO-20	--	1000-inch Range Montford Point (ASR #2.32) A-1, 50-foot .22 Caliber Range (ASR #2.87)	NFA	--	--	--	--	--	--
UXO-21	--	Gas Chamber (2nd Marine Division) (ASR #2.204)	NFA	--	--	--	--	--	--
UXO-22	--	Sites 6 & 82 (OU 2)	ESI	ESI	September 2015	ESD	February 2016	--	--
UXO-23	--	D-9 Skeet Range (ASR #2.82)	RI/FS	--	--	--	--	RI	January 2017
				--	--	--	--	FS	August 2017
UXO-24	--	Camp Geiger Area	ESI	PA/SI	October 2014	ESI	April 2016	--	--
UXO-25	--	Verona Loop	NFA	--	--	--	--	--	--
UXO-26	--	B-3, Gas Chamber (ASR #2.79a and 2.79c)	NFA	--	--	--	--	--	--
UXO-27	--	Gun Position Owl (ASR #2.212)	PA/SI	PA/SI	May 2015	--	--	--	--
UXO-28	--	Wallace Creek Phase I Munitions Response Site	PA/SI	--	--	PA/SI	September 2016	--	--
UXO-29	--	New River Runway Expansion Area (ASR #2.1, 2.167, and 2.29)	PA/SI	--	--	PA/SI	May 2016	--	--

Note: Reports and deliverable dates in bold text are final primary documents.


AMTRAC = amphibious tractor
 ASR = Archives Search Report
 BOQ = Bachelors Officers' Quarters
 CS = chemical smoke
 DRMO = Defense Reutilization and Marketing Office
 ESI = Expanded Site Investigation

FS = Feasibility Study
 ft = foot, feet
 FY = fiscal year
 HPIA = Hadnot Point Industrial Area
 LTM = long-term monitoring
 LUC = land use control

MCAS = Marine Corps Air Station
 MNA = monitored natural attenuation
 NBC = nuclear, biological, and chemical
 NFA = no further action
 NTCRA = Non-time-critical Remedial Action
 OU = operable unit

PA = Preliminary Assessment
 PRB = permeable reactive barrier
 RD = Remedial Design
 RI = Remedial Investigation
 RIP = remedy-in-place


ROD = Record of Decision
 SI = Site Investigation
 TNT = trinitrotoluene
 VOC = volatile organic compound
 UST = underground storage tank
 UXO = unexploded ordnance

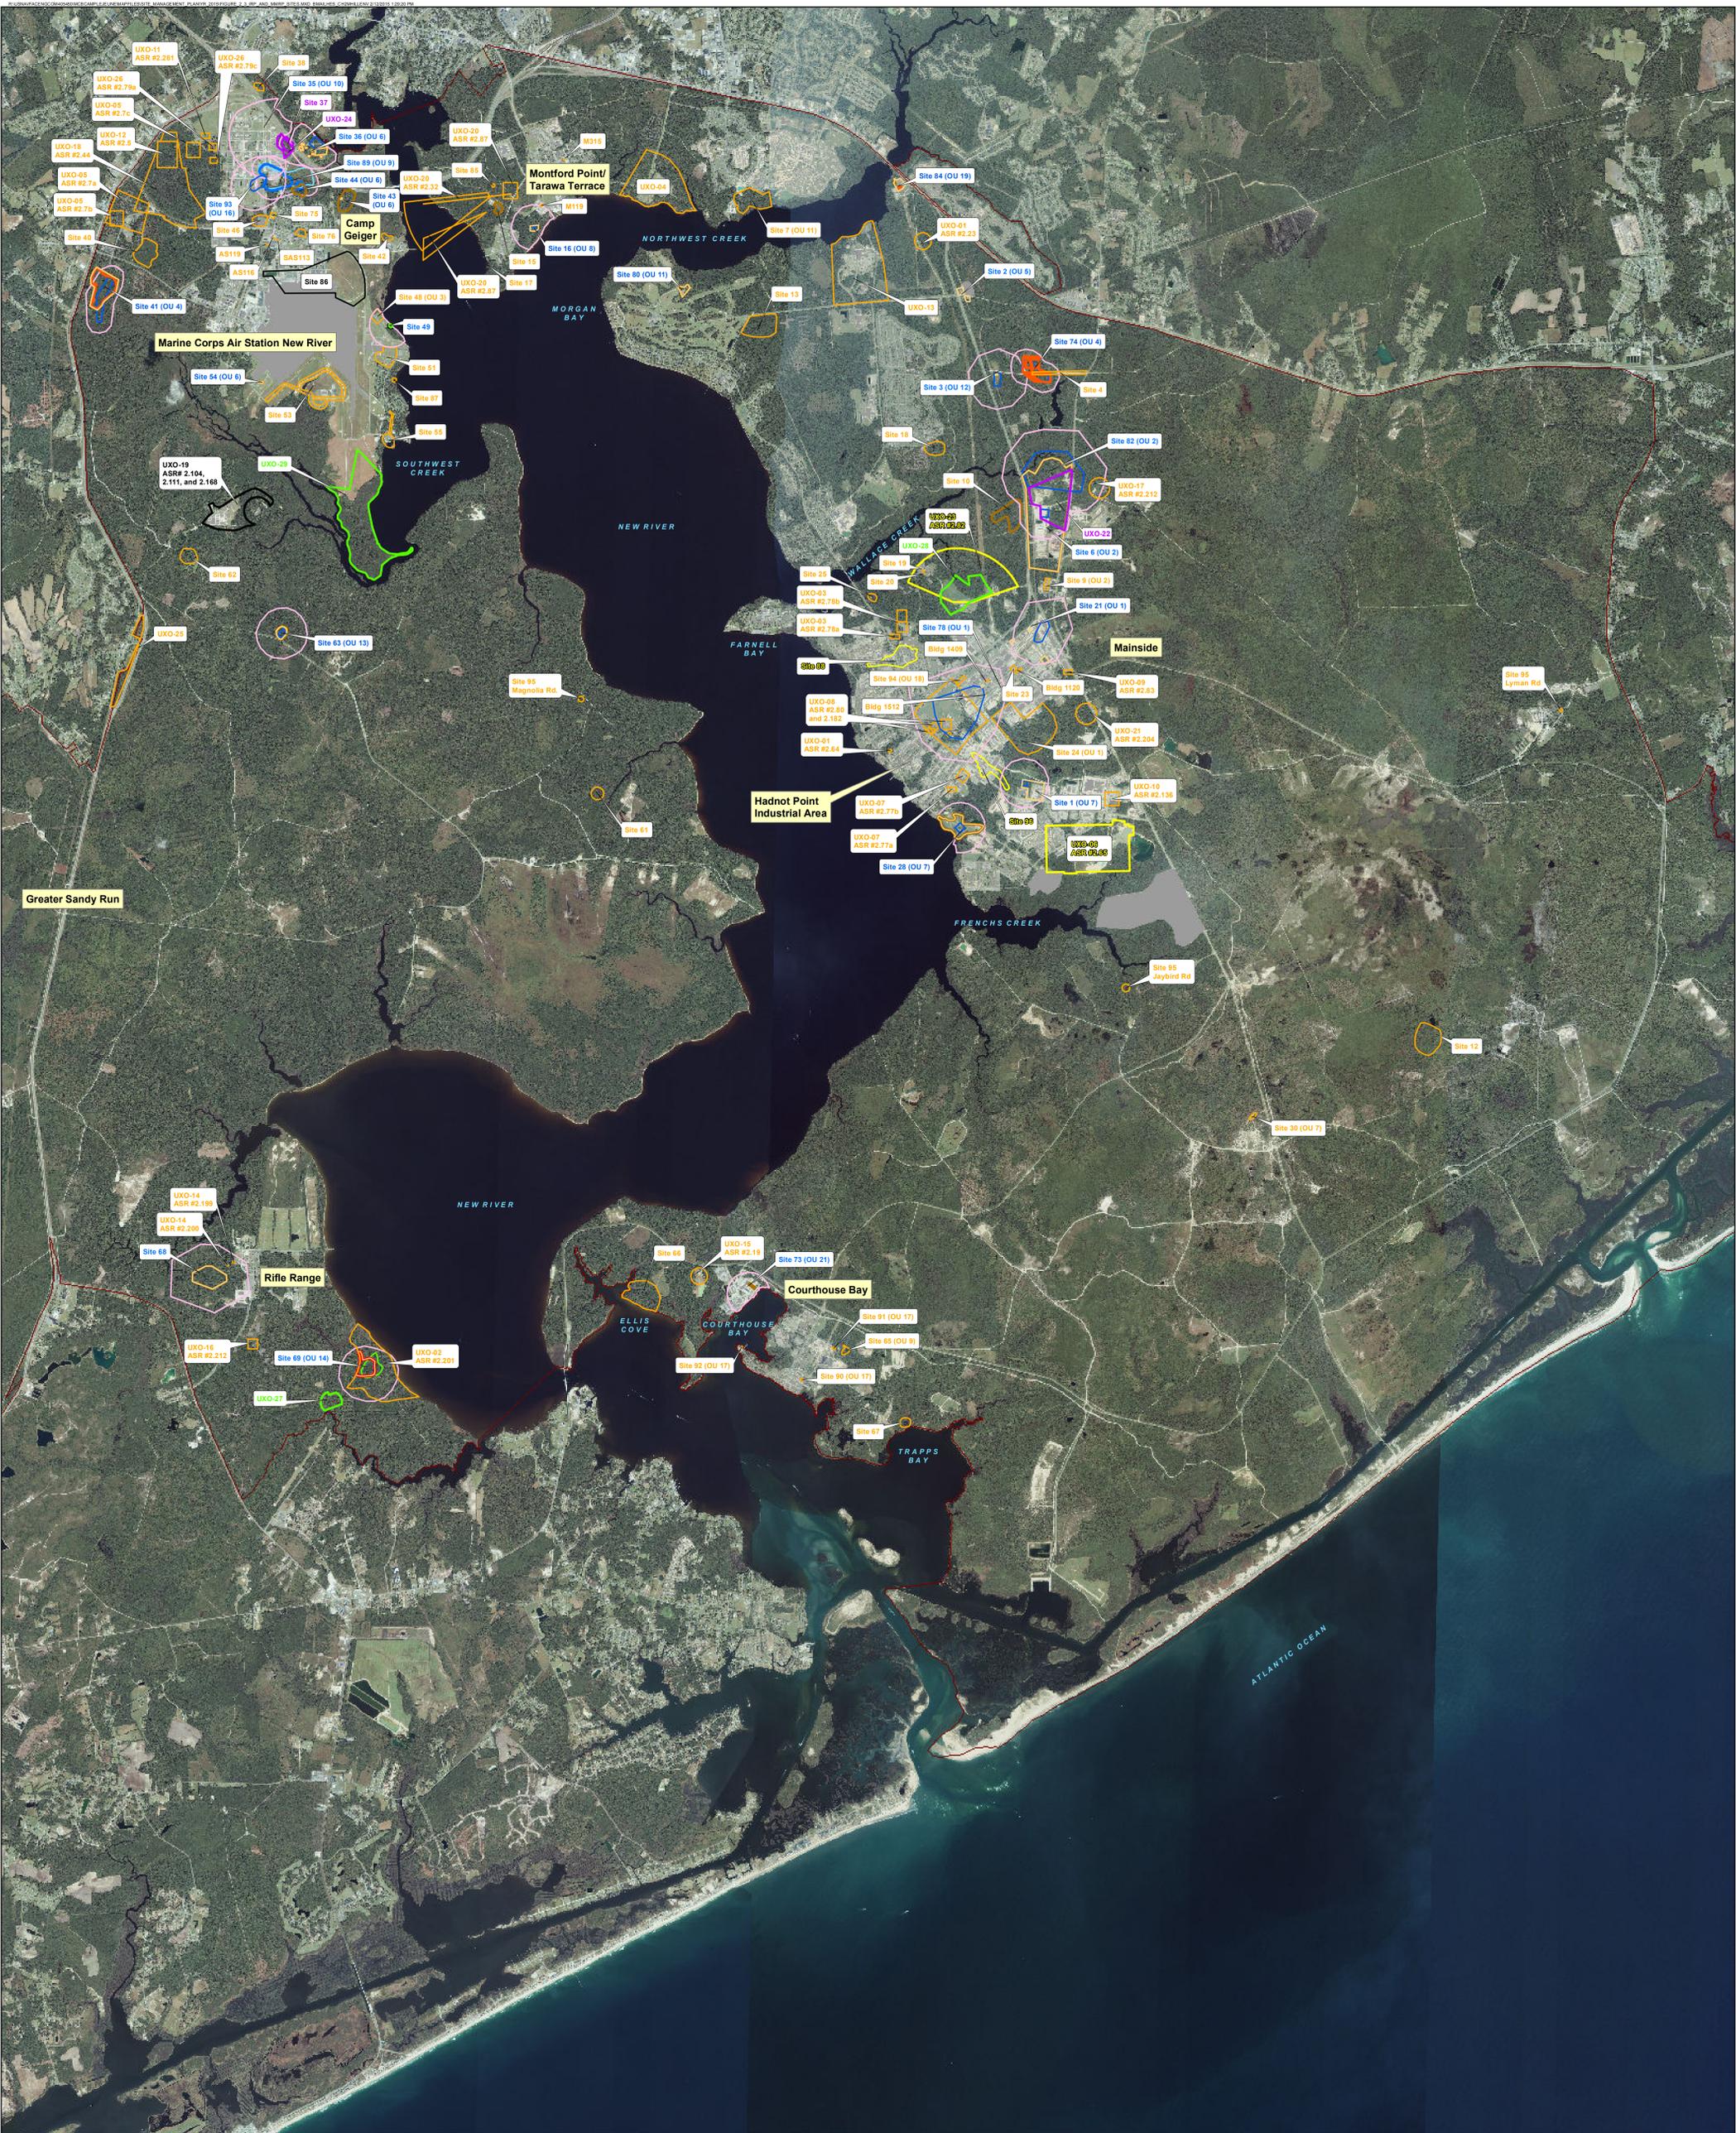

Legend		
 PA/SI Sites	 Installation Boundary	 Industrial/Non-Industrial Use Control Boundary (Vapor Intrusion)
 ESI Sites	RIP Sites with LUCs:	 Access Control Boundary
 RI/FS Sites	 Aquifer Use Control Boundary	
 Proposed Plan/ROD Sites	 Non-Industrial Use Control Boundary	
 RD/RA Sites	 Intrusive Activities Control Boundary (Soil)	
 NFA Sites	 Intrusive Activities Control Boundary (Groundwater)	

Note: LUC boundaries depicted may have multiple LUCs associated and the most conservative LUC is shown






 1 inch = 2,500 feet

Figure 2-3
 IRP and MMRP Sites
 FY 2015 Site Management Plan
 MCB CAMLEJ
 North Carolina





Legend ■ PA/SI Sites ■ ESI Sites ■ RI/FS Sites Proposed Plan/ROD Sites RD/RA Sites NFA Sites		 Installation Boundary RIP Sites with LUCs: Aquifer Use Control Boundary Non-Industrial Use Control Boundary Intrusive Activities Control Boundary (Soil) Intrusive Activities Control Boundary (Groundwater)		 Industrial/Non-Industrial Use Control Boundary (Vapor Intrusion) Access Control Boundary <small>Note: LUC boundaries depicted may have multiple LUCs associated and the most conservative LUC is shown</small>	
---	--	--	--	---	--





 1 inch = 2,500 feet

Figure 2-4
 Active IRP Sites
 FY 2015 Site Management Plan
 MCIEAST-MCB CAMLEJ
 North Carolina

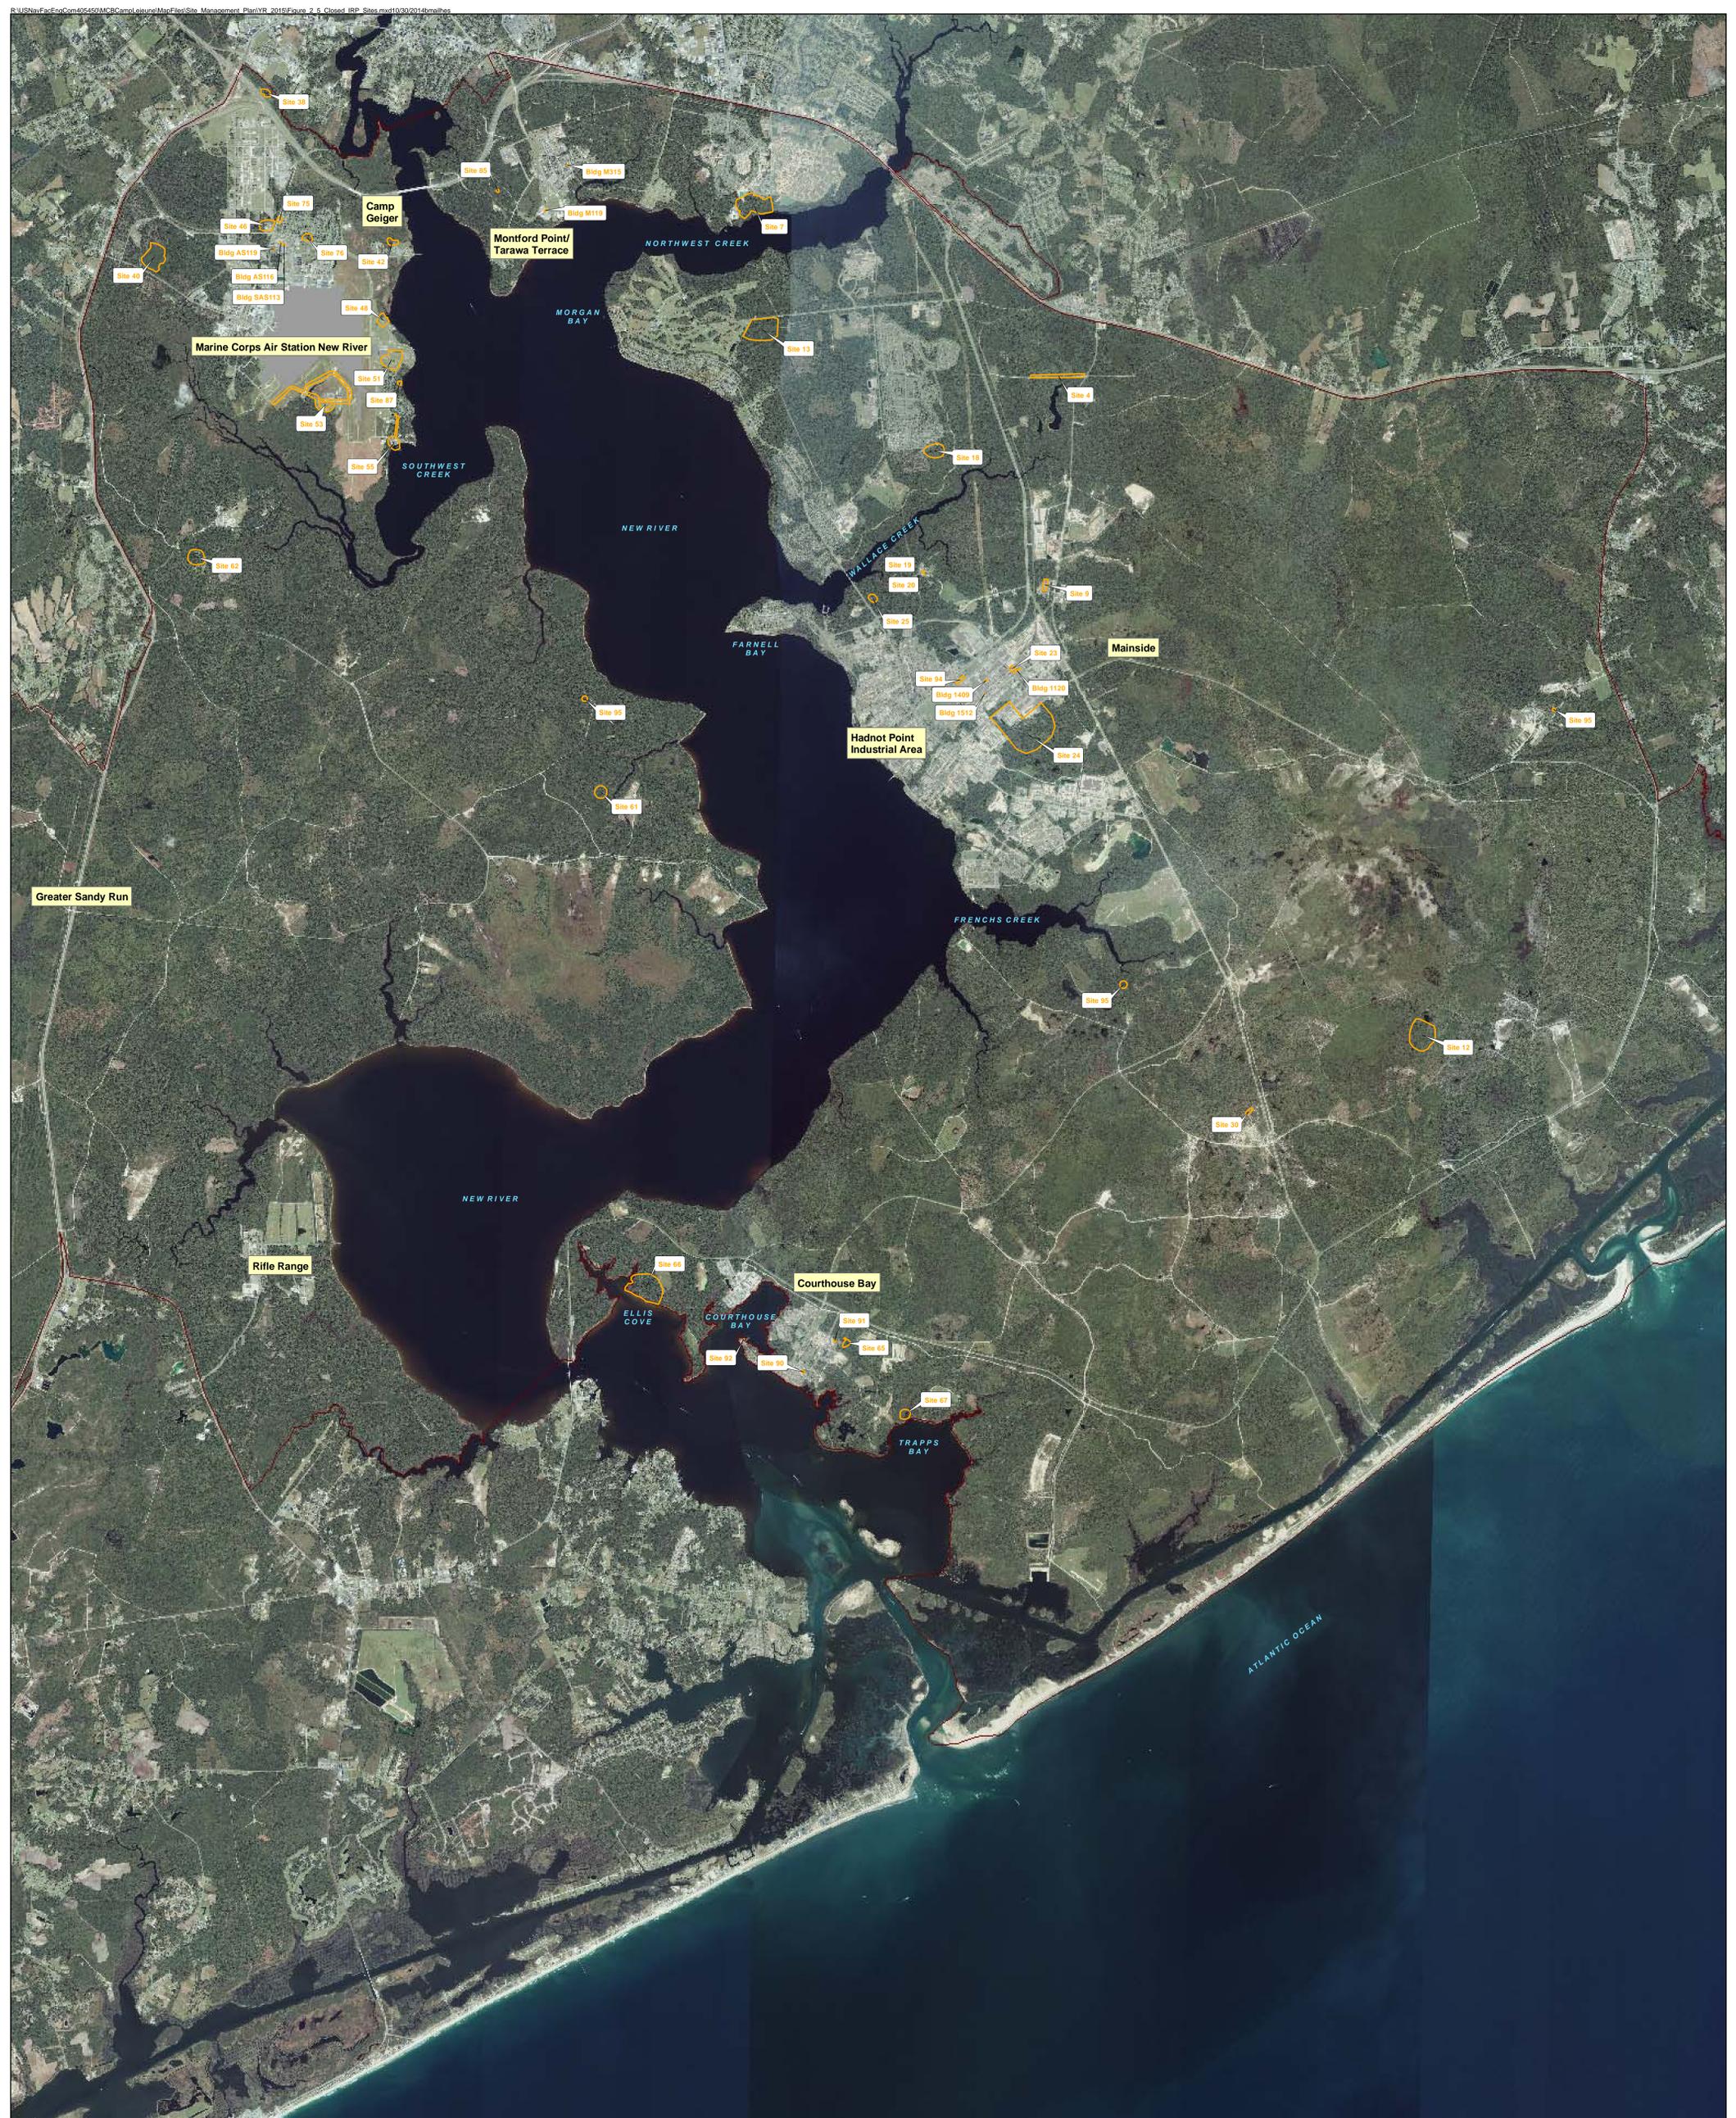Legend
 Yellow circle: NFA Sites
 Red line: Installation Boundary


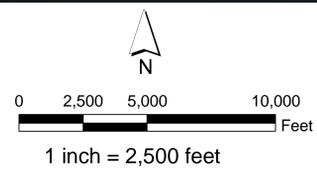


Figure 2-5
 Closed IRP Sites
 FY 2015 Site Management Plan
 MCIEAST-MCB CAMLEJ
 North Carolina



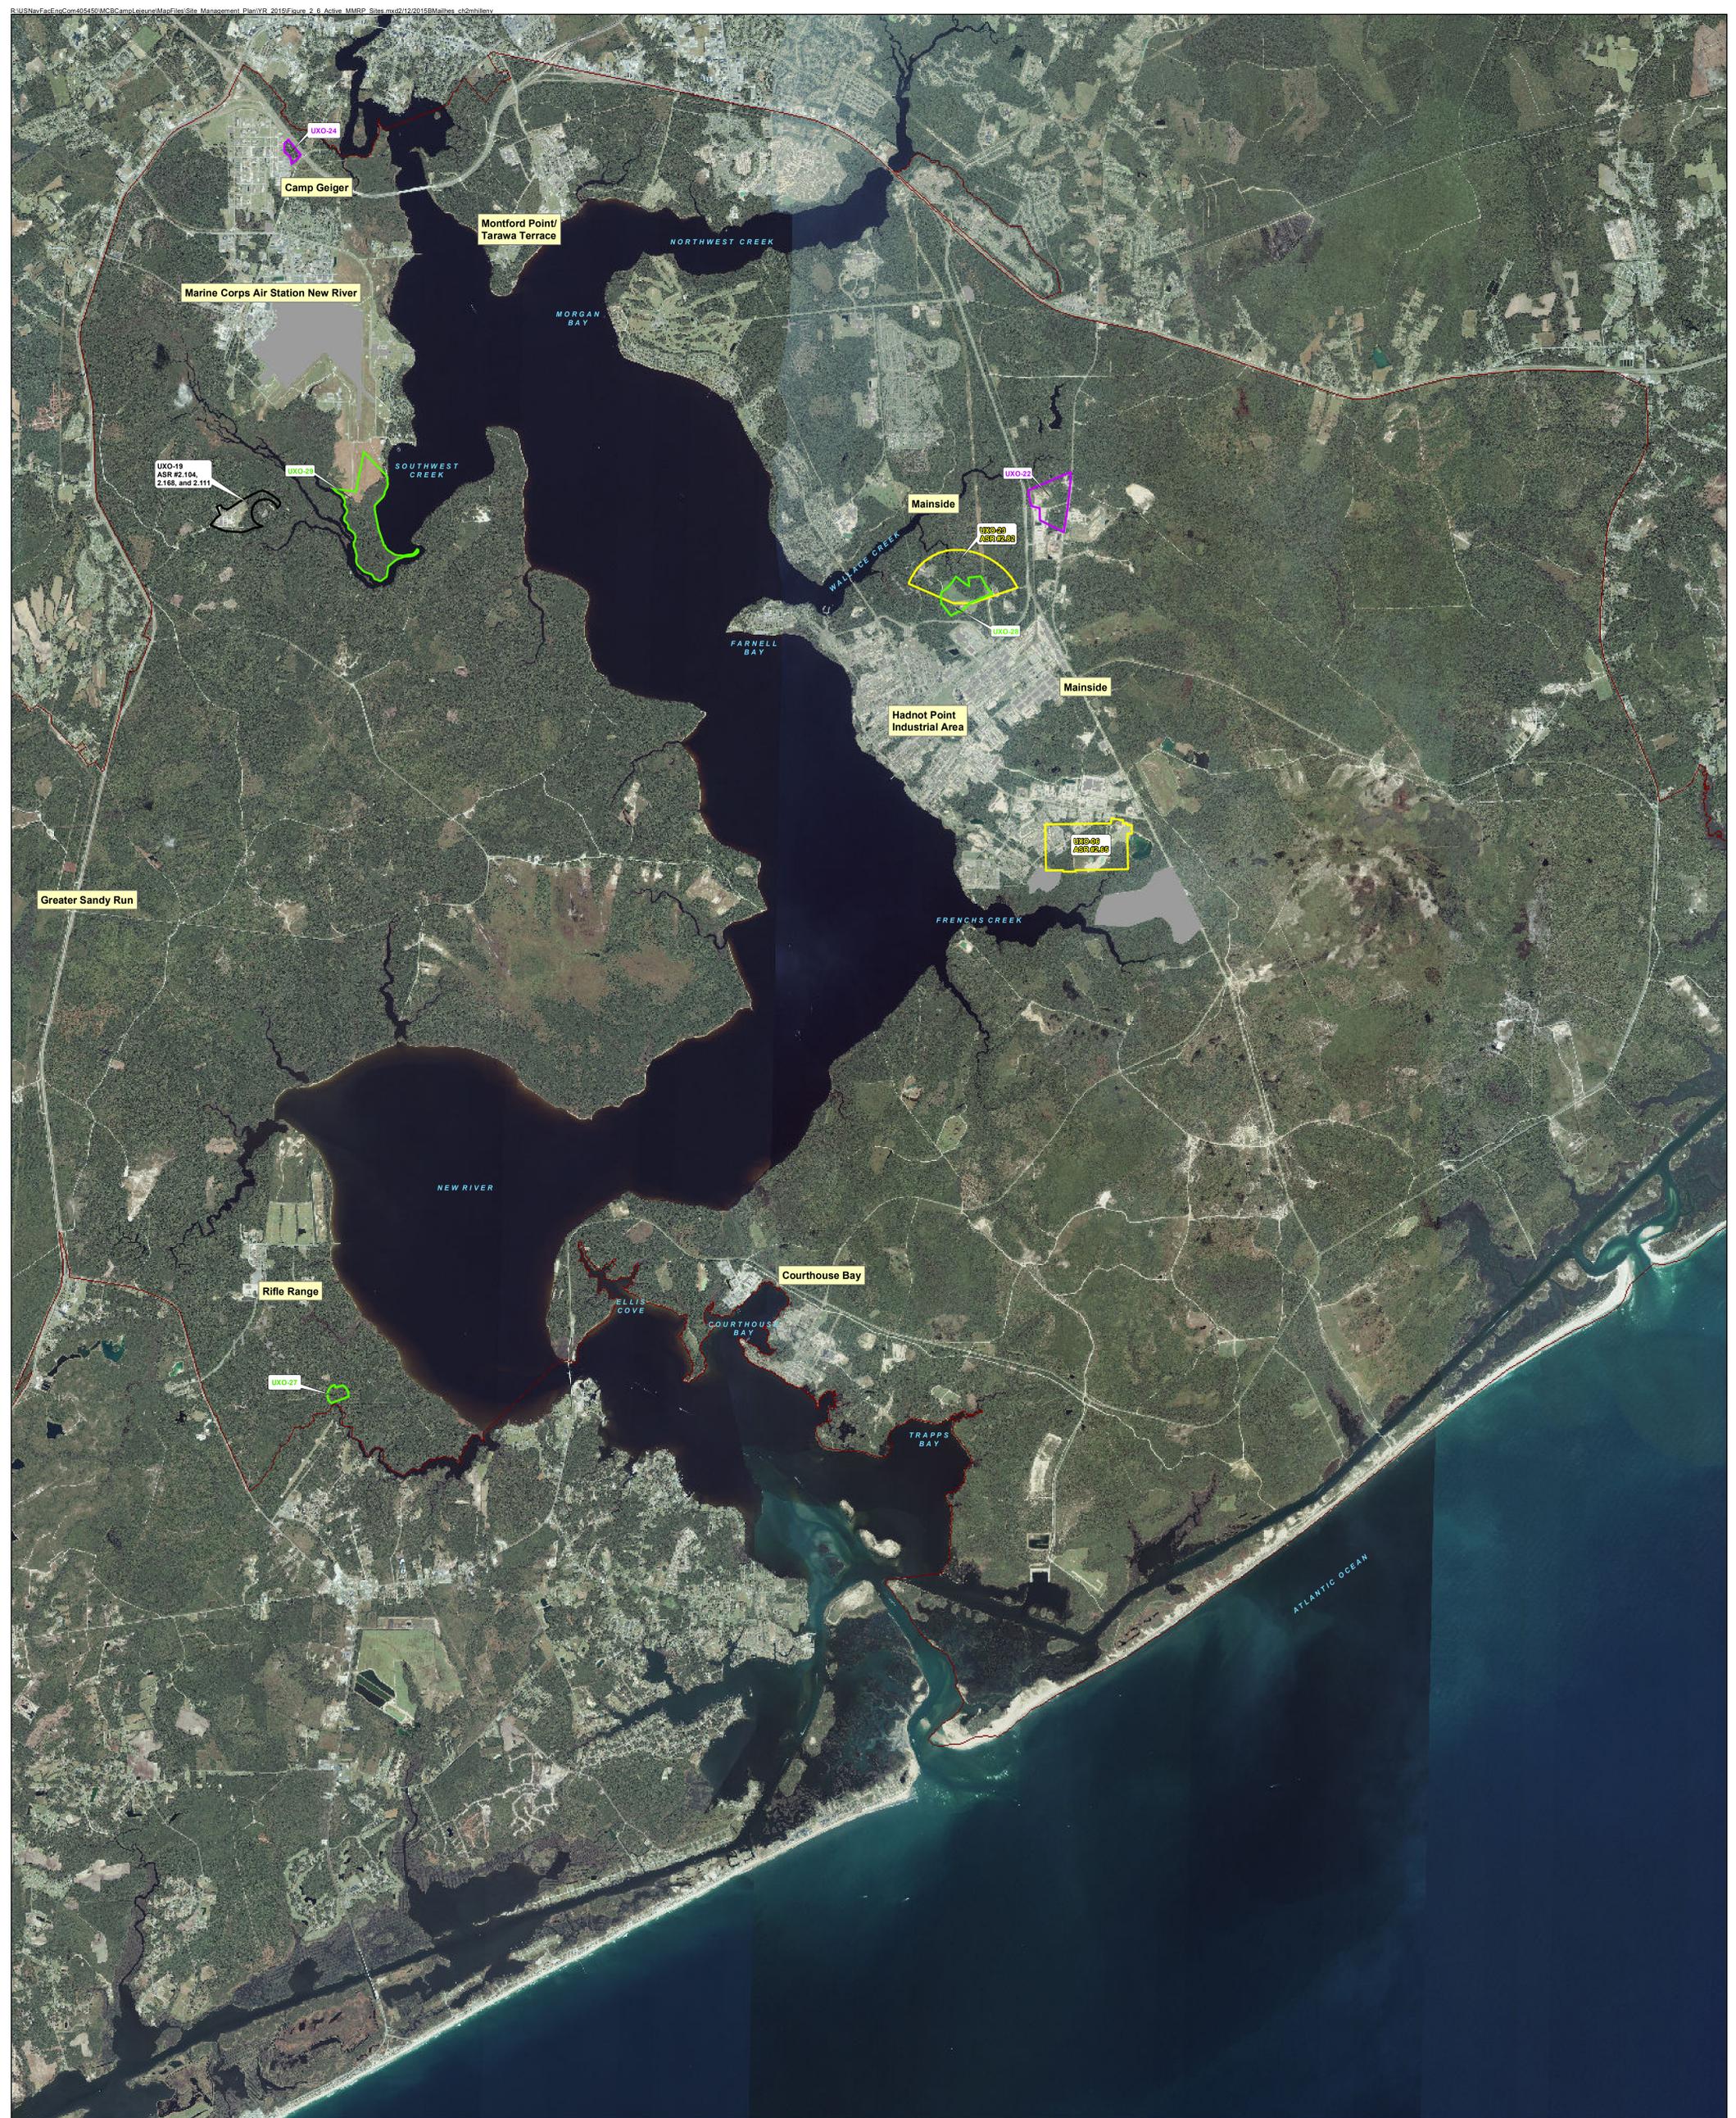

Legend
 ESI Sites
 PA/SI Sites
 Proposed Plan/ROD Sites
 RIF/S Sites
 Installation Boundary


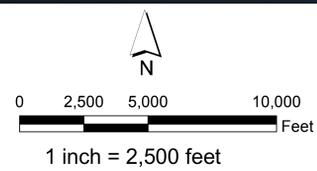


Figure 2-6
 Active MMRP Sites
 FY 2015 Site Management Plan
 MCIEAST-MCB CAMLEJ
 North Carolina



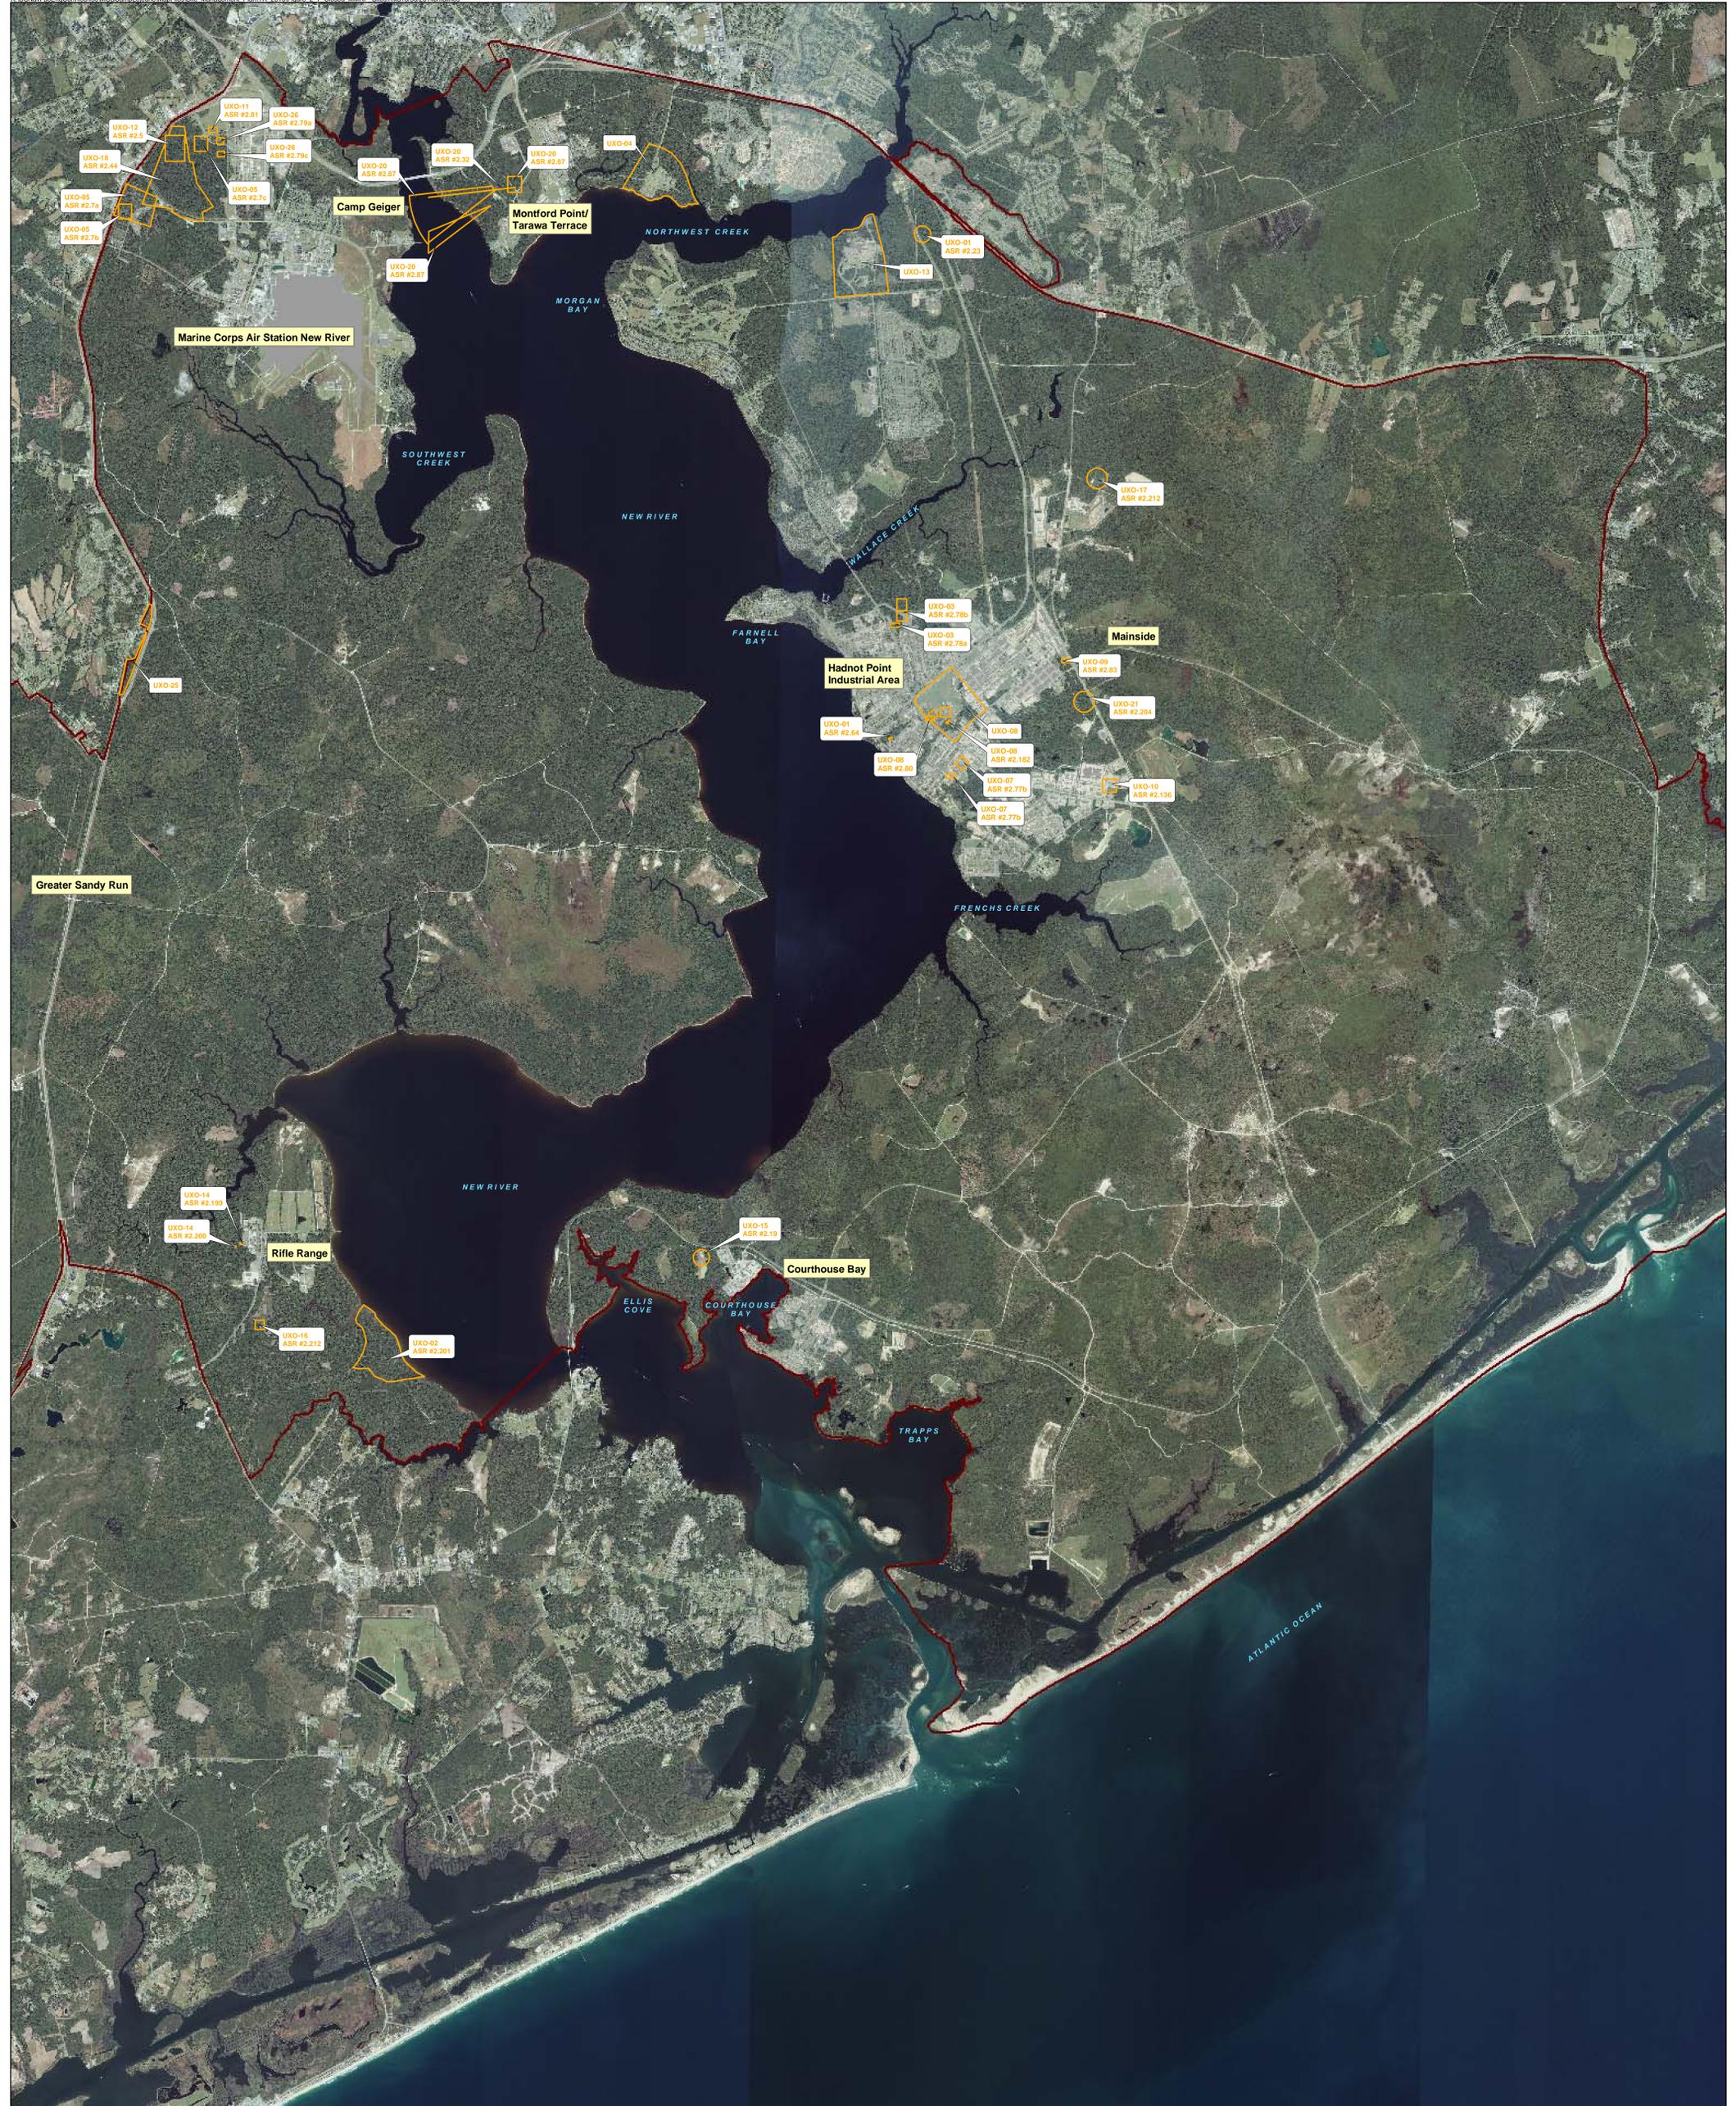

Legend
 [Yellow Box] NFA Sites
 [Red Line] Installation Boundary

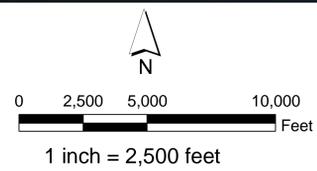


Figure 2-7
 Closed MMRP Sites
 FY 2015 Site Management Plan
 MCIEAST-MCB CAMLEJ
 North Carolina



Legend

- Historic Range Boundaries
- Site Boundaries
- Installation Boundary

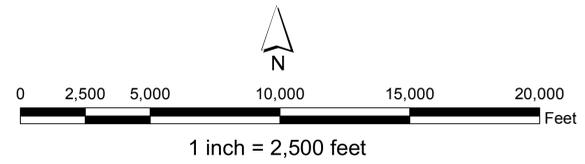


Figure 2-8
 Additional Sites
 FY 2015 Site Management Plan
 MCIEAST-MCB CAMLEJ
 North Carolina





- Legend**
- Site Boundaries
 - Installation Boundary

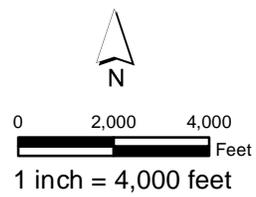


Figure 2-9
Transferred IRP Sites
FY2015 Site Management Plan
MCIEAST-MCB CAMLEJ
North Carolina

Descriptions of PA/SI Sites

The following sections discuss the site history, summarize previous investigations, and present future activities of the three MMRP sites that are in the PA/SI phase of the CERCLA process.

3.1 MMRP PA/SI Sites

3.1.1 UXO-27 – Gun Position Owl (ASR #2.212)

Site UXO-27 (ASR #2.212) covers approximately 14 acres in the southern portion of the Stone Bay Complex (**Figure 3-1**). The site is mostly covered by forest and Everett Creek Road runs along the northern portion of the site. Gun Position Owl may have been used for indirect firing of 105-mm and 155-mm projectiles into the K-2 impact area. No other documentation has been identified to indicate that other military munitions have been used within Gun Position Owl.

FIGURE 3-1
MMRP Site UXO-27

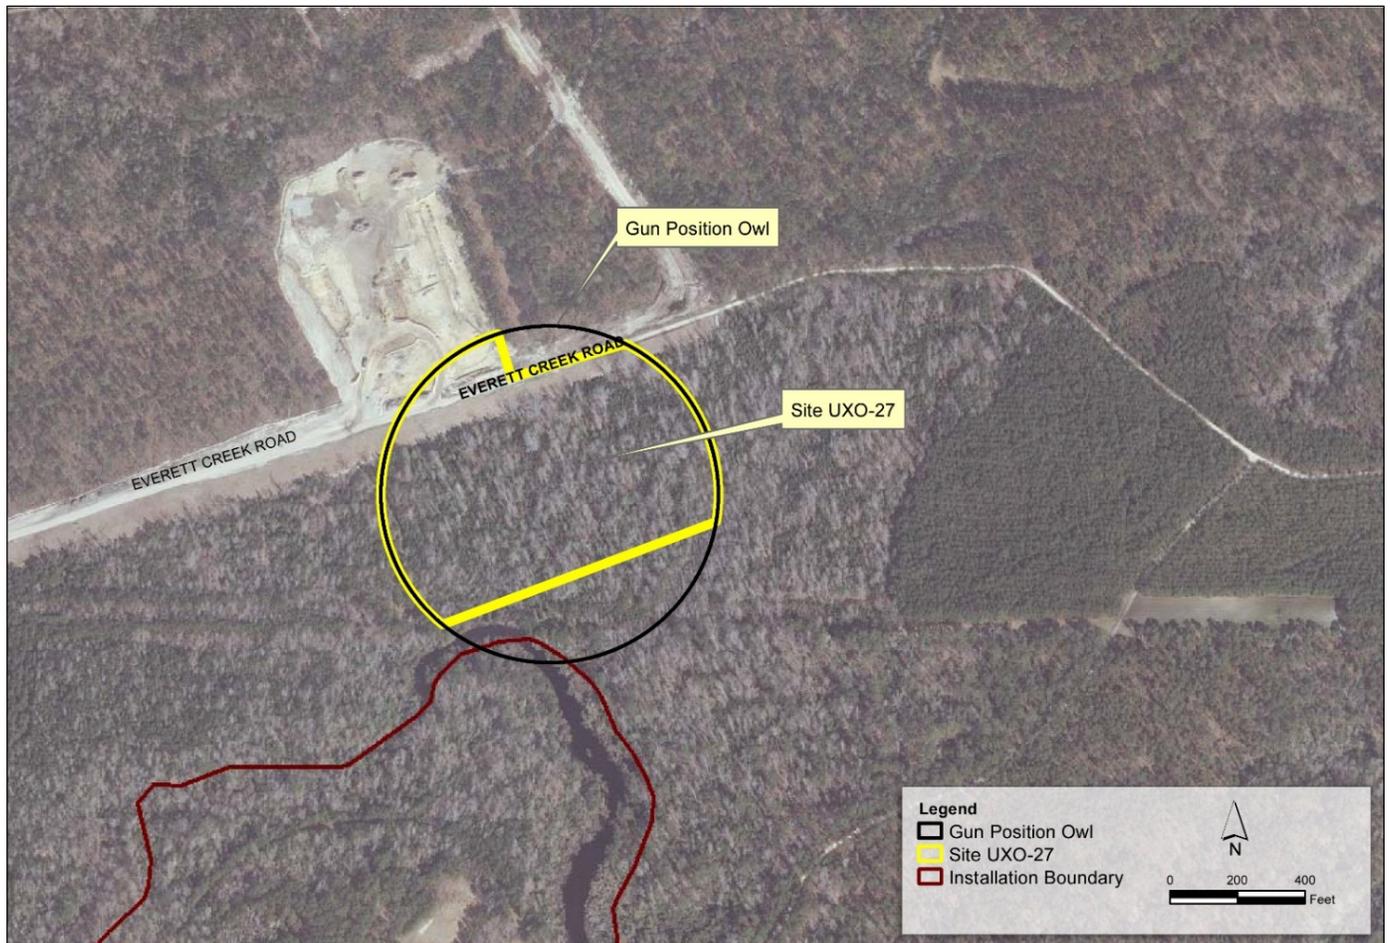


TABLE 3-1
 Previous Investigations Summary, MMRP UXO-27

Previous Investigation/Action	Date	Activities
Draft PA/SI (CH2M HILL, 2014)	2013-2014	<p>In 2013 a PA/SI was initiated to evaluate the nature and extent of potential MEC, MPPEH, and MC at UXO-27. Field activities included DGM, an intrusive anomaly investigation, and soil and groundwater sampling for MC analysis. Approximately 700 anomalies were identified during DGM and over 400 anomalies were intrusively investigated. No MEC and only MPPEH/material documented as safe (MDAS) were identified.</p> <p>Only metals were detected above screening criteria in soil and groundwater. However, the results of the risk screening indicated that exposure would not result in unacceptable risks to human health or ecological receptors. Based on the results, no further action and closure under the MMRP was recommended for Site UXO-27.</p>

3.1.1.1 Future Activities

The PA/SI will be completed in FY 2015 followed by closure under the MMRP (**Schedule 3-1**).


**Schedule 3-1
MMRP Site UXO-27 (ASR# 2.212)
FY 2015 Site Management Plan**

ID	Task Name	Duration	Start	Finish	2015											
					Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May		
1	PA/SI	197 days	Thu 8/7/14	Fri 5/8/15												
2	Draft PA/SI Report to Navy/Base	1 day	Thu 8/7/14	Thu 8/7/14												
3	Review Period	146 days	Fri 8/8/14	Fri 2/27/15												
4	Draft PA/SI Report to Team	10 days	Mon 3/2/15	Fri 3/13/15												
5	Review Period	30 days	Mon 3/16/15	Fri 4/24/15												
6	Final PA/SI Report	10 days	Mon 4/27/15	Fri 5/8/15												

3.1.2 UXO-28—Wallace Creek Phase I Munitions Response Site

Site UXO-28 covers approximately 58 acres, just west of the intersection of Holcomb Boulevard and Parachute Tower Road in the Mainside area of the Base (**Figure 3-2**). UXO-28 overlaps the theoretical shot fall zone of UXO-23, the Former Base Skeet Range (**Section 5.2.2**) and was identified based on the discovery of MEC/MPPEH during the NTCRA activities in 2013.

FIGURE 3-2
MMRP Site UXO-28

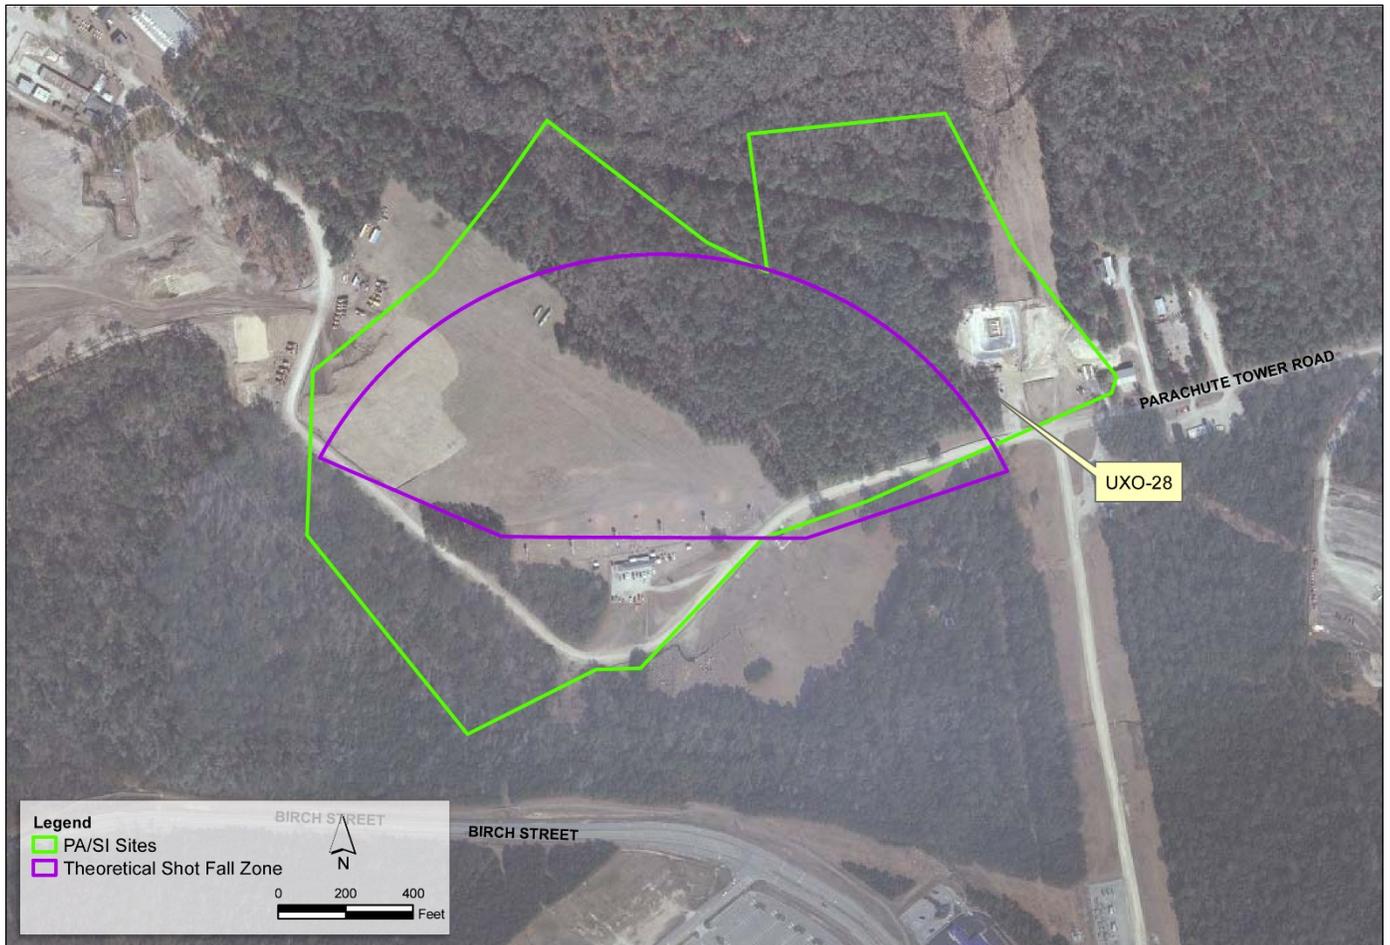

3.1.2.1 Future Activities

A PA/SI will be conducted in FY 2015/2016 (**Schedule 3-2**).

**Schedule 3-2
MMRP Site UXO-28
FY 2015 Site Management Plan
MCIEAST-MCB CAMLEJ**

ID	Task Name	Duration	Start	Finish	2016																
					Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	
1	PA/SI	310 days	Tue 6/30/15	Mon 9/5/16																	
2	Draft UFP-SAP	60 days	Tue 6/30/15	Mon 9/21/15																	
3	Review Period	45 days	Tue 9/22/15	Mon 11/23/15																	
4	Final UFP-SAP	10 days	Tue 11/24/15	Mon 12/7/15																	
5	Field Activities/Data Evaluation	80 days	Tue 12/8/15	Mon 3/28/16																	
6	Draft PA/SI Report	60 days	Tue 3/29/16	Mon 6/20/16																	
7	Review Period	45 days	Tue 6/21/16	Mon 8/22/16																	
8	Final PA/SI Report	10 days	Tue 8/23/16	Mon 9/5/16																	

3.1.3 UXO-29—New River Runway Expansion Area (ASR #2.1, 2.167, and 2.29)

Site UXO-29 covers approximately 182 acres and is located at the southern end of the runway at MCAS New River (**Figure 3-3**). The site encompasses portions of three historical terrestrial ranges. Former Infantry Weapons Demonstration Course, B17 (ASR #2.29) was active from 1946 to 1947 and reportedly used 75 mm, 105 mm, and 155 mm projectiles. Former Artillery Training Area (ASR #2.1) was active from 1941 to 1943 and reportedly used small arms, rockets, and projectiles. Former hand grenade range (practice demonstrator, M113 (ASR #2.167) was active from 1970 to 1977 and reportedly used for hand grenade training. The site was identified during initial military construction (MILCON) activities for the runway expansion based on discovery of 2.36-inch practice bazooka rounds.

FIGURE 3-3
MMRP Site UXO-29



Previous investigations are listed in **Table 3-2**.

TABLE 3-2
Previous Investigations Summary, MMRP UXO-29

Previous Investigation/Action	Date	Activities
Munitions Response Investigation (CH2M HILL, 2014)	2013-2014	In 2013, a focused munitions response investigation was conducted in the 10 acre MCAS New River Expansion area to reduce the potential for encountering MEC and MPPEH during future MILCON activities. Field activities consisted of 100 percent DGM and intrusive investigations and post-detonation soil sampling. Eight MEC (including high explosive and white phosphorus rounds) and over 120 MPPEH items were identified and removed. Post-detonation soil sampling results did not indicate any unacceptable human health or ecological risks due to exposure to soil within the area of the controlled detonation. Because DGM and the intrusive investigation were conducted over 100 percent (%) of the MRS and all identified anomalies were removed to the maximum depth of detection, the explosives safety quantity distance (ESQD) arcs were removed and MILCON was approved to proceed. The discovery of MEC and MPPEH within the footprint of Site UXO-29 indicates that additional MEC and MPPEH may exist and additional investigation was recommended.

3.1.3.1 Future Activities

Additional investigation within the MMRP site will be conducted in FY 2015/2016 (**Schedule 3-3**).

**Schedule 3-3
MMRP Site UXO-29
FY 2015 Site Management Plan
MCIEAST-MCB CAMLEJ**

ID	Task Name	Duration	Start	Finish	2016																
					Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	
1	PA/SI	310 days	Tue 6/30/15	Mon 9/5/16																	
2	Draft UFP-SAP	60 days	Tue 6/30/15	Mon 9/21/15																	
3	Review Period	45 days	Tue 9/22/15	Mon 11/23/15																	
4	Final UFP-SAP	10 days	Tue 11/24/15	Mon 12/7/15																	
5	Field Activities/Data Evaluation	80 days	Tue 12/8/15	Mon 3/28/16																	
6	Draft PA/SI Report	60 days	Tue 3/29/16	Mon 6/20/16																	
7	Review Period	45 days	Tue 6/21/16	Mon 8/22/16																	
8	Final PA/SI Report	10 days	Tue 8/23/16	Mon 9/5/16																	

SECTION 4

Descriptions of ESI Sites

The following sections discuss the site history, summary of previous investigations, and future activities of the one IRP site and three MMRP sites that are in the ESI phase of the CERCLA process.

4.1 IRP ESI Sites

4.1.1 Site 37—Camp Geiger Area Surface Dump

Site 37, the Camp Geiger Area Surface Dump, encompasses approximately 4 acres in the Camp Geiger area of the Base (**Figure 4-1**). Between 1950 and 1951, Site 37 was used for the surface disposal of wastes including motor parts, garbage, and wood. During investigations at Site 37, buried debris was identified. US 17 Bypass runs through the northeastern portion of the site and the rest of the site is primarily wooded. In 2010, buried munitions were discovered in the vicinity and the area was identified as UXO-24 under the MMRP (**Section 4.2.3**).

FIGURE 4-1
IRP Site 37



Previous investigations are listed in **Table 4-1**.

TABLE 4-1
Previous Investigations Summary, IRP Site 37

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at Site 37, and no further assessment was recommended.
Confirmatory Site Assessment (Osage, 2011)	2009-2011	To verify the presence or absence of contamination due to the site's history as a dump, confirmatory sampling was conducted. Soil and groundwater samples were collected for VOCs, semivolatile organic compounds (SVOCs), pesticides/polychlorinated biphenyls [PCBs], herbicides, and metals. Potential unacceptable risks to the environment were identified due to exposure to pesticides and herbicides in soil and an additional investigation was recommended.
UXO-24 and Site 37 Preliminary Assessment/Site Investigation (CH2M HILL, 2014)	2013 - 2014	In 2013 a PA/SI was initiated to evaluate the nature and extent of potential MEC and material potentially presenting an explosive hazard (MPPEH) at UXO-24 (described in Section 3.2.1) and to evaluate the potential risk from pesticides and herbicides identified during the Site 37 Confirmatory Site Assessment. At Site 37, field activities included soil sampling analyzed for pesticides and herbicides. Pesticides were detected at concentrations exceeding the screening criteria; however, no potential human health or environmental risks were identified due to exposure to soil. During the MEC investigation activities, buried debris was identified. The PA/SI recommended an ESI to delineate the nature and extent of the waste disposal area.

4.1.1.1 Future Activities

The ESI will be conducted in FY 2015/FY 2016 (**Schedule 4-1**). Based on the findings of the ESI, the path forward for the site will be determined.

**Schedule 4-1
IRP Site 37
FY 2015 Site Management Plan**


ID	Task Name	Duration	Start	Finish	2015												2016					
					Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr
1	Expanded SI for UXO-24/Site 37	356 days	Fri 11/21/14	Fri 4/1/16																		
2	Draft UFP-SAP	106 days	Fri 11/21/14	Fri 4/17/15																		
3	Review Period	45 days	Mon 4/20/15	Fri 6/19/15																		
4	Final UFP-SAP	10 days	Mon 6/22/15	Fri 7/3/15																		
5	Field Investigation/Data Evaluation	80 days	Mon 7/6/15	Fri 10/23/15																		
6	Draft Expanded SI Report	60 days	Mon 10/26/15	Fri 1/15/16																		
7	Review Period	45 days	Mon 1/18/16	Fri 3/18/16																		
8	Final Expanded SI Report	10 days	Mon 3/21/16	Fri 4/1/16																		

4.2 MMRP ESI Sites

4.2.1 UXO-22—Sites 6 and 82 (OU 2)

Site UXO-22 covers approximately 75 acres between Holcomb Boulevard and Piney Green Road on the Mainside area of the Base (**Figure 4-2**). UXO-22 encompasses the location of the former Munitions Disposal Area and portions of IRP Sites 6 and 82 within OU 2. LUCs for intrusive activities are currently in place at Sites 6 and 82 that encompass UXO-22. Disposal trenches containing MPPEH (including expended 105- mm cartridges); communication wire; graphite battery packs; containers of petroleum, oil, and lubricant (POL); and metal 55-gallon drums were discovered and removed during the OU 2 RI (Baker, 1993), and additional MPPEH and munitions debris (MD) were identified during Supplemental Investigation activities conducted from 2009 to 2010. No former range activities are known to have occurred at the site. Current land uses at Site UXO-22 are industrial and commercial and consist of operation of the Base truck scales, equipment staging areas, parking lots, and a groundwater remediation system for Site 82.

FIGURE 4-2
MMRP Site UXO-22

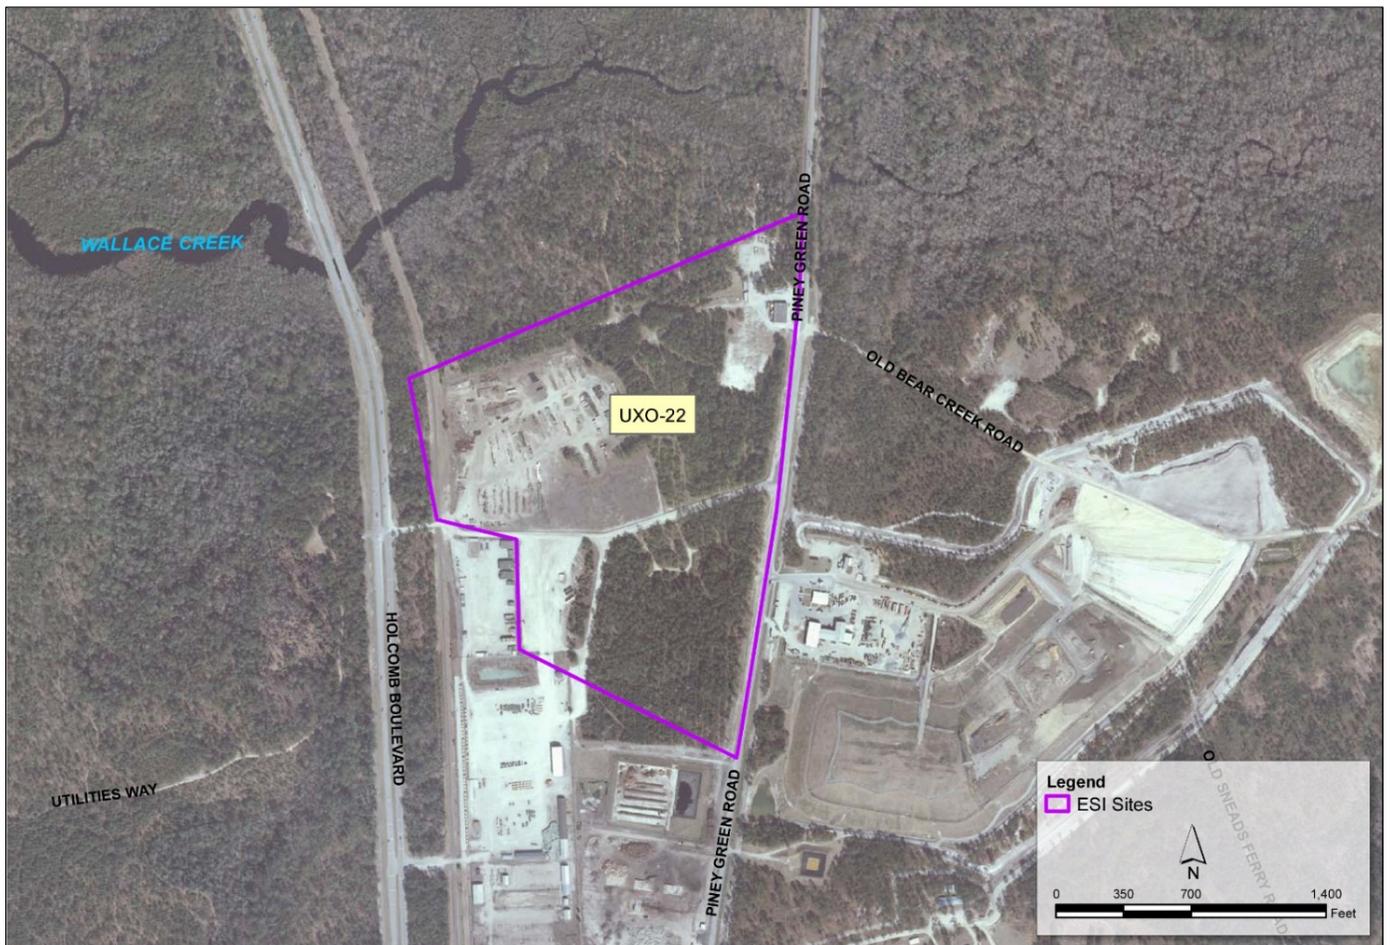

Previous investigations are listed in **Table 4-2**.

TABLE 4-2
Previous Investigations Summary, MMRP Site UXO-22

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2013)	2011 -2013	<p>A field investigation was conducted to evaluate the presence and nature of MC contamination. Field activities included soil and groundwater sampling for explosives and metals. Explosives and metals were detected in exceedance of screening criteria in subsurface soil, sediment, and groundwater samples.</p> <p>Potential human health and ecological risks were identified from exposure to metals in soil, including surface soil in the ephemeral drainage. The metals exceedances are likely associated with the long-term use as a historical storage and waste disposal area rather than with the presence of MPPEH and MEC. Therefore, it was recommended that metals in soil be addressed as part of IRP Sites 6 and 82.</p> <p>Potential explosive hazards were identified based on the MEC and MPPEH found onsite during previous IRP investigations. An RI was recommended to further characterize the nature and extent of MEC. Additionally, a MEC surface clearance was recommended to minimize explosive risks from unintentional detonations, especially in the wooded areas and in the former Defense Reutilization and Marketing Office (DRMO) area.</p>
Draft Expanded Site Investigation (CH2M HILL)	2013-2014	<p>An ESI was conducted to further investigate the presence and nature of MEC and MPPEH and to evaluate the extent of the battery disposal area identified during the PA/SI. Field activities included DGM, an intrusive investigation, and collection of soil samples from beneath the battery disposal area, and surface clearing and soil sifting within the former DRMO. The data is being evaluated and the ESI Report will be submitted in FY 2015.</p>

4.2.1.1 Future Activities

The ESI Report will be completed in FY 2015. An Explanation of Significant Difference (ESD) for OU 2 will be completed in FY 2016 that will incorporate an intrusive activity control for potential MEC into the LUCs for OU 2 (**Schedule 4-2**).

**Schedule 4-2
MMRP Site UXO-22
FY 2015 Site Management Plan
MCIEAST-MCB CAMLEJ**

ID	Task Name	Duration	Start	Finish	2016											
					Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb
1	Expanded SI	143 days	Mon 3/2/15	Wed 9/16/15	▶											
2	Draft Report	88 days	Mon 3/2/15	Wed 7/1/15	▶											
3	Review Period	45 days	Thu 7/2/15	Wed 9/2/15						▶						
4	Final Report	10 days	Thu 9/3/15	Wed 9/16/15							▶					
5	ESD	115 days	Thu 9/17/15	Wed 2/24/16							▶					
6	Draft ESD	60 days	Thu 9/17/15	Wed 12/9/15							▶					
7	Review Period	45 days	Thu 12/10/15	Wed 2/10/16										▶		
8	Final ESD	10 days	Thu 2/11/16	Wed 2/24/16											▶	

4.2.2 UXO-24—Camp Geiger Area

Site UXO-24 covers approximately 9 acres of mostly wooded land east of G Street in the Camp Geiger area of the Base (**Figure 4-3**). Prior to the 1950s, the site was completely wooded. Between 1950 and 1951, the site was used as a surface dump for items such as wood, tires, and scrap metal (Osage, 2011). During the late 1950s, the site was partially cleared for the construction of a carpenter shop, lumber rack, and paint shop in the northern portion of the site. Buried discarded military munitions (DMM) were discovered at UXO-24 in 2010. A limited visual site inspection conducted by Base Explosive Ordnance Disposal (EOD) personnel found additional DMM and MPPEH in the area surveyed. Because Site UXO-24 also encompasses the majority of Site 37 (**Section 3.1.1**), the two sites are being investigated simultaneously.

FIGURE 4-3
MMRP Site UXO-24



TABLE 4-3
Previous Investigations Summary, MMRP UXO-24

Previous Investigation/Action	Date	Activities
UXO-24 and Site 37 Preliminary Assessment/Site Investigation (CH2M HILL, 2014)	2013-2014	In 2013 a PA/SI was initiated to evaluate the nature and extent of potential MEC and MPPEH at UXO-24 and to evaluate the potential risk from pesticides and herbicides identified during the Site 37 Confirmatory Site Assessment (described in Section 3.1.1). At UXO-24, field activities included digital geophysical mapping (DGM) and an intrusive investigation. Approximately 1,500 anomalies were identified during DGM, and intrusive investigation of 989 of the anomalies resulted in the discovery of 14 MEC items, consisting of 2 40-millimeter (mm) high explosive projectiles, 1 40-mm projectile, and 11 fuzes. During the MEC investigation activities, buried waste was identified. The PA/SI recommended an ESI to delineate the nature and extent of the waste disposal area.

4.2.2.1 Future Activities

The ESI will be conducted in FY 2015/FY 2016 (**Schedule 4-3**). Based on the findings of the ESI, the path forward for the site will be determined.

**Schedule 4-3
MMRP Site UXO-24
FY 2015 Site Management Plan**

ID	Task Name	Duration	Start	Finish	2015												2016						
					Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	
1	Expanded SI for UXO-24/Site 37	356 days	Fri 11/21/14	Fri 4/1/16																			
2	Draft UFP-SAP	106 days	Fri 11/21/14	Fri 4/17/15																			
3	Review Period	45 days	Mon 4/20/15	Fri 6/19/15																			
4	Final UFP-SAP	10 days	Mon 6/22/15	Fri 7/3/15																			
5	Field Investigation/Data Evaluation	80 days	Mon 7/6/15	Fri 10/23/15																			
6	Draft Expanded SI Report	60 days	Mon 10/26/15	Fri 1/15/16																			
7	Review Period	45 days	Mon 1/18/16	Fri 3/18/16																			
8	Final Expanded SI Report	10 days	Mon 3/21/16	Fri 4/1/16																			

Descriptions of RI/FS Sites


The following sections discuss the site history, summary of previous investigations, and future activities of the two IRP sites and two MMRP sites that are in the RI/FS phase of the CERCLA process. Because these sites are currently under investigation, the site boundaries encompass the current nature and extent of contamination.

5.1 IRP RI/FS Sites

5.1.1 Site 88 (OU 15)—Base Dry Cleaners

Site 88, the former Base Dry Cleaning Facility Building 25, encompasses approximately 41 acres in the Hadnot Point Industrial Area (HPIA) of MCIEAST-MCB CAMLEJ (**Figure 5-1**). Building 25 began operating as a dry cleaning facility in the 1940s. Five 750-gallon USTs were installed on the north side of the building to store dry cleaning fluids. Initially, Varsol was used in dry cleaning operations. Because of flammability concerns, Varsol’s use was discontinued in the 1970s and it was replaced with tetrachloroethene (PCE). The PCE was stored in one 150-gallon aboveground storage tank (AST) adjacent to the north wall of Building 25, in the same vicinity as the USTs. PCE was reportedly stored in the AST from the 1970s until 1995. Spent PCE was reportedly disposed of in floor drains during this time. In December 1986 and March 1995, self-contained dry cleaning machines were installed in Building 25, eliminating the need for bulk storage of PCE. The USTs and AST were removed in November 1995. The dry cleaning operations ceased in January 2004, and the building was demolished to slab in August 2004.

FIGURE 5-1
IRP Site 88, OU 15

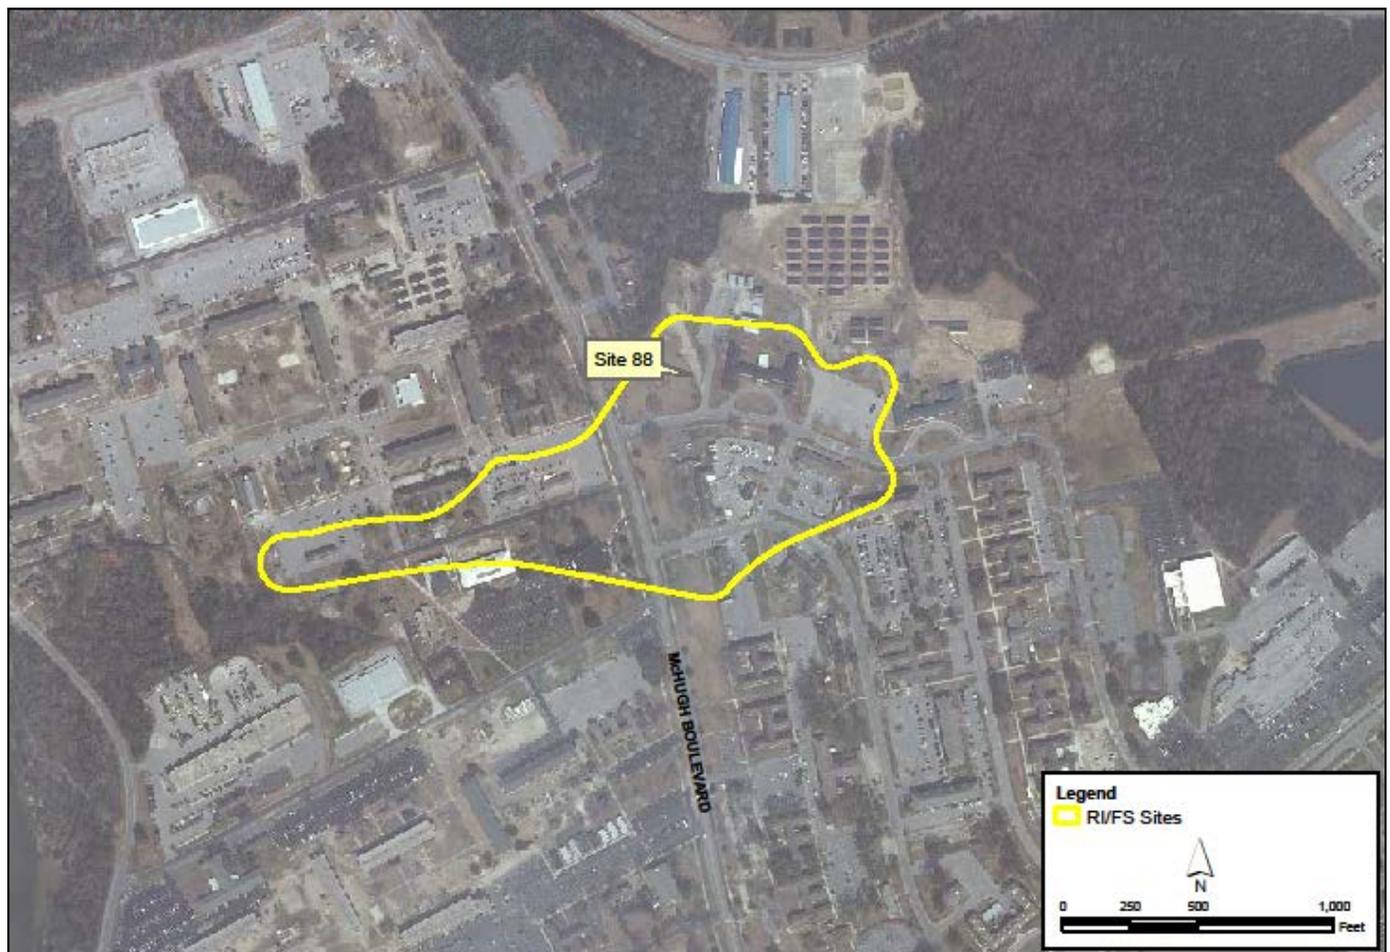

Previous investigations are listed in **Table 5-1**.

TABLE 5-1
Previous Investigations Summary, IRP Site 88

Previous Investigation/Action	Date	Activities
Focused Remedial Investigation (Baker, 1998)	1996 - 1998	During removal of the USTs and ASTs, CVOCs and metals were detected in soil samples, and CVOCs, total petroleum hydrocarbons (TPH), and naphthalene were detected in groundwater samples. As a result of these findings, a Focused RI was initiated. Field activities included soil and groundwater sampling for VOCs, and natural attenuation indication parameters (NAIPs). Subsurface soil contamination was identified under and near Building 25, and adjacent to the underground sewer line. Chlorinated solvent contamination was identified in surficial and upper Castle Hayne aquifer groundwater, and Building 25 was confirmed as the source area, suggesting the presence of a dense non-aqueous phase liquid (DNAPL).
Dense Non-aqueous Phase Liquid Recovery (Duke Engineering and Services, 1999)	1998 - 2000	Based on the results of the Focused RI, Site 88 was selected as a candidate for a surfactant enhanced aquifer remediation (SEAR) demonstration for DNAPL remediation. The presence of PCE DNAPL was confirmed, ranging from 16 to 20 feet bgs, directly beneath Building 25 and in an area adjacent to the north side of the building. The SEAR demonstration was conducted in the area north of Building 25 and DNAPL was extracted. Post-SEAR investigations indicated the DNAPL plume was removed from the upper, more permeable regions in the aquifer.
Long-term Monitoring (Baker, 2002)	1999 - 2002	LTM at Site 88 was implemented in April 1999 and discontinued in 2002 when an Amended RI was initiated.
Reductive Anaerobic Bioremediation In Situ Treatment Technology (Battelle Memorial Institute, 2001)	2000 - 2002	Reductive Anaerobic Bioremediation In Situ Treatment Technology treatability testing was performed to the northwest of Building 25 to investigate if "microbially-catalyzed reductive dechlorination of chloroethenes could be stimulated in situ". PCE-contaminated groundwater was pumped from 88-MW051W, amended with electron donor solution (butyric acid and yeast extract), and then injected into 88-MW051W, and groundwater samples were collected and analyzed over a period of 30 weeks. The study concluded that native microbial populations were capable of sequentially reducing PCE to ethene. Also, PCE and TCE concentrations were reduced to below detectable levels in almost all pilot study wells after 14 weeks and remained depressed throughout the remainder of the demonstration.
Supplemental Site Investigation (CH2M HILL, 2003)	2002 - 2003	The Supplemental Site Investigation (SSI) was conducted to determine the nature and extent of contamination and to provide recommendations for completing a comprehensive RI. Groundwater samples were collected and analyzed for VOCs, metals, and NAIPs. The analytical results indicated a general northwest migration of contaminants. Further, the vertical distribution of VOCs suggested that although appreciable volumes of DNAPL are observed to have accumulated upon the shallow silt layer, this layer was not impermeable, and was evidently allowing dissolved-phase VOCs to migrate vertically to the intermediate-depth aquifer zone.
Membrane Interface Probe Investigation (CH2M HILL, 2004)	2004	A membrane interface probe (MIP) investigation was conducted to refine previous source area characterization efforts and conduct vertical soil profiling in the vicinity of Building 25 and the nearby sewer systems. Information provided by the MIP investigation was used to evaluate the horizontal and vertical distribution of the DNAPL source area.
Engineering Evaluation/Cost Analysis and Non-time-critical Removal Action (CH2M HILL, 2004; AGVIQ/CH2M HILL, 2006)	2004 - 2006	An EE/CA for the source area beneath Building 25 was completed and presented at a public meeting in June 2004 and shallow soil mixing with clay zero-valent iron (ZVI) was the recommended technology. In 2005, the removal action was completed, treating approximately 7,050 cubic yards (yd ³) of impacted soil. Within the treatment area, PCE concentrations in the soil were reduced by greater than 99 percent. Despite the significant source area reduction, residual dissolved phase groundwater contamination remained over a large portion of the surrounding and downgradient areas.
Remedial Investigation (CH2M HILL, 2008)	2005 - 2008	An RI was completed to address previous data gaps and complete the source identification and delineation of the release. Field activities included monitoring well installation and groundwater sampling. Samples were analyzed for VOCs and NAIPs. Results indicated a delineated VOC plume in groundwater that extended south of the source area. Potential human health risks were identified from VOCs in groundwater. No unacceptable ecological risks were identified.

TABLE 5-1
Previous Investigations Summary, IRP Site 88

Previous Investigation/Action	Date	Activities
Treatability Study (CH2M HILL, 2011)	2010-2011	To evaluate effectiveness of remedial technologies to treat the VOC plume, a pilot study was conducted using ERD and in situ chemical oxidation (ISCO) for contaminant mass reduction and ERD as a biobarrier to prevent further downgradient contaminant migration. For mass reduction, ISCO was demonstrated to be most effective based on a VOC reduction of 87 percent, whereas for ERD, an appropriate dose would be cost-prohibitive. The ERD biobarrier achieved up to 97 percent PCE reduction and was effective. The results of the pilot study will be used for the development of remedial alternatives in the FS.
Draft Feasibility Study (CH2M HILL, 2012)	2011-2012	Remedial alternatives were evaluated to address VOCs in soil and groundwater in three zones. Zone 1 is defined as the location of the initial source area with high concentrations of VOC at shallow depths. Zones 2 and 3 are downgradient from Zone 1 and include constituent of concern (COC) concentrations at a wide range of depths covering a large footprint. Alternatives for Zone 1 soil included no action, LUCs, and excavation. Zone 1 groundwater alternatives included no action, vertical air sparging/soil vapor extraction (SVE), and vertical ISCO. Zone 2 alternatives for groundwater included no action, horizontal air sparging, and horizontal ISCO. Zone 3 groundwater alternatives included no action, monitored natural attenuation (MNA), and an ERD barrier. The current site CSM is shown on Figure 5-2.
Basewide Vapor Intrusion Evaluation (AGVIQ/ CH2M HILL, 2009, CH2M HILL, 2011, and CH2M HILL, 2014)	2007 - 2014	Site 88 was included in the phased Basewide vapor intrusion evaluation, conducted from 2007-2011, to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. Vapor intrusion was identified as a pathway of concern at 1 building and a VIMS was installed in 2012. VIMS were installed in three additional buildings in 2012 to reduce the possibility of future vapor migration and additional sampling was recommended at Building HP57 to assess temporal variability. Additional sampling was conducted at Building HP57 and Buildings 37A (identified based on exceedances of groundwater in the vicinity) in 2013. Based on the results, NFA is recommended for Building 37A and periodic monitoring is recommended at Building HP57. Additionally, if new buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.


5.1.1.1 Future Activities

A Draft FS was submitted in 2012. A tracer study and additional groundwater and soil investigation will be initiated in FY 2015 to support finalizing the FS. The finalized FS, proposed plan, and ROD will follow (**Schedule 5-1**). If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the geographic information system (GIS), and all construction projects on-Base go through environmental review.

**Schedule 5-1
IRP Site 88
FY 2015 Site Management Plan**

ID	Task Name	Duration	Start	2015												2016												2017												
				Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug
1	FS	466 days	Fri 8/1/14	[Solid black bar from Aug 2015 to Jun 2016]																																				
2	Tracer Study	347 days	Fri 8/1/14	[Blue hatched bar from Aug 2015 to Nov 2015]																																				
3	Draft Final FS	60 days	Tue 12/1/15	[Blue hatched bar from Dec 2015 to Jan 2016]																																				
4	Review Period	45 days	Tue 2/23/16	[Blue hatched bar from Feb 2016 to Mar 2016]																																				
5	Final FS	14 days	Tue 4/26/16	[Blue hatched bar from Apr 2016 to May 2016]																																				
6	Proposed Plan	123 days	Mon 5/16/16	[Solid black bar from May 2016 to Jun 2016]																																				
7	Draft Proposed Plan	45 days	Mon 5/16/16	[Blue hatched bar from May 2016 to Jun 2016]																																				
8	Review Period	45 days	Mon 7/18/16	[Blue hatched bar from Jul 2016 to Aug 2016]																																				
9	Final Proposed Plan	10 days	Mon 9/19/16	[Blue hatched bar from Sep 2016 to Oct 2016]																																				
10	Public Meeting/Review Period	23 days	Mon 10/3/16	[Blue hatched bar from Oct 2016 to Nov 2016]																																				
11	ROD	119 days	Thu 11/3/16	[Solid black bar from Nov 2016 to Feb 2017]																																				
12	Draft ROD	60 days	Thu 11/3/16	[Blue hatched bar from Nov 2016 to Dec 2016]																																				
13	Review Period	45 days	Thu 1/26/17	[Blue hatched bar from Jan 2017 to Feb 2017]																																				
14	Final ROD	14 days	Thu 3/30/17	[Blue hatched bar from Mar 2017 to Apr 2017]																																				
15	RD	150 days	Wed 4/19/17	[Solid black bar from Apr 2017 to Jun 2017]																																				
16	Draft RD	75 days	Wed 4/19/17	[Blue hatched bar from Apr 2017 to May 2017]																																				
17	Review Period	45 days	Wed 8/2/17	[Blue hatched bar from Aug 2017 to Sep 2017]																																				
18	Final RD	30 days	Wed 10/4/17	[Blue hatched bar from Oct 2017 to Nov 2017]																																				

FIGURE 5-2
Site 88 Conceptual Site Model

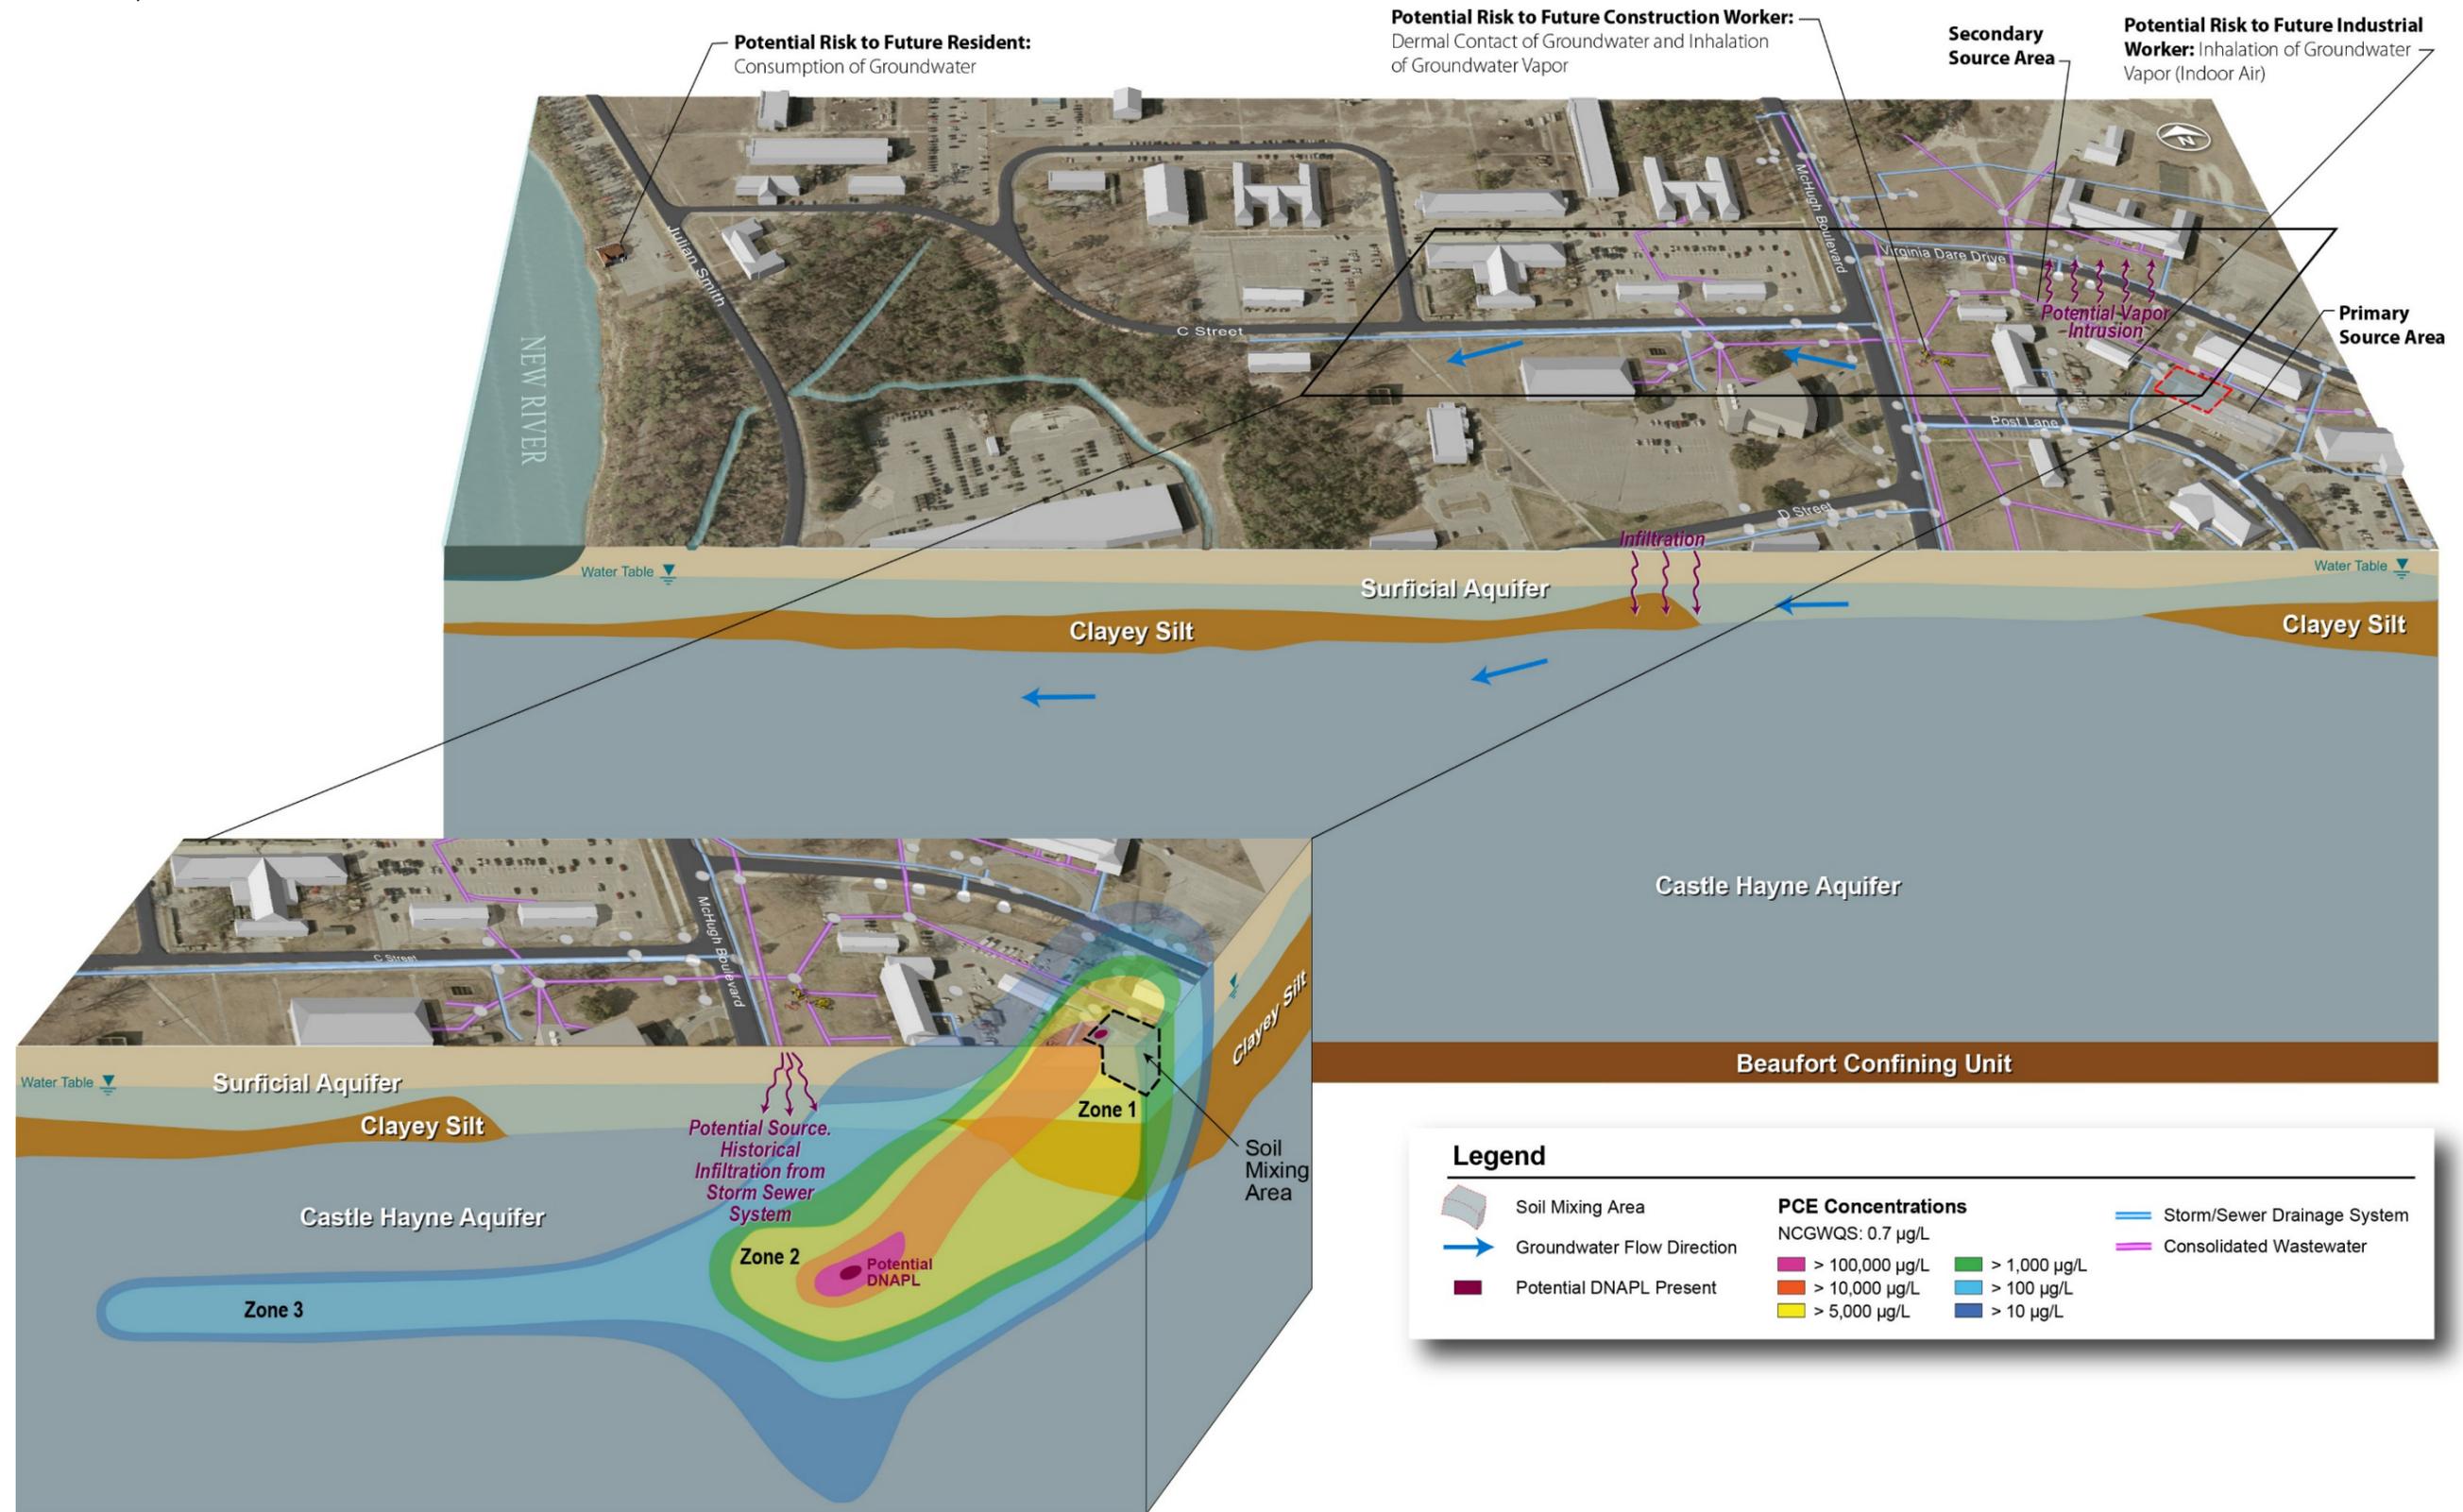


This page intentionally left blank.

5.1.2 Site 96 (OU 22)—Building 1817 UST

Site 96, previously Solid Waste Management Unit (SWMU) 360, encompasses approximately 14 acres in the Mainside HPIA between Connector Road and McHugh Boulevard (**Figure 5-3**). Site 96 is the site of a former 300-gallon waste-oil UST positioned near Building 1817. Building 1817 is a Hazardous Materials Consolidation Center. The former UST was located in the eastern portion of the compound, which is currently used as a temporary staging area for batteries, refrigeration units, and other used equipment prior to disposal and or reutilization.

FIGURE 5-3
IRP Site 96, OU 22

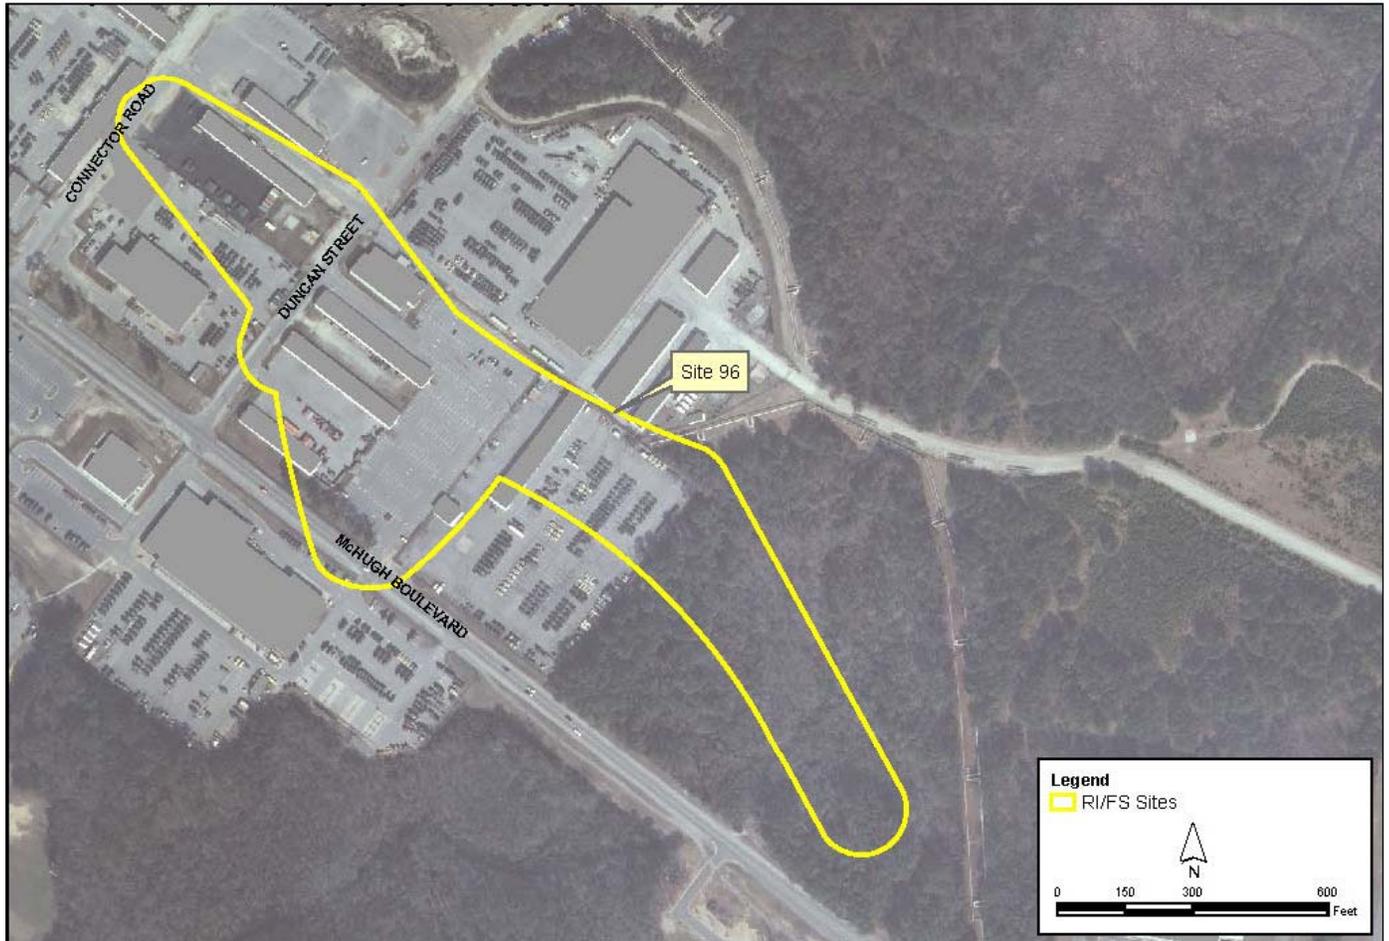

Previous investigations are listed in **Table 5-2**.

TABLE 5-2
Previous Investigations Summary, IRP Site 96

Previous Investigation/Action	Date	Activities
UST Removal and Investigations (Catlin, 1997)	1997	The 300-gallon waste oil UST was removed in July 1997, and confirmatory samples were collected under the UST program. Additional sampling was completed in December 1997, indicating a petroleum release had occurred at the UST. A Limited Site Assessment was also conducted under the UST program, which included installing monitoring well 1817MW01 within the former UST excavation. Upon discovery of elevated concentrations of chlorinated compounds in groundwater, the site was removed from the UST program and included in the Confirmatory Site Investigation (CSI) under the Resource Conservation and Recovery Act (RCRA).
Confirmatory Site Investigation (Baker, 2005)	2002 - 2005	The CSI included soil and groundwater sampling for VOCs, SVOCs, pesticides, and RCRA metals analyses. The CSI identified VOCs, SVOCs, and pesticides in groundwater that exceeded screening criteria.

TABLE 5-2
Previous Investigations Summary, IRP Site 96

Previous Investigation/Action	Date	Activities
Resource Conservation and Recovery Act Facility Investigation (RFI) (Baker and CH2M HILL, 2005) and Amended RFI (CH2M HILL, 2006)	2005 - 2006	The RFI included soil and groundwater sampling for VOCs, pesticides, and RCRA metals analysis. A chlorinated volatile organic compound (CVOC) plume was identified in groundwater. Potential unacceptable human health risks to future residents were identified from exposure to tetrachloroethene (PCE), trichloroethene (TCE), and heptachlor epoxide in groundwater.
Corrective Measures Study (CH2M HILL, 2007)	2007	A Corrective Measures Study (CMS) was conducted to develop RGOs for the site and to evaluate management options for groundwater at SWMU 360. The corrective measures evaluated were enhanced reductive dechlorination (ERD), air sparging, and ISCO.
Additional Groundwater Delineation (Osage, 2009)	2007 - 2009	The downgradient and vertical extent of the CVOC plume was not fully delineated and additional groundwater samples were collected for analysis of PCE and its daughter products. As a result, the vertical extent of contamination was delineated but the plume extends horizontally more than 1,800 feet southeast from the source area and is not fully delineated to NCGWQS. Because the contamination is not associated with the former UST, the SWMU was transferred to the IRP to complete the delineation under an RI/FS.
Basewide Vapor Intrusion Evaluation (AGVIQ/, CH2M HILL, 2009, CH2M HILL, 2011, and CH2M HILL, 2014)	2007 - 2014	Site 96 was included in the phased Basewide vapor intrusion evaluation, conducted from 2007-2011, to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. Groundwater, soil gas, and air samples were collected from Building 1817 and subslab soil gas samples were collected from Buildings 1827 and 1828 which are located within the Site 96 boundary southwest of Building 1817. Although significant vapor intrusion impacts were not expected, additional sampling was recommended at Buildings 1827 and 1828 to assess temporal and spatial variability. Based on results of the phased investigations and monitoring reports, NFA was recommended for Buildings 1817 and 1827 and periodic monitoring was recommended at Building 1828. Additionally, if new buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.

5.1.2.1 Future Activities

An RI/FS is planned in FY 2015/2016, followed by a Proposed Plan and ROD (**Schedule 5-2**). If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS and all construction projects on-Base go through environmental review.

**Schedule 5-2
IRP Site 96
FY 2015 Site Management Plan
MCIEAST-MCB CAMLEJ**


ID	Task Name	Duration	Start	Finish	2015												2016												2017											
					Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct
1	RI/FS	413 days	Fri 11/21/14	Tue 6/21/16	[Gantt bar for RI/FS from 11/21/14 to 6/21/16]																																			
2	Draft RI UFP-SAP	93 days	Fri 11/21/14	Tue 3/31/15	[Gantt bar for Draft RI UFP-SAP from 11/21/14 to 3/31/15]																																			
3	Review Period	45 days	Wed 4/1/15	Tue 6/2/15	[Gantt bar for Review Period from 4/1/15 to 6/2/15]																																			
4	Final RI UFP-SAP	10 days	Wed 6/3/15	Tue 6/16/15	[Gantt bar for Final RI UFP-SAP from 6/3/15 to 6/16/15]																																			
5	Field Activities/Data Evaluation	120 days	Wed 6/17/15	Tue 12/1/15	[Gantt bar for Field Activities/Data Evaluation from 6/17/15 to 12/1/15]																																			
6	Draft RI/FS Report	90 days	Wed 12/2/15	Tue 4/5/16	[Gantt bar for Draft RI/FS Report from 12/2/15 to 4/5/16]																																			
7	Review Period	45 days	Wed 4/6/16	Tue 6/7/16	[Gantt bar for Review Period from 4/6/16 to 6/7/16]																																			
8	Final RI/FS Report	10 days	Wed 6/8/16	Tue 6/21/16	[Gantt bar for Final RI/FS Report from 6/8/16 to 6/21/16]																																			
9	Proposed Plan	119 days	Wed 6/8/16	Mon 11/21/16	[Gantt bar for Proposed Plan from 6/8/16 to 11/21/16]																																			
10	Draft Proposed Plan	40 days	Wed 6/8/16	Tue 8/2/16	[Gantt bar for Draft Proposed Plan from 6/8/16 to 8/2/16]																																			
11	Review Period	45 days	Wed 8/3/16	Tue 10/4/16	[Gantt bar for Review Period from 8/3/16 to 10/4/16]																																			
12	Final Proposed Plan	10 days	Wed 10/5/16	Tue 10/18/16	[Gantt bar for Final Proposed Plan from 10/5/16 to 10/18/16]																																			
13	Public Meeting/Review Period	24 days	Wed 10/19/16	Mon 11/21/16	[Gantt bar for Public Meeting/Review Period from 10/19/16 to 11/21/16]																																			
14	ROD	135 days	Wed 10/5/16	Tue 4/11/17	[Gantt bar for ROD from 10/5/16 to 4/11/17]																																			
15	Draft ROD	60 days	Wed 10/5/16	Tue 12/27/16	[Gantt bar for Draft ROD from 10/5/16 to 12/27/16]																																			
16	Review Period	45 days	Wed 12/28/16	Tue 2/28/17	[Gantt bar for Review Period from 12/28/16 to 2/28/17]																																			
17	Final ROD	30 days	Wed 3/1/17	Tue 4/11/17	[Gantt bar for Final ROD from 3/1/17 to 4/11/17]																																			

5.2 MMRP RI/FS Sites

5.2.1 UXO-06 (OU 24)—Fortified Beach Assault Area (ASR #2.65)

Site UXO-06, the Fortified Beach Assault Area, encompasses approximately 177 acres in the Mainside of MCIEAST-MCB CAMLEJ, south of McHugh Boulevard and west of Sneads Ferry Road (**Figure 5-4**). This range was reportedly in use from 1953 until approximately 1977. The types of munitions used onsite include blank small arms, demolitions, flame throwers, 3.5-inch practice rockets, practice rifle grenades, and smoke and white phosphorus hand grenades. In addition, solvents and solutions were used at the site to clean equipment. The east central portion of Site UXO-06 has been investigated and cleared and is being used as a borrow pit to support construction projects across the Base.

FIGURE 5-4
MMRP Site UXO-06 (OU 24), ASR #2.65

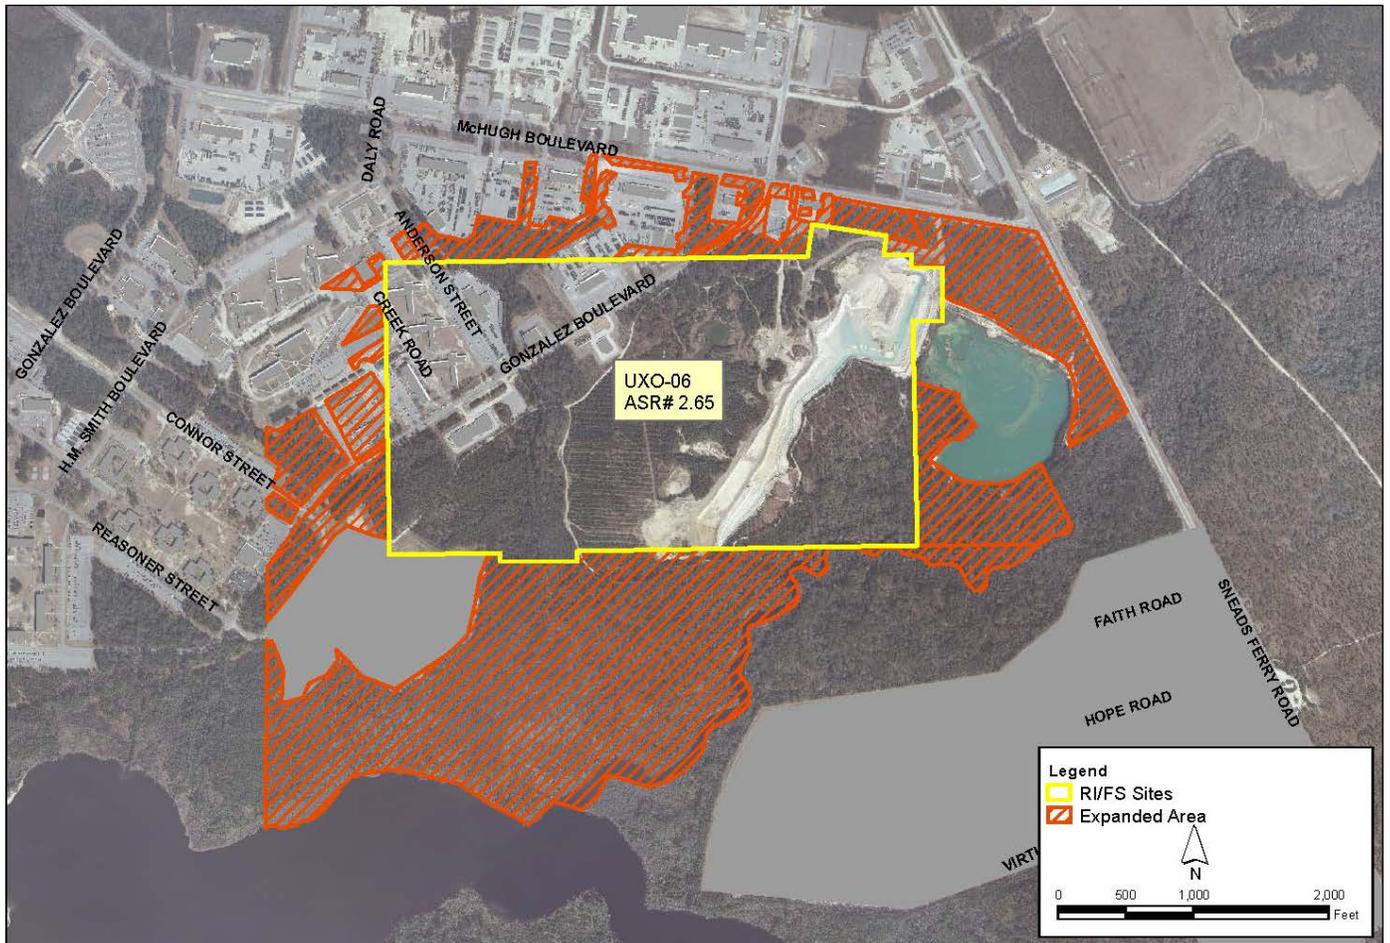

Previous investigations are listed in **Table 5-3**.

TABLE 5-3
Previous Investigations Summary, MMRP Site UXO-06 (OU 24), ASR #2.65

Previous Investigation/Action	Date	Activities
Focused Site Investigation (CH2M HILL, 2007; 2008)	2006 - 2008	In support of MILCON activities for an armory and extended parking area, soil and groundwater sampling, and 100 percent DGM were conducted in a 4-acre area at UXO 6. Samples were analyzed for VOCs, SVOCs, pesticides/PCBs, explosives, perchlorate, TPH, and metals. No unacceptable human health or ecological risks were identified in site media. The 1,368 anomalies that were identified during DGM were investigated and removed prior to MILCON activities. Several MEC items were discovered and removed including a practice rocket, colored smoke hand grenade, and hand signal flare. Because it is not possible to provide 100 percent assurance that all MEC items have been removed from the site, "3R" (Recognize, Retreat, Report) training was provided for protection of construction workers.
Focused Preliminary Assessment/Site Investigation (Arcadis, 2007)	2007	To evaluate the presence of UXO and impacted soil or groundwater within a proposed sewer line easement, the Onslow Water and Sewer Authority initiated a Focused PA/SI at UXO-06. Field activities included soil and groundwater sampling and DGM. Samples were analyzed for VOCs, SVOCs, TPH, explosives, perchlorate, and metals. No unacceptable risks to construction workers were identified in site media. 790 geophysical anomalies that were identified during DGM were investigated and were removed. All anomalies with the exception of two practice 3.5-inch rockets and one expended smoke rifle grenade were construction/cultural debris.
Preliminary Assessment/Site Investigation (CH2M HILL, 2012)	2008 - 2012	A sitewide field investigation was conducted to identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC. Field activities included soil, groundwater, surface water, and sediment sampling; and 10 percent DGM and intrusive anomaly investigation. The samples were analyzed for VOCs, SVOCs, pesticides, explosives, TPH, perchlorate, and metals and no unacceptable human health or ecological risks were identified from exposure to environmental media. MPPEH was found on the ground surface and in burial pits and there is potential for MEC/MPPEH to remain in the surface and subsurface at the site. An RI was recommended to further evaluate the potential for subsurface MEC in uninvestigated and undeveloped areas within the site and along the site boundaries.
Focused Site Investigation (CH2M HILL, 2010, 2011, 2012)	2010 - 2012	A Focused SI was conducted at the UXO-06 Borrow Pit Expansion Area in a phased approach. Field activities included 100 percent DGM and intrusive investigations. A total of 10,250 geophysical anomalies were investigated, 15 MEC items were identified and destroyed through controlled detonations, and over 2,000 MPPEH items were identified. Based on the clearance activities, the borrow pit was recommended to be opened for excavation in January 2012. The intrusive investigation significantly reduced the risk of encountering subsurface MEC. However, because it is not possible to provide 100 percent assurance that all MEC items have been removed from the site, "3R" (Recognize, Retreat, and Report) training was recommended for protection of site operators. On-call support from Base EOD or a qualified UXO contractor for inspection and disposal of suspected MEC that may be unearthed was also recommended.
Draft Remedial Investigation (CH2M HILL, 2014)	2012-2014	An RI was conducted to further evaluate the nature and extent of subsurface MEC in uninvestigated and undeveloped areas within the site and in areas adjacent to UXO-06 boundaries. Field activities included DGM, an intrusive investigation, and post-detonation soil sampling. Approximately 3,300 anomalies and 190 MPPEH items were discovered. MPPEH was demilitarized onsite and classified as MDAS. Post-detonation soil sampling results did not indicate any unacceptable human health or ecological risks due to exposure to soil within the area of the controlled detonation. Human health risk assessment (HHRAs) and ecological risk assessments (ERAs) previously conducted at UXO-06 were reviewed and updated for the RI. There were no impacts to environmental media from MEC/MPPEH and no unacceptable risks to human or ecological receptors identified from exposure to MC in site media. The RI will be finalized in FY 2015.

5.2.1.1 Future Activities

The RI will be finalized in FY 2015 followed by an FS in FY 2015 and a Proposed Plan, ROD, and RD. (**Schedule 5-3**).

**Schedule 5-3
MMRP Site UXO-06 ASR# 2.65
FY 2015 Site Management Plan**


ID	Task Name	Duration	Start	2015												2016												2017														
				Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul		Aug	Sep	Oct	Nov	Dec	Jan								
1	RI	161 days	Thu 8/7/14	▶																																						
2	Draft RI Report	62 days	Thu 8/7/14	■			▶																																			
3	Review Period	45 days	Mon 12/29/14												■			▶																								
4	Final RI Report	14 days	Mon 3/2/15												■		▶																									
5	FS	130 days	Fri 3/20/15	▶																																						
6	Draft FS	71 days	Fri 3/20/15												■			▶																								
7	Review Period	45 days	Mon 6/29/15												■			▶																								
8	Final FS Report	14 days	Mon 8/31/15												■		▶																									
9	Proposed Plan	123 days	Fri 9/18/15	▶																																						
10	Draft Proposed Plan	40 days	Fri 9/18/15												■			▶																								
11	Review Period	45 days	Fri 11/13/15												■			▶																								
12	Final Proposed Plan	14 days	Fri 1/15/16												■		▶																									
13	Public Meeting/Review Period	24 days	Thu 2/4/16												■			▶																								
14	ROD	119 days	Fri 1/15/16	▶																																						
15	Draft ROD	60 days	Fri 1/15/16												■			▶																								
16	Review Period	45 days	Fri 4/8/16												■			▶																								
17	Final ROD	14 days	Fri 6/10/16												■		▶																									
18	RD	119 days	Thu 6/30/16	▶																																						
19	Draft RD	60 days	Thu 6/30/16												■			▶																								
20	Review Period	45 days	Thu 9/22/16												■			▶																								
21	Final RD	14 days	Thu 11/24/16												■		▶																									

5.2.2 UXO-23—D-9 Skeet Range (ASR #2.82)

The D-9 Skeet Range is located west of Holcomb Boulevard and north of Parachute Tower Road and encompasses approximately 187 acres (**Figure 5-5**). The D-9 Skeet Range was used for recreational shooting from 1953 until it was closed in July 2011. The range was one of four live-fire ranges within a training area known as Area D. The weapons historically accommodated included 12-, 16-, 20-, 28-, and 410-gauge shotguns and sizes of lead shot used on the range included 7.5 mm, 8 mm, 8.5 mm, and 9 mm. Although the total amounts of ammunition used on the skeet ranges are not available, it is estimated that several hundred thousand rounds were fired each year.

Currently, the Wallace Creek MILCON project covers approximately 100 acres north of Hadnot Point and south of Wallace Creek and includes the theoretical shot fall-zone of the D-9 Skeet Range. Planned and ongoing construction consists of barracks support buildings (such as the mess hall and fitness center) and parking areas.

FIGURE 5-5
MMRP Site UXO-23, ASR #2.82

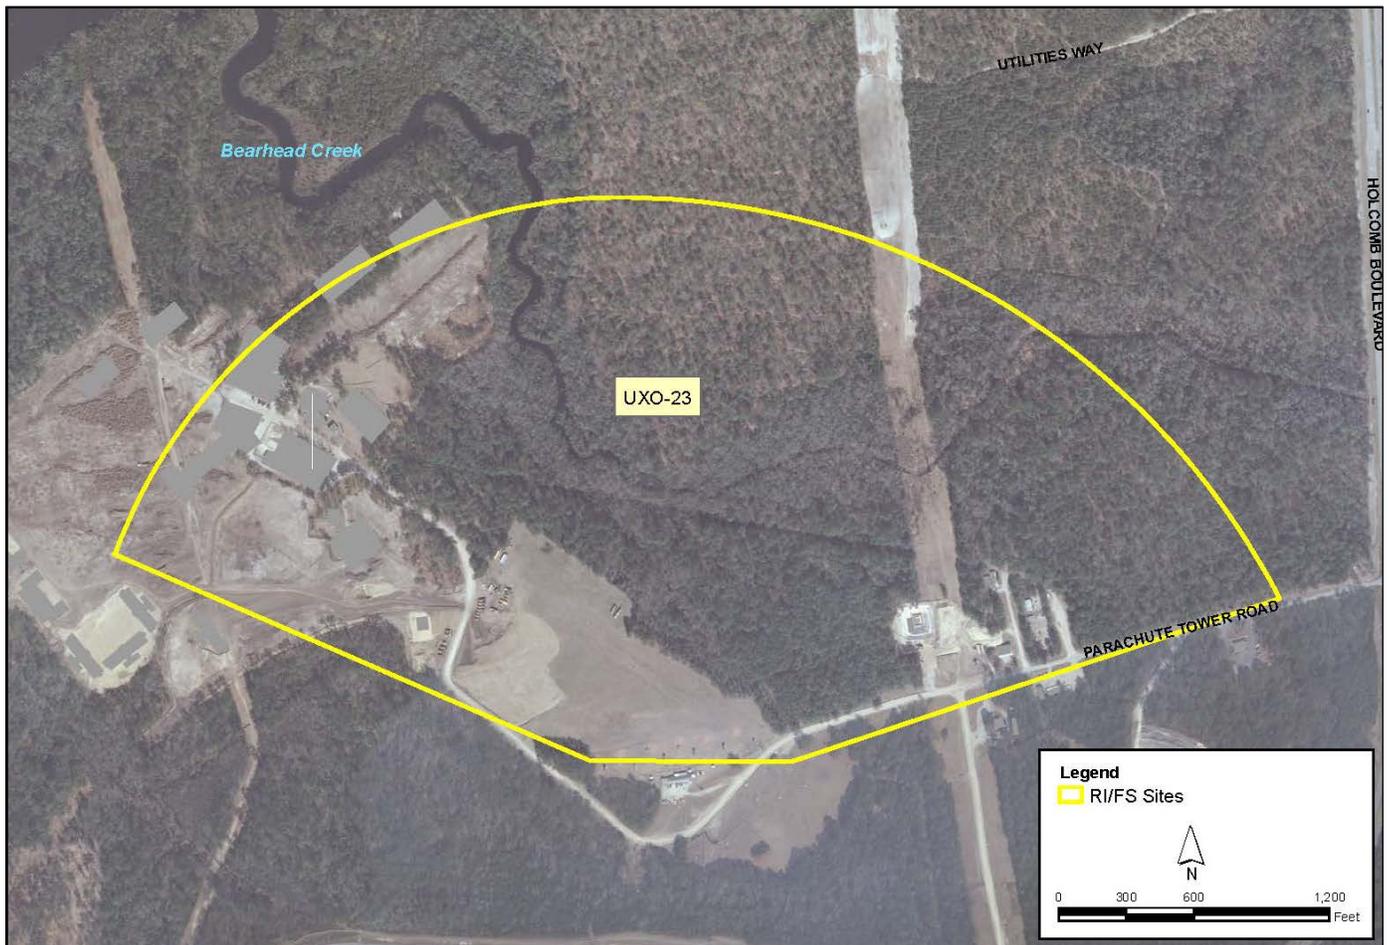

Previous investigations are listed in **Table 5-4**.

TABLE 5-4
Previous Investigations Summary, MMRP Site UXO-23, ASR #2.82

Previous Investigation/Action	Date	Activities
Focused Site Investigation (CH2M HILL, 2008)	2007 - 2008	A field investigation was conducted to evaluate the distribution of lead within the area south of Bearhead Creek. Surficial soil samples were field screened using X-ray fluorescence (XRF) to identify potential lead impacts. Soil and groundwater samples were also collected and analyzed for lead to confirm the XRF results. The highest concentrations of lead were generally found to correspond with the theoretical shot fall-zone for the range. Additional sampling of surface soils and groundwater and an HHRA was recommended.

TABLE 5-4
Previous Investigations Summary, MMRP Site UXO-23, ASR #2.82

Previous Investigation/Action	Date	Activities
Focused Preliminary Assessment/Site Investigation (CH2M HILL, 2010)	2008 - 2010	The Focused PA/SI was conducted to evaluate potential impacts to human health and the environment in the area north of Bearhead Creek. Soil, groundwater, surface water, and sediment samples were collected and were analyzed for perchlorate, polycyclic aromatic hydrocarbons (PAHs), and metals. Potential human health risks to future residents from PAHs in groundwater north of Bearhead Creek and potential ecological risks from metals and PAHs in Bearhead Creek were identified.
Wallace Creek Expanded Site Investigation (CH2M HILL, 2010)	2009 - 2010	Additional soil sampling was conducted in the theoretical shot fall-zone to delineate the horizontal and vertical extents of lead impacts and to investigate potential impacts to drainage features that convey surface water runoff from the theoretical shot fall-zone. A HHRS and an ERS were performed on the data collected to-date. In the north area, potential risks have been identified from PAHs in groundwater, metals and PAHs in surface water, and sediment within Bearhead Creek and associated wetlands and drainages. In the southern area of the Skeet Range, outside of the shot fall-zone, no unacceptable risks were identified in soil and groundwater. In the vicinity of the theoretical shot fall-zone, potential unacceptable risks to human health and the environment were identified from exposure to lead and PAHs in surface soil, and a removal action was recommended once the Skeet Range is closed.
Draft Engineering Evaluation/Cost Analysis (CH2M HILL, 2010)	2010	The EE/CA evaluated alternatives for the NTCRA to address potential unacceptable risks from lead and PAHs in the shot fall-zone. The alternatives were no action, excavation with offsite disposal, excavation with particle separation and backfill, excavation with stabilization and offsite disposal, and In situ stabilization.
Environmental Update (CH2M HILL, 2011)	2011	After submission of the Draft EE/CA, several MILCON projects were planned/initiated adjacent to the NTCRA area and additional investigation was conducted in 2011. Additional soil sampling for lead and PAH analysis was conducted in the theoretical shot fall zone to verify and update the NTCRA removal area. Lead concentrations exceeded the cleanup level at three soil sample locations within the proposed NTCRA area. Soil samples were also screened using a XRF analyzer and three surface soil samples contained lead concentrations in exceedance of the cleanup level. The proposed NTCRA area was modified based on these results.
Engineering Evaluation/Cost Analysis (CH2M HILL, 2012)	2011 – 2012	The EE/CA evaluating alternatives for the NTCRA to address potential unacceptable risks from lead and PAHs in the theoretical shot fall zone was updated with the modified NTCRA area based on the Environmental Update.
Action Memorandum (CH2M HILL, 2012)	2012	An AM was completed to propose in situ stabilization followed by excavation and offsite disposal as the NTCRA to address lead and PAHs in soil.
Wallace Creek Bachelor Enlisted Quarters Confirmation Sampling (CH2M HILL, 2012)	2012	In support of MILCON activities for a Bachelor Enlisted Quarters (BEQ) facility located northwest of the theoretical shot fall zone, soil and groundwater sampling was conducted to evaluate whether environmental impacts related to historical activities could pose unacceptable risks to construction workers and future residents. The samples were analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. There were no unacceptable risks for human and ecological receptors at the proposed BEQ location. Therefore, MILCON activities were recommended to proceed as planned.
Non-time-critical Removal Action Construction Completion Report (Osage, 2013)	2012-2013	The NTCRA was initiated to treat and remove lead and PAH contaminated soil in the theoretical shot fall zone and three drainages connected to the southern portion of the shot fall zone. Approximately 52,000 tons of contaminated soil were removed. During the NTCRA activities, nine munitions-related items, including 81mm practice mortars, were identified. Because PAH and lead concentrations in exceedance of screening criteria were identified at greater depths than expected, the NTCRA was placed on hold until the contaminated soil could be vertically delineated. The contaminated soil was covered with a geotextile liner and 1 foot of clean fill.
Non-time-critical Removal Action Technical Memorandum (CH2M HILL, 2014)	2014	In support of the remaining NTCRA area, soil samples were collected to vertically delineate PAH and lead contaminated soil. Depths to soil with concentrations below the action levels ranged from 2 to 6.5 feet bgs. Based on these results, the estimated volume of impacted soils remaining in the NTCRA area beneath the geotextile fabric was calculated to be approximately 7,000 yd ³ .

5.2.2.1 Future Activities

The removal of the remaining PAH and lead-impacted soil is projected for completion in FY 2015. The RI will be completed in FY 2015/2016 followed by an FS, Proposed Plan, ROD, and RD (Schedule 5-4).

Descriptions of Proposed Plan and ROD Sites


The following sections discuss the site history, summary of previous investigations, and future activities of the one IRP site and one MMRP site that are in the Proposed Plan and ROD phase of the CERCLA process. Because these sites are currently under investigation, the site boundaries encompass the current nature and extent of contamination.

6.1 IRP Proposed Plan/ROD Sites

6.1.1 Site 86 (OU 20)—Tank Area AS419-AS421 at MCAS

Site 86, Tank Area AS419-AS421, is located within the operations area of MCAS New River and covers approximately 146 acres (**Figure 6-1**). From 1954 to 1988, Site 86 served as a storage area for petroleum products. In 1954, three 25,000-gallon ASTs were installed within an earthen berm. The three tanks were reportedly used for No. 6 fuel oil storage until 1979. From 1979 to 1988, the tanks were used for temporary storage of waste oil. The three tanks were emptied in 1988 and were removed in 1992. Today, the former location of the tanks is grass-covered and only a slight depression remains. In 2006, an RFI was completed for SWMU 303/318 (located south of Site 86) and identified CVOCs in groundwater from an undetermined source. Based on these results, the IRP Partnering Team agreed that Site 86 would be expanded to include the SWMU area.

FIGURE 6-1
IRP Site 86, OU 20

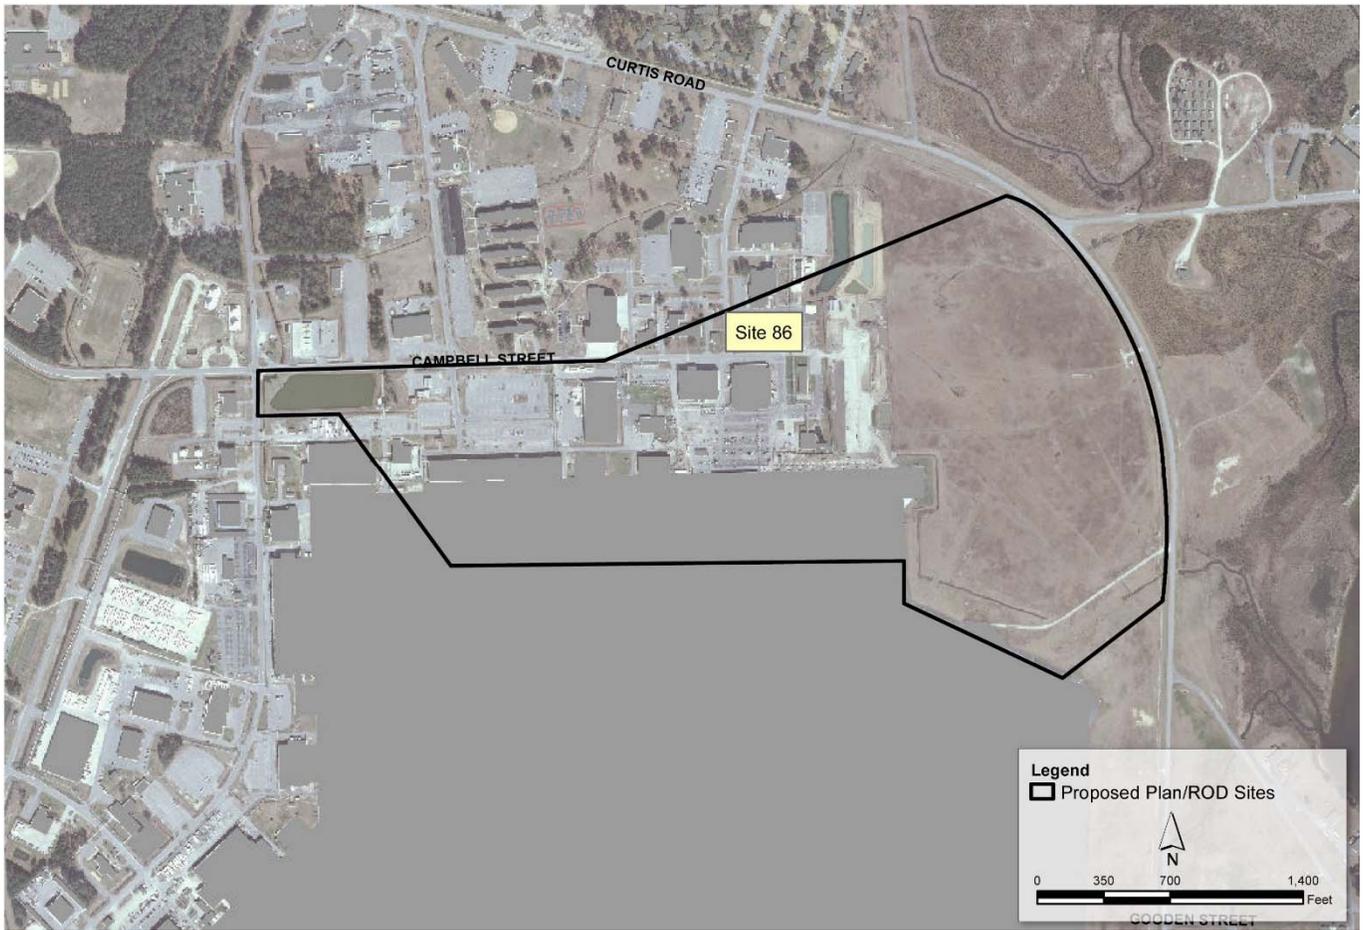

Previous investigations are listed in **Table 6-1**.

TABLE 6-1
Previous Investigations Summary, IRP Site 86

Previous Investigation/Action	Date	Activities
Preliminary Site Investigation (ESE, 1990)	1990	A Preliminary Site Investigation was initiated to determine the presence or absence of contamination based on the site's history. Soil samples were collected and analyzed for VOCs and TPH. The results revealed limited TPH contamination and low-level detections of VOCs, likely attributable to localized surface spills.
UST Assessment (O'Brien & Gere, 1992)	1992	Soil and groundwater sampling was conducted to determine the nature and extent of contamination as a result of three onsite ASTs used for temporary storage of waste petroleum products. Results revealed TPH contamination in soil and identified VOCs in groundwater. Due to the lack of significant petroleum-related impacts and the discovery of chlorinated solvent contamination in groundwater, UST-AS419-21 (original Site 86) was transferred from the UST Program to the IRP in April 1994. Further investigation and remediation of groundwater were recommended.
Remedial Investigation (Baker, 1996)	1995 - 1996	A soil and groundwater investigation was conducted to analyze the nature and extent of contamination. Samples were analyzed for VOCs, SVOCs, metals, and TPH. Soil results indicated localized VOC and metals contamination in samples collected within and immediately adjacent to the former AST area and wide-spread, low-level SVOC contamination (primarily PAHs). Groundwater analytical results indicated the presence of VOC contamination limited to the surficial aquifer in the central and southeastern portion of the site. Although VOCs were not present in the Castle Hayne aquifer, the VOCs appeared to have migrated vertically to the lower portion of the surficial aquifer and were migrating horizontally in the general direction of groundwater flow.
Post-Remedial Investigation Fieldwork (Baker, 2000)	1997 - 2000	To delineate the vertical and horizontal extent of the VOC contamination and to collect additional data to determine the appropriate remedial alternative, post-RI field work was implemented. Soil and groundwater samples were collected for VOCs and NAIPs. A large plume was identified, extending east-northeast from Site 86, and a much smaller plume was identified to the southwest, near a former wash rack area. The plumes were not fully delineated.
Long-term Monitoring	1998 - 2005	Groundwater LTM was conducted for VOCs, NAIPs, and metals at Site 86 to assess whether contamination remained present, had migrated, or was degrading through natural processes. In 2005, the site was removed from the LTM program, as other ongoing investigations and studies were being conducted.
Amended Remedial Investigation (CH2M HILL, Baker, and CDM, 2003)	2001 - 2003	Based on the findings of post-RI monitoring, an Amended RI was conducted in order to further delineate the nature and extent of contamination. Soil and groundwater samples were collected and analyzed for VOCs. Potential human health risks were identified from VOCs in groundwater. No unacceptable ecological risks were identified.
Air/Ozone Sparging Pilot Study (AGVIQ/CH2M HILL, 2006)	2004 - 2006	The Technology Evaluation Report and Pilot Study Work Plan were completed in 2004, which recommended injection of ozone through a horizontal well. The pilot study was conducted from 2005 to 2006 for the main TCE groundwater plume at the site. The report concluded that TCE concentrations were reduced by 99 percent in groundwater.
Expanded Supplemental Remedial Investigation (CH2M HILL, 2011)	2007 – 2011	The Supplemental Remedial Investigation (SRI) was conducted to identify the potential source of VOCs, characterize the nature and extent of contamination east of the flight line, and assess potential risk to human health and the environment. Soil, groundwater, sediment, and surface water samples were collected and analyzed for VOCs, SVOCs, pesticides, and metals. Potential human health risks were identified based on future exposure to chromium in soil and VOCs and chromium in groundwater. An FS was recommended to evaluate remedial alternatives.

TABLE 6-1
Previous Investigations Summary, IRP Site 86

Previous Investigation/Action	Date	Activities
Pilot Study (CH2M HILL, 2013)	2011 – 2012	To evaluate effectiveness of technologies to treat the VOC plume, a pilot study was conducted in two separate zones at Site 86. ERD with bioaugmentation was conducted in Zone 1 and ISCO using slow-release permanganate candles was conducted in Zone 2. Follow-up monitoring indicates that in Zone 1, the TCE mass was decreased by 93 percent and the VOC mass was reduced by 81 percent. In Zone 2, initial VOC concentrations were reduced by 81 percent and subsequent monitoring results were variable. The results of the pilot study were used for the development of remedial alternatives in the FS.
Feasibility Study (CH2M HILL, 2013)	2012-2013	Remedial alternatives were developed and evaluated to address VOCs in groundwater. The five alternatives were no action, MNA and LUCs, air sparging with MNA and LUCs, ISCO with MNA and LUCs, and ERD with MNA and LUCs.
Proposed Remedial Action Plan (CH2M HILL, 2014) and Record of Decision (CH2M HILL, 2014)	2014	A Proposed Remedial Action Plan (PRAP) was issued in January 2014 to solicit public input on the preferred alternative (MNA and LUCs) and a public meeting was held in February 2014. General comments were addressed during the public meeting and no written comments were received. The ROD was signed on October 29, 2014. The current site CSM is shown on Figure 6-2 .
Remedial Design (CH2M HILL, 2014) and Draft Interim Remedial Action Completion Report (IRACR) (CH2M HILL, 2014)	2014	The RD presents the design of the remedy as specified by the ROD, including MNA and LUCs. In FY 2015, LTM will be initiated and LUCs for aquifer use control and industrial and non-industrial use control for groundwater and vapor intrusion will be implemented.


6.1.1.1 Future Activities

The IRACR will be finalized in FY 2015 (**Schedule 6-1**). If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS and all construction projects on-Base go through environmental review.

**Schedule 6-1
IRP Site 86
FY 2015 Site Management Plan**

ID	Task Name	Duration	Start	Finish	
1	RA	60 days	Mon 4/13/15	Fri 7/3/15	
2	LUCs	30 days	Mon 4/13/15	Fri 5/22/15	
3	Initiate MNA/Well Installation	30 days	Mon 4/13/15	Fri 5/22/15	
4	Final IRACR	30 days	Mon 5/25/15	Fri 7/3/15	

FIGURE 6-2
Site 86 Conceptual Site Model

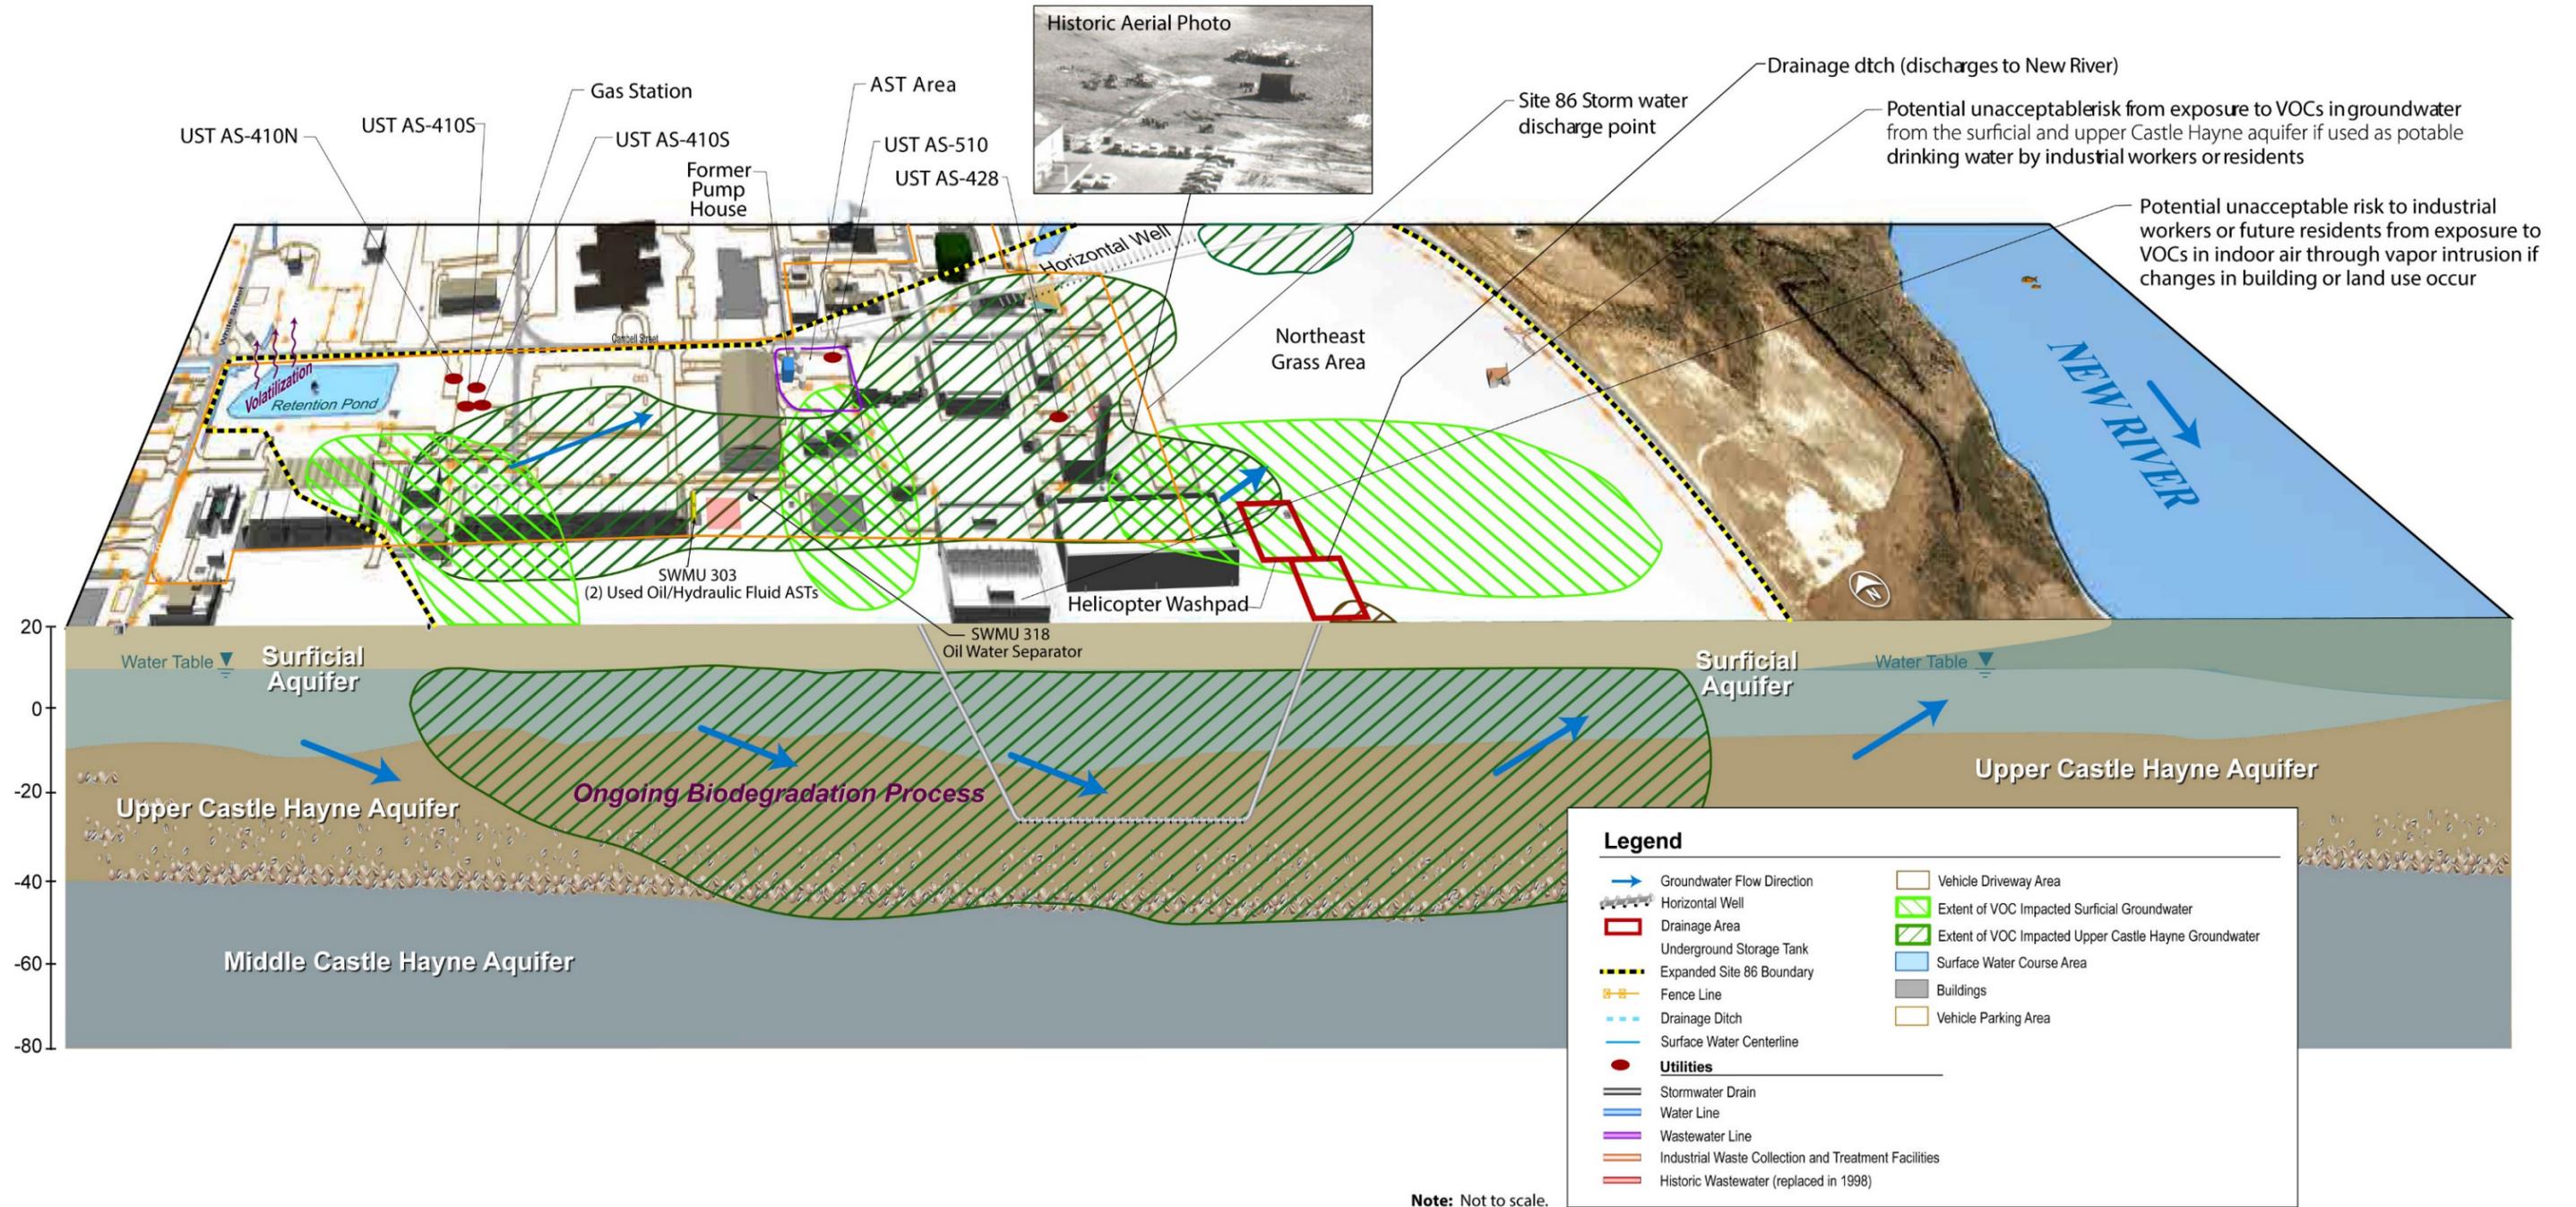


This page intentionally left blank.

6.2 MMRP Proposed Plan/ROD Sites

6.2.1 UXO-19 (OU 25)—M-4, Rifle Grenade Range (ASR #2.104), K-22 Practice Hand Grenade Course (ASR #2.111), and M115 Hand Grenade Course (ASR #2.168)

Site UXO-19 is located within the Camp Devil Dog training area. The site initially covered approximately 80 acres; however, a 22-acre area in the eastern portion of the initial site boundary is currently active and used as a Military Operations in Urban Terrain training facility. The current Site UXO-19 boundary, excluding the training facility, covers approximately 64 acres, as shown on **Figure 6-3**. There are eight overlapping ranges within UXO-19 boundaries, three of which were identified for closure under the MMRP. The M-4 Rifle Grenade Range (ASR #2.104) was used between 1950 and 1960. Reported munitions used were M28 and M29 rifle grenades, white phosphorus hand and rifle grenades, pyrotechnics, and demolitions. The K-22 Practice Hand Grenade Course (ASR #2.111) was used between 1950 and 1960 to practice grenade throwing techniques. Facilities included a bunker and foxhole. The M115 Hand Grenade Course (ASR #2.168) was used from 1970 to 1977 for high explosive hand grenades. The range consisted of six throwing pits, six control pits, and a barricade with two observation ports.

FIGURE 6-3
MMRP Site UXO-19 (OU 25), ASR #2.104, ASR #2.111, and ASR #2.168

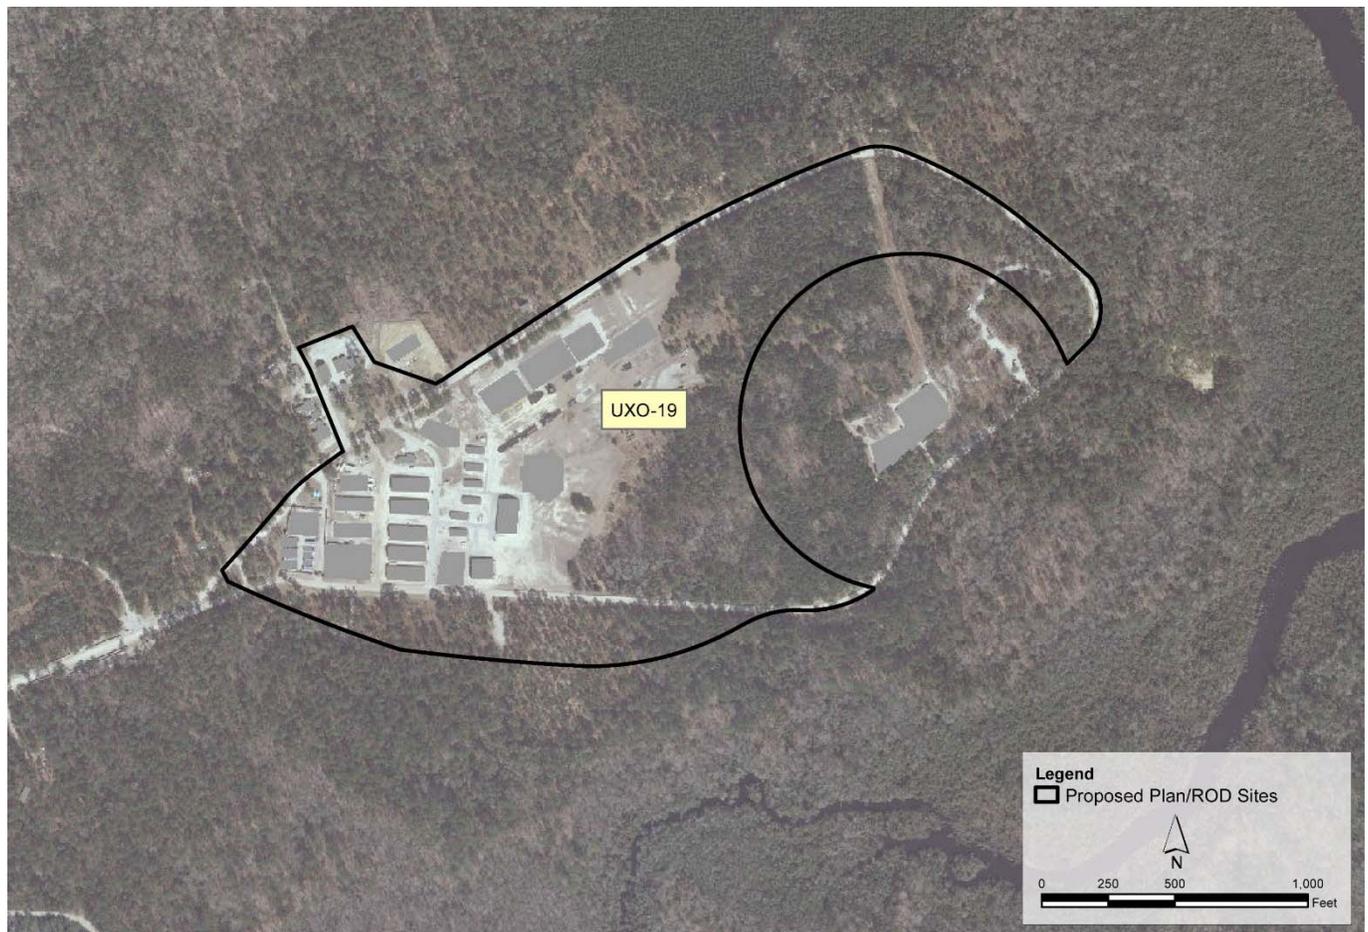

Previous investigations are listed in **Table 6-2**.

TABLE 6-2
 Previous Investigations Summary, MMRP Site UXO-19 (OU 25), ASR #2.104, ASR #2.111, and ASR #2.168

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2010)	2010	<p>In support of MILCON activities in the vicinity of the former grenade ranges, soil and groundwater sampling, 10 percent DGM of the former range area, 100 percent DGM of the MILCON footprint, and an intrusive MEC investigation were initiated in FY 2009. Samples were analyzed for explosives, metals, and perchlorate, and two subsurface soil samples were analyzed for VOCs. No unacceptable risks to human health or the environment were identified in site media. Approximately 4,465 geophysical anomalies were identified during DGM, 4,417 of which were intrusively investigated. 42 items were classified as UXO and detonated on site, and other MEC items were discovered and removed.</p>
Remedial Investigation/ Feasibility Study (CH2M HILL, 2014)	2011-2014	<p>Field activities were conducted in support of MILCON from 2011 to 2013 and included 100 percent DGM and intrusive in the undeveloped areas of the site. Approximately 47,000 geophysical anomalies and 24 saturated responses areas were identified for intrusive investigation. Approximately 450 MEC items were identified and destroyed through controlled detonations, and over 50,000 MPPEH items were identified.</p> <p>Soil and/or groundwater samples were collected following controlled detonation and within a battery burn pit that was discovered on site. Soil results were above screening criteria in two of the detonation locations and within the burn pit. Soil investigation-derived waste was excavated from these locations; confirmation samples were collected; and no unacceptable human health risks remained.</p> <p>Based on the previous investigation activities, no unacceptable risks to human health or ecological receptors are expected from exposure to MC in site media. Potential hazards associated with exposure to MEC present within developed areas during intrusive activities at any depth and within the undeveloped areas at depths greater than 2 feet below ground surface (bgs). To address these hazards, remedial alternatives evaluated include no action, LUCs, subsurface removal of MEC in undeveloped areas (via excavation, DGM, and intrusive investigation) and LUCs, and subsurface removal of MEC (via excavation and sifting) and LUCs.</p>

6.2.1.1 Future Activities

A Proposed Plan is being prepared to solicit public input on the preferred alternative for UXO-19 and will be finalized in FY 2015 followed by a ROD and RD (**Schedule 6-2**).

Schedule 6-2
MMRP Site UXO-19 ASR# 2.104, 2.111, and 2.168
FY 2015 Site Management Plan

ID	Task Name	Duration	Start													2016		
				Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Jan	Feb	Mar	
1	Proposed Plan	41 days	Fri 1/30/15	[Solid black bar from Feb to Mar]														
2	Final Proposed Plan	1 day	Fri 1/30/15	[Blue hatched bar from Feb to Feb]														
3	Public Meeting/Review Period	23 days	Wed 2/25/15	[Blue hatched bar from Feb to Mar]														
4	ROD	119 days	Mon 3/30/15	[Solid black bar from Mar to Sep]														
5	Draft ROD	60 days	Mon 3/30/15	[Blue hatched bar from Mar to May]														
6	Review Period	45 days	Mon 6/22/15	[Blue hatched bar from Jun to Aug]														
7	Final ROD	14 days	Mon 8/24/15	[Blue hatched bar from Aug to Sep]														
8	RD	119 days	Fri 9/11/15	[Solid black bar from Sep to Feb 2016]														
9	Draft RD	60 days	Fri 9/11/15	[Blue hatched bar from Sep to Nov]														
10	Review Period	45 days	Fri 12/4/15	[Blue hatched bar from Dec to Feb 2016]														
11	Final RD	14 days	Fri 2/5/16	[Blue hatched bar from Feb to Feb 2016]														

SECTION 7

Descriptions of RD and RA Sites


The following sections discuss the site history, summary of previous investigations, and future activities at Site 69, the only site that is in the RD/RA phase of the CERCLA process. There are currently no MMRP sites in the RD/RA phase of the CERCLA process.

7.1 IRP RD/RA Sites

7.1.1 Site 69 (OU 14)—Rifle Range Chemical Dump

Site 69, the Rifle Range Chemical Dump, encompasses approximately 14 acres located approximately 1,300 feet west of the New River in the Rifle Range area of MCIEAST-MCB CAMLEJ (**Figure 7-1**). From 1950 to 1976, Site 69 was reportedly used to dispose of chemical wastes including PCBs, solvents, pesticides, and drums of “gas” that possibly contained cyanide (tear gas) or other training agents, also known as chemical agent (CA). Site 69 is located within Site UXO-02 (**Section 8.3.3**), which was used as an explosive range from 1973 to 2002 and was addressed under the MMRP.

FIGURE 7-1
IRP Site 69, OU 14

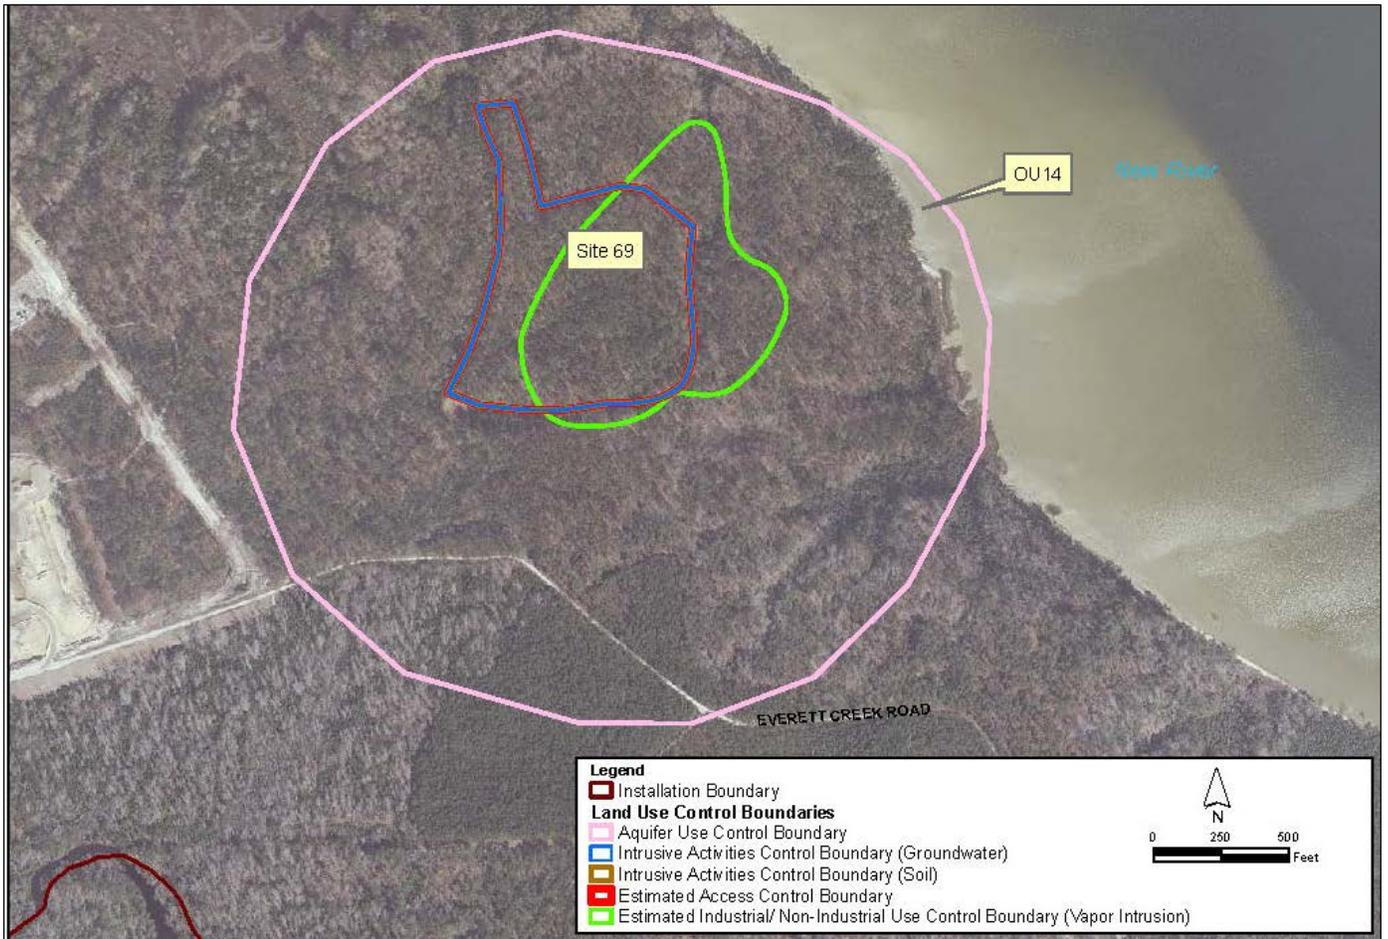

Previous investigations are listed in **Table 7-1**. A LUC summary is provided in **Table 7-2**.

TABLE 7-1
Previous Investigations Summary, IRP Site 69

Previous Investigation/Action	Date	Activities
Radiation Survey and Soil Sampling (NEESA, 1981)	1980 - 1981	Based on the reported history that Site 69 was a suspected radioactive waste disposal site, a radiation survey and soil sampling were conducted. Radioactivity was not detected at higher than average natural concentrations and soil sample results indicated naturally-occurring radioactivity.
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. A confirmation study was recommended at Site 69 based on the presence of buried hazardous or toxic wastes and the potential for migration into the aquifer.
Confirmation Study (ESE, 1990)	1984 - 1987	To verify the presence or absence of contamination due to the site's history as a dump, confirmatory sampling was conducted. Groundwater, surface water, and sediment samples were collected and analyzed for VOCs, pesticides/PCBs, select SVOCs, select metals, and residual chlorine. Analytical results identified VOCs in groundwater and surface water and pentachlorophenol (PCP) in one sediment sample.
Remedial Investigation (Baker, 1997)	1995 - 1997	Field activities were conducted to assess the nature and extent of contamination and potential human health and environmental impacts of the site. Geophysical investigations were conducted and groundwater, surface water, sediment, fish, shellfish, and benthic macro invertebrate samples were collected. Samples were analyzed for VOCs, SVOCs, metals, and pesticides/PCBs. Geophysical investigations indicated buried metallic objects near the groundwater source area. Potential human health risks were identified for future residents due to exposure of VOCs and metals in groundwater. No unacceptable ecological risks were identified and surface water and sediment analytical results indicated that the New River, Everett Creek, and the unnamed tributary north of the site were not impacted by the former disposal operations.
In-Well Aeration Pilot Study (Baker, 1998)	1996 - 1998	A pilot study was initiated to assess the effectiveness of In-well aeration for treatment of VOCs in groundwater. After 2 years of operation and testing, the method was determined to be ineffective at reducing groundwater contamination and the pilot study was discontinued.
Proposed Remedial Action Plan (Baker, 1998)	1998	The PRAP identified MNA and LUCs as the preferred alternative to address potential risks from groundwater and waste. The PRAP was submitted for public review and comment. General comments for informational purposes were addressed during the public meeting and no written comments were received.
Interim Record of Decision (Baker, 2000)	2000	The interim selected remedy was LTM for MNA of VOCs in groundwater and to monitor potential migration and LUCs to prevent exposure to waste, soil, and groundwater.
Interim Remedial Action	1998 - 2005	Groundwater LTM for VOCs and NAIPs was implemented in 1998 and continued until 2005, as the site is a part of ongoing investigations and studies in which the LTM requirements are being fulfilled or exceeded by site-specific monitoring programs. LUCs were implemented in 2001 and updated in 2002 and remain in place.
Surface Water and Sediment Sampling	2005	Due to a request by Onslow County Commissioners, NCDENR–Department of Water Quality and the Base performed split surface water and sediment sampling in surface waters adjacent to Site 69. NCDENR recommended no further sampling and no advisory to be issued.
Radiation Survey (Radiological Affairs Service Office, 2007)	2007	A radiation survey was conducted and radioactivity was not detected at higher than average natural concentrations, which confirmed the 1980 to 1981 findings.
Supplemental Investigation (CH2M HILL, 2011)	2008 - 2011	A supplemental investigation was conducted simultaneously with the UXO-02 PA/SI to further delineate the nature and extent of contamination and move the site towards a final ROD. Field activities included a geophysical survey, monitoring well installation, and soil, groundwater, surface water, and sediment sampling. Potential human health risks were identified due to exposure to pesticides, PCBs, VOCs, and metals in groundwater. Potential ecological risks were identified due to exposure to pesticides in surface soil and sediment. An FS was recommended to identify RAOs and evaluate potential treatment alternatives. The current site CSM is shown on Figure 7-2.

TABLE 7-1
Previous Investigations Summary, IRP Site 69

Previous Investigation/Action	Date	Activities
UXO-02 Expanded Site Investigation (CH2M HILL, 2012)	2011-2012	An ESI was conducted at UXO-02, including Site 69, to further investigate potential unacceptable risks identified during the UXO-02 PA/SI and Site 69 Supplemental Investigation. Field activities included an intrusive anomaly investigation, monitoring well installation, and soil, groundwater, surface water, and sediment sampling for pesticides, metals, and/or explosives analyses. No unacceptable human health or ecological risks were identified from potential exposure to soil, surface water, sediment, or metals in surficial aquifer groundwater. NFA was recommended for the portion of UXO-02 located outside of the Site 69 perimeter fence. The remaining environmental impacts to be further assessed were associated with potential risks from exposure to waste and the VOC groundwater plume associated with Site 69.
Feasibility Study (CH2M HILL, 2012)	2011-2012	Remedial alternatives were evaluated to address the waste disposal area and COCs in groundwater. The alternatives evaluated for the waste disposal area were no action, LUCs, capping with LUCs, and removal. The alternatives evaluated for groundwater were no action; MNA with LUCs; permeable reactive barrier (PRB) with MNA and LUCs; ERD with bioaugmentation, MNA, and LUCs; and ISCO with MNA and LUCs.
Proposed Remedial Action Plan (CH2M HILL, 2012) and Record of Decision (CH2M HILL, 2013)	2012-2013	A PRAP was issued to solicit public input on the preferred alternative (capping with LUCs for waste and MNA and LUCs for groundwater) and a public meeting was held. General comments for informational purposes were addressed during the public meeting and no written comments were received. The ROD was issued and signed on June 25, 2013.
Remedial Design (CH2M HILL, 2013) and Draft Remedial Action Completion Report (TetraTech, 2014)	2013-2014	The RD presents the design of remedy as specified by the ROD, including capping, plans for MNA and LTM, and a LUCIP. Construction of the soil cap was completed in 2014 and the updated survey plat will be filed with the Onslow County Register of Deeds in 2015.

TABLE 7-2
Land Use Control Summary, IRP Site 69

LUC Boundary	Estimated Area (Acres)	Final Land Use Control Implementation Plan (LUCIP)	Onslow County Registration Date
Non-Industrial Use Control Boundary	14.55	July 2002	Pending removal
Intrusive Activities Control Boundary (Groundwater)	8		Pending removal
Aquifer Use Control Boundary (1,000 feet)	127.2		February 2002
Access Control Boundary	14.6	Proposed	
Intrusive Activities Control Boundary (Soil and Groundwater)	14.6		--
Industrial/Non-Industrial Use Control Boundary (Vapor Intrusion)	15.7		


7.1.1.1 Future Activities

The Draft RACR, documenting completion of the soil cap construction and registration of updated LUCs will be completed in FY 2015 (**Schedule 7-1**).

**Schedule 7-1
IRP Site 69
FY 2015 Site Management Plan
MCIEAST-MCB CAMLEJ**

ID	Task Name	Duration	Start	Finish	2015											
					Oct	Nov	Dec	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep
1	RA	253 days	Wed 10/1/14	Fri 9/18/15												
2	LUCs	60 days	Wed 10/1/14	Tue 12/23/14												
3	Initiate MNA/Well Installation	88 days	Fri 2/27/15	Tue 6/30/15												
4	Draft IRACR	14 days	Wed 7/1/15	Mon 7/20/15												
5	Review Period	30 days	Tue 7/21/15	Mon 8/31/15												
6	Final IRACR	14 days	Tue 9/1/15	Fri 9/18/15												

FIGURE 7-2
Site 69 Conceptual Site Model

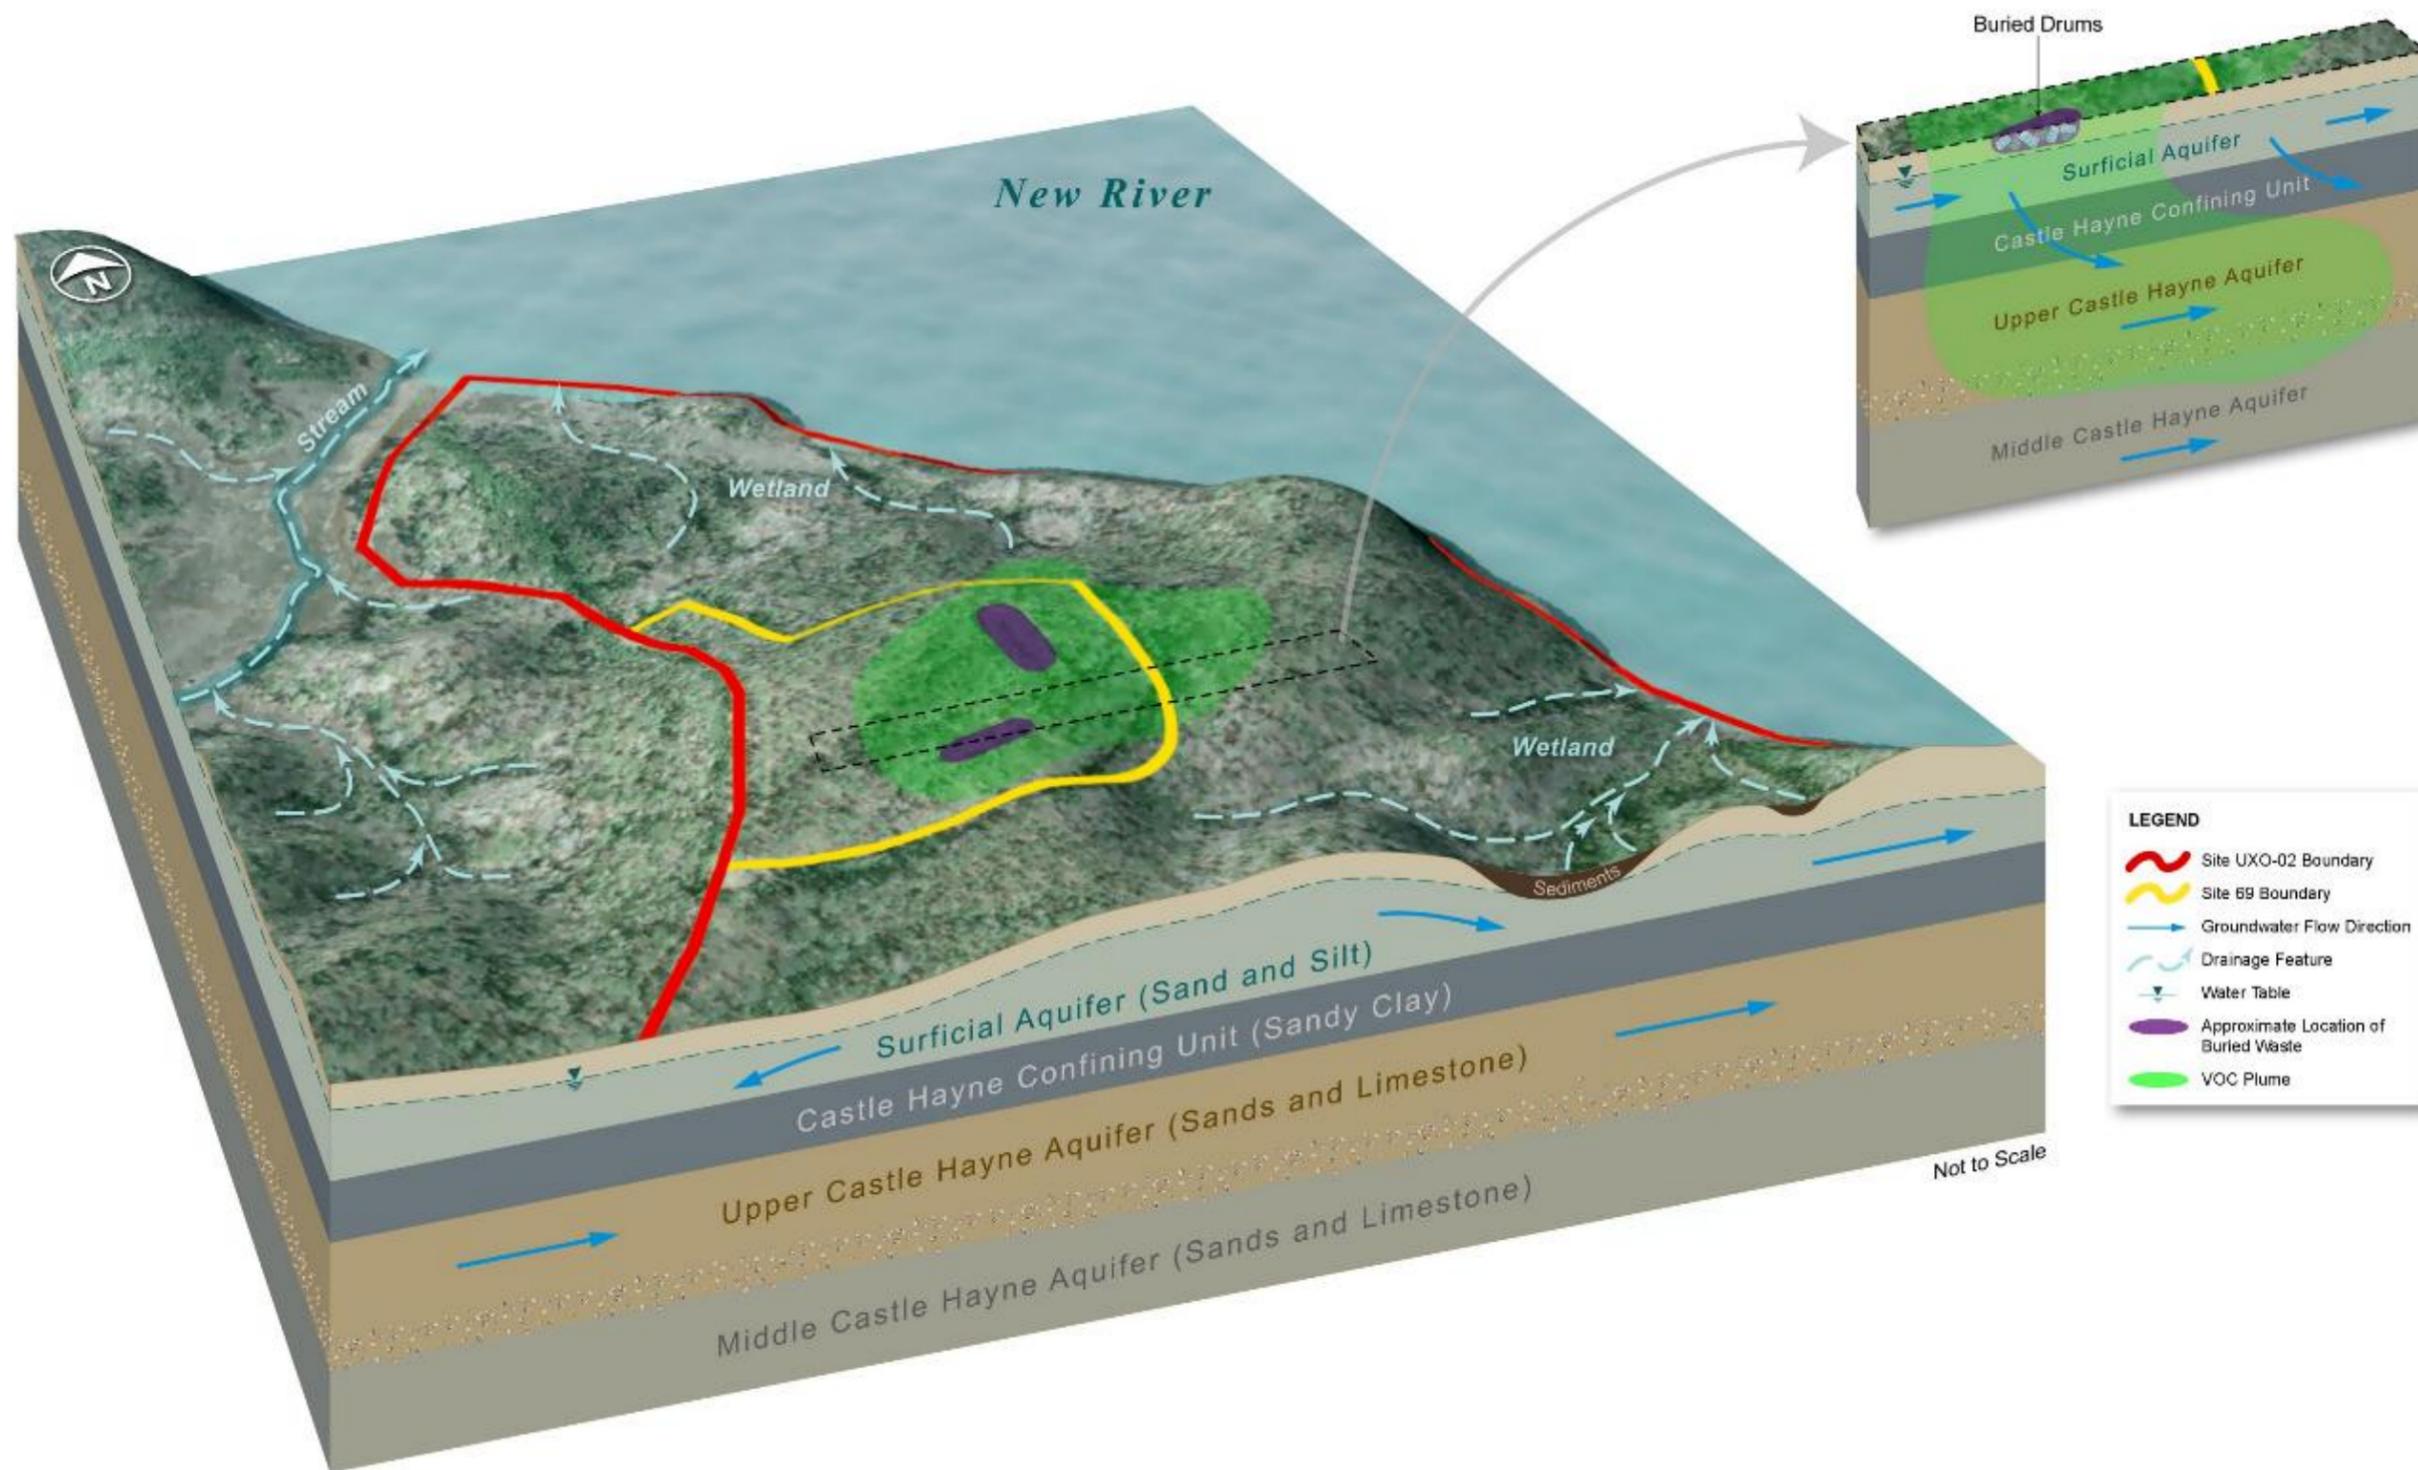

This page intentionally left blank.

Descriptions of RIP and RC Sites


The following sections discuss the site history for the 63 IRP sites and 21 MMRP Sites (there are two UXO-01 sites considered in this count) that are in the RIP and RC phase of the CERCLA process. Remedies are in place (such as groundwater treatment, LTM, and/or LUCs) for 26 of the IRP sites. Response is complete with NFA for 37 IRP sites and 21 MMRP sites.

8.1 IRP RIP Sites

8.1.1 Site 1 (OU 7)—French Creek Liquids Disposal Area

Site 1, the French Creek Liquids Disposal Area, covers approximately 8 acres located within OU 7 on the Mainside of the Base (**Figure 8-1**). OU 7 consists of three sites (Sites 1, 28, and 30) that have been grouped together into one OU because of their similar characteristics of suspected waste (POL) and geographic location. Site 1 has been used by several different mechanized, armored, and artillery units since the 1940s. Reportedly, liquid wastes generated from vehicle maintenance were routinely poured onto the ground surface. The wastes were reported to be primarily POL; however, battery acid was also reportedly disposed of. The suspected POL and battery acid disposal areas lie in the northern and southern portions of the site. The estimated quantity of POL waste disposed at the areas is between 5,000 and 20,000 gallons, and the quantity of battery acid waste is between 1,000 and 10,000 gallons. Currently, Site 1 continues to serve as a vehicle and equipment maintenance and staging area.

FIGURE 8-1
IRP Site 1

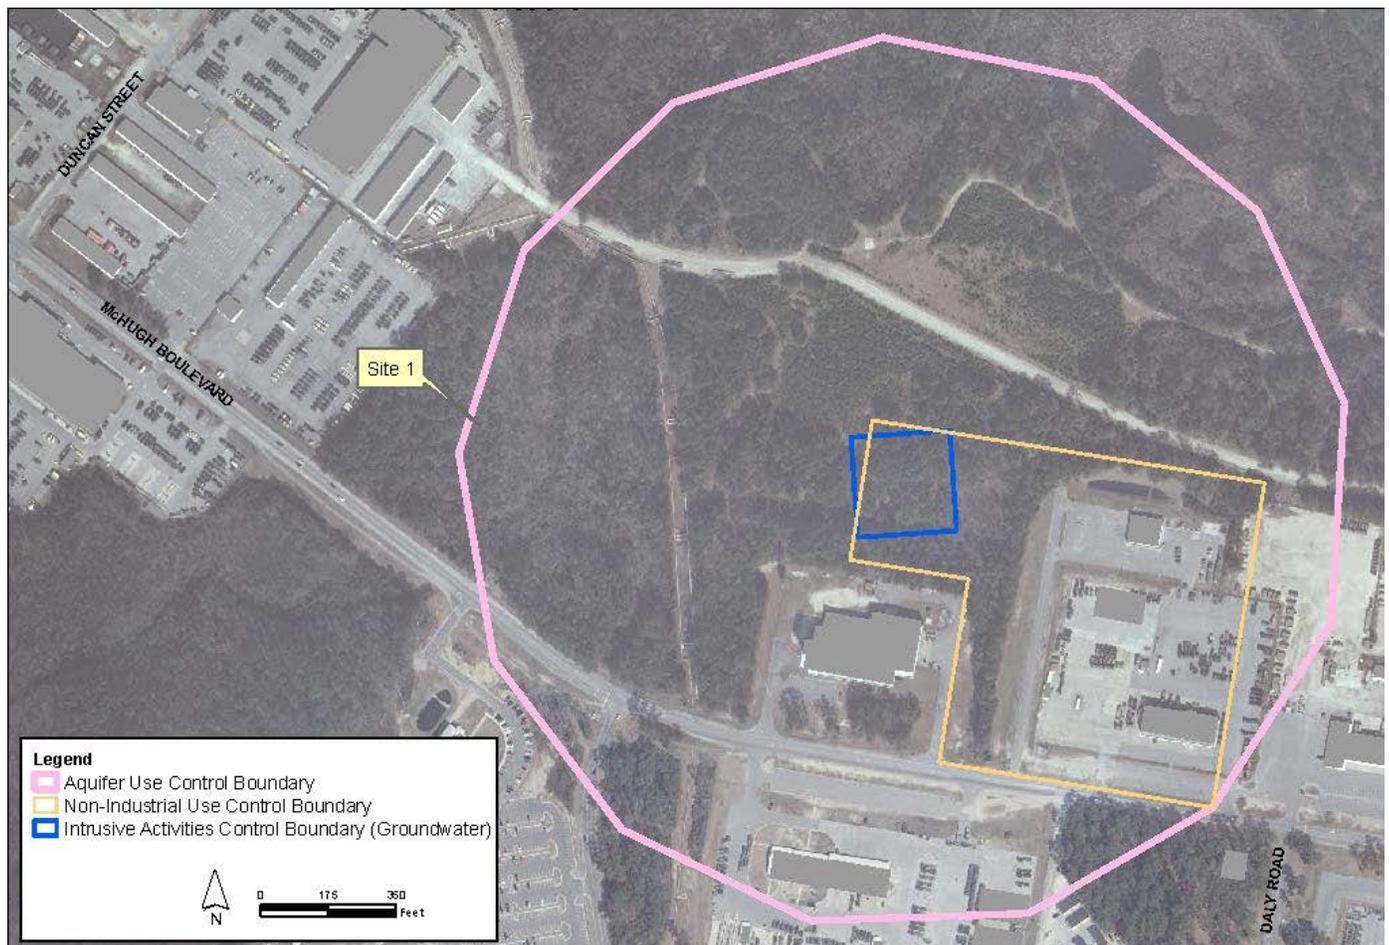

Previous investigations are listed in **Table 8-1** and the LUC Summary is presented in **Table 8-2**.

TABLE 8-1
Previous Investigations Summary, IRP Site 1

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Results indicated that waste POL and used battery acid could potentially migrate to groundwater and surface water; and thus recommended that a Confirmation Study be conducted.
Confirmation Study (ESE, 1990)	1984 - 1987	A Confirmation Study was conducted to further investigate the findings of the IAS. Field activities included groundwater, surface water, and sediment sampling for VOCs, metals, and oil and grease (O&G). Groundwater samples collected from the surficial aquifer identified the presence of CVOCs, metals, and O&G.
Soil Assessment (1991)	1991	A soil assessment was completed for an area in the southern portion of the site in support of a potential MILCON project. Samples were analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. Analytical results identified metals constituents at levels generally consistent with background concentrations.
Groundwater Study (1993)	1993	To evaluate current site conditions during scoping of the RI/FS groundwater sampling was conducted. Samples were analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. Analytical results identified metals constituents at concentrations generally consistent throughout the site.
Remedial Investigation/ Feasibility Study (Baker, 1995)	1994 - 1995	An RI was completed to assess the nature and extent of contamination that may have resulted from previous disposal practices. Field activities consisted of a site survey, and soil and groundwater sampling for VOCs, SVOCs, pesticides/PCBs, metals, and TPH. VOCs and metals were detected in groundwater and soil. Potential human health risks were identified for future child and adult residents due to exposure to metals in groundwater. Minimal ecological risks were identified for terrestrial receptors due to exposure from metals. COCs were evaluated during the FS and metals were eliminated as site-related COCs. The FS also evaluated remedial alternatives for VOCs in groundwater and RAOs were developed for the site.
Proposed Remedial Action Plan (1995) and Record of Decision (Baker, 1996)	1995 - 1996	A PRAP was issued to solicit public input on the preferred alternative (LTM and LUCs) and a public meeting was held. The Final ROD was issued and signed in October 1996 followed by initiation of LTM.
Remedy-in-Place and Remedial Action Completion Report (CH2M HILL, 2002)	1996 - 2002	Groundwater LTM was initiated in 1996 and included biannual sampling of eight monitoring wells (nine monitoring wells were initially specified in the work plan; however, one well was destroyed prior to the initiation of sampling) for VOCs analysis. Upon reevaluating the LTM Program in 1998, site-wide LTM was discontinued and quarterly confirmation sampling for VOC analysis was implemented at two wells. In April 2000, the concentrations of VOCs were below the cleanup levels for at least four consecutive quarters, and discontinuation of confirmatory sampling was recommended in the October 2000 LTM Report (CH2M HILL and Baker, 2000). Following approval from USEPA and NCDENR in January 2001, a RACR was prepared to document the completion of confirmatory sampling. LUCs were implemented in 2000 and updated in 2002.
Five-year Review, (CH2M HILL, 2010)	2010	The Five-year Review was conducted to determine whether current remedies-in-place at MCIEAST-MCB CAMLEJ remain protective of human health and the environment. Because LTM was conducted and cleanup levels in groundwater were achieved, the Five-year Review recommended the removal of LUCs restricting groundwater intrusive activities and aquifer use and abandoning monitoring wells at Site 1.
Remedial Investigation Data Review	2013	Because the only unacceptable risk identified at Site 1 was related to exposure to groundwater (1995 RI) and groundwater cleanup levels were achieved during LTM, the IRP Partnering Team, consisting of representatives from MCIEAST-MCB CAMLEJ, the Navy, USEPA, and NCDENR, recommended that previous soil and RI data be re-evaluated to determine whether there was contamination or waste remaining in place to confirm that the non-industrial LUC was needed. RI soil data were compared to current screening criteria, and antimony was detected at concentrations in exceedance of the criteria at three surface soil and seven subsurface soil locations. Because no unacceptable risks were identified from exposure to soil during the RI, no indications of waste remaining in place were identified during review of the RI, and groundwater cleanup levels were achieved during LTM, the IRP Partnering Team reached consensus to remove the LUCs and document the Response Complete in a RACR (CH2M HILL, 2013).

TABLE 8-2
Land Use Control Summary, IRP Site 1

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	16.6		
Intrusive Activities Control Boundary (Groundwater)	1.5	July 2002	February 2002
Aquifer Use Control Boundary (1,000 feet)	79.2		

8.1.1.1 Future Activities

A RACR will be completed in FY 2015 to document the completion of the RAOs identified in the Final ROD and the removal of all LUCs at Site 1.

8.1.2 Site 2 (OU 5)—Former Nursery/Daycare Center

Site 2, the Former Nursery/Daycare Center, encompasses approximately 5 acres just inside the Main Gate in the northeast portion of the Base (Figure 8-2). From 1945 to 1958, an onsite building was used for storing, handling, and dispensing pesticides. Chemicals known to have been used at Site 2 include chlordane, 4,4'-dichlorodiphenyltrichloroethane (DDT), diazinon, and 4,4'-dichlorodiphenyldichloroethane. Chemicals known to have been stored include dieldrin, lindane, malathion, and silvex. A preliminary soil sampling investigation conducted in 1982 indicated the presence of pesticides, resulting in the transfer of the daycare center to another location.

FIGURE 8-2
IRP Site 2, OU 5



Previous investigations are listed in **Table 8-3** and the LUC Summary is presented in **Table 8-4**.

TABLE 8-3
Previous Investigations Summary, IRP Site 2

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCI-EAST-MCB CAMLEJ. The potential for adverse impacts was identified from pesticides that could potentially migrate to groundwater and surface water and additional investigation was recommended.

TABLE 8-3
Previous Investigations Summary, IRP Site 2

Previous Investigation/Action	Date	Activities
Confirmation Study (ESE, 1990)	1984 - 1990	A Confirmation Study was conducted to verify the presence of contaminants. Field activities included groundwater, surface water, soil, and sediment sampling for VOCs, pesticides, and herbicides. Analytical results indicated the presence of pesticides and VOCs in environmental media. Further characterization of groundwater and supplemental surface water and sediment investigations were recommended.
Geophysical Investigation (Baker, 1992)	1991 - 1992	A surface geophysical investigation was performed to establish the source of groundwater contamination. No anomalies that could serve as sources (that is, tanks or drums) of groundwater contamination were identified. However, an atypical subsurface feature was detected. The data from this anomaly were not sufficiently conclusive to ascertain whether it was a tank, large-diameter utility line, or other buried structure.
Remedial Investigation/ Feasibility Study (Baker, 1994)	1993 - 1994	An RI was conducted to characterize potential environmental impacts and threats to human health resulting from previous site activities. A geophysical investigation and soil gas survey were conducted and soil, groundwater, surface water, and sediment samples were collected and analyzed for VOCs, SVOCs, pesticides/PCBs, herbicides, and metals. Unacceptable human health risks were identified due to the presence of pesticides in soil and VOCs in groundwater. Potential unacceptable risks to ecological receptors were also identified due to the presence of pesticides in sediment and soil. A TCRA was recommended for soil and remedial alternatives for groundwater were evaluated in the FS.
Time-critical Removal Action (OHM, 1995)	1994 - 1995	Based on the findings of the RI, a TCRA was recommended for removal of pesticide-contaminated soil to achieve industrial land use. The TCRA included the excavation and offsite treatment of pesticide-contaminated soil and concrete. A total of 1,049 tons of pesticide-contaminated soil was excavated and sent for offsite disposal.
Proposed Remedial Action Plan and Record of Decision (Baker, 1994)	1994	A PRAP was issued to solicit public input on the preferred alternative (LTM and LUCs) and a public meeting was held. The Final ROD was issued and signed in September 1994.
Remedy-in-Place and Long-term Monitoring Closeout Report (CH2M HILL, 2008)	1995 - 2008	Groundwater LTM was initiated in 1995 and included annual sampling of six shallow monitoring wells for VOC analysis. In 2007, groundwater concentrations fell below cleanup levels for four consecutive events, LTM was discontinued, and an SC report was submitted. LUCs were implemented in 2001 and updated in 2002 and 2008.
Update to the Operable Unit No. 5 - Site 2 Closeout Report Technical Memorandum (CH2MHILL, 2011)	2011	This Technical Memorandum provided an update to the Closeout Report for Operable Unit 5, Site 2 (CH2M HILL, 2008) to incorporate the Notice of Non-Significant Changes. The cleanup levels in groundwater were achieved, and no risk to human health and the environment from exposure to groundwater remained at Site 2. Therefore, the LUCs restricting groundwater intrusive activities and aquifer use were removed. LUCs remain in place to prohibit non-industrial use within the extent of the former soil removal actions where pesticides remain in soil above levels that allow for UU/UE.

TABLE 8-4
Land Use Control Summary, IRP Site 2
FY 2015 Site Management Plan
MCIEAST-MCB CAMLEJ

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Updates
Non-Industrial Use Control Boundary (Soil)	3.3	September 2008	June 2009

8.1.2.1 Future Activities

LUCs will be maintained to prohibit non-industrial use within the extent of the former soil removal action areas where pesticides remain in soil above levels that allow for UU/UE.

8.1.3 Site 3 (OU 12)—Old Creosote Plant

Site 3, the Old Creosote Plant, encompasses approximately 5 acres on the Mainside of the Base (**Figure 8-3**). The Creosote Plant reportedly operated from 1951 to 1952 to supply treated lumber during construction of the MCIEAST-MCB CAMLEJ Railroad. An onsite sawmill, reportedly located in the northern portion of the site, supplied cut timbers for the creosote treatment.

FIGURE 8-3
IRP Site 3, OU 12



Previous investigations are listed in **Table 8-5** and the LUC summary is presented in **Table 8-6**.

TABLE 8-5
Previous Investigations Summary, IRP Site 3

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at Site 3, and it was concluded that no further assessment was necessary. However, USEPA requested an additional investigation to determine whether hazardous waste contamination existed.
Site Investigation (1991)	1991	An SI was conducted to confirm the presence or absence of contamination at Site 3. Field activities included soil, groundwater and sediment sampling. The analytical results identified SVOCs in soil and groundwater, and an RI was proposed.

TABLE 8-5
Previous Investigations Summary, IRP Site 3

Previous Investigation/Action	Date	Activities
Remedial Investigation/ Feasibility Study (Baker, 1996)	1994 - 1996	An RI was conducted to characterize the nature and extent of contamination discovered during the SI. Field activities included installation of monitoring wells, and the collection of soil and groundwater samples. PAHs (primarily naphthalene) were identified in both soil and groundwater. Fuel constituents, such as ethylbenzene and xylenes, were also detected in soil and groundwater. Potential unacceptable human health risks were identified due to PAHs in soils and VOCs and PAHs in groundwater. No unacceptable ecological risks were identified. In 1996, an FS was conducted to screen remedial alternatives for addressing soil and groundwater contamination.
Proposed Remedial Action Plan (1996) and Record of Decision (Baker, 1997; 2000)	1996 - 2000	A PRAP was issued in 1996 to solicit public input on the preferred alternative (source removal with onsite biological treatment of PAH-contaminated subsurface soils, LTM, and LUCs) and a public meeting was held. The Final ROD was issued and signed in 1997. However, a pilot scale treatability study conducted in 1998 indicated that biological treatment of soils was not effective. As a result, an Amended ROD was signed in June 2000, identifying soil excavation with offsite disposal, LTM, and LUCs as the preferred remedial alternative. The current CSM is shown on Figure 8-4 .
Remedy-in-Place	1997 - present	The selected remedy for soil identified in the Amended ROD was conducted as an NTCRA in 2000, during which 3,295 tons of PAH-contaminated soil were removed to achieve industrial cleanup levels. Groundwater LTM for VOCs and SVOCs was implemented in 1997 and is ongoing. LUCs were implemented in 2001 and updated in 2002. If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.

TABLE 8-6
Land Use Control Summary, IRP Site 3


LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	0.14		
Intrusive Activities Control Boundary (Soil)	0.14		
Intrusive Activities Control Boundary (Groundwater)	4.1	July 2002	February 2002
Aquifer Use Control Boundary (1,000 feet)	134.1		

8.1.3.1 Future Activities

LUCs will be maintained to prohibit soil intrusive activities and prohibit non-industrial use within the extent of the former soil removal action areas where PAHs remain in soil above levels that allow for UU/UE. LTM is ongoing to monitor the concentrations of VOCs and SVOCs in groundwater, and LUCs are in-place to prohibit groundwater intrusive activities and aquifer use until cleanup levels are achieved. Based on recommendations from the FY 2012 LTM Report, a pilot study is planned for FY 2015 to evaluate potential remedial technologies to reduce COC concentrations.

If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.


FIGURE 8-4
Site 3 Conceptual Site Model

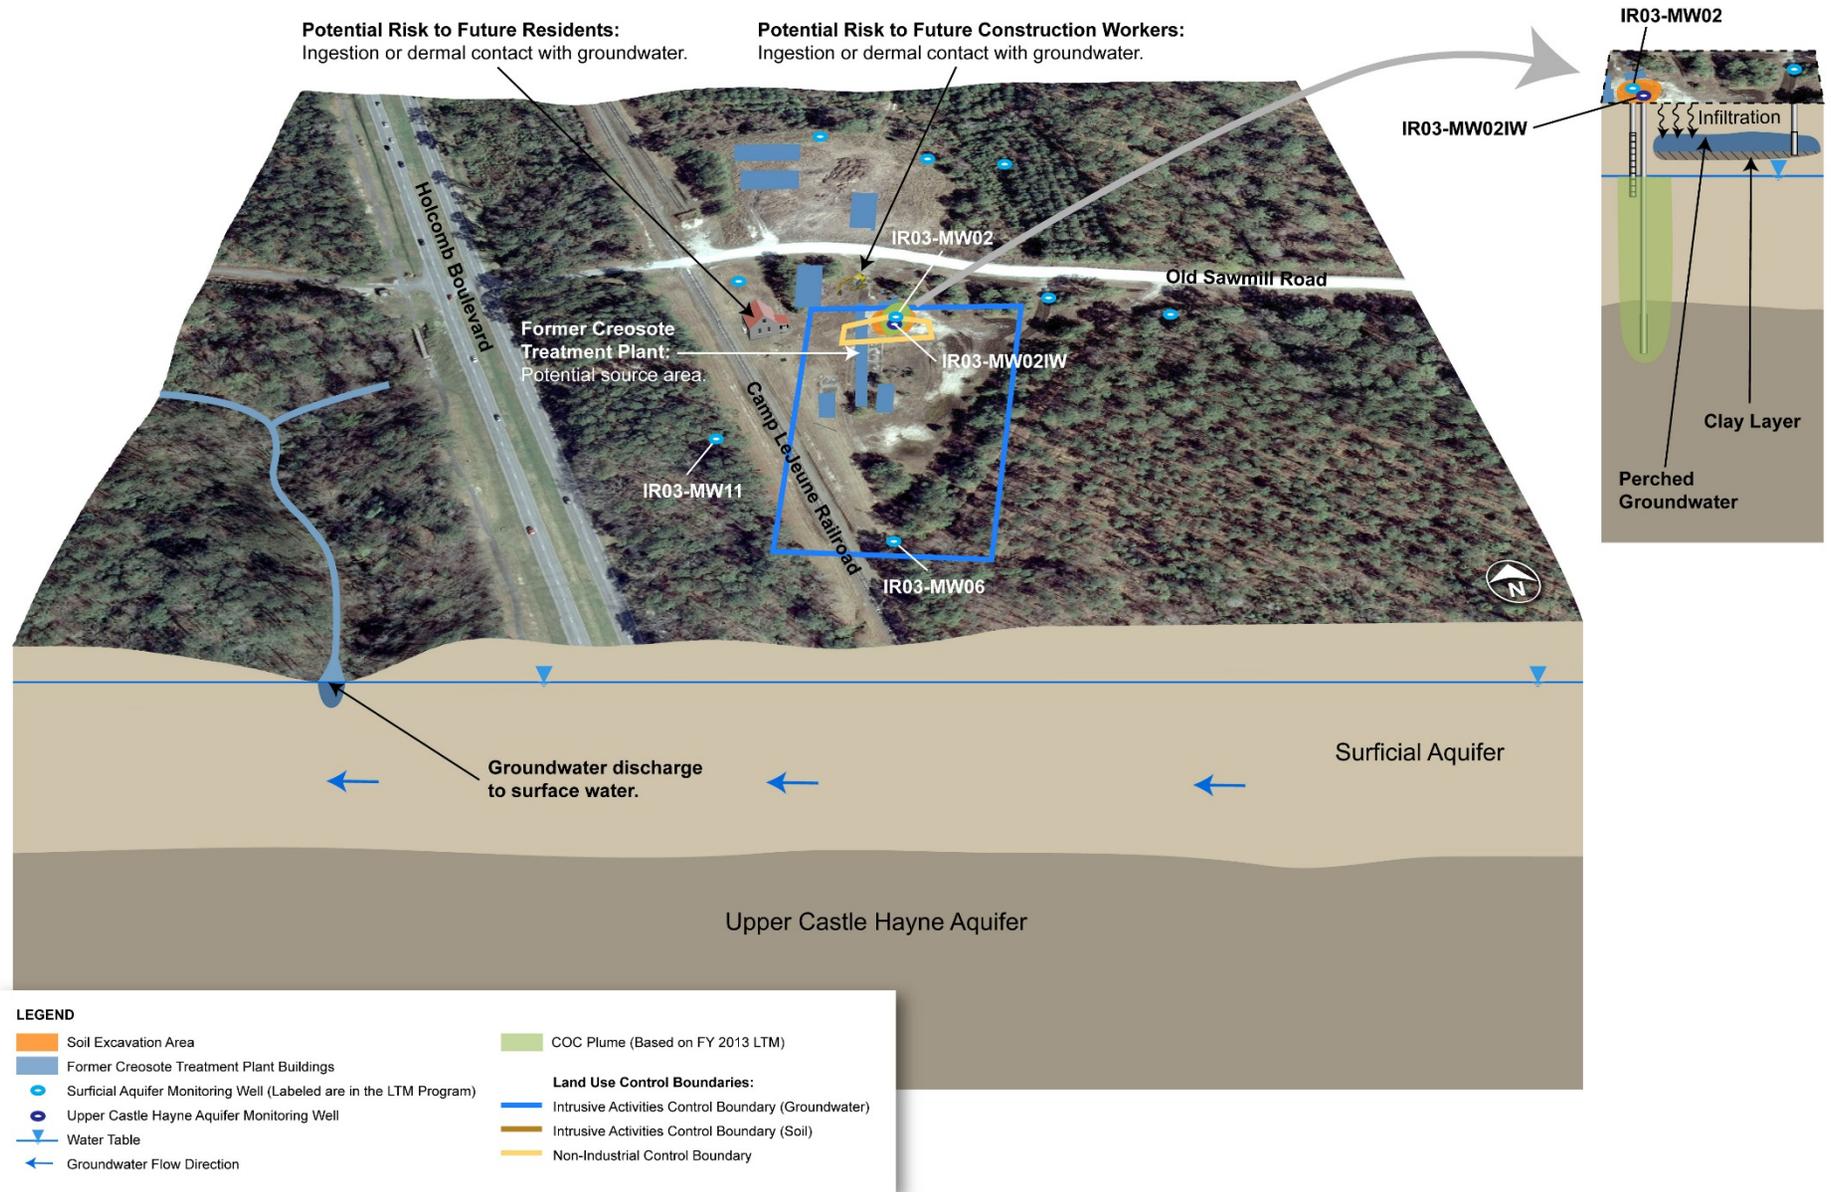

8.1.4 Site 6 (OU 2)—Lots 201 and 203

Site 6 is located within OU 2, approximately 2 miles east of the New River and 2 miles south of State Route 24 (Figure 8-5). OU 2 consists of three sites (Sites 6, 9, and 82) that have been grouped together because of their proximity to one another. Site 6 covers an area of approximately 177 acres that incorporates Storage Lots 201 and 203, a wooded area between the storage lots, and a ravine. From the 1940s to the late 1980s, Site 6 was used for disposal and storage of wastes and supplies, including pesticides transformers containing PCBs, solvents, electrolytes, and waste oils. Currently, Lot 201 is used to store military equipment, vehicles, hydraulic oils, and other “non-hazardous” supplies. Most of Lot 203 remains an open field; 21 acres were temporarily used by the DRMO for metal staging operations between 2001 and 2012.

FIGURE 8-5
IRP Site 6, OU 2

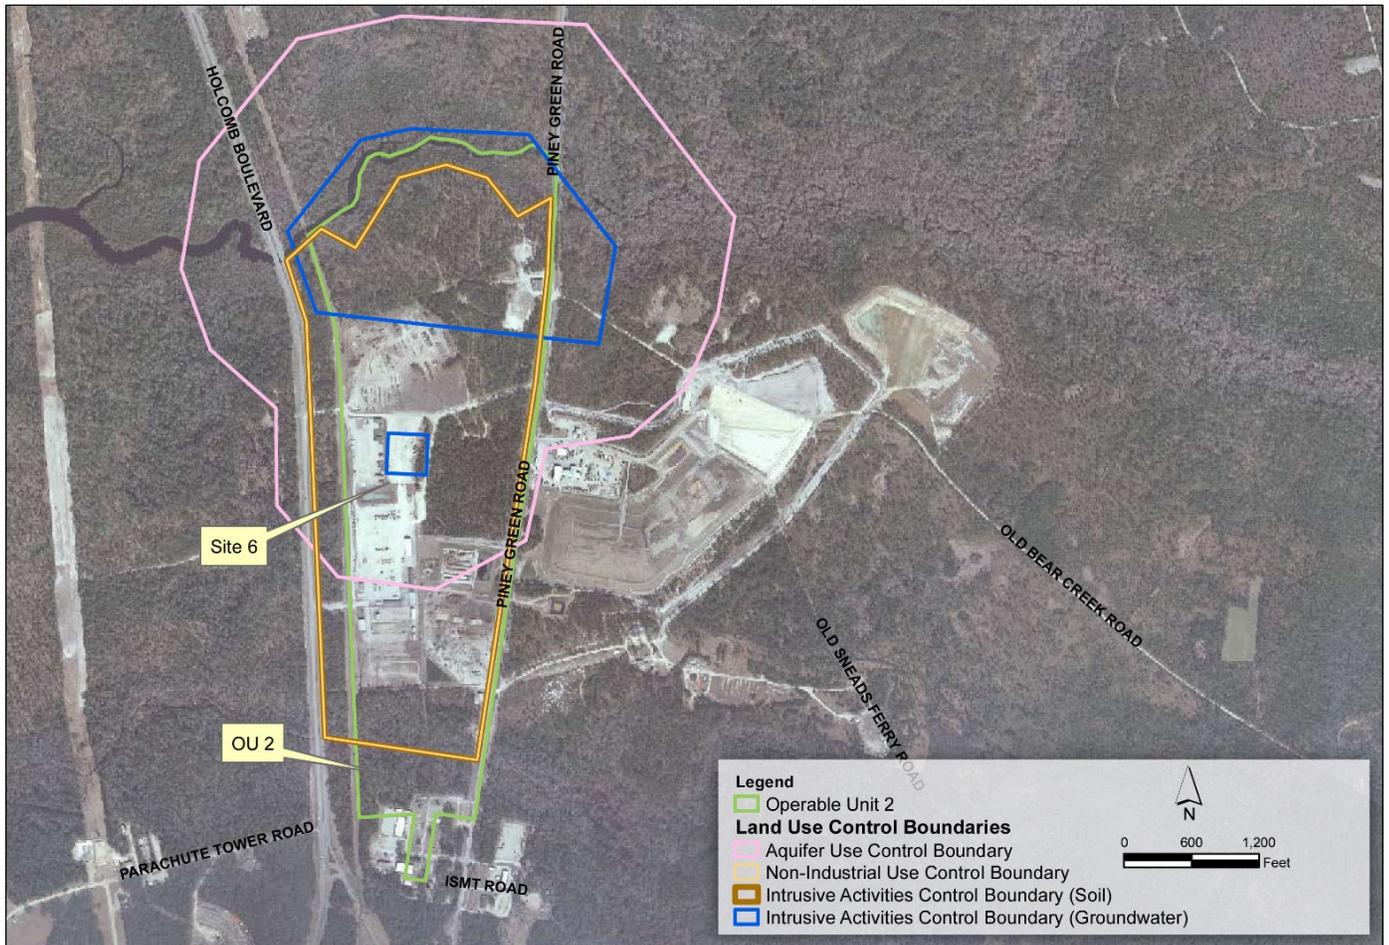

Previous investigations are listed in **Table 8-7** and the LUC summary is presented in **Table 8-8**.

TABLE 8-7
Previous Investigations Summary, IRP Site 6

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Wastes present reportedly originated from dumping and storage activities and the IAS recommended that a Confirmation Study be conducted to verify the presence of contamination.
Confirmation Study (ESE, 1990)	1984 - 1987	Field activities including soil, groundwater, surface water, and sediment sampling, were conducted to verify the presence or absence of contamination. Soil samples were analyzed for pesticides, and all other media were analyzed for VOCs and pesticides. Low levels of pesticides were detected in soil samples. Groundwater samples collected from shallow monitoring wells revealed low levels of VOCs and benzene.

TABLE 8-7
Previous Investigations Summary, IRP Site 6

Previous Investigation/Action	Date	Activities
Soil Gas Survey (1989)	1989	A soil gas survey was conducted to identify the presence of VOCs that may potentially affect personnel working within Lot 203. No imminent hazards were identified with the results of the survey.
Remedial Investigation/ Feasibility Study (Baker, 1993)	1992 - 1993	Field activities consisted of a preliminary site survey, a geophysical survey, a soil investigation including drilling and sampling, a groundwater investigation including monitoring well installation and sampling, drum waste sampling, test pit investigation, a surface water and sediment investigation, and an aquatic and ecological survey. Pesticides/PCBs, VOCs, SVOCs, and metals were identified in soil, groundwater, surface water, and sediment across the OU. The HHRA identified potential human health risks due to exposure to soil and groundwater. Potential adverse ecological impacts were identified for Wallace Creek and Bear Head Creek. The FS developed and screened remedial alternatives for addressing groundwater and soil contamination.
Proposed Remedial Action Plan and Record of Decision (Baker, 1993)	1993	A PRAP was to solicit public input on the preferred alternative (soil removal, groundwater extraction and treatment, LTM, and LUCs) and a public meeting was held. The Final ROD was issued and signed in September 1993.
Remedy-in-Place	1994 - present	The selected remedy identified in the ROD was conducted as a TCRA in 1994, during which 20 drums containing DDT were removed and contaminated soil was excavated. A second TCRA was conducted from 1995 to 1996 to remove more than 2,655 yd ³ of drums, batteries, and communications wire. Groundwater extraction and treatment and LTM for VOCs were implemented in 1996 and are ongoing. LUCs were implemented in 2001 and updated in 2002. The current CSM is shown on Figure 8-6 .
Chlorobenzene Summary Report (CH2M HILL, 2010)	2008 - 2010	To identify the potential source of chlorobenzene contamination and delineate the extent in groundwater, an SSI was conducted. During vegetation clearing activities, MD was discovered and an Explosives Safety Submission (ESS) was submitted to remove and dispose of the MD. The geophysical survey results indicated the presence of several linear features, potentially representing trenches containing metallic debris. Chlorobenzene concentrations in groundwater continue to fluctuate, the dissolved chlorobenzene is migrating downgradient, and the chlorobenzene plume has not been fully delineated vertically and horizontally. The potential source of the chlorobenzene is likely disposal trenches and test pitting, and additional groundwater delineation was recommended.
Basewide Vapor Intrusion Evaluation (CH2M HILL, AGVIQ, 2009)	2007 – 2009	A Basewide Vapor Intrusion Study was conducted to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. At OU 2, no buildings were identified within 100 feet of a monitoring well containing VOC concentrations above NCGWQS. If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.
Chlorobenzene Test Pitting Investigation Technical Memorandum (CH2M HILL, 2012)	2010-2012	As a follow-up to the recommendations of the Chlorobenzene Summary Report, test pitting to investigate the large geophysical anomalies and soil sampling were conducted. Twelve test pit excavations were completed and cultural debris, MD, drums, buckets, communication batteries, communication wires, and scrap metal were uncovered. At Test Pit 10, two drums were uncovered, resulting in elevated breathing zone measurements, and the soil results indicated chlorobenzene concentrations at 70,000,000 micrograms per kilogram. Additional monitoring wells were also installed and sitewide groundwater samples were collected to further investigate the extent of chlorobenzene in groundwater. Recommendations are to complete the delineation of chlorobenzene in groundwater, assess the distribution of chlorobenzene in vadose zone soil, and update LUCs, as necessary.

TABLE 8-7
Previous Investigations Summary, IRP Site 6

Previous Investigation/Action	Date	Activities
Action Memorandum and Time-critical Removal Action (CH2M HILL, 2011)	2011	An AM documented the decision for a TCRA to address the buried drums and chlorobenzene-impacted soil discovered during test pitting activities. The TCRA was conducted in May 2011. Approximately 42 yd ³ of soil and debris were removed. Confirmation samples were collected in the excavated area, and analytical results indicated that concentrations of chlorobenzene were still present in soil above industrial screening levels. The site was restored with clean backfill, and further investigation of chlorobenzene in soil via passive soil gas and soil sampling and an evaluation of the current RIP was recommended.
Draft Supplemental Investigation Report (CH2M HILL, 2014)	2012-2014	In 2012 and 2013, a supplemental investigation was conducted to evaluate the potential for additional VOC source material in soil and groundwater. Field activities included hydrogeologic testing and soil, groundwater, and passive soil gas sampling for VOCs. VOCs were detected at concentrations exceeding screening criteria in soil and groundwater samples. Based on the results, additional horizontal and vertical delineation, groundwater modeling, and a pilot study for chlorobenzene and chlorinated ethenes in groundwater are planned.


TABLE 8-8
Land Use Control Summary, IRP Site 6

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	206.75		
Intrusive Activities Control Boundary (Soil)	206.75		
Intrusive Activities Control Boundary (Groundwater)	99.4	July 2002	February 2002
Aquifer Use Control Boundary (1,000 feet)	404.91		

8.1.4.1 Future Activities

The supplemental investigation report will be finalized in FY 2015. Based on recommendations from the supplemental investigation, an additional investigation will be conducted in FY 2015 to further delineate the current extent of groundwater contamination and design/implement pilot studies to optimize current remedies. LUCs are in place to prohibit soil and groundwater intrusive activities, aquifer use, and non-industrial use. If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.

FIGURE 8-6
Site 6 Conceptual Site Model

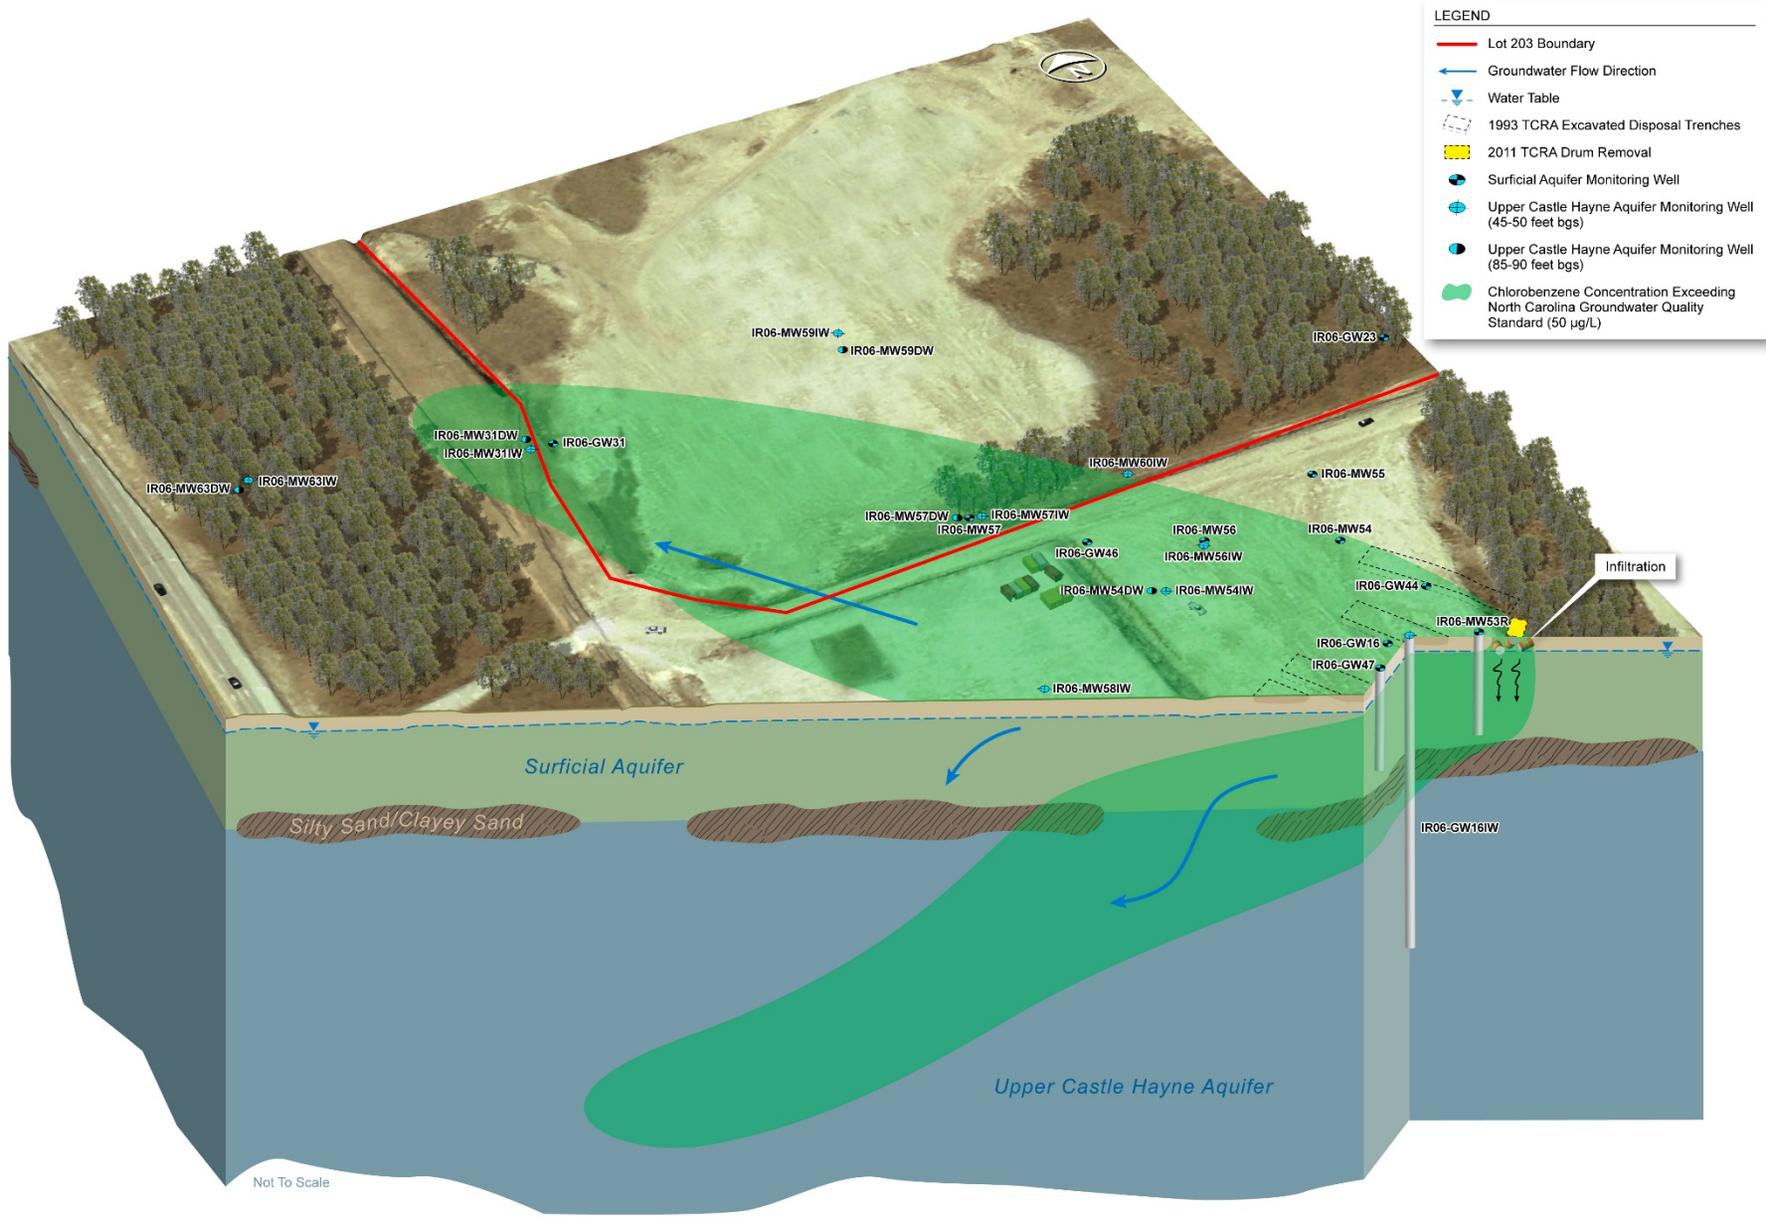

8.1.5 Site 10 (Pre-RI)—Original Base Dump

Site 10, the Original Base Dump, is located on the Mainside of the Base (**Figure 8-7**). Site 10 was approximately 5 to 10 acres in size during full operation of the landfill and was reportedly used for construction debris and as a burn dump during construction of the Base, prior to 1950.

In 2012, the Base implemented soil LUCs for conservativeness based on the site's history as a dump. This site was moved from RC to RIP in 2013.

FIGURE 8-7
IRP Site 10



Previous investigations are listed in **Table 8-9** and the LUC summary is presented in **Table 8-10**.

TABLE 8-9
Previous Investigations Summary, IRP Site 10

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. During investigation it was determined that the site did not require further investigation. However, the site was added to the IRP in 1994 when it was reported that two marines developed skin rashes after contacting a heavy oily material that may have been at the site.
Site Investigation (Baker, 2001)	1998 - 2001	An SI was conducted to verify the presence or absence of contamination. Field activities included a site survey and soil, groundwater, surface water, and sediment sampling. No unacceptable risks to human health were identified. The ERA identified minimal potential risks from metals in surface water. Based on the findings, the Final SI recommended NFA.
No Action Decision Document (CH2M HILL 2005)	2005	A Final NADD was completed May 12, 2005.

TABLE 8-10
 Land Use Control Summary, IRP Site 10

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Intrusive Activities Control Boundary (Soil)	25.2	NA	NA

8.1.5.1 Future Activities

Base implemented LUCs are in place to prohibit soil intrusive activities within the extent of waste.

8.1.6 Site 15 (SWMU 46)—Montford Point Burn Landfill Area

Site 15, the former Montford Point Burn Landfill Area operated between 1948 and 1958 and was used for the disposal of sewage treatment sludge and other materials, including litter, metal, asphalt, and sand (**Figure 8-8**). Surface wastes in this area were investigated under the RCRA program as SWMU 46. Upon removal of surface wastes, Site 15 was transferred to the IRP on December 28, 2007. The site covers approximately 24 acres and the waste disposal area is 2 acres.

In 2012, the Base added soil LUCs for conservativeness, based on the site's history as a dump. This site was moved from RC to RIP in 2013.

FIGURE 8-8
IRP Site 15



Previous investigations are listed in **Table 8-11** and the LUC summary is presented in **Table 8-12**

TABLE 8-11
Previous Investigations Summary, IRP Site 15

Previous Investigation/Action	Date	Activities
Confirmatory Site Investigation (Baker, 2001; 2002)	1997 - 2002	A Phase I CSI was conducted in 1997 and recommended a Phase II CSI, which was performed in 2002. Together the CSIs included soil sampling for metals and SVOCs, groundwater sampling for metals, and a geophysical survey to identify the location of the buried waste. The results indicated that an anomaly consistent with a small landfill was present in the central portion of the site.

TABLE 8-11
Previous Investigations Summary, IRP Site 15

Previous Investigation/Action	Date	Activities
Resource Conservation and Recovery Act Facility Investigation (CH2M HILL/Baker, 2005)	2004 - 2005	An RFI was conducted to further identify the waste locations and evaluate potential contamination. The RFI consisted of additional geophysical testing, test pit trenching, surface and subsurface soil sampling, installation of one monitoring well, and groundwater sampling. Soil samples were analyzed for VOCs, SVOCs, metals, and pesticides and groundwater was analyzed for metals. The RFI concluded that metals in surface soil and metals and pesticides in the landfill posed potential risks to human and ecological receptors. It was recommended that surface mounds and contaminated surface soil should be managed as RCRA waste and the landfill waste be managed under CERCLA as Site 15.
Site Reconnaissance and Soil Sampling (CH2M HILL, 2006)	2006	Mound and surface soil sampling for VOCs, SVOCs, pesticides/PCBs, and RCRA metals was conducted to identify the area for removal. Pesticides and metals that exceeded screening criteria were identified for interim measures (IMs) removal.
Interim Measure (Shaw, 2007)	2007	Removal of three mounds and a surface soil area to a depth of 1 foot bgs was conducted. A total of 1,039 tons of soil and debris were removed and confirmation soil sampling indicated pesticide and metal concentrations below screening criteria.
Preliminary Assessment/Site Investigation (CH2M HILL, 2010)	2009-2010	A field investigation was completed at Site 15 in support of the potential Camp Johnson MILCON project. Field activities included soil and groundwater sampling for VOCs, SVOCs, pesticides/PCBs, and metals, and the excavation of test pits for waste delineation. Buried waste was not encountered in the test pits, with the exception of small inert pipes and metal. Potentially unacceptable human health risks were identified based on chromium in groundwater at one location. Potentially unacceptable ecological risks were identified for one surface soil and three subsurface soil areas based on pesticides, PCBs, and metals. Additional sampling and risk assessment were recommended.
Expanded Site Investigation (CH2M HILL, 2012)	2011 - 2012	An ESI was conducted to further assess the nature and extent of contaminants and evaluate potential risks to human health and the environment. Field activities included soil and groundwater sampling for VOCs, SVOCs, Pesticides/PCBs, and metals. Exposure to surface and subsurface soil would not result in unacceptable risks to human health. Although potentially unacceptable risks were identified due to future residential exposure to SVOCs (primarily benzo(a)pyrene) in groundwater; benzo(a)pyrene was detected in only 1 of 8 samples, was not detected in the duplicate sample, and the concentration was below the maximum contaminant level. No significant ecological risks were identified from exposure to surface soil. For subsurface soil, potential risks to lower- and upper-trophic-level receptors could occur if the lead and pesticides in subsurface soil is exposed. However, given the lack of deep-dwelling earthworms, limited burrowing activity, unlikelihood for excavation in the waste disposal area, and the relatively small area exposed by occasional tree falls, exposure to subsurface soils is unlikely. Based on these conclusions, NFA was recommended.
No Action Decision Document (CH2M HILL, 2013)	2013	The Final NADD was signed in February 2013.

TABLE 8-12
Land Use Control Summary, IRP Site 15

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Intrusive Activities Control Boundary (Soil)	3.3	NA	NA

8.1.6.1 Future Activities

Base implemented LUCs are in place to prohibit soil intrusive activities within the extent of waste.

8.1.7 Site 16 (OU 8)—Former Montford Point Burn Dump

Site 16, the Former Montford Point Burn Dump, encompasses approximately 4 acres in the Montford Point area of the Base (**Figure 8-9**). The Montford Point Burn dump was open from approximately 1958 to 1972, although unauthorized dumping subsequently occurred. Trash from the surrounding housing area and buildings is suspected to have been burned and then covered with soil at Site 16. Records indicate that building debris, garbage, tires, and small amounts of waste oils were disposed of at the site. Materials, including asbestos insulating material for pipes, were also dumped on the surface. The quantity of asbestos material was estimated at less than 1 yd³, and mitigation was completed. Currently, Site 16 is vacant.

FIGURE 8-9
IRP Site 16, OU 8



Previous investigations are listed in **Table 8-13** and the LUC Summary is presented in **Table 8-14**.

TABLE 8-13
Previous Investigations Summary, IRP Site 16

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Research indicated that unauthorized dumping of asbestos posed a possible health threat and recommended an investigation or removal be completed. Corrective measures were undertaken to remove the asbestos material.

TABLE 8-13
Previous Investigations Summary, IRP Site 16

Previous Investigation/Action	Date	Activities
Remedial Investigation/ Feasibility Study (Baker, 1996)	1994 - 1996	An RI was conducted to assess the nature and extent of contamination. Field activities included a site survey, soil, groundwater, surface water, and sediment sampling. Minimal potential human health risks were identified for future residents due to the presence of PCBs in the soil. However, the maximum detected PCB concentration (2.1 parts per million) was below the recommended cleanup level for PCBs of 10 to 25 parts per million for industrial areas. No unacceptable ecological risks were identified for terrestrial or aquatic receptors.
Proposed Remedial Action Plan and Record of Decision (Baker, 1996)	1996	A Final PRAP was issued to solicit public input on the preferred alternative (no RA) and a public meeting was held. The ROD for OU 8 was signed on September 30, 1996. Minimal risks were identified in the RI; therefore, no RAs were required in the ROD.
Remedy-in-Place	2001 - 2002	Although the ROD did not require RA, for conservativeness LUCs were implemented by the Base in 2001 and updated in 2002 due to the site's past use as a dump.
Explanation of Significant Difference (CH2M HILL, 2012)	2012	An ESD was submitted in 2012 to document the LUCs as the remedy, including the addition of an intrusive activities control boundary for soil to prevent exposure to waste in-place.
Land Use Control Implementation Plan (CH2M HILL, 2013)	2013 - 2014	LUCs were updated in the 2014 LUCIP Update and a new Notice of Contaminated Site was filed with Onslow County real property records.

TABLE 8-14
Land Use Control Summary, IRP Site 16

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Intrusive Activities Control Boundary (Soil)	2.1	August 2014	August 2014
Non-Industrial Use Control Boundary (Soil)	2.1		
Intrusive Activities Control Boundary (Groundwater)	0.169	July 2002	February 2007
Aquifer Use Control Boundary (1,000 feet)	60.2		


8.1.7.1 Future Activities

Because the waste remains in-place, the LUCs prohibiting aquifer use, intrusive activities for soil and groundwater, and non-industrial land use will be maintained.

8.1.8 Site 21 (OU 1) —Transformer Storage Lot 140

Site 21, the Transformer Storage Lot 140, covers approximately 10 acres within OU 1, and is 1 mile east of the New River and 2 miles south of State Route 24 (**Figure 8-10**). OU 1 consists of three sites (Sites 21, 24, and 78) that have been grouped together into one OU because of their proximity to one another. From 1950 to 1951, a pit located in the northern portion of Site 21 was used as a drainage receptor for oil from transformers. Surface discharge of transformer oils was also reported. The quantity of oil disposal is unknown. The pit reportedly measured 25 to 30 feet long by 6 feet wide and 8 feet deep. In 1958, a pest control shop was moved from Building 712 (Site 2) to Building 1105, located in the southern portion of Site 21. From 1958 to 1977, Building 1105 was used for pesticide mixing and as a cleaning area for pesticide application equipment. Overland discharge of wastewater generated during cleaning operations was documented. The estimated quantity of wastewater discharged was approximately 350 gallons per week in 1977.

FIGURE 8-10
IRP Site 21, OU 1

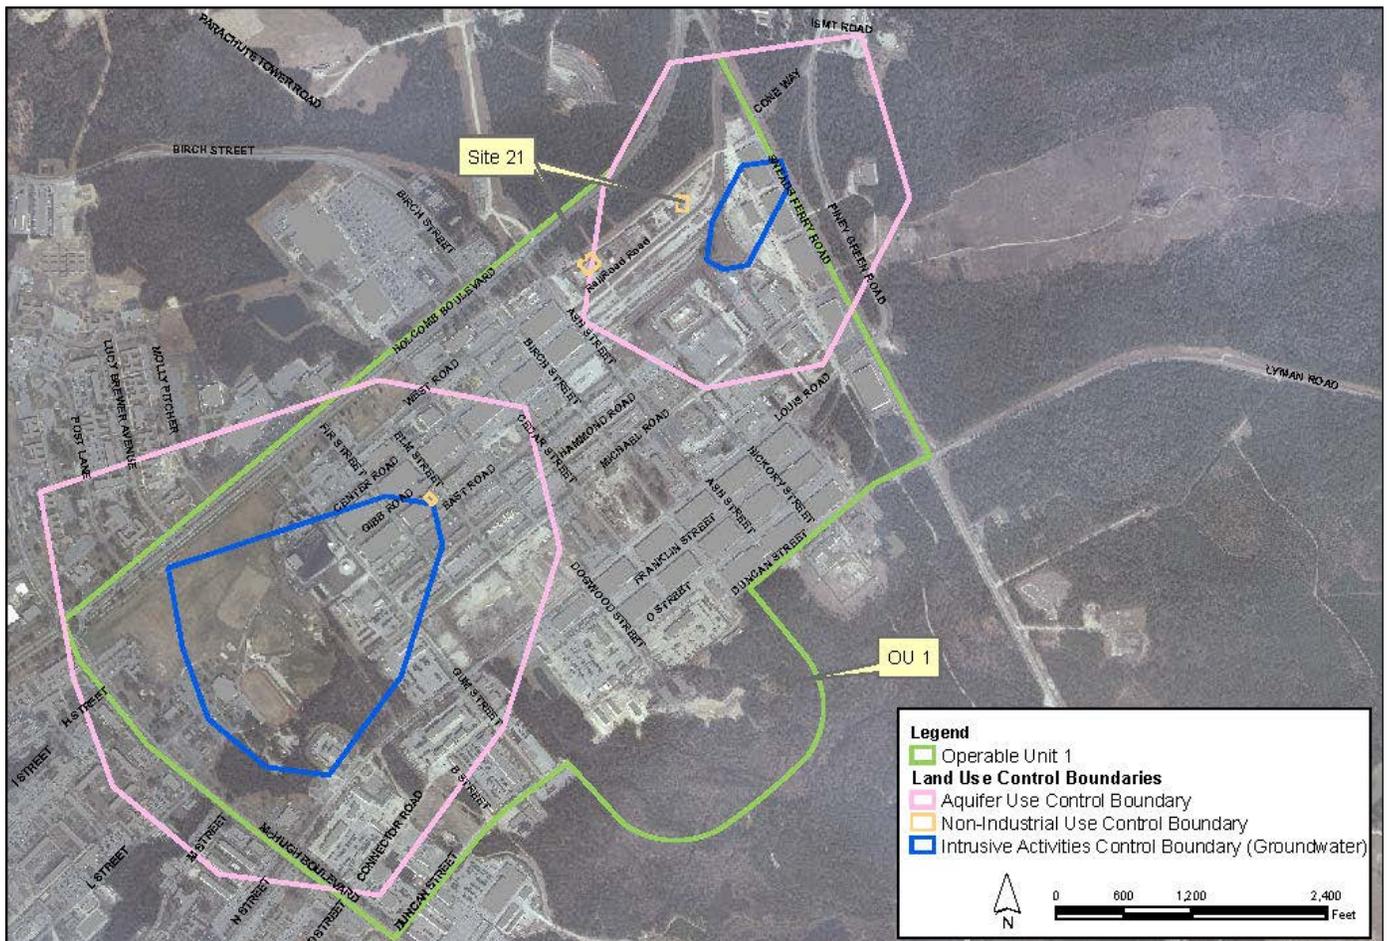

Previous investigations are listed in **Table 8-15** and the LUC summary is presented in **Table 8-16**.

TABLE 8-15
Previous Investigations Summary, IRP Site 21

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Research indicated that past site operations may have impacted soil, groundwater, and surface water and recommended an additional investigation.
Confirmation Study (ESE, 1990)	1984 - 1987	The Confirmation Study included soil and groundwater investigations. Analytical results confirmed the presence of pesticides/PCBs in soils.
Remedial Investigation/ Feasibility Study (Baker, 1994)	1994	An RI was conducted to assess the nature and extent of contamination. Field activities included groundwater, soil, sediment, and surface water sampling. No potential risks to human health were identified. Potential ecological risks were identified based on exposure to pesticides and PCBs in soil at Site 21. An FS was conducted to develop and screen remedial alternatives for addressing soil contamination at three separate areas on the site.
Proposed Remedial Action Plan and Record of Decision (Baker, 1994)	1994	A PRAP was issued to solicit public input on the preferred alternative (excavation and offsite disposal to address soil contamination) and a public meeting was held. The Final ROD was issued in September 1994.
Explanation of Significant Differences (Baker, 1995)	1995	Before implementing the soil remedy, an ESD was issued to revise the cleanup level for PCBs to the federal PCB action level for industrial sites due to the industrial nature of site activities.
Remedy-in-Place	1995 - 2002	The removal action identified in the ROD was performed in 1995, and approximately 650 tons of pesticide-contaminated soil and 161 tons of PCB-contaminated soil were excavated and disposed offsite. Because the removal action was only considered protective for industrial site use, a LUCIP was completed in 2001 that restricted development to industrial land use. LUCs were implemented as part of OU 1 in 2001 and amended in 2002.

TABLE 8-16
Land Use Control Summary, IRP Site 21

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	0.815	July 2002	February 2002

8.1.8.1 Future Activities

LUCs will be maintained to prohibit non-industrial use within the extent of the former soil removal action areas where pesticides and PCBs remain in soil above levels that allow for UU/UE.

8.1.9 Site 28 (OU 7) — Hadnot Point Burn Dump

Site 28, the Hadnot Point Burn Dump, is located within OU 7 on the Mainside of the Base. OU 7 consists of three sites (Sites 1, 28, and 30) that have been grouped together into one OU because of their unique characteristics of suspected waste (POL) and geographic location (**Figure 8-11**). Site 28 operated from 1946 to 1971 as a burn area for a variety of solid wastes generated on the Base and covers approximately 17 acres. Industrial waste, trash, oil-based paint, and construction debris were reportedly burned and then covered with soil. In 1971, the burn dump ceased operations and was graded and seeded with grass. The total volume of fill within the dump is estimated to be between 185,000 and 375,000 yd³. Currently, most of Site 28 is used for recreation and physical training exercises.

FIGURE 8-11
IRP Site 28, OU 7



Previous investigations are listed in **Table 8-17** and the LUC summary is presented in **Table 8-18**.

TABLE 8-17
Previous Investigations Summary, IRP Site 28

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The IAS concluded potential impact to surface water due to past disposal practices and recommended an additional investigation to determine the boundaries of the disposal area and verify the presence of hazardous wastes.
Confirmation Study (ESE, 1988)	1984 - 1987	The Confirmation Study included groundwater, surface water, sediment, and fish tissue investigations. Metals detected in groundwater, surface water, and sediment

TABLE 8-17
Previous Investigations Summary, IRP Site 28

Previous Investigation/Action	Date	Activities
		were determined to be related to past site activities. Additionally, VOCs and O&G were detected in groundwater samples.
Remedial Investigation / Feasibility Study (Baker 1995)	1994 - 1995	An RI was conducted to further characterize the nature and extent of contamination. RI field activities consisted of a site survey, soil, groundwater, surface water, and sediment sampling, and an aquatic and ecological survey. Low levels of VOCs were detected in soil and metals in groundwater. Potential human health risks were identified due to the presence of metals in soil and sediment, and the presence of metals and VOC in groundwater. The concentrations of metals in soil were just above the screening criteria; therefore, the risks associated with exposure to soils were deemed low. No unacceptable ecological risks were identified. Remedial alternatives for groundwater were evaluated during preparation of the FS, submitted in July 1995.
Proposed Remedial Action Plan (Baker, 1995) and Record of Decision (Baker, 1996)	1995 - 1996	A PRAP was issued to solicit public input on the preferred alternative (LTM and LUCs) and a public meeting was held. The Final ROD was issued and signed in October 1996 followed by initiation of LTM.
Long-term Monitoring and Closeout Report (CH2M HILL, 2002)	1996 - 2002	Semi-annual groundwater, surface water, and sediment LTM was initiated in 1996 and included sampling of seven monitoring wells and three surface water and sediment locations for metals analysis. In 1998, quarterly groundwater, surface water, and sediment sampling was initiated to evaluate the seasonal fluctuations of lead. In 2001, Site 28 was recommended for removal from LTM and site closure after multiple rounds of data indicated that lead concentrations fluctuated seasonally. The seasonal fluctuations were based on naturally occurring organic matter and changes in groundwater elevation over time. Based on these results, a Closeout Report was prepared to document the completion of LTM.
Data Review (MCIEAST-MCB CAMLEJ Partnering Team, 2013)	2013	Based on recommendations from the Five-year Review, existing site data were reviewed by the MCIEAST-MCB CAMLEJ Partnering Team and the consensus was reached to update the LUCIP to: <ul style="list-style-type: none"> Remove the groundwater intrusive activities LUCs as recommended in the Five-year Review Maintain the aquifer use LUC to prevent drinking water well installation within the extent of waste remaining in place Maintain and extend the non-industrial use LUC to encompass the former burn dump boundaries and Orde Pond, where waste was reportedly encountered during utilities installation in 2012 Add soil intrusive activities LUCs to prevent exposure to the waste remaining in-place as recommended in the Five-year Review
Land Use Control Implementation Plan (CH2M HILL, 2014)	2014	Based on LTM results for groundwater, cleanup levels have been achieved. A LUCIP was prepared to document the removal of LUCs restricting groundwater intrusive activities and aquifer use. Additionally, because waste remains in place LUCs to restrict soil intrusive activities are required within the extent of waste to prevent exposure. An updated Notice of Contaminated Site was filed with Onslow County real property records in October 2014.

TABLE 8-18
Land Use Control Summary, IRP Site 28

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	17.3	July 2002	February 2002
Intrusive Activities Control Boundary (Soil)	17.3	Proposed	October 2014
Aquifer Use Control Boundary (1,000 feet)	92.5	July 2002	February 2002


8.1.9.1 Future Activities

LUCs will be maintained to prevent exposure to waste in place.

8.1.10 Site 35 (OU 10) — Camp Geiger Area Fuel Farm

Site 35, formerly the Camp Geiger Area Fuel Farm, is located within Camp Geiger, in the northwest portion of the Base and covers approximately 45 acres (**Figure 8-12**). The fuel farm was composed of five 15,000-gallon ASTs, underground fuel transmission lines, a pump house, a fuel unloading pad, an oil-water separator (OWS), and a distribution island. The ASTs were installed in 1945 as part of the original Camp Geiger construction. The fuel farm was active until it was decommissioned in the spring of 1995 to make way for the construction of the U.S. Highway 17 Bypass. During the active life of the fuel farm, several releases of fuel occurred. A vehicle maintenance garage (former Building TC474) and weapons cleaning area were also present at Site 35. Currently an armory, several warehouses, general storage buildings, and troop barracks occupy the area.

FIGURE 8-12
IRP Site 35, OU 10

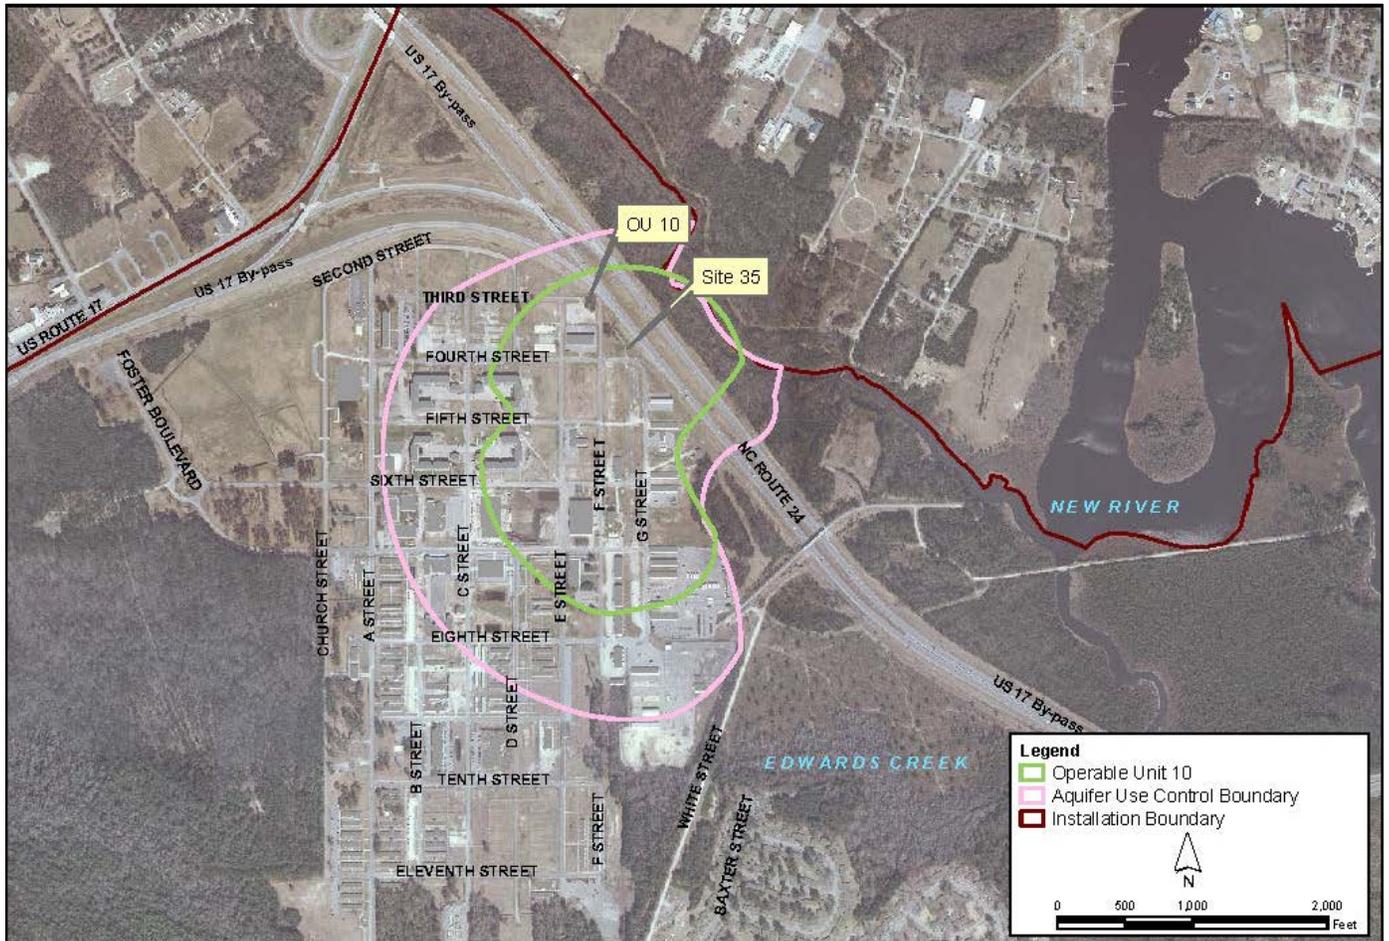

Previous investigations are listed in **Table 8-19** and the LUC summary is presented in **Table 8-20**.

TABLE 8-19
Previous Investigations Summary, IRP Site 35

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Due to potential for petroleum hydrocarbon impacts from historical site activities and recorded spills, the site was recommended for further investigation.
Confirmation Study (ESE, 1985)	1985	Soil, groundwater, sediment, and surface water samples were collected to delineate contamination. Results indicated that all media were potentially impacted by previous site activities.

TABLE 8-19
Previous Investigations Summary, IRP Site 35

Previous Investigation/Action	Date	Activities
Focused Feasibility Study (NUS Corporation, 1990)	1990	Soil, groundwater, surface water, and sediment samples were collected to evaluate a 1990 petroleum release. Risks to human health or the environment and IMs to remediate the area were evaluated. Although no unacceptable risks were found, remediation was recommended because petroleum hydrocarbon levels exceeded cleanup standards.
Comprehensive Site Assessment (Law, 1992)	1991 - 1992	Soil and groundwater samples were collected to identify the source, nature, and extent of petroleum hydrocarbon impacts. Petroleum hydrocarbon related contamination was found in soil (generally located at or below groundwater table) and in shallow groundwater. CVOC contamination was found in shallow and intermediate groundwater.
Interim Remedial Action Remedial Investigation/Feasibility Study (Baker, 1994)	1993 - 1994	Additional sampling and excavation of a shallow trench along Brinson Creek were conducted to support selection of an IRA to address soil contamination. Soil samples were collected for petroleum hydrocarbons. Analytical results identified three areas of petroleum hydrocarbon contamination in the soil, which corresponded to past unauthorized discharges of fuel products.
Soil Interim Record of Decision (Baker, 1994)	1994 - 1997	An Interim PRAP was submitted to address soils and was followed by an Interim Record of Decision (IROD). The selected remedy was excavation and offsite disposal of contaminated soil. From 1995 to 1997 approximately 15,700 tons of petroleum hydrocarbon contaminated soil were excavated and shipped offsite for disposal or recycling. Confirmatory sampling was conducted and revealed concentrations below cleanup goals. The site was restored and a closeout report was completed in 1997.
Remedial Investigation (Baker, 1995)	1994 - 1995	A soil gas survey, and soil, groundwater, surface water, and sediment sampling was conducted to evaluate the nature and extent of contamination and potential risks to human health and the environment. Results revealed soil and groundwater contamination; the extent of groundwater contamination was not delineated. The HHRA concluded that the overall site risk was above the acceptable risk range and the ERA concluded that contamination had the potential to affect the integrity of ecological receptors.
Interim Feasibility Study (Baker, 1995)	1995	The Interim FS addressed groundwater impacts and identified RAs for a focused area near the fuel farm, a known source of groundwater contamination. Although the extent of groundwater contamination was not adequately defined during the RI, an Interim FS was deemed necessary because groundwater contamination in the vicinity of the Fuel Farm was a known source of ongoing contamination to Brinson Creek.
Interim Record of Decision (Baker, 1995)	1995	An Interim PRAP was submitted to address shallow groundwater and was followed by an IROD. The IROD was issued based on the Interim FS for remediation of surficial groundwater near the fuel farm. <i>In situ</i> air sparging was the selected remedy for shallow groundwater, and the 100-foot trench was installed in 1998.
Draft Supplemental Groundwater Investigation (Baker, 1996)	1995 to 1996	Soil, groundwater, surface water, and sediment samples were collected to fill data gaps from the RI and support the air sparging pilot study. Contamination was identified in groundwater and sediment. The supplemental HHRA concluded that the overall future site risk was above the acceptable risk range.
Draft <i>In Situ</i> Air Sparging Treatability Study (Baker, 1996)	1996	A pilot study was conducted for <i>in situ</i> air sparging in the shallow aquifer. Groundwater, soil, and sediment sampling results indicated that air sparging had limited effectiveness for VOC removal, and no further investigation was recommended.
Closeout Report (OHM, 1997)	1995 - 1997	In response to the IROD, a removal action for petroleum hydrocarbon soil was initiated. Approximately 15,700 tons of contaminated soil were removed from the former fuel farm area.
Long-term Monitoring (CH2M HILL, 2005)	1999 - 2004	Groundwater samples were collected, quarterly in 1999 and semiannually from 2000 to 2004, to assess seasonal changes in contaminant distribution. LTM was discontinued in 2004 when an SRI was initiated.
Natural Attenuation Evaluation (CH2M HILL, Baker, CDM, 2003)	1998 - 2002	Seasonal changes, plume stability, and presence of natural degradation were evaluated to determine if the natural attenuation process could reduce groundwater contamination to levels of compliance. Groundwater and surface water samples were collected and analyzed for VOCs, metals, and NAIPs. Results indicated natural attenuation was degrading CVOCs, but biological degradation appeared to be stalled in some locations.

TABLE 8-19
Previous Investigations Summary, IRP Site 35

Previous Investigation/Action	Date	Activities
Hot Spot Characterization (Baker, 2003)	2002 - 2003	Characterization was completed to delineate any continuing contaminant sources. Field activities included soil and groundwater sampling for VOCs, SVOCs, volatile petroleum hydrocarbon, extractable petroleum hydrocarbon, and total organic carbon. Based on the analytical results, one shallow hot spot was co-mingled with petroleum hydrocarbons, and a deeper, larger hot spot was identified.
Technical Evaluation (CH2M HILL, 2003)	2003	A Technical Evaluation was conducted to develop and evaluate RA alternatives for groundwater. ISCO via modified Fenton's reagent followed by potassium permanganate was recommended for TCE removal. <i>In situ</i> air sparging with vertical wells was recommended for the petroleum hydrocarbon contamination.
Pilot Study (CH2M HILL, 2006)	2003 - 2005	The pilot study evaluated the effectiveness of ISCO for the remediation of TCE-impacted groundwater. Final results revealed that TCE was reduced by 80 to 98 percent and total VOCs were reduced by 72 to 85 percent within the pilot study area.
Supplemental Remedial Investigation (CH2M HILL, 2009)	2005 - 2008	Soil, groundwater, surface water, and sediment samples were collected to delineate extent of contamination. VOCs exceeded criteria and presented unacceptable risks in groundwater.
Non-time-critical Removal Action (CH2M HILL, 2008)	2006 - 2008	After the submittal of an EE/CA in 2007, an AM was prepared to document ERD as the preferred NTCRA to address CVOCs in groundwater. ERD via injection of emulsified vegetable oil (EVO) and lactate using direct-push technology was implemented. The results indicated minimal contaminant reduction based on limited distribution of substrate and limited microbial bioavailability.
Feasibility Study (CH2M HILL, 2009)	2009	Remedial alternatives to address CVOC-impacted groundwater were assessed including, no action, MNA, ERD with bioaugmentation, ISCO, and <i>in situ</i> air sparging.
Proposed Remedial Action Plan and Record of Decision (CH2M HILL, 2009)	2009	A PRAP was issued in April 2009 to solicit public input on the preferred alternative (<i>in situ</i> air sparging using a horizontal well, LTM and MNA, and LUCs) and a public meeting was held. Questions received during the public meeting were general inquiries and no comments were received during the public comment period. The Final ROD was issued and signed in November 2009. The site CSM is shown on Figure 8-13 .
Basewide Vapor Intrusion Evaluation (CH2M HILL, AGVIQ, 2009 and CH2M HILL, 2011)	2007 – 2011	Site 35 was included in the phased Basewide vapor intrusion evaluation to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. No unacceptable risks were identified from indoor air related to vapor intrusion; therefore, it was concluded that vapor intrusion is not a current significant pathway of concern for any of the buildings located in the vicinity of Site 35. The report recommended subslab soil gas and indoor air monitoring at one building with previous exceedances of Base-specific soil gas screening levels every 5 years until three rounds indicate no unacceptable risks. If new buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.
Remedy-in-Place and Interim Remedial Action Completion Report (Shaw, 2011)	2010 - 2011	The RD was completed for <i>in situ</i> air sparging using a horizontal well, LTM and MNA, and LUCs. The horizontal well was installed to address VOCs in groundwater; air sparging was initiated in 2010 and discontinued in 2013 based the downward trending concentrations of VOCs in the source area wells. LUCs were also finalized to prohibit aquifer use until cleanup levels for UU/UE are achieved. Groundwater LTM and MNA for VOCs and NAIPs was initiated in 2011 to evaluate the effectiveness of the system and monitor plume migration. An IRACR was submitted in 2011.
Basewide Vapor Intrusion Evaluation (CH2M HILL, AGVIQ, 2009, CH2M HILL, 2011, and CH2M HILL 2014)	2007 - 2014	Site 35 was included in the phased Basewide vapor intrusion evaluation, conducted from 2007-2011, to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. Vapor intrusion was not identified as a significant pathway of concern for any of the buildings located in the vicinity of Site 35. However, additional sampling was recommended to further characterize temporal variability at Building G533 and based on the 2013 results, NFA is recommended. If new buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.


TABLE 8-20
 Land Use Control Summary, IRP Site 35

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Aquifer Use Control Boundary	178.6	May 2010	August 2010

8.1.10.1 Future Activities

The MNA will be continued to monitor migration of VOC contamination. LUCs will be maintained to prohibit aquifer use until cleanup levels are achieved. If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.

FIGURE 8-13
Site 35 Conceptual Site Model

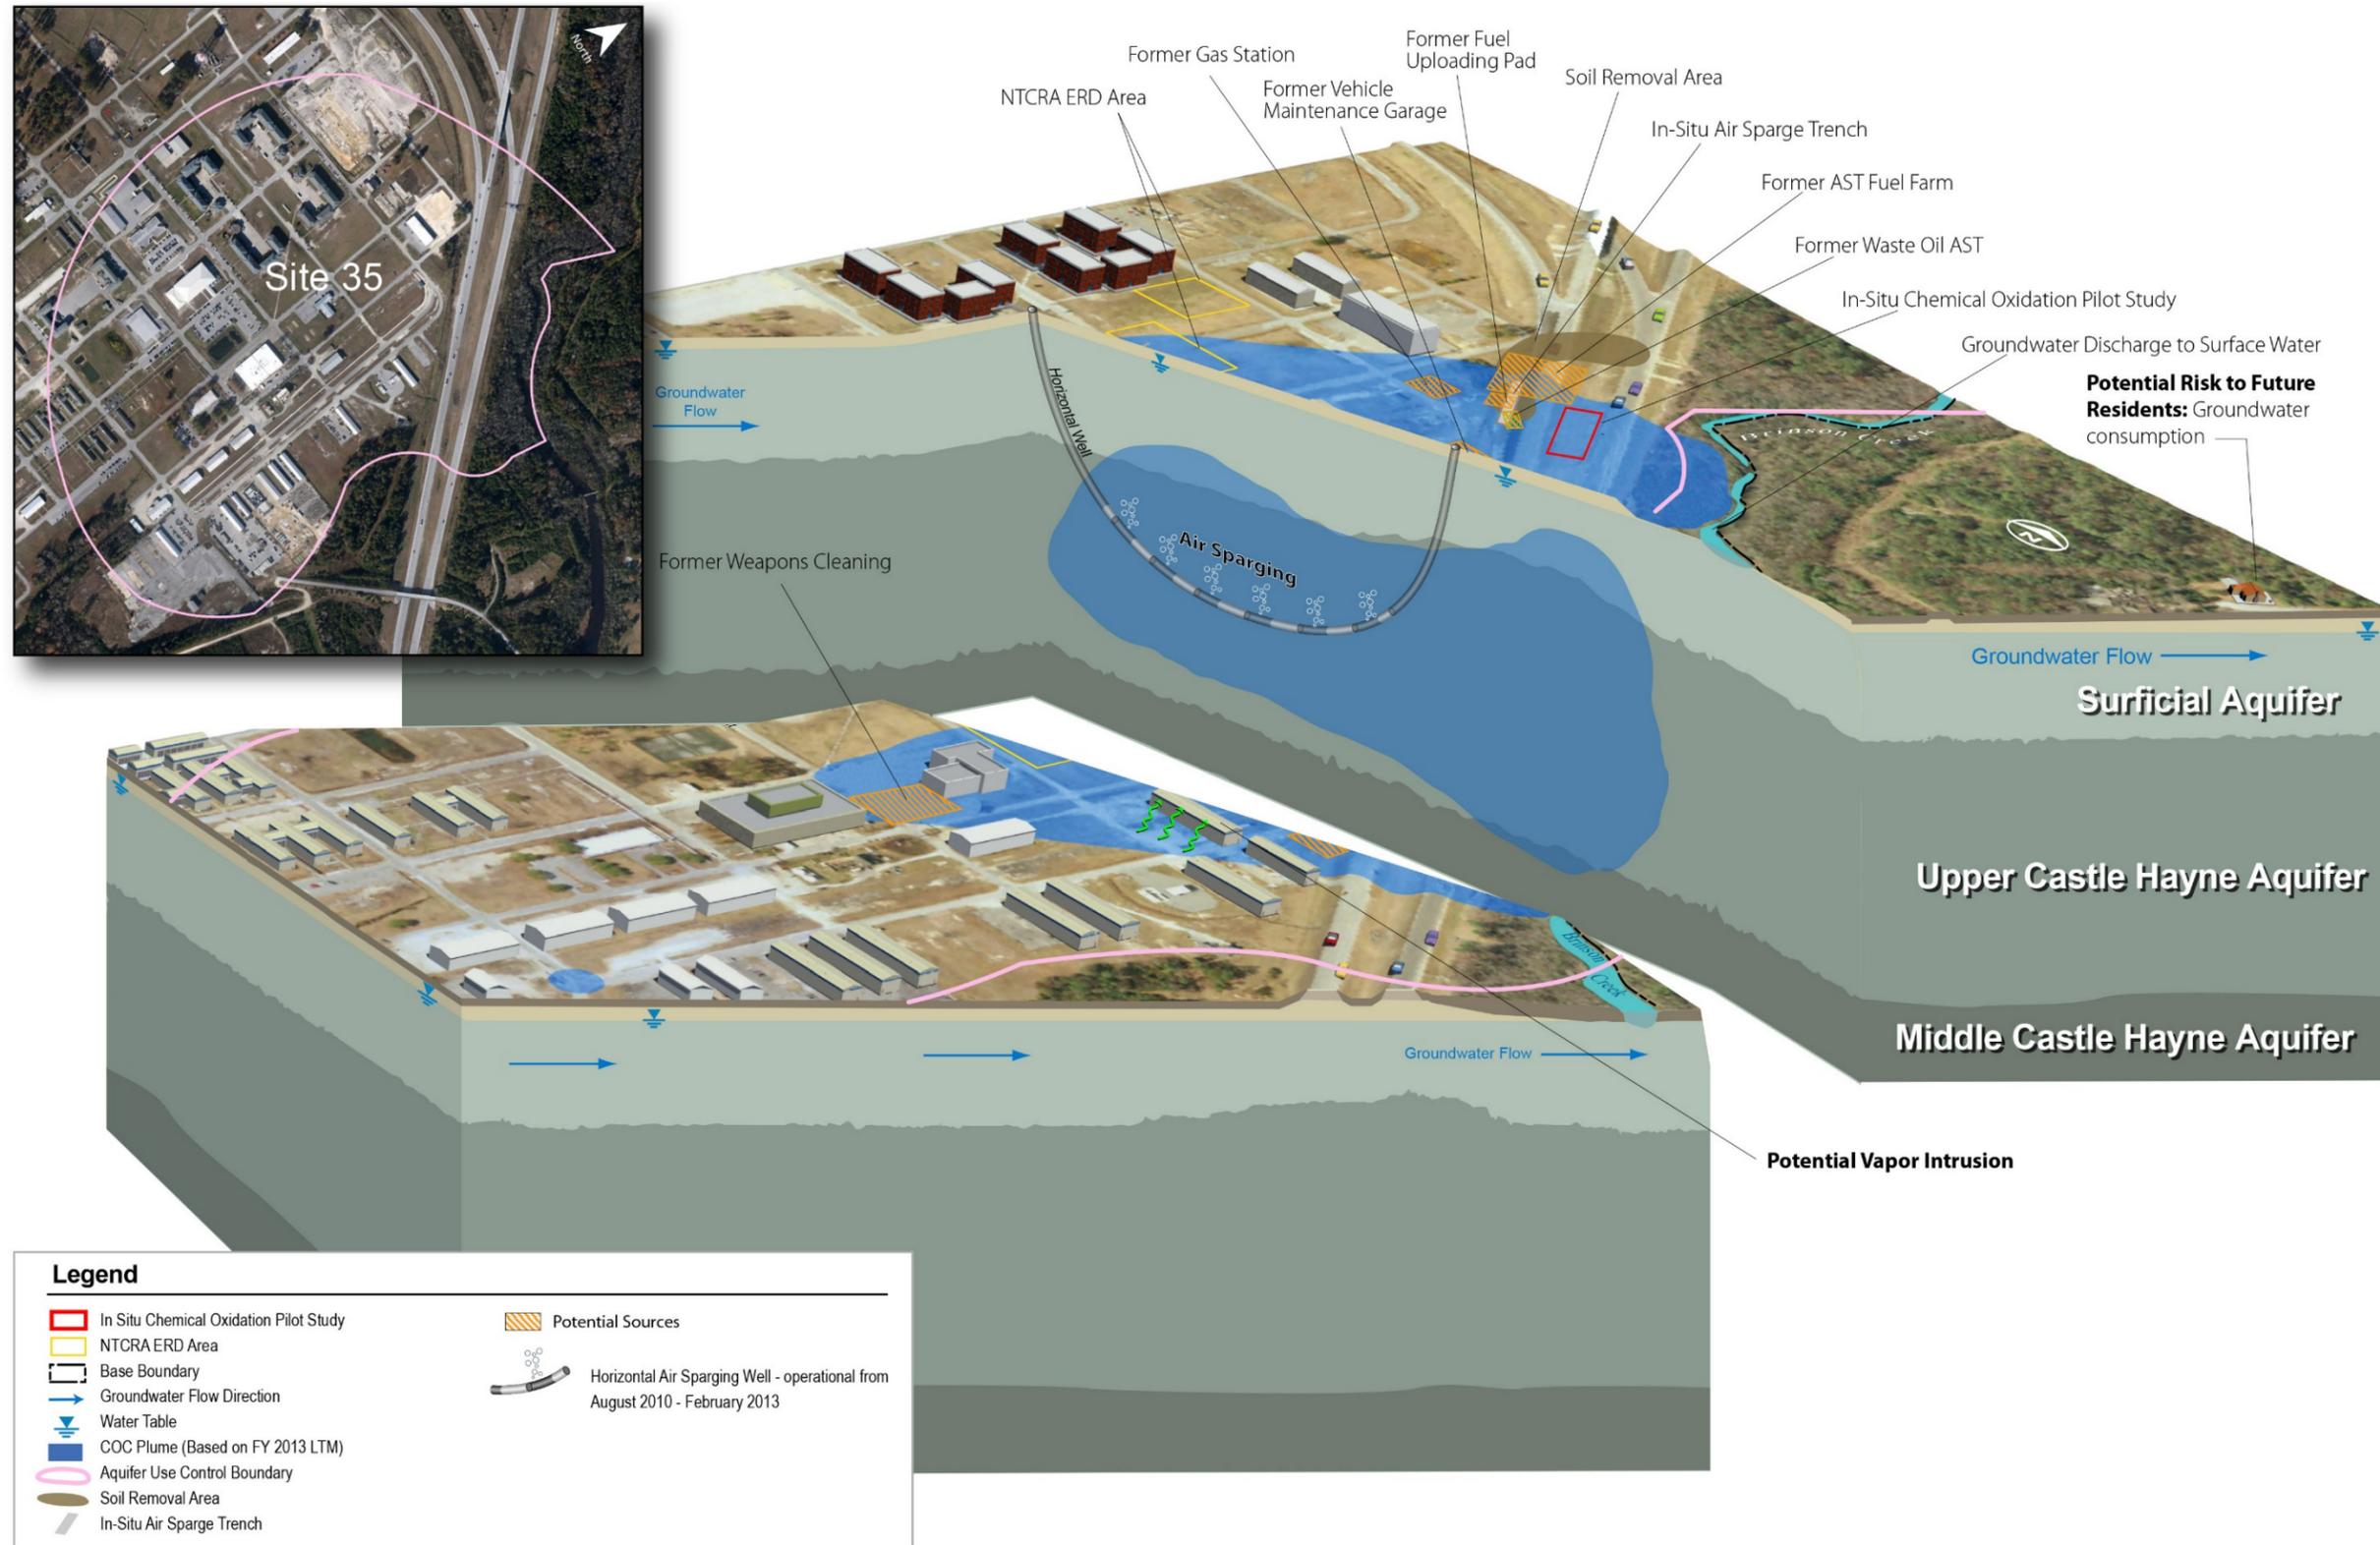


This page intentionally left blank.

8.1.11 Site 36 (OU 6) — Camp Geiger Dump Area Near Sewage Treatment Plant

Site 36, the Camp Geiger Dump Area, encompasses approximately 20 acres within OU 6 in the northwest portion of the Base (**Figure 8-14**). OU 6 covers approximately four sites (Sites 36, 43, 44, and 54) that have been grouped together into one OU because of the similar characteristics of material disposed and geographic location. Site 36 is reported to have been used for the disposal of municipal wastes and mixed industrial wastes, including trash, waste oils, solvents, and hydraulic fluids that were generated at MCAS New River. The dump was active from the late 1940s to the late 1950s and covers approximately 5 acres. Most of the material was burned and buried.

FIGURE 8-14
IRP Site 36, OU 6

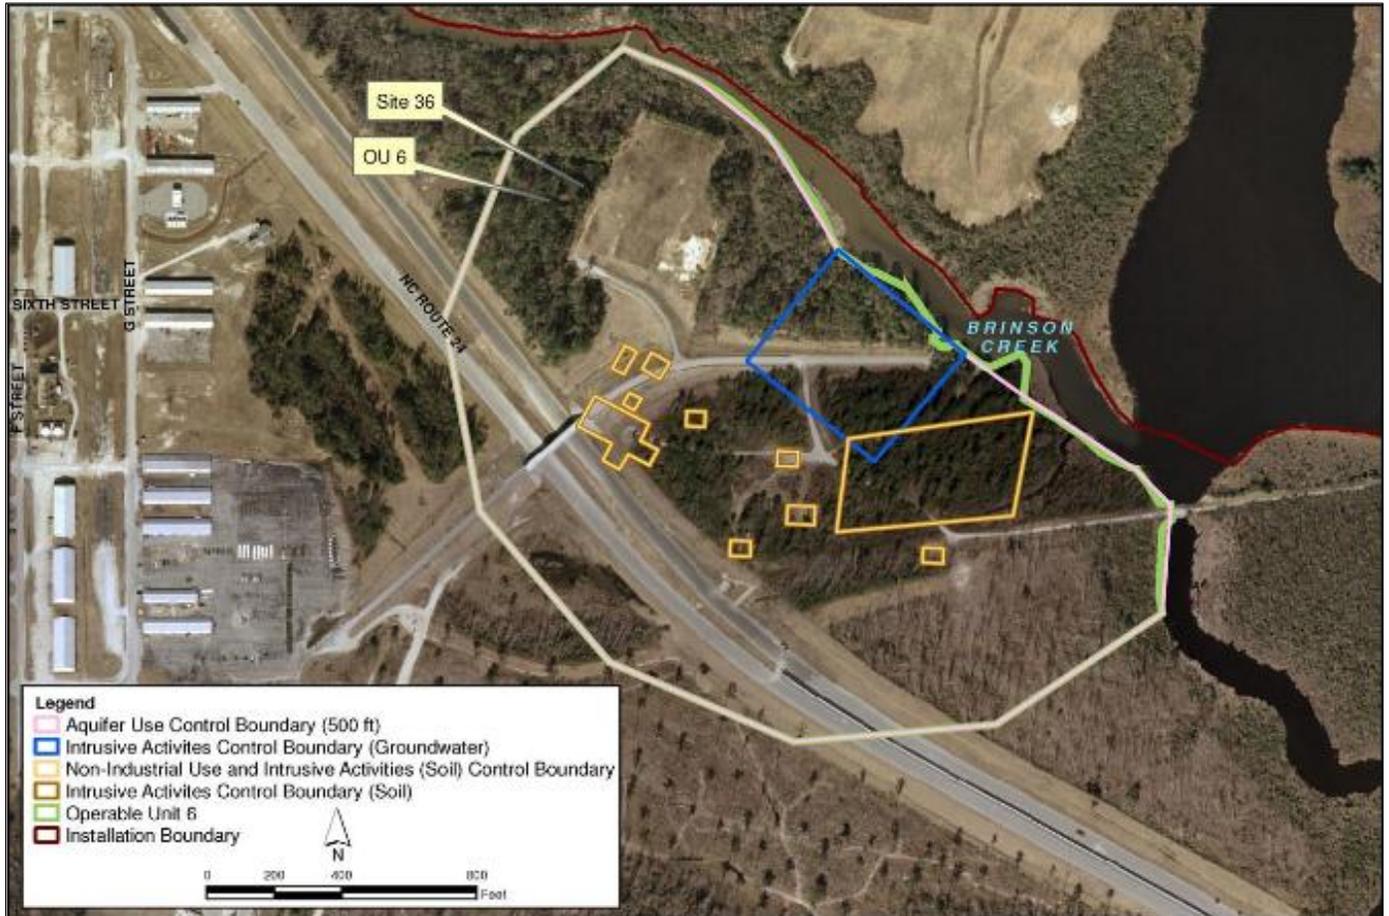

Previous investigations are listed in **Table 8-21** and the LUC summary is presented in **Table 8-22**.

TABLE 8-21
Previous Investigations Summary, IRP Site 36

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. A Confirmation Study was recommended due to the indication that hazardous substances were disposed of.
Confirmation Study (ESE, 1990)	1984 - 1987	A Confirmation Study was conducted to verify the presence of potential contaminants in groundwater, surface water, and sediment. An RI/FS was recommended to further characterize VOCs and metals in groundwater.
Remedial Investigation (Baker, 1996)	1994 - 1996	To further characterize the nature and extent of contamination, an RI was conducted. Field activities included the installation of additional monitoring wells and the collection of soil, groundwater, surface water, and sediment samples. Potential human health risks were identified due to exposure to lead, PAHs, pesticides, and PCBs in soil and VOCs in groundwater. Minimal potential ecological risks were identified for aquatic receptors at Site 36.

TABLE 8-21
Previous Investigations Summary, IRP Site 36

Previous Investigation/Action	Date	Activities
Time-critical Removal Action (1997)	1997	A TCRA was conducted to remove PCB-contaminated surface soil at concentrations posing an imminent threat to human health and the environment. Approximately 92 tons of regulated PCB-contaminated soils and 148 tons of non-regulated soils were excavated.
Post-Remedial Investigation Groundwater Monitoring	(1998-present)	A post-RI monitoring program consisting of quarterly groundwater and surface water sampling was initiated. Monitoring was implemented to determine if MNA could be a viable remedial alternative for VOCs in groundwater and to evaluate plume movement. Annual groundwater and semi-annual surface water sampling is currently conducted at Site 36 in accordance with the ROD, RD, and LTM optimization report.
Feasibility Study (Baker, 1998; 2002)	1998 - 2002	Based on the results of the RI, FSs were completed in 1998 and 2002 to evaluate remedial alternatives to mitigate risks from lead, PAHs, and pesticides in soil and VOCs in groundwater. The preferred alternative was excavation and offsite disposal for soil and MNA for groundwater.
Interim Remedial Action (Shaw, 2003)	2003	An EE/CA was presented at a public meeting for completing an interim response removal action. Excavation and offsite disposal of PAH and pesticide-contaminated soil was the selected NTCRA. A total of 1,630 tons of soil were removed from four areas within the south-central portion of the site. The NTCRA was completed before the Final ROD was issued.
Proposed Remedial Action Plan (Baker, 2002) and Record of Decision (Baker, 2005)	2002 - 2005	A PRAP was issued to solicit public input on the preferred alternative (excavation and offsite disposal and LUCs for soil and MNA and LUCs for groundwater) and a public meeting was held. The Final ROD was issued and signed in July 2005.
Remedy-in-Place and Interim Remedial Action Completion Report (CH2M HILL, 2005; 2007)	1998 - present	LTM of groundwater and surface water for VOCs and NAIPs was initiated in 1998. An RD was completed for OU 6 in 2005 to document the LUC implementation and maintenance actions and LTM activities for MNA at Site 36. LUCs were implemented in 2005. In 2007, an IRACR was completed to document the RIP. The CSM is shown on Figure 8-15 .

TABLE 8-22
Land Use Control Summary, IRP Site 36


LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	4.8		
Intrusive Activities Control Boundary (Soil)	4.8		
Intrusive Activities Control Boundary (Groundwater)	4.8	September 2005	February 2007
Aquifer Use Control Boundary (1,000 feet)	64.8		

8.1.11.1 Future Activities

The groundwater and surface water MNA will be continued to monitor the VOC plume and migration. LUCs will be maintained to prohibit groundwater intrusive activities and aquifer use until cleanup levels are achieved. LUCs are also in place to prohibit soil intrusive activities and non-industrial use within the extent of former soil removal action areas where PAHs, PCBs, and/or lead remain in soil above levels that allow for UU/UE. Based on recommendations from the FY 2012 LTM report, a pilot study is planned for FY 2015 to evaluate potential remedial technologies to reduce COC concentrations enhance MNA.

If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.

FIGURE 8-15
Site 36 Conceptual Site Model

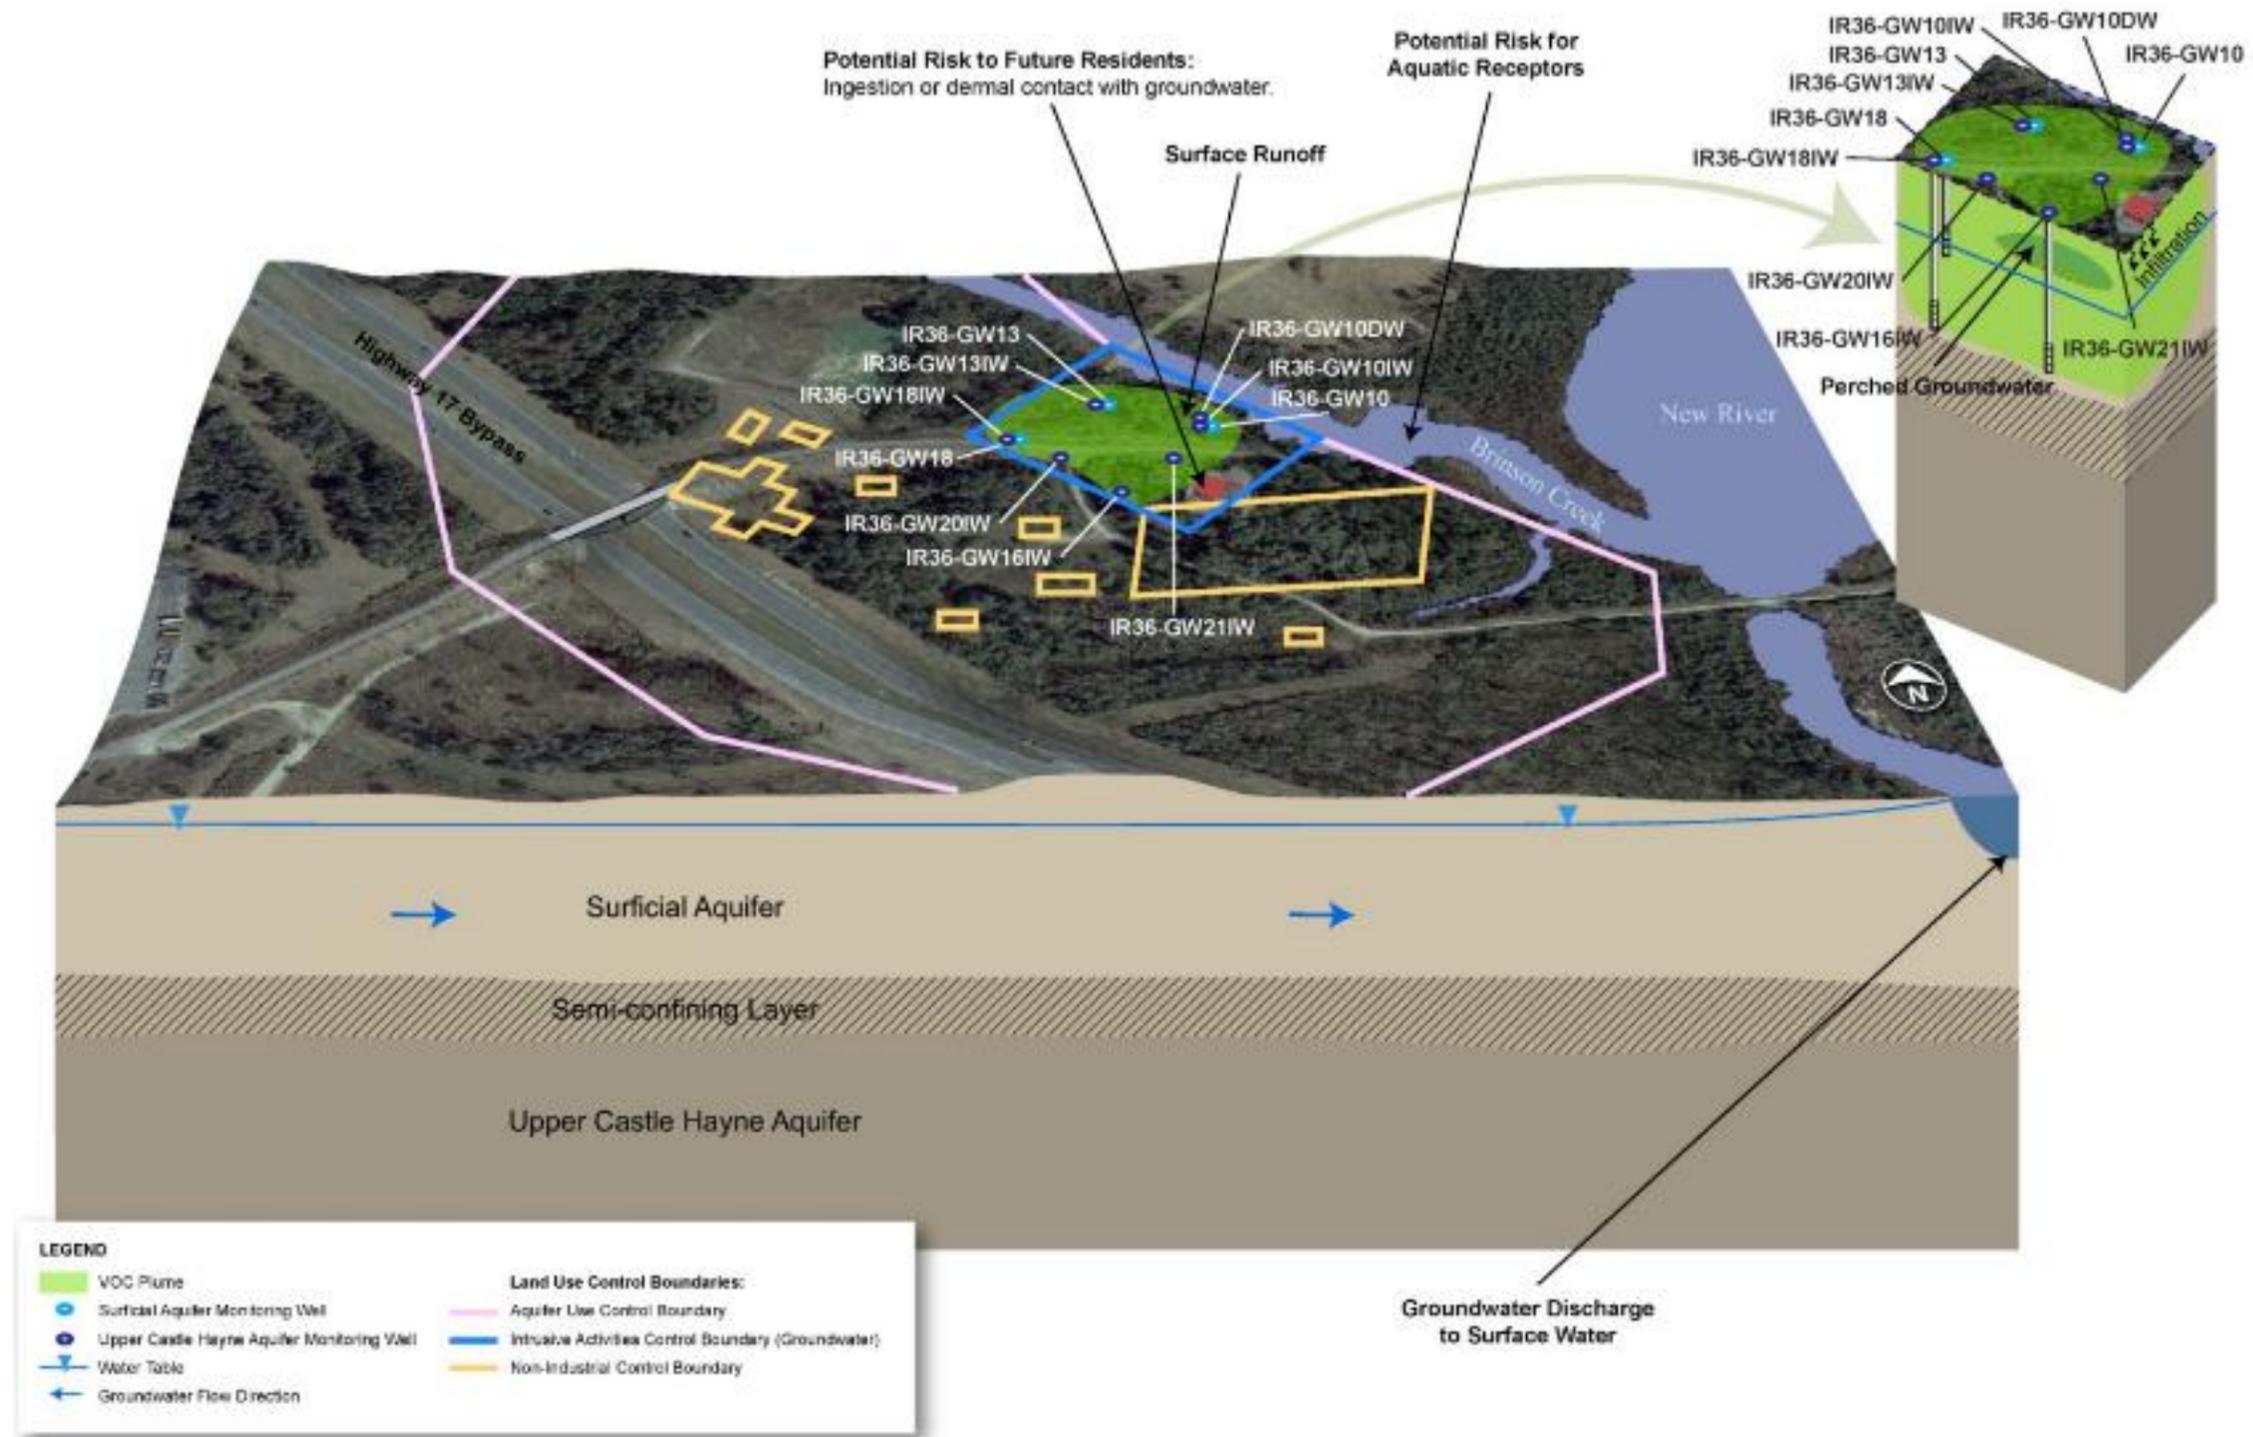


This page intentionally left blank.

8.1.12 Site 41 (OU 4) — Camp Geiger Dump near Former Trailer Park

Site 41, the Camp Geiger Dump near the Former Trailer Park, encompasses approximately 37 acres within OU 4 in the Camp Geiger area of the Base (**Figure 8-16**). OU 4 consists of two sites (Sites 41 and 74) that have been grouped together based on the unique characteristic of suspected waste (CAs). Construction debris, POL compounds, solvents, batteries, ordnance, chemical training agents, and, in 1964, mirex (a pesticide), was reportedly disposed at Site 41. The debris was reportedly burned and graded over with soil. The dump area contains an estimated 110,000 yd³ of waste. The amount of solvents and oil disposed was estimated to be between 10,000 and 15,000 gallons; and the quantity of mirex was estimated at several tons.

FIGURE 8-16
IRP Site 41, Operable Unit 4

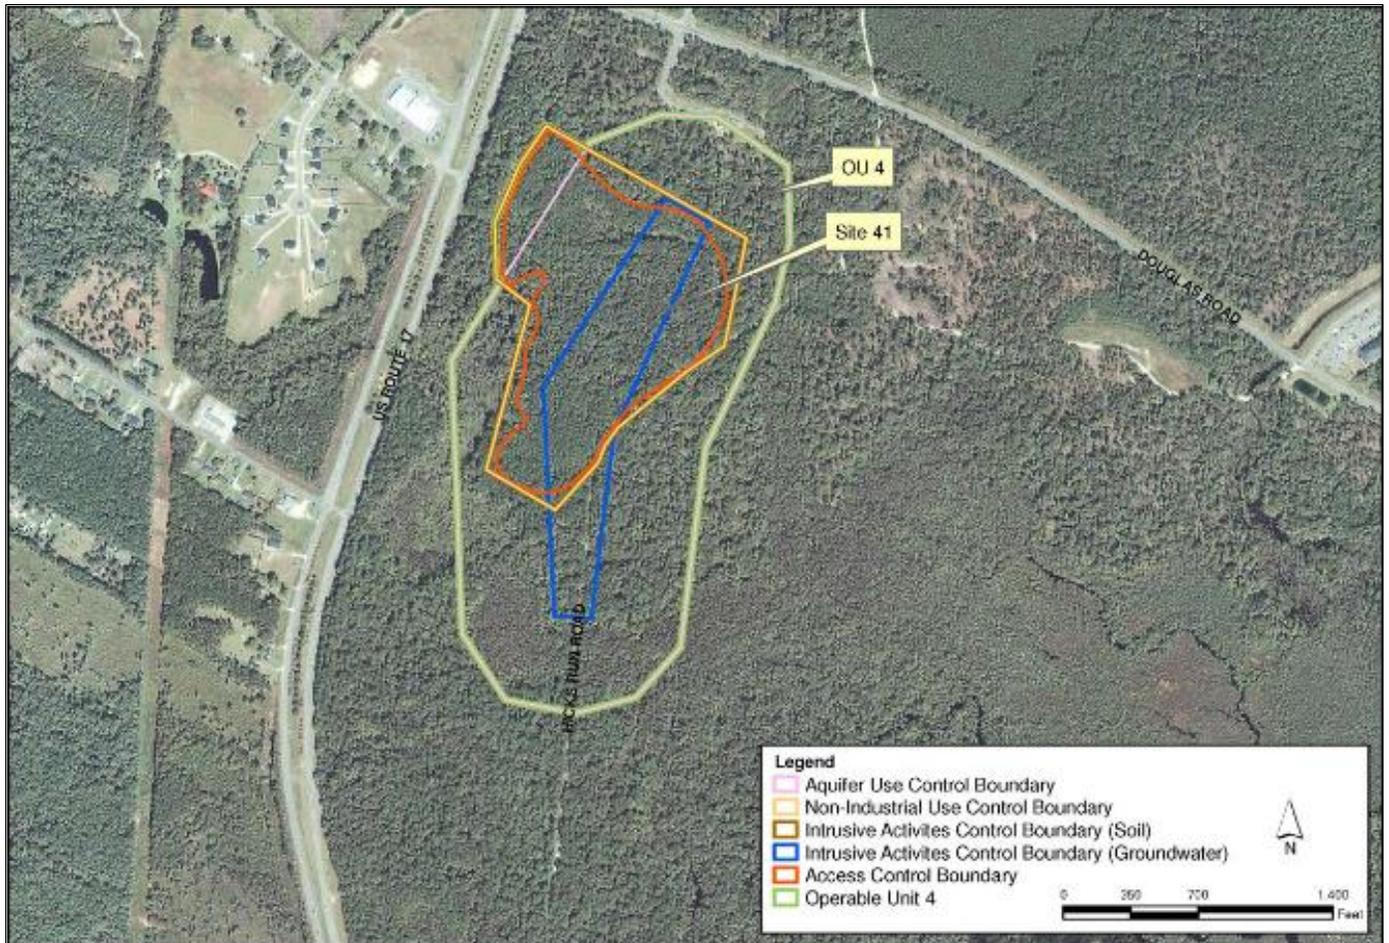

Previous investigations are listed in **Table 8-23** and the LUC summary is presented in **Table 8-24**.

TABLE 8-23
Previous Investigations Summary, IRP Site 41

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCEAST-MCB CAMLEJ. The IAS concluded that disposal of industrial wastes and pesticides could impact groundwater and recommended an additional investigation to verify the presence of hazardous wastes.
Confirmation Study (ESE, 1990)	1984 - 1987	The Confirmation Study included groundwater, surface water, and sediment investigations. O&G and phenols were detected in groundwater, surface water, and sediment samples. VOCs, metals, and one nitroaromatic were detected in groundwater samples.

TABLE 8-23
Previous Investigations Summary, IRP Site 41

Previous Investigation/Action	Date	Activities
Remedial Investigation/ Feasibility Study (Baker, 1995)	1993 - 1995	To further characterize the nature and extent of contamination an RI was conducted. Field activities included a geophysical investigation, soil, groundwater, surface water, and sediment sampling, and an aquatic and ecological survey. The geophysical investigation indicated that the site contained a significant amount of buried construction debris. Although there was reported history of CA disposal, no chemical surety degradation compounds were detected in soil. Potential human health risks were identified due to exposure to metals in groundwater and seep surface water. Minimal potential ecological risks were identified for aquatic receptors at Site 41. An FS was conducted to develop and screen remedial alternatives for addressing soil, groundwater, and surface water contamination.
Proposed Remedial Action Plan and Record of Decision (Baker, 1995)	1995	A PRAP was issued to solicit public input on the preferred alternative (LTM to monitor contaminant migration and LUCs) and a public meeting was held. The Final ROD was issued and signed in December 1995.
Remedy-in-Place and Remedial Action Completion Report (CH2M HILL, 2006)	1997 - 2008	LTM was initiated in 1997 and included sampling of five monitoring wells and eight surface water and sediment locations twice a year for analysis of VOCs, metals, total dissolved solids (TDS), and total suspended solids (TSS). In 2005 the groundwater cleanup levels were achieved and LTM was discontinued. LUCs were implemented in 2001 and updated in 2002. A RACR was prepared to document the completion of LTM. A fence was installed around the perimeter of the site in 2008 to restrict access.

TABLE 8-24
Land Use Control Summary, IRP Site 41

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary	36.6		
Intrusive Activities Control Boundary (Groundwater)	16.4		
Intrusive Activities Control Boundary (Soil)	36.6	July 2002	February 2002
Aquifer Use Control Boundary (500 feet)	86.4		
Access Control Boundary	30		

8.1.12.1 Future Activities

The LUCs to prohibit intrusive activities, aquifer use, and non-industrial use at the site are protective of human health and the environment because exposure to waste that could result in unacceptable risks are being controlled. Perimeter fencing also restricts access to the waste area.

8.1.13 Site 43 (OU 6) — Agan Street Dump

Site 43, the Agan Street Dump, encompasses approximately 14 acres within OU 6 in the operations area of MCAS New River (**Figure 8-17**). OU 6 consists of four sites (Sites 36, 43, 44, and 54) that have been grouped together into one OU because of the similar characteristics of material disposed and geographic location. An abandoned sewage treatment plant (STP) is adjacent to the site. The Agan Street Dump reportedly received inert material such as construction debris and trash. Sludge from the former STP was also reportedly dumped onto the ground surface of Site 43; however, it is not clear when disposal operations took place.

FIGURE 8-17
IRP Site 43, OU 6



Previous investigations are listed in **Table 8-25** and the LUC summary is presented in **Table 8-26**.

TABLE 8-25
Previous Investigations Summary, IRP Site 43

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The IAS concluded that waste quantities at the site, regardless of their nature, were minor; therefore, a Confirmation Study was not recommended. However, USEPA requested an additional investigation to determine whether hazardous waste contamination existed.
Site Investigation (1991)	1991	An SI was conducted to determine the presence or absence of hazardous waste contamination. Field activities included soil, groundwater, surface water, and sediment sampling. The SI identified PAHs in surface soil, carbon disulfide and metals in groundwater, benzoic acid and metals in surface water, and PAHs and pesticides in sediment. Further characterization as part of an RI/FS was recommended.

TABLE 8-25
Previous Investigations Summary, IRP Site 43

Previous Investigation/Action	Date	Activities
Remedial Investigation / Feasibility Study (Baker, 1995; 2002)	1995 - 2002	To further assess contamination at the site an RI field investigation was initiated. Field activities included a site survey and soil, groundwater, surface water, and sediment sampling. Samples were analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. Exploratory test pits completed as part of the soil investigation identified miscellaneous debris associated with the disposal of construction material from the nearby housing area. Potential human health risks were identified for current and future receptors due to exposure to soils. Minimal potential ecological risks were identified. Based on the findings of the RI, a removal action for PAH-contaminated soil was recommended in the revised OU 6 FS.
Interim Remedial Action (1995; 2003)	1995	IRAs were conducted at Site 43 for surficial metallic debris and PAH-contaminated soil in 1995 and 2003, respectively. Approximately 7.3 tons of metallic debris were removed for recycling and a total of 1,477 tons of soil were excavated.
Proposed Remedial Action Plan and Record of Decision (Baker, 2002; 2005)	2002 - 2005	The preferred alternative, Excavation and Offsite Disposal and LUCs for soil, for Site 43 was presented in the PRAP in 2002. A public notice of availability, public comment period, and public meeting were held to solicit community input on the preferred alternative. Excavation and offsite disposal for soil was completed in 2003 during the IRA. Therefore, LUCs for soil were selected as the remedy for Site 43 as documented in the ROD for OU 6, signed in July 2005.
Remedy-in-Place and Interim Remedial Action Completion Report (CH2M HILL, 2007)	2005 - 2007	Soil LUCs were implemented in 2005, and an IRACR was completed to document the RIP.

TABLE 8-26
Land Use Control Summary, IRP Site 43

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	0.14	September 2005	February 2007
Intrusive Activities Control Boundary (Soil)	13.2		


8.1.13.1 Future Activities

LUCs will be maintained to prohibit soil intrusive activities and non-industrial use within the extent of former soil removal action areas where PAHs remain in soil above levels that allow for UU/UE.

8.1.14 Site 44 (OU 6) — Jones Street Dump

Site 44, the Jones Street Dump, encompasses approximately 6 acres within OU 6 in the operations area of MCAS New River (**Figure 8-18**). OU 6 consists of four sites (Sites 36, 43, 44, and 54) that have been grouped together into one OU because of the similar characteristics of material disposed and geographic location. Site 44 was reportedly in operation during the 1950s. Although the quantity of waste is not known, debris, cloth, lumber, and paint cans were reportedly disposed of at the site.

FIGURE 8-18
IRP Site 44, OU 6

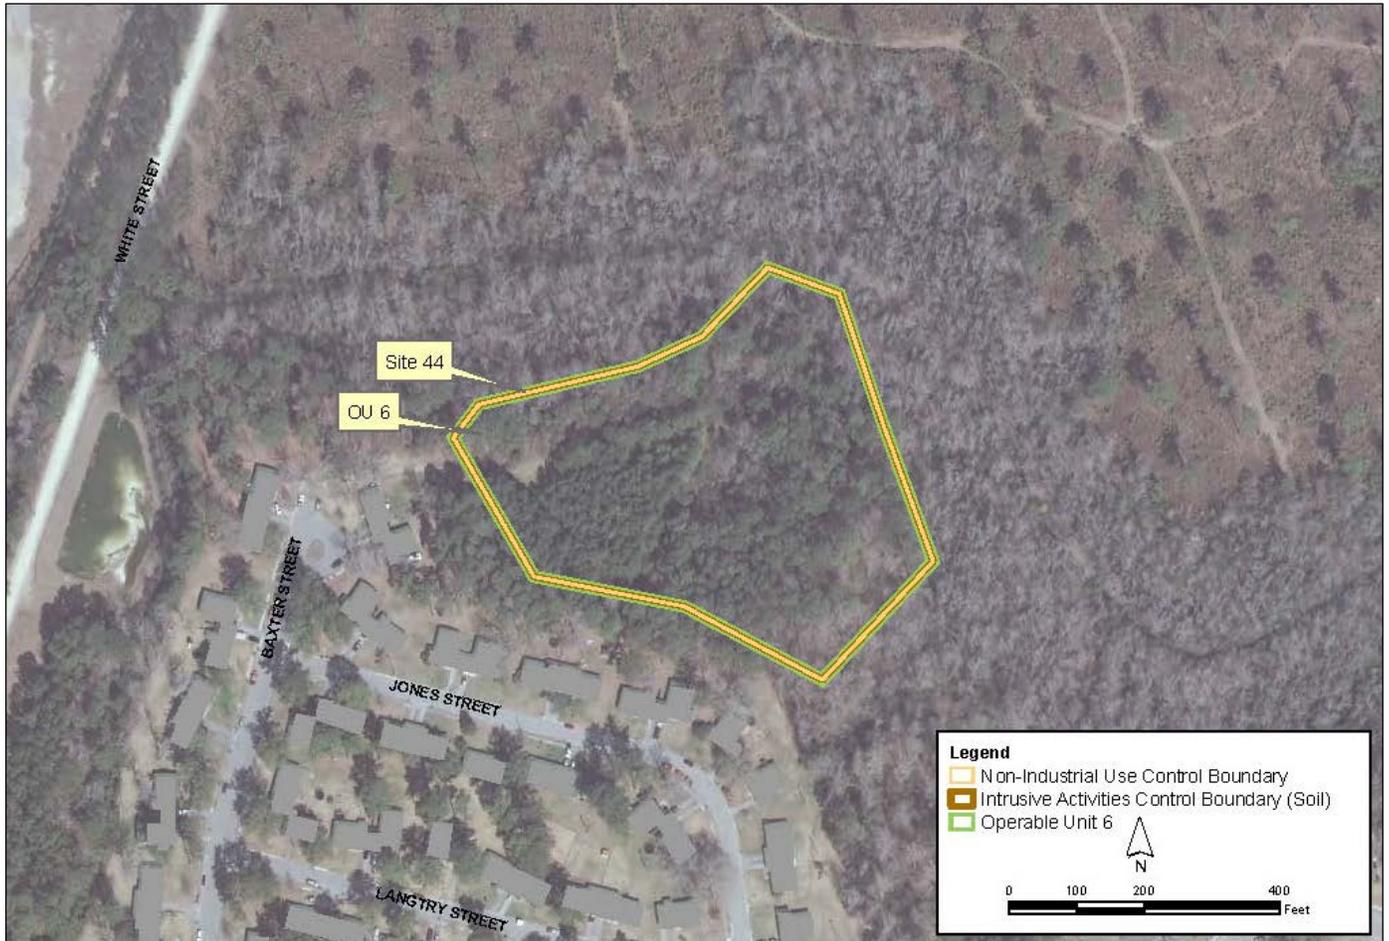

Previous investigations are listed in **Table 8-27** and the LUC summary is presented in **Table 8-28**.

TABLE 8-27
Previous Investigations Summary, IRP Site 44

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCI-EAST-MCB CAMLEJ. Due to the negligible quantity of inert material reportedly disposed at Site 44, a Confirmation Study was not recommended. However, the USEPA later requested an additional investigation to determine whether hazardous waste contamination existed.
Site Investigation (1991)	1991	An SI was conducted to verify the presence or absence of contamination. Field activities included soil, groundwater, surface water, and sediment sampling. The analytical results identified PAHs, pesticides, and metals in soil; VOCs, PAHs, and metals in groundwater; VOCs and metals in surface water; and pesticides and metals in sediment. Based on these results, an RI was proposed.

TABLE 8-27
Previous Investigations Summary, IRP Site 44

Previous Investigation/Action	Date	Activities
Remedial Investigation / Feasibility Study (Baker, 1995 and 2002)	1995 - 2002	An RI was completed to characterize the nature and extent of contamination and potential impacts to human health and the environment. Field activities included a site survey and soil, groundwater, surface water, and sediment sampling. No unacceptable risks to human health or the environment were identified, and therefore no action was recommended in the FS.
Proposed Remedial Action Plan and Record of Decision (Baker, 2002 and 2005)	2002 - 2005	Although no action was recommended during the FS, for conservativeness, MCIEAST-MCB CAMLEJ identified potential risks based on the OU 6 sites formerly used for waste disposal. Therefore, LUCs were the preferred alternative presented in the PRAP in 2002. A public notice of availability, public comment period, and public meeting were held to solicit community input on the preferred alternative. LUCs were selected as the remedy for Site 44 as documented in the ROD for OU 6, signed in July 2005.
Remedy-in-Place and Interim Remedial Action Completion Report (CH2M HILL, 2007)	2005 - 2007	An RD was completed for OU 6 in September 2005 to document the LUC implementation. A Final OU 6 IRACR was completed in August 2007 to document the RIP at Site 44 (LUCs).

TABLE 8-28
Land Use Control Summary, IRP Site 44

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Intrusive Activities Control Boundary (Soil)	5.6	September 2005	February 2007
Non-Industrial Use Control Boundary	5.6		

8.1.14.1 Future Activities

LUCs will be maintained to prohibit soil intrusive activities and non-industrial use in the former waste disposal area.

8.1.15 Site 49 (OU 23) – MCAS Suspected Minor Dump

Site 49, the MCAS Suspected Minor Dump, encompasses approximately 1 acre and is located within MCAS New River, in the northwest portion of the Base (**Figure 8-19**). The dates of operation are unknown, but Site 49 is suspected of having been used for the disposal of paint cans. A building is located approximately 50 feet from the northeast boundary of the site and is currently used for the storage of miscellaneous industrial materials and paint supplies. A drainage pipe exits the building and ends in the northeast portion of Site 49. A drainage ditch for taxiways, runways, and miscellaneous buildings along Curtis Road and Longstaff Street bisects the site. Various types of construction-related surface debris have been observed at the site.

FIGURE 8-19
Site IRP 49, OU 23



Previous investigations are listed in **Table 8-29** and the LUC summary is presented in **Table 8-30**.

TABLE 8-29
Previous Investigations Summary, IRP Site 49

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCI-EAST-MCB CAMLEJ. The quantity of waste disposed of was determined to be insignificant and did not warrant further investigation.

TABLE 8-29
Previous Investigations Summary, IRP Site 49

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2009-2011	To verify the presence or absence of contamination due to the site's history as a dump, confirmatory sampling was conducted. Soil and groundwater samples were collected in July 2009 and analyzed for SVOCs, VOCs, and metals. Based on analytical results, additional groundwater samples were collected in February 2010 and analyzed for VOCs, SVOCs, and metals were detected at concentrations exceeding screening criteria in soil. VOCs and metals were detected in groundwater at concentrations exceeding screening criteria. Potential human health and ecological risks were identified due to exposure to VOCs in groundwater. The PA/SI recommended an additional investigation to assess VOCs in groundwater.
Remedial Investigation/ Feasibility Study (CH2M HILL, 2012)	2011 - 2012	Field activities were conducted to assess the nature and extent of contamination and potential human health and environmental impacts. Field activities included soil, groundwater, pore water, surface water, and sediment sampling for VOC analysis. VOC concentrations exceeded screening criteria in one soil sample, one groundwater sample, one surface water sample, and one pore water sample. Potential unacceptable human health risks were identified due to exposure to VOCs in groundwater and RAOs were developed. The remedial alternatives evaluated were no action, MNA and LUCs, enhanced <i>in situ</i> bioremediation with LUCs and LTM, and air sparging with LUCs and LTM.
Proposed Remedial Action Plan and Record of Decision (CH2M HILL, 2013 and 2014)	2013 - 2014	A PRAP was issued to solicit public input on the preferred alternative (MNA and LUCs) and a public meeting was held. No written comments were received. The Final ROD was signed on April 24, 2014.
Remedial Design (CH2M HILL, 2014) and Interim Remedial Action Completion Report (CH2M HILL, 2014)	2014	<p>The RD provides the implementation actions, monitoring framework, and site closure milestones for the selected remedy for Site 49, which includes:</p> <ul style="list-style-type: none"> • MNA to monitor groundwater and pore water and track changes in COC concentrations • LUCs to prevent aquifer use and protect any future potential receptors from vapor intrusion <p>MNA remedial action activities began in February 2014 and are ongoing. These activities included the installation of vertical and HDD air sparging wells in the source area, two PRBs in the downgradient area, and five in-creek aerators and baseline groundwater monitoring. The air sparging system was started in September 2013 and operation and maintenance reports are submitted monthly.</p>

TABLE 8-30
Land Use Control Summary, IRP Site 49

LUC Boundary	Estimated Area (Acres)	Final ROD	Onslow County Registration Date
Aquifer Use Control Boundary (1,000 feet)	37.58	April 2014	September 2014
Industrial/Non-Industrial Use Control Boundary (vapor intrusion)	0.46		

8.1.15.1 Future Activities


LUCs will be maintained to prohibit aquifer use and mitigate the potential for vapor intrusion pathways for future buildings and land use. LTM is ongoing to monitor the concentrations of VOCs in groundwater and pore water, and LUCs are in place to prohibit aquifer use until cleanup levels are achieved.

If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.

8.1.16 Site 54 (OU 6) — Crash Crew Fire Training Burn Pit

Site 54, the Crash Crew Fire Training Burn Pit, covers approximately 1 acre near the southwest end of Runway 5-23 within the MCAS New River operations area (**Figure 8-20**). OU 6 consists of four sites (Sites 36, 43, 44, and 54) that have been grouped together into one OU because of the similar characteristics of material disposed and geographic location. The site has served as the fire training burn pit since the mid-1950s. The former Crash Crew Fire Training Burn Pit was 90 feet in diameter and situated at the center of this site. Originally, fire training was conducted on the ground surface within a bermed area using jet propulsion (JP)-type fuel, which was stored in an 8,000-gallon UST, northwest of the burn pit. An OWS, located approximately 100 feet southeast of the burn pit, was used for temporary storage and collection of the spent fuel. In 1975, a lined burn pit was constructed and was used until 1999. Beginning in August 2000, the burn pit was converted to a training area that employs clean-burning fuels with operational and engineering controls. It is estimated that nearly 500,000 gallons of POL may have been used at Site 54.

FIGURE 8-20
IRP Site 54, OU 6

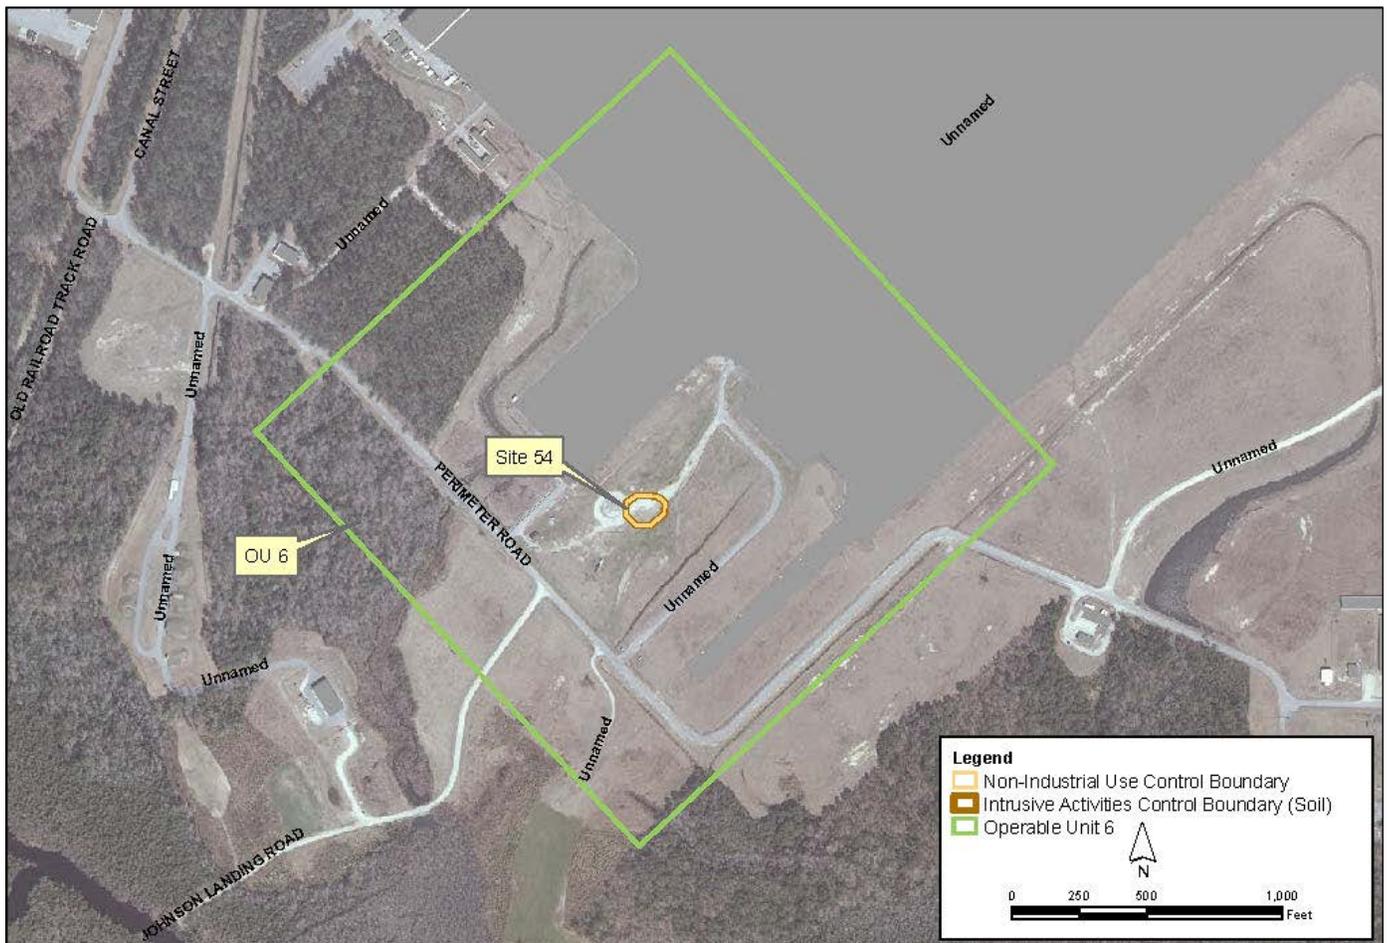

Previous investigations are listed in **Table 8-31** and the LUC summary is presented in **Table 8-32**.

TABLE 8-31
Previous Investigations Summary, IRP Site 54

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. It was concluded that waste fuels, oils, and solvents may remain in the soil and recommended an additional investigation to verify the presence of hazardous wastes.
Confirmation Study (ESE, 1990)	1984 - 1987	A Confirmation Study was conducted to verify the presence or absence of hazardous waste. Field activities included groundwater and sediment investigations. Due to the presence of low levels of petroleum compounds, further characterization was recommended.
Remedial Investigation (Baker, 1995 and 2002)	1995 - 2002	An RI as conducted to further characterize contamination at the site. Field activities included a site survey and soil and groundwater sampling. The RI identified potential risks from lead, SVOCs, and VOCs in groundwater. A Revised FS (the original FS only included Site 36) was completed for OU 6. Based on the findings of the RI, the FS recommended no action at Site 54.
Post-Remedial Investigation Monitoring (2002)	1998 - 2002	The post-RI monitoring program at Site 54 began in 1998 consisting of quarterly groundwater sampling. Based on the groundwater data collected following the IRA conducted in 2001, it was determined that lead, SVOCs and VOCs no longer posed an impact to the groundwater. Subsequently, groundwater monitoring was discontinued in 2002.
Interim Remedial Action (2001)	2001	An IRA for the UST, POL-contaminated soils, and construction debris from the former burn pit was completed at Site 54 in 2001. The removal area was 128 feet long by 96.5 feet wide and extended 9 feet bgs to the depth of groundwater. Construction activities also included a new concrete-lined fire training area and two propane tanks.
Feasibility Study (Baker, 2002)	2002	Based on the results of the IRA and post-RI groundwater monitoring, it was determined that lead, SVOCs, and VOCs no longer impacted the groundwater; therefore, no action was identified during the FS.
Proposed Remedial Action Plan and Record of Decision (Baker, 2002 and 2005)	2002 - 2005	Although no action was recommended during the FS, for conservativeness, MCIEAST-MCB CAMLEJ identified potential risks based on the OU 6 sites formerly used for waste disposal. Therefore, LUCs was the preferred alternative presented in the PRAP in 2002. A public notice of availability, public comment period, and public meeting were held to solicit community input on the preferred alternative. LUCs were selected as the remedy for Site 54 as documented in the ROD for OU 6, signed in July 2005.
Remedy-in-Place and Interim Remedial Action Completion Report (CH2M HILL, 2007)	2005 - 2007	An RD was completed for OU 6 in 2005 to document the LUC implementation and maintenance actions at Site 54. A Final OU 6 IRACR was completed to document the RIP (LUCs).

TABLE 8-32
Land Use Control Summary, IRP Site 54

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	0.29	September 2005	February 2007
Intrusive Activities Control Boundary (Soil)	0.29		


8.1.16.1 Future Activities

LUCs will be maintained to prohibit soil intrusive activities and non-industrial use.

8.1.17 Site 63 (OU 13)—Verona Loop Dump

Site 63, the Verona Loop Dump, encompasses approximately 5 acres, nearly 2 miles south of the MCAS New River operations area (**Figure 8-21**). The area reportedly received bivouac wastes generated during training exercises. No hazardous wastes were reportedly disposed of at Site 63. Currently, training exercises, maneuvers, and recreational hunting frequently take place in the area.

FIGURE 8-21
IRP Site 63, Operable Unit 13

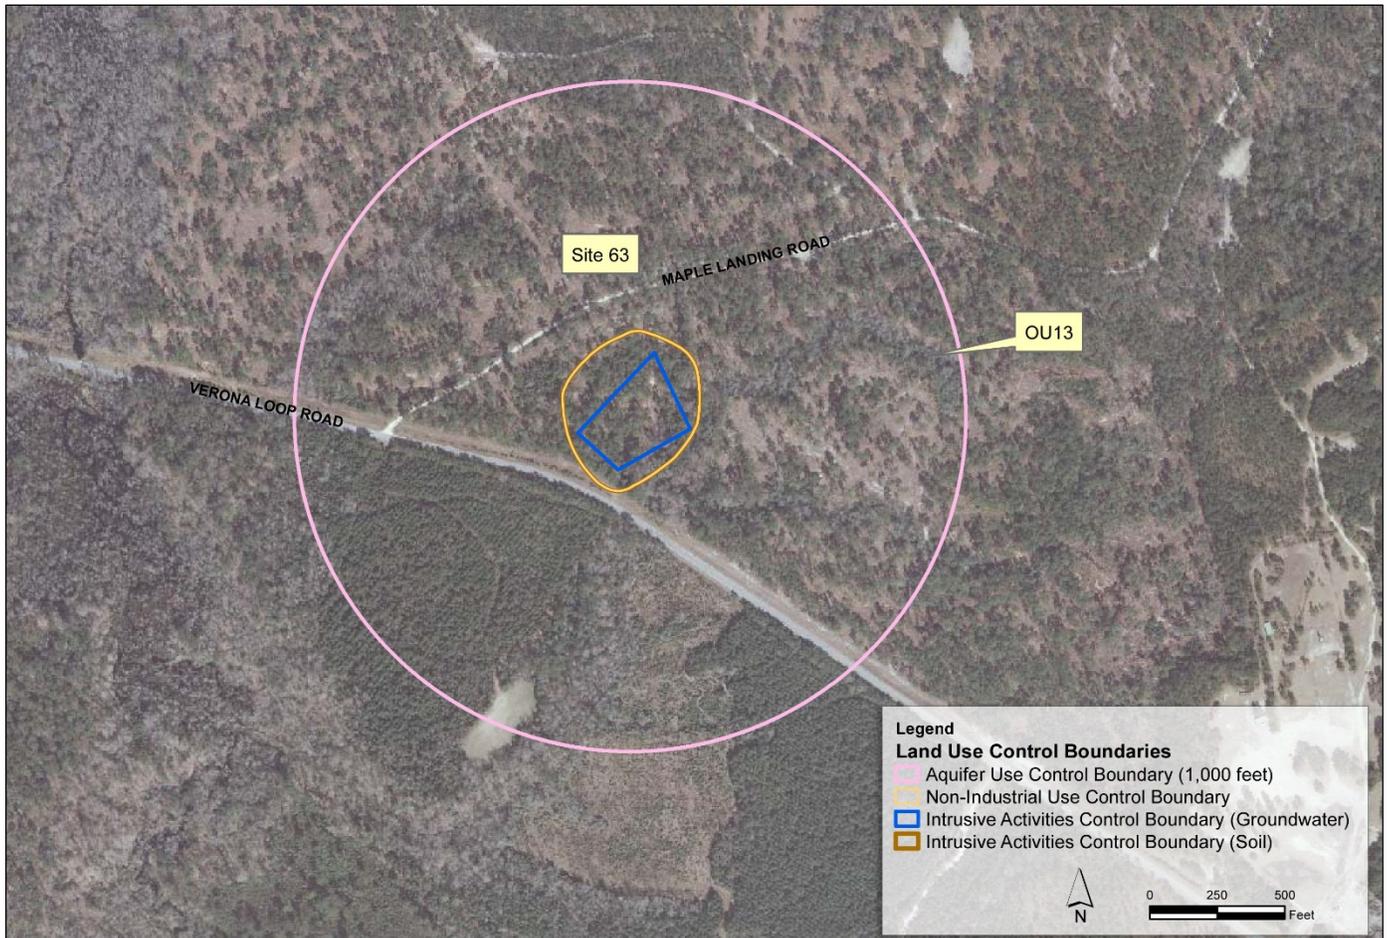

Previous investigations are listed in **Table 8-33** and the LUC summary is presented in **Table 8-34**.

TABLE 8-33
Previous Investigations Summary, IRP Site 63

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The quantities of waste reportedly disposed of at the site, whether hazardous or not, were insignificant and it was concluded that no further assessment was necessary. However, USEPA requested an additional investigation to determine whether hazardous waste contamination existed.
Site Investigation (Baker, 1994)	1994	An SI was conducted to determine whether hazardous waste contamination existed. Field activities included soil, groundwater, surface water, and sediment sampling for VOCs, SVOCs, pesticides/PCBs, and metals. Fill materials were encountered in soils, confirming that disposal of waste materials occurred at the site. The analytical results identified metals and organic compounds detected in soil and groundwater samples. Based on these findings, the SI recommended further evaluation.

TABLE 8-33
Previous Investigations Summary, IRP Site 63

Previous Investigation/Action	Date	Activities
Remedial Investigation (Baker, 1996)	1995-1996	An RI was conducted to evaluate the nature and extent of contamination and potential risks to human health and the environment. Field activities consisted of a site survey and soil, groundwater, surface water, and sediment sampling. Samples were analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. No unacceptable human health or ecological risks were identified.
Proposed Remedial Action Plan and Record of Decision (Baker, 1996 and 1997)	1996 - 1997	A PRAP was issued to solicit public input on the preferred alternative (no action) and a public meeting was held. The Final ROD was issued and signed in April 1997.
Remedy-in-Place	2001 - 2002	Although the ROD did not require RA, for conservativeness the Base implemented LUCs in 2001 and updated them in 2002.
Explanation of Significant Differences (CH2M HILL, 2012)	2012 - 2013	An ESD was submitted in 2012 to document the LUCs as the remedy including the addition of a non-industrial use control and an intrusive activities control boundary for soil to prevent exposure to waste in place.
Land Use Control Implementation Plan Update (CH2M HILL, 2014)	2013 -2014	LUCs were updated in the 2014 LUCIP Update and a new Notice of Contaminated Site was filed with Onslow County real property records in August 2014.

TABLE 8-34
Land Use Control Summary, IRP Site 63

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Intrusive Activities Control Boundary (Soil)	5	August 2014	August 2014
Non-Industrial Use Control Boundary (Soil)	5		
Intrusive Activities Control Boundary (Groundwater)	2	July 2002	February 2002
Aquifer Use Control Boundary (1,000 feet)	100		


8.1.17.1 Future Activities

LUCs will remain in-place to restrict groundwater and soil intrusive activities, aquifer use, and non-industrial use.

8.1.18 Site 68 (Pre-RI)—Rifle Range Dump

Site 68, the Rifle Range Dump, covers approximately 4 acres and is located in the Rifle Range Area of the Base (Figure 8-22). From 1942 to 1972, this area was used as a disposal site for various types of wastes, including garbage, building debris, waste treatment sludge, and solvents. The depth of the fill area is approximately 10 feet and the amount of material deposited has been estimated to be 100,000 yd³. The amount of solvents disposed at Site 68 was estimated to be between 1,000 and 2,000 gallons.

FIGURE 8-22
IRP Site 68

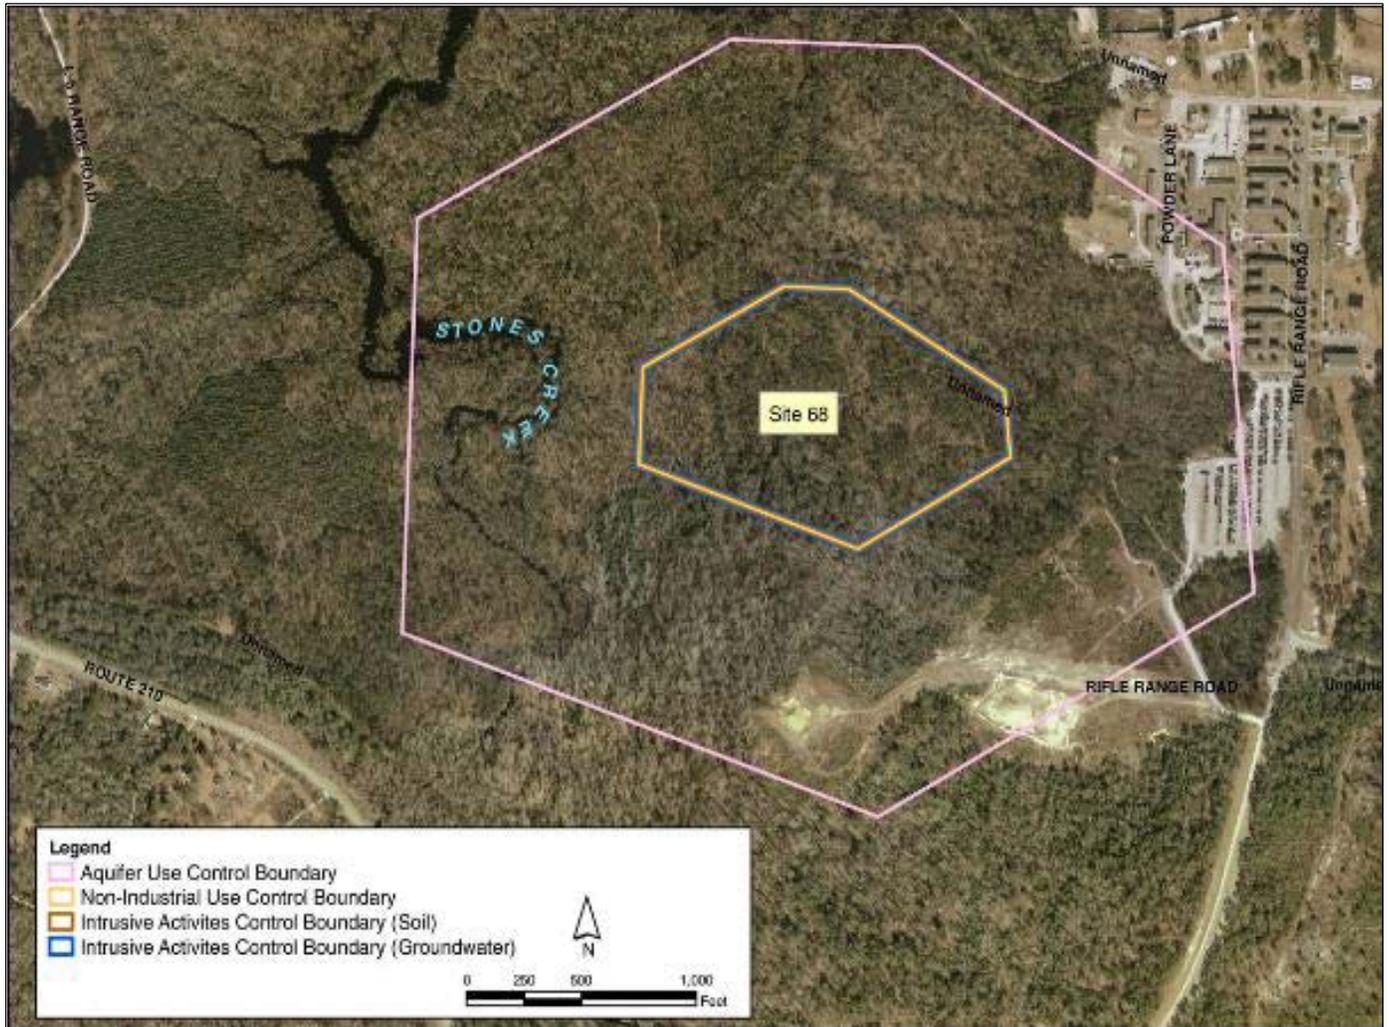

Previous investigations are listed in Table 8-35 and the LUC summary is presented in Table 8-36.

TABLE 8-35
Previous Investigations Summary, IRP Site 68

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCI-EAST-MCB CAMLEJ. Organic compounds were identified in potable supply wells, located upgradient from the site. Even though these wells are located upgradient from the site, it was suspected that continuous pumping may have drawn contaminants to the wells. Based on these findings, the IAS recommended an additional investigation.
Site Summary Report (ESE, 1990)	1984 - 1990	Monitoring wells were installed and groundwater samples were collected for VOCs analysis from the monitoring wells and potable supply wells in 1984 and again in 1986. No COPCs were detected in groundwater samples collected from these wells.

TABLE 8-35
 Previous Investigations Summary, IRP Site 68

Previous Investigation/Action	Date	Activities
Pre-Remedial Investigation Screening Study (Baker, 1998)	1995 - 1998	A Pre-RI screening study was conducted to determine whether contamination was present at the site. Field activities included soil, groundwater, surface water, and sediment sampling. Pesticide/PCBs were detected in soil samples, VOCs and metals were detected in groundwater samples, and pesticides and metals were detected in sediment. No unacceptable human health risks were identified and no further RA was recommended
No Action Decision Document (2001)	2001	The Final NADD was completed May 8, 2001, which stated that all investigations or activities for the IRP for Site 68 are complete.
Remedy-in-Place	2001 - Present	Although no RA was required, for conservativeness, the Base implemented LUCs in 2001 and updated them in 2002, due to the site's history as a dump.

TABLE 8-36
 Land Use Control Summary, IRP Site 68

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	26.9		
Intrusive Activities Control Boundary (Soil)	26.9		
Intrusive Activities Control Boundary (Groundwater)	26.9	July 2002	February 2007
Aquifer Use Control Boundary (1,000 feet)	202.8		

8.1.18.1 Future Activities

Base implemented LUCs will be maintained to prohibit soil intrusive activities and non-industrial use, groundwater intrusive activities, and aquifer use.

8.1.19 Site 73 (OU 21)—Courthouse Bay

Site 73, the Amphibious Vehicle Maintenance Facility covers approximately 14 acres located along the northwest shore of Courthouse Bay (**Figure 8-23**). The Amphibious Vehicle Maintenance Facility was constructed in 1946. Maintenance activities were historically conducted in the former Building A3 located southeast of the current Building A47. Used motor oil and battery acid resulting from maintenance activities were reportedly discharged directly to the ground surface northeast of former Building A3. Between 1983 and 1989, Building A3 was demolished and a new building was constructed. Based on the nature of maintenance activities conducted and CVOCs identified in groundwater, it is likely that other hazardous substances including chlorinated solvents, were also disposed of in this area. Ten USTs containing various petroleum hydrocarbon products (diesel fuel, gasoline, and/or waste oil) were formerly located at Site 73 to support the operations. All USTs except A47-1 have been removed (approximate location of A47-1 is within the footprint of the former maintenance building). UST A47-1 is currently not in use and is believed to be closed in-place. NCDENR issued NFA for five of the USTs (A47-2, A47-4, A47-5, A-2, and A-10/SA26). Investigations are currently being completed under the UST Program for four of the USTs (A47-3, UST-A47/SA21, A12-1, and A12-2). Significant development of the Courthouse Bay area surrounding Site 73 has occurred in the last 10 to 15 years and the current land use is industrial.

FIGURE 8-23
IRP Site 73, OU 21



Previous investigations are listed in **Table 8-37** and the LUC summary is presented in **Table 8-38**.

TABLE 8-37
Previous Investigations Summary, IRP Site 73

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. A review of historical records, aerial photographs, and field inspections found that an estimated 400,000 gallons of waste oil was discharged directly onto the ground surface. Approximately 20,000 gallons of waste battery acid was also reportedly disposed in the area. Therefore, Site 73 was recommended for additional study.
Confirmation Study (ESE, 1990)	1985	To confirm the presence or absence of contamination groundwater samples were collected in areas where washing had occurred, or locations of existing or suspected former USTs. Results indicated that shallow groundwater was impacted by VOCs and metals.
UST Investigations (1993)	1991 - 1993	Between 1991 and 1993, several UST investigations were completed, which included the collection of soil and groundwater samples in the vicinity of several USTs at the site. Analytical results identified TPH and benzene, toluene, ethylbenzene, and total xylenes (BTEX) compounds in soil and groundwater.
Preliminary Investigation (1994)	1994	A soil gas survey and groundwater screening program was conducted. The analytical results identified nine AOCs at Site 73, segregated by potential sources of contamination.
Remedial Investigation (Baker, 1997)	1997	Surface soil, subsurface soil, groundwater, sediment, and surface water samples, and benthic and aquatic species were collected to evaluate the nature and extent of contamination and potential risks to human health and the environment. Several VOCs were identified as COCs in groundwater, and the HHRA identified potential risk to future receptors. The ERA identified a potential risk to terrestrial receptors due to contaminants in soil and surface water.
Feasibility Study (Baker, 1998)	1998	Groundwater sampling was conducted for further delineation. Results indicated that natural attenuation was occurring. The shallow benzene plume was stable and decreasing in concentration; and the shallow CVOC AOC had not changed in shape or size but was not fully delineated. The Supplemental Groundwater Investigation concluded that additional delineation was necessary and recommended a Natural Attenuation Evaluation (NAE). Remedial alternatives were developed and presented in an FS to mitigate the potential for direct exposure and to treat impacted groundwater.
Groundwater Modeling Report (Baker, 1998)	1998	Groundwater modeling was conducted to predict the fate and transport of CVOCs. The results indicated that natural degradation was occurring in the deep aquifer zone and that intermediate and deep groundwater was discharging to Courthouse Bay and the New River.
Long-term Monitoring Optimization Report (CH2M HILL, 2005)	2000 - 2005	LTM of CVOCs and benzene in shallow, intermediate, and deep groundwater was conducted to verify the plumes were stable and not expanding. Because of ongoing investigations at Site 73, LTM was discontinued.
Natural Attenuation Evaluation Study (CH2M HILL, Baker, CDM, 2002)	2002	A study was conducted to evaluate the extent and rate of natural attenuation. Benzene was the only fuel-related compound detected in the shallow and intermediate aquifer zones; it was degrading by natural, <i>in situ</i> processes and was not discharging to Courthouse Bay. Reduced levels of TCE, cis-1,2-dichloroethene (DCE), and VC and their patterns of occurrence in the shallow aquifer zone, were indicative of natural attenuation, but the potential for VC to discharge into Courthouse Bay was identified. TCE, cis-1,2-DCE, and VC were identified in the intermediate aquifer zone but were considered not likely discharging to Courthouse Bay. Additional delineation was recommended to verify the extent of impacts.
Technology Evaluation (Baker, 2003)	2003	Potential remedial options were evaluated for treatment of intermediate groundwater with TCE concentrations above 1,000 micrograms per liter ("hot spot" area). Five treatment technologies (ISCO using permanganate, abiotic reduction using colloidal iron injection, ERD promoted by hydrogen release compound, bio-augmentation, sparging with hydrogen, cometabolic sparging with air and propane, or sparging with ozone using horizontal wells) were evaluated based on effectiveness, site constraints, depth of the contaminant mass, presence of underground utilities, land use, and cost. Hydrogen sparging delivered via a horizontal directionally drilled (HDD) well was recommended
Hydrogen Sparging Pilot Study (MicroPact, Baker, 2006)	2003 - 2006	A 900-foot-long horizontal well with 400 feet of screened area was installed to a depth of 85 feet bgs in the "hot spot" area. Approximately 40 hydrogen injections were completed in 2004 and 2005. The average TCE concentration decreased by approximately 35 percent, and the average total VOC concentration decreased by approximately 8 percent.

TABLE 8-37
Previous Investigations Summary, IRP Site 73

Previous Investigation/Action	Date	Activities
Phase 2 Pilot Study (AGVIQ, CH2M HILL, 2008)	2008	A pilot study was conducted to evaluate air and ozone sparging for removal of CVOCs present in the "hot spot" area using the existing HDD well. Results indicated that TCE concentrations in the intermediate aquifer zone decreased by 75 percent, with ERD and sparging being the primary treatment mechanisms.
Supplemental Remedial Investigation (CH2M HILL, 2009)	2006 - 2009	An SRI was completed to summarize the nature and extent of impacts and potential risks to human health and the environment. Primary COCs identified were VOCs (TCE, cis-1,2-DCE, 1,1-DCE, VC, and benzene) within the Castle Hayne aquifer. Soil samples were collected to delineate the extent of petroleum-related impacts. No significant source of free-phase petroleum was identified; however, an area of petroleum hydrocarbon-impacted soil was delineated in the area corresponding with historical waste oil discharge. The source of contamination was likely from multiple surficial spills associated with maintenance activities that occurred before the concrete-paved parking area was constructed.
Feasibility Study (CH2M HILL, 2009)	2009	Potential remedial alternatives were identified to address CVOCs in groundwater and petroleum hydrocarbon-impacted soil. Four remedial alternatives were selected for detailed comparative analysis: (1) no action, (2) MNA, (3) ERD using existing horizontal well and downgradient ERD injections, and (4) air sparging with downgradient ERD injections.
Proposed Remedial Action Plan and Record of Decision (CH2M HILL, 2009)	2009	A PRAP was issued in April 2009 to solicit public input on the preferred alternative (<i>in situ</i> air sparging using the horizontal well, downgradient ERD injections, LTM for MNA, and LUCs) and a public meeting was held. Questions received during the public meeting were general inquiries and no comments were received during the public comment period. The Final ROD was issued and signed in November 2009. The site CSM is shown on Figure 8-24 .
Remedy-in-Place and Interim Remedial Action Completion Report (Shaw, 2011)	2009-2014	The RD was prepared for <i>in situ</i> air sparging by the horizontal well, downgradient ERD injections, LTM and MNA, and LUCs. In FY 2010, the horizontal well was initiated for air sparging to treat the highest VOC concentrations in groundwater, and LUCs were finalized to prohibit aquifer use and exposure to soil until cleanup levels for UU/UE are achieved. Quarterly groundwater LTM and MNA for analysis of VOCs and NAIPs was initiated in 2010 to evaluate the effectiveness of treatment and monitor plume migration. ERD injections were completed in 2011 and an IRACR was submitted. The air sparge system was discontinued in 2012 based on TCE concentrations in groundwater reduced below the cleanup level, the ERD biobarrier in-place, and the potential for air sparging to impact vapor intrusion at adjacent buildings. A second round of ERD injections was completed in December 2013 and an Interim Remedial Action Activities Summary was submitted (Osage, 2014).
Basewide Vapor Intrusion Evaluation (CH2M HILL, AGVIQ, 2009, CH2M HILL, 2011, and CH2M HILL, 2014)	2007 – 2014	Site 73 was included in the phased Basewide vapor intrusion evaluation, conducted from 2007-2011, to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. Vapor intrusion was not identified as a significant pathway of concern for any of the buildings located in the vicinity of Site 73. However, during operation of the air sparge system, subslab soil gas concentrations increased and additional sampling was conducted to confirm that the concentrations decreased since the system was shut down in 2012. Based on the 2013 sampling, concentrations are approaching baseline levels and NFA was recommended. If new buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.

TABLE 8-38
Land Use Control Summary, IRP Site 73


LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Intrusive Activities Control Boundary (Soil)	0.8	September 2010	August 2010
Aquifer Use Control (1,000 feet)	47.1		

8.1.19.1 Future Activities

MNA will be continued to monitor reduction and migration of VOC contamination. LUCs will be maintained to prohibit aquifer use until cleanup levels are achieved. LUCs are also in-place to prohibit intrusive activities where soil contamination remains in-place above concentrations that allow for UU/UE.


If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.

FIGURE 8-24
Site 73 Conceptual Site Model

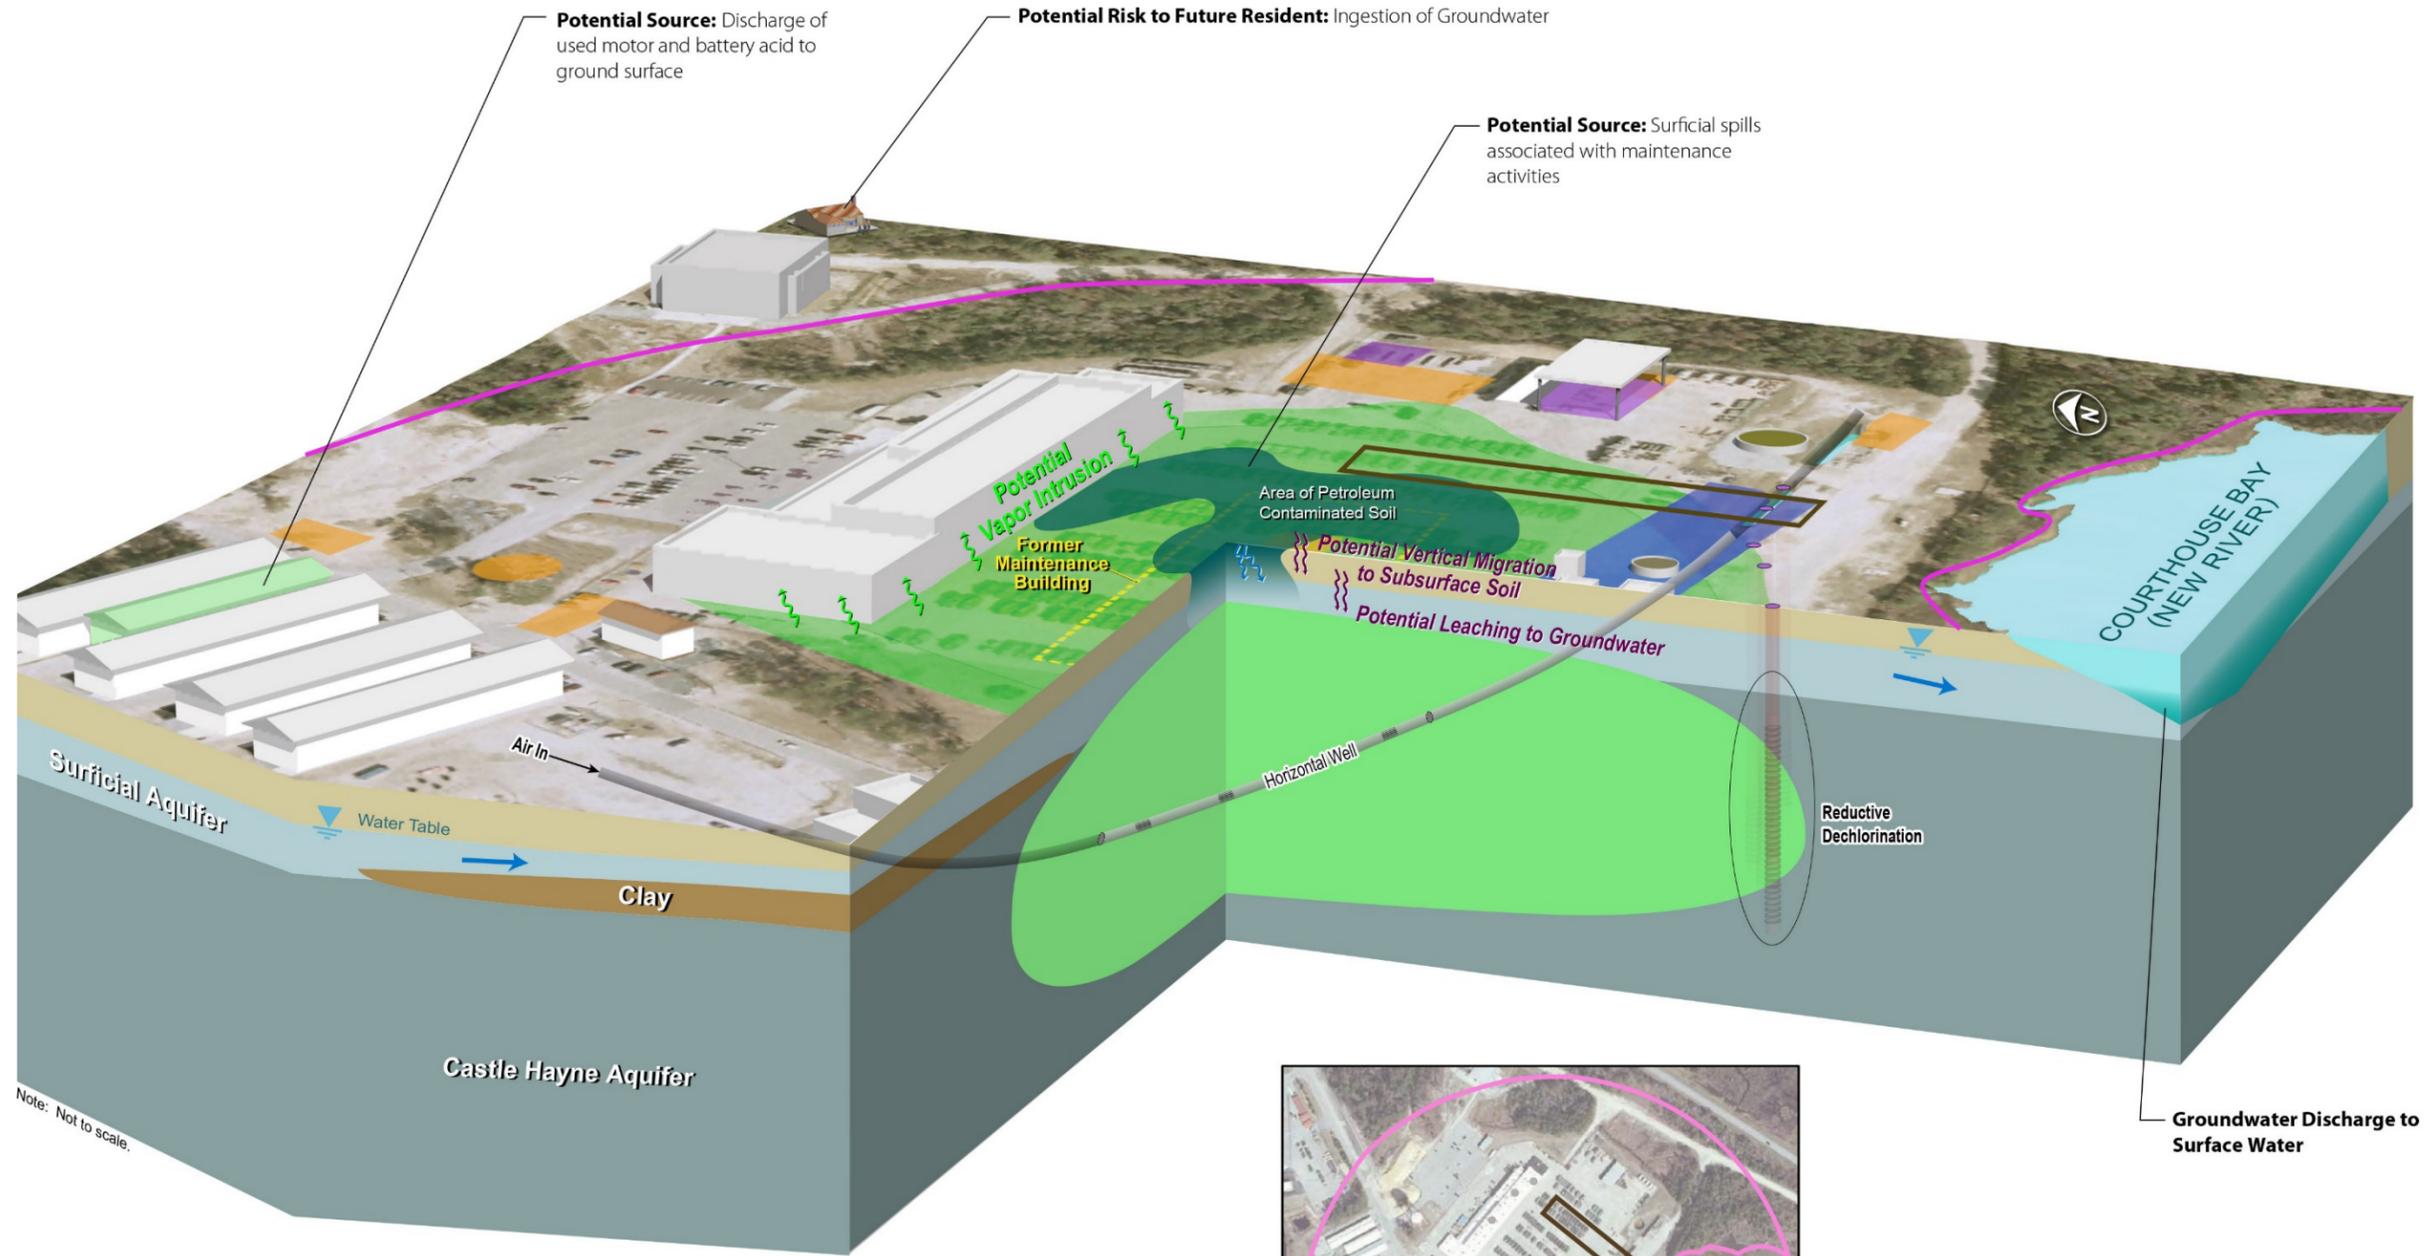

Note: Not to scale.

Legend			
	Horizontal Sparge Well - in operation from October 2010 to March 2012		ERD Biobarrier Injection Well
	Groundwater Flow Direction		Aquifer Use Control Boundary
	COC Plume (Based on FY 2013 LTM)		Intrusive Activities Control Boundary (Soil)
			Existing/Formal UST
			Hazmat Storage
			Vehicle Washdown Areas

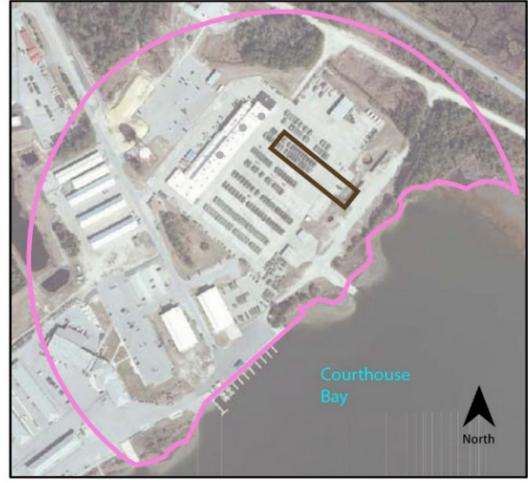


This page intentionally left blank.

8.1.20 Site 74 (OU 4)—Mess Hall Grease Dump Area

Site 74, the Mess Hall Grease Dump, was used from the early 1950s through the early 1960s and covers approximately 24 acres within OU 4 (**Figure 8-25**). OU 4 consists of two sites (Sites 41 and 74) that have been grouped together based on the unique characteristic of suspected waste. Grease from the mess hall at Site 74 was reportedly disposed of in trenches. It was also reported that drums containing PCBs and pesticide-soaked bags were buried near the grease pit. Estimates of quantities include 1,100 gallons of PCB oil, 50 to 500 gallons of DDT, and 2,200 gallons of drummed pesticides. One internal memorandum reports chemical training agents in the form of test kits were reportedly disposed at Site 74. A former Pest Control Area was also reportedly located in the southeastern portion of the site.

FIGURE 8-25
IRP Site 74, OU 4

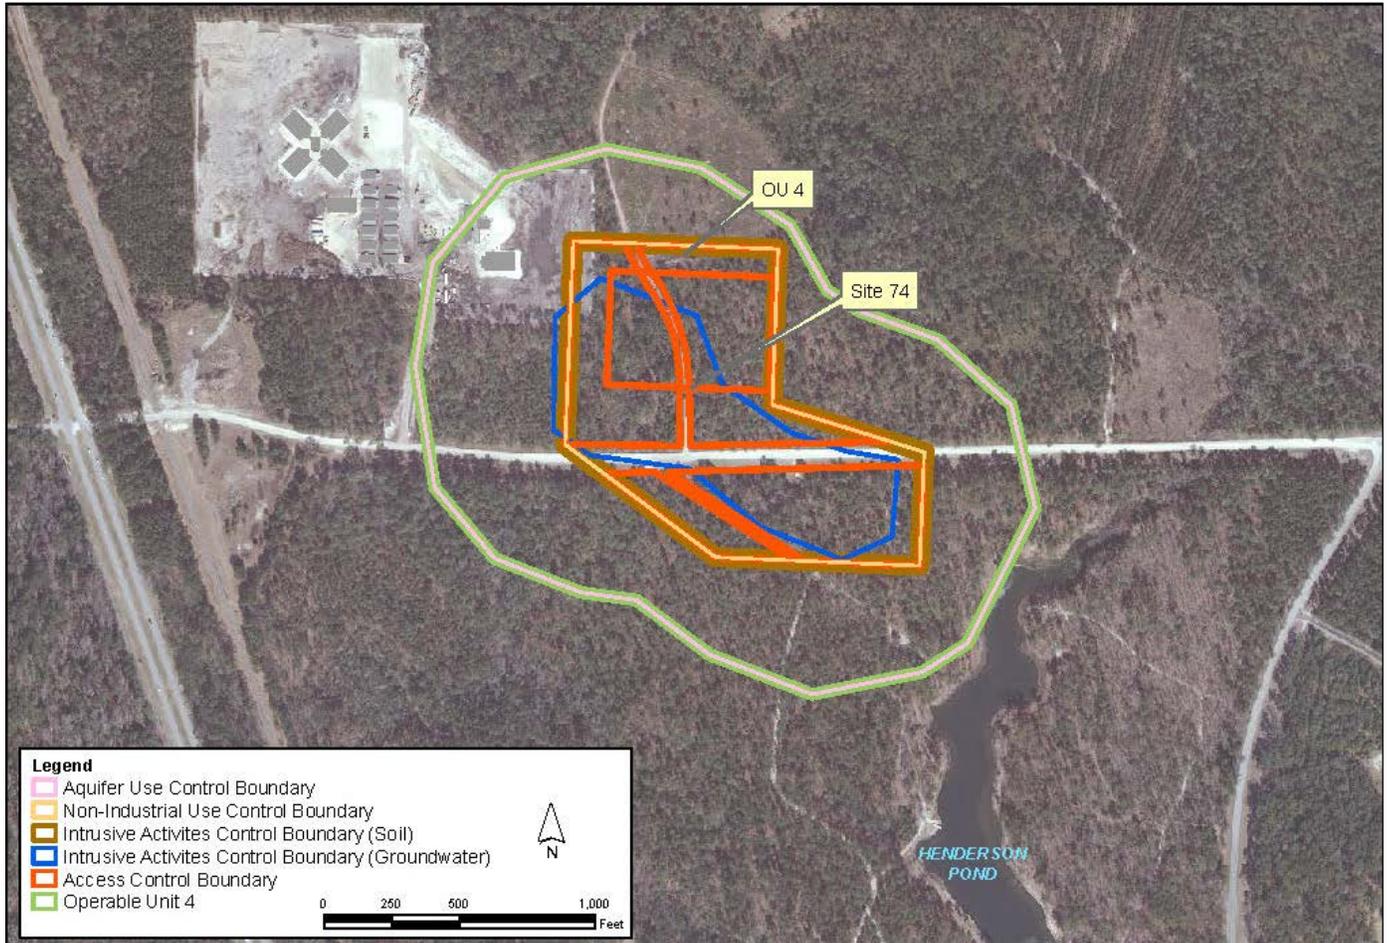

Previous investigations are listed in **Table 8-39** and the LUC summary is presented in **Table 8-40**.

TABLE 8-39
Previous Investigations Summary, IRP Site 74

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The IAS concluded that disposal of industrial wastes and pesticides could impact groundwater and recommended an additional investigation to verify the presence of hazardous wastes.
Confirmation Study (ESE, 1990)	1984 - 1987	The Confirmation Study included groundwater, surface water, and sediment investigations. O&G and phenols were detected in groundwater, surface water, and sediment samples. VOCs, metals, and one nitroaromatic were detected in groundwater samples.

TABLE 8-39
Previous Investigations Summary, IRP Site 74

Previous Investigation/Action	Date	Activities
Remedial Investigation/ Feasibility Study (Baker, 1995)	1993 - 1995	To further characterize the nature and extent of contamination an RI was conducted. Field activities included a geophysical investigation, soil, groundwater, surface water, and sediment sampling, and an aquatic and ecological survey. The geophysical investigation indicated that the site contained a significant amount of buried construction debris. Although there was reported history of CA disposal, no chemical surety degradation compounds were detected in soil. Potential human health risks were identified due to exposure to metals in groundwater and seep surface water. Minimal potential ecological risks were identified for aquatic receptors at Site 41. An FS was conducted to develop and screen remedial alternatives for addressing soil, groundwater, and surface water contamination.
Proposed Remedial Action Plan and Record of Decision (Baker, 1995)	1995	A PRAP was issued to solicit public input on the preferred alternative (LTM to monitor contaminant migration and LUCs) and a public meeting was held. The Final ROD was issued and signed in December 1995.
Remedy-in-Place and Remedial Action Completion Report (CH2M HILL, 2006)	1997 - 2011	LTM was initiated in 1997 and included sampling of five monitoring wells and eight surface water and sediment locations twice a year for analysis of VOCs, metals, TDS, and TSS. In 2005 the groundwater cleanup levels were achieved and LTM was discontinued. LUCs were implemented in 2001 and updated in 2002. A RACR was prepared to document the completion of LTM. A fence was installed around the perimeter of the site in 2008 to restrict access and additional fencing was installed in 2011 along both sides of the access road leading to Henderson Pond.
Confirmatory Sampling (CH2M HILL, 2012)	2012	Soil samples were collected from beneath the access road area through Site 74 leading to the proposed Henderson Pond and Hickory Pond recreational area to evaluate potential risks to human health and the environment. The samples were analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. The HHRS indicated that exposure to soil by the most likely potential receptors, construction workers, was not expected to result in any unacceptable risks. Future residential (and potentially recreational) exposure to SVOCs and pesticides in soil may result in unacceptable risk to human health. Additionally, ecological exposure to pesticides/PCBs soil may pose a potential risk. However, any exposures other than by construction workers are unlikely because the soil is beneath 0.5 to 1 foot of gravel and LUCs are in place to prevent intrusive activities and residential development.
Henderson Pond/Hickory Pond Investigation Report (CH2M HILL, 2013)	2012	In 2012, an additional investigation was conducted based on potential risk to human and ecological receptors identified during the confirmatory sampling (Phase 1). Surface/subsurface soil, sediment, surface water, and fish tissue samples were collected and analyzed for metals, PCBs, pesticides, SVOCs, and/or VOCs. Based on risk assessments conducted using these data, direct exposure to soil within the proposed recreational improvement areas and sediment and surface water in Henderson and Hickory Ponds do not result in unacceptable risks to human health and the environment. However, carcinogenic risks associated with ingestion of fish from either Henderson or Hickory Pond by adults, children, and lifetime anglers are within acceptable USEPA levels. However, ingestion of fish from Henderson or Hickory Pond, based on reasonable maximum exposure assumptions, would result in non-carcinogenic hazards above acceptable USEPA levels for adults and children. The hazard is associated with non-dioxin like PCBs for Henderson Pond and mercury for Hickory Pond. Anglers are notified of potential risk from consumption of fish, consistent with advisories already in place for North Carolina, through flyers posted at the Game Wardens Office and signage along the ponds.

TABLE 8-40
Land Use Control Summary, IRP Site 74

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	23.8		
Intrusive Activities Control Boundary (Groundwater)	13.9		
Intrusive Activities Control Boundary (Soil)	23.8	July 2002	February 2002
Aquifer Use Control Boundary (500 feet)	71.2		
Access Control Boundary	20.5		August 2011


8.1.20.1 Future Activities

The LUCs to prohibit intrusive activities, aquifer use, and non-industrial use at the site are protective of human health and the environment because exposure to waste that could result in unacceptable risks are being controlled. Perimeter fencing also restricts access to the waste area.

8.1.21 Site 78 (OU 1)—Hadnot Point Industrial Area

Site 78, the HPIA, covers approximately 590 acres and is located within OU 1, 1 mile east of the New River and 2 miles south of State Route 24 (**Figure 8-26**). OU 1 consists of three sites (Sites 21, 24, and 78) that have been grouped together into one OU because of their proximity to one another. The HPIA, constructed in the late 1930s, was the first developed area at MCIEAST-MCB CAMLEJ. The HPIA consists of maintenance shops, warehouses, painting shops, printing shops, auto body shops, and other small industrial facilities. Due to the industrial nature of the site, many spills and leaks have occurred over the years. Most of these spills and leaks have consisted of petroleum-related products and solvents from USTs and drums.

FIGURE 8-26
IRP Site 78, OU 1

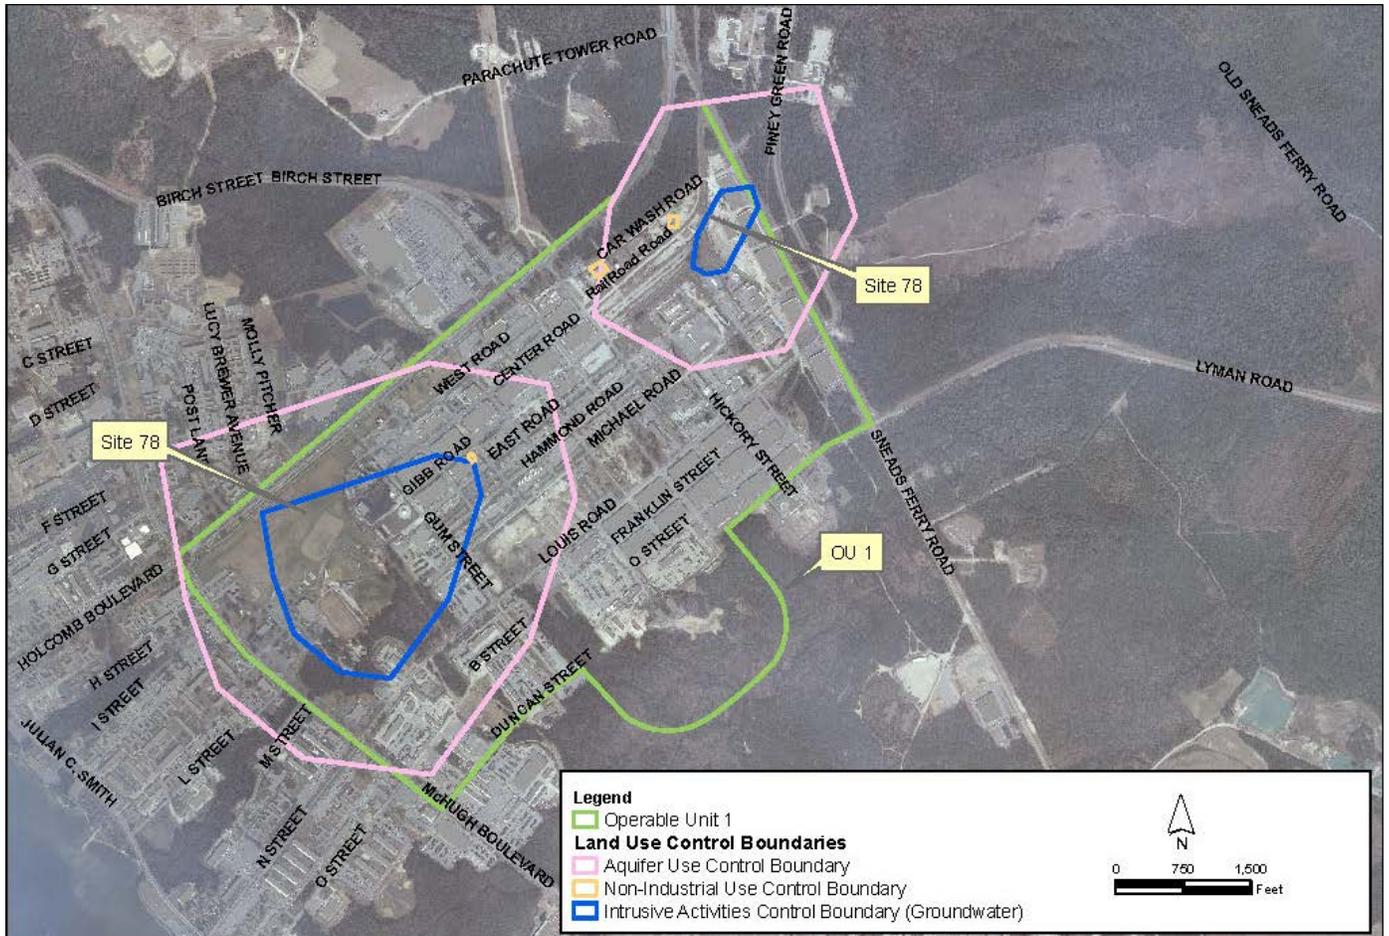

Previous investigations are listed in **Table 8-41** and the LUC summary is presented in **Table 8-42**.

TABLE 8-41
Previous Investigations Summary, IRP Site 78

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The IAS recommended additional investigations based on historical operations in HPIA.
Interim Remedial Investigation/Interim Feasibility Study/Interim Proposed Remedial Action Plan /Interim Record of Decision for Surficial Aquifer (Baker, 1992)	1984 - 1992	Several investigations were conducted to evaluate the nature and extent of the threat to human health and the environment caused by the release or threatened release of hazardous substances, pollutants, or contaminants. Field events included a geophysical survey and groundwater and soil sampling. Elevated levels of organic compounds (primarily PCBs, pesticides, and VOCs) and inorganic compounds (metals) were identified throughout OU 1 in various media. Potential unacceptable human health risks were identified due to VOCs in groundwater. The preferred alternative for addressing the shallow groundwater VOC contamination was groundwater extraction and treatment systems to prevent migration of the VOC plumes in the shallow groundwater at Site 78 North and Site 78 South and LUCs to prevent exposure to groundwater. The IROD was signed on September 23, 1992.
Remedial Investigation/ Feasibility Study, Proposed Remedial Action Plan, Record of Decision (Baker, 1994)	1984 - 1994	Additional investigations and risk assessments were conducted to define the nature and extent of contamination in soil and groundwater. Potential ecological risks were identified based on exposure to pesticides and PCBs in soil. Potential human health risks were identified for future residents due to exposure to VOCs in groundwater at Site 78. The Final ROD for addressing soil and groundwater at OU 1 was signed September 15, 1994. The selected remedy was excavation and offsite disposal of pesticide and PCB-contaminated soil to achieve industrial cleanup levels, continuation and expansion of the groundwater extraction/treatment systems at Site 78 North and Site 78 South, LTM, and LUCs.
Explanation of Significant Differences (Baker, 1995)	1995	An ESD was issued to revise the cleanup level for PCBs to the federal PCB action level for industrial sites due to the industrial nature of site activities.
Notice of Non-significant Changes (United States Marine Corps, 1997)	1997	A Notice of Non-significant Changes was submitted that identified ROD changes including removal of heptachlor epoxide, metals, TSS, TDS, and O&G from the LTM program.
Optimization Study (Radian, 2000)	2000	The optimization study recommended shutting down operation of the Site 78 South system in the short term and shutting down the Site 78 North system when mass removal from recovery wells reached asymptotic levels. The recommendations were not implemented.
Natural Attenuation Evaluation (2002)	2001 - 2002	Based on the findings of the LTM sampling, an NAE was conducted to further delineate the contaminant plume and to determine whether natural attenuation of CVOCs was occurring. Field activities included groundwater sampling for VOCs. The NAE concluded that there was evidence for natural attenuation processes occurring at the site.
Oxygen Release Compound and Hydrogen Release Compound Pilot Studies (CH2M HILL, 2005)	2003 - 2005	Two pilot studies were initiated to evaluate effectiveness of in situ technologies to remediate chlorinated compounds in groundwater. The pilot study performed at Site 78 North included injection of oxygen release compound into groundwater at locations with vinyl chloride concentrations higher than 1,000 milligrams per liter. The pilot study performed at Site 78 South included the injection of hydrogen release compound, into groundwater at locations with TCE concentrations greater than 1,000 milligrams per liter. The final Pilot Study report reported that the concentration of vinyl chloride in groundwater at Site 78 North was reduced by 25 to 50 percent and that the concentration of TCE in groundwater at Site 78 South was reduced by an order of magnitude at the majority of wells, but dechlorination was not complete and appeared to stall at the DCE daughter product.
Remedy-in-Place	1995 - present	The soil excavation to remove pesticide and PCB-contaminated soils was completed in 1995. The groundwater extraction and treatment systems at Site 78 North and South have been in operation since 1995. Groundwater LTM for VOCs and NAIPIs was implemented in 1995 and is ongoing on a quarterly and annual basis. LUCs were implemented in June 2001 and updated in July 2002 to prohibit soil and groundwater use at Site 78. The current CSM is shown on Figure 8-27 .
Hadnot Point Industrial Area Evaluation (CH2M HILL, 2010)	2009 - 2010	An extensive groundwater investigation was conducted across the HPIA to assess the current CVOC and petroleum hydrocarbon impacts and identify any data gaps. The report recommended expansion of the LTM program and LUC boundaries and treatment system optimization.
Plume Delineation (Rhēa, 2011)	2009 - 2011	A field screening was conducted to further delineate VOCs in groundwater. Analytical results suggested that VOC contamination was present outside of the current LUC boundaries and recovery well and LTM network. Further investigation to confirm these results was recommended.

TABLE 8-41
Previous Investigations Summary, IRP Site 78

Previous Investigation/Action	Date	Activities
Hadnot Point Construction Area Risk Evaluation Update (CH2M HILL, 2012)	2012	During a MILCON PA/SI for the Hadnot Point Construction Area (HPCA; CH2M HILL, 2010) located within the HPIA of Site 78, potentially unacceptable risks were identified based on future residential exposure to PAHs and metals in surface soil and ecological exposure to metals in surface water and sediment located in a drainage feature. Additional risk evaluation was recommended and an ecological site survey was conducted. The evaluation concluded that concentrations of PAHs and metals detected in surface soil appear to be ubiquitous in nature and are present across the HPCA with no identified source; the potential human health risks were based on a reasonable maximum exposure, assuming direct contact with the highest concentrations, whereas the central tendency exposure, based on more realistic exposure duration, soil ingestion rates, and average concentrations, were within USEPA's acceptable ranges. Overall, risks to ecological receptors from exposure to surface soil, sediment, and surface water at the HPCA are considered low and significant impacts to receptor populations are unlikely. Based on these conclusions, NFA was recommended in the HPCA.
Historical Metals Evaluation (CH2M HILL, 2013)	2012	In 2012, an evaluation of metals in groundwater was conducted based on recommendations of the Five-year Review. Groundwater samples were collected from monitoring wells in the LTM program and analyzed for total metals. Ten COPCs were identified in the surficial aquifer and one COPC was identified in the Castle Hayne aquifer. The report recommended the following: (1) collect additional groundwater samples for target analyte list metals analysis every 3 years as part of the LTM program; (2) redevelop IR78-RW09 and resample using techniques that minimize turbidity; and (3) further assess fate and transport in areas where previous activities may have affected geochemical properties.
Basewide Vapor Intrusion Evaluation (CH2M HILL, AGVIQ, 2009 and CH2M HILL, 2011)	2007 - 2014	Site 78 was included in the phased Basewide vapor intrusion evaluation, conducted from 2007-2011, to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. VIMS were installed in three additional buildings (eight were previously installed under the UST program) within the HPIA from November 2011 to February 2012 and system startup was conducted in 2012 to reduce the possibility of vapor migration into the buildings. Although vapor intrusion was not identified as a significant pathway of concern, additional sampling was recommended at Buildings 901, 1601, and 1606 to further evaluate the vapor intrusion pathway and/or assess temporal variability. Based on the 2013 monitoring results, NFA was recommended at Buildings 901 and 1606 and periodic monitoring was recommended at Building 1601. Additionally, if new buildings are planned for construction in the vicinity of the VOC groundwater plumes, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.
Groundwater Delineation Report (CH2M HILL, 2014)	2011-2014	In 2011, a supplemental groundwater investigation was initiated to investigate if the LTM program and LUCs remain protective in the short term and support the future evaluation of alternative treatment technologies for long-term protectiveness. The investigation included monitoring well installation, groundwater sampling, a passive soil gas survey, and an MIP investigation. The results of the investigation identified CVOC contaminant plumes in Site 78 North and South that were different than defined by previous investigations. As a result, recommendations for changes were made for the LTM program and LUC boundaries.
Land Use Control Implementation Plan Update (CH2M HILL, 2014)	2014	Based on results of the Groundwater Delineation Report, Site 78 LUCs were updated to encompass the current extent of VOC exceedances in groundwater and to evaluate future buildings and land use for potential vapor intrusion pathways. A LUCIP was prepared to document the updated LUCs. An updated Notice of Contaminated Site will be filed with Onslow County real property records in 2015.

TABLE 8-42
Land Use Control Summary, IRP Site 78


LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	0.7		
Intrusive Activities Control Boundary (Groundwater)	29		
Aquifer Use Control Boundary (1,000 feet)	720	January 2015	Pending
Industrial/Non-Industrial Use Control (Vapor Intrusion)	54		

8.1.21.1 Future Activities

The groundwater extraction and treatment systems at Site 78 North and South, LTM, and LUCs will be maintained. Based on recommendations from the Groundwater Delineation Report, further groundwater investigation is warranted to assess fate and transport. The updated Notice of Contaminated Site will be filed with Onslow County in FY 2015. The report for the Site 78 South treatability study will be submitted in FY 2015.

If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.

FIGURE 8-27
Site 78 Conceptual Site Model

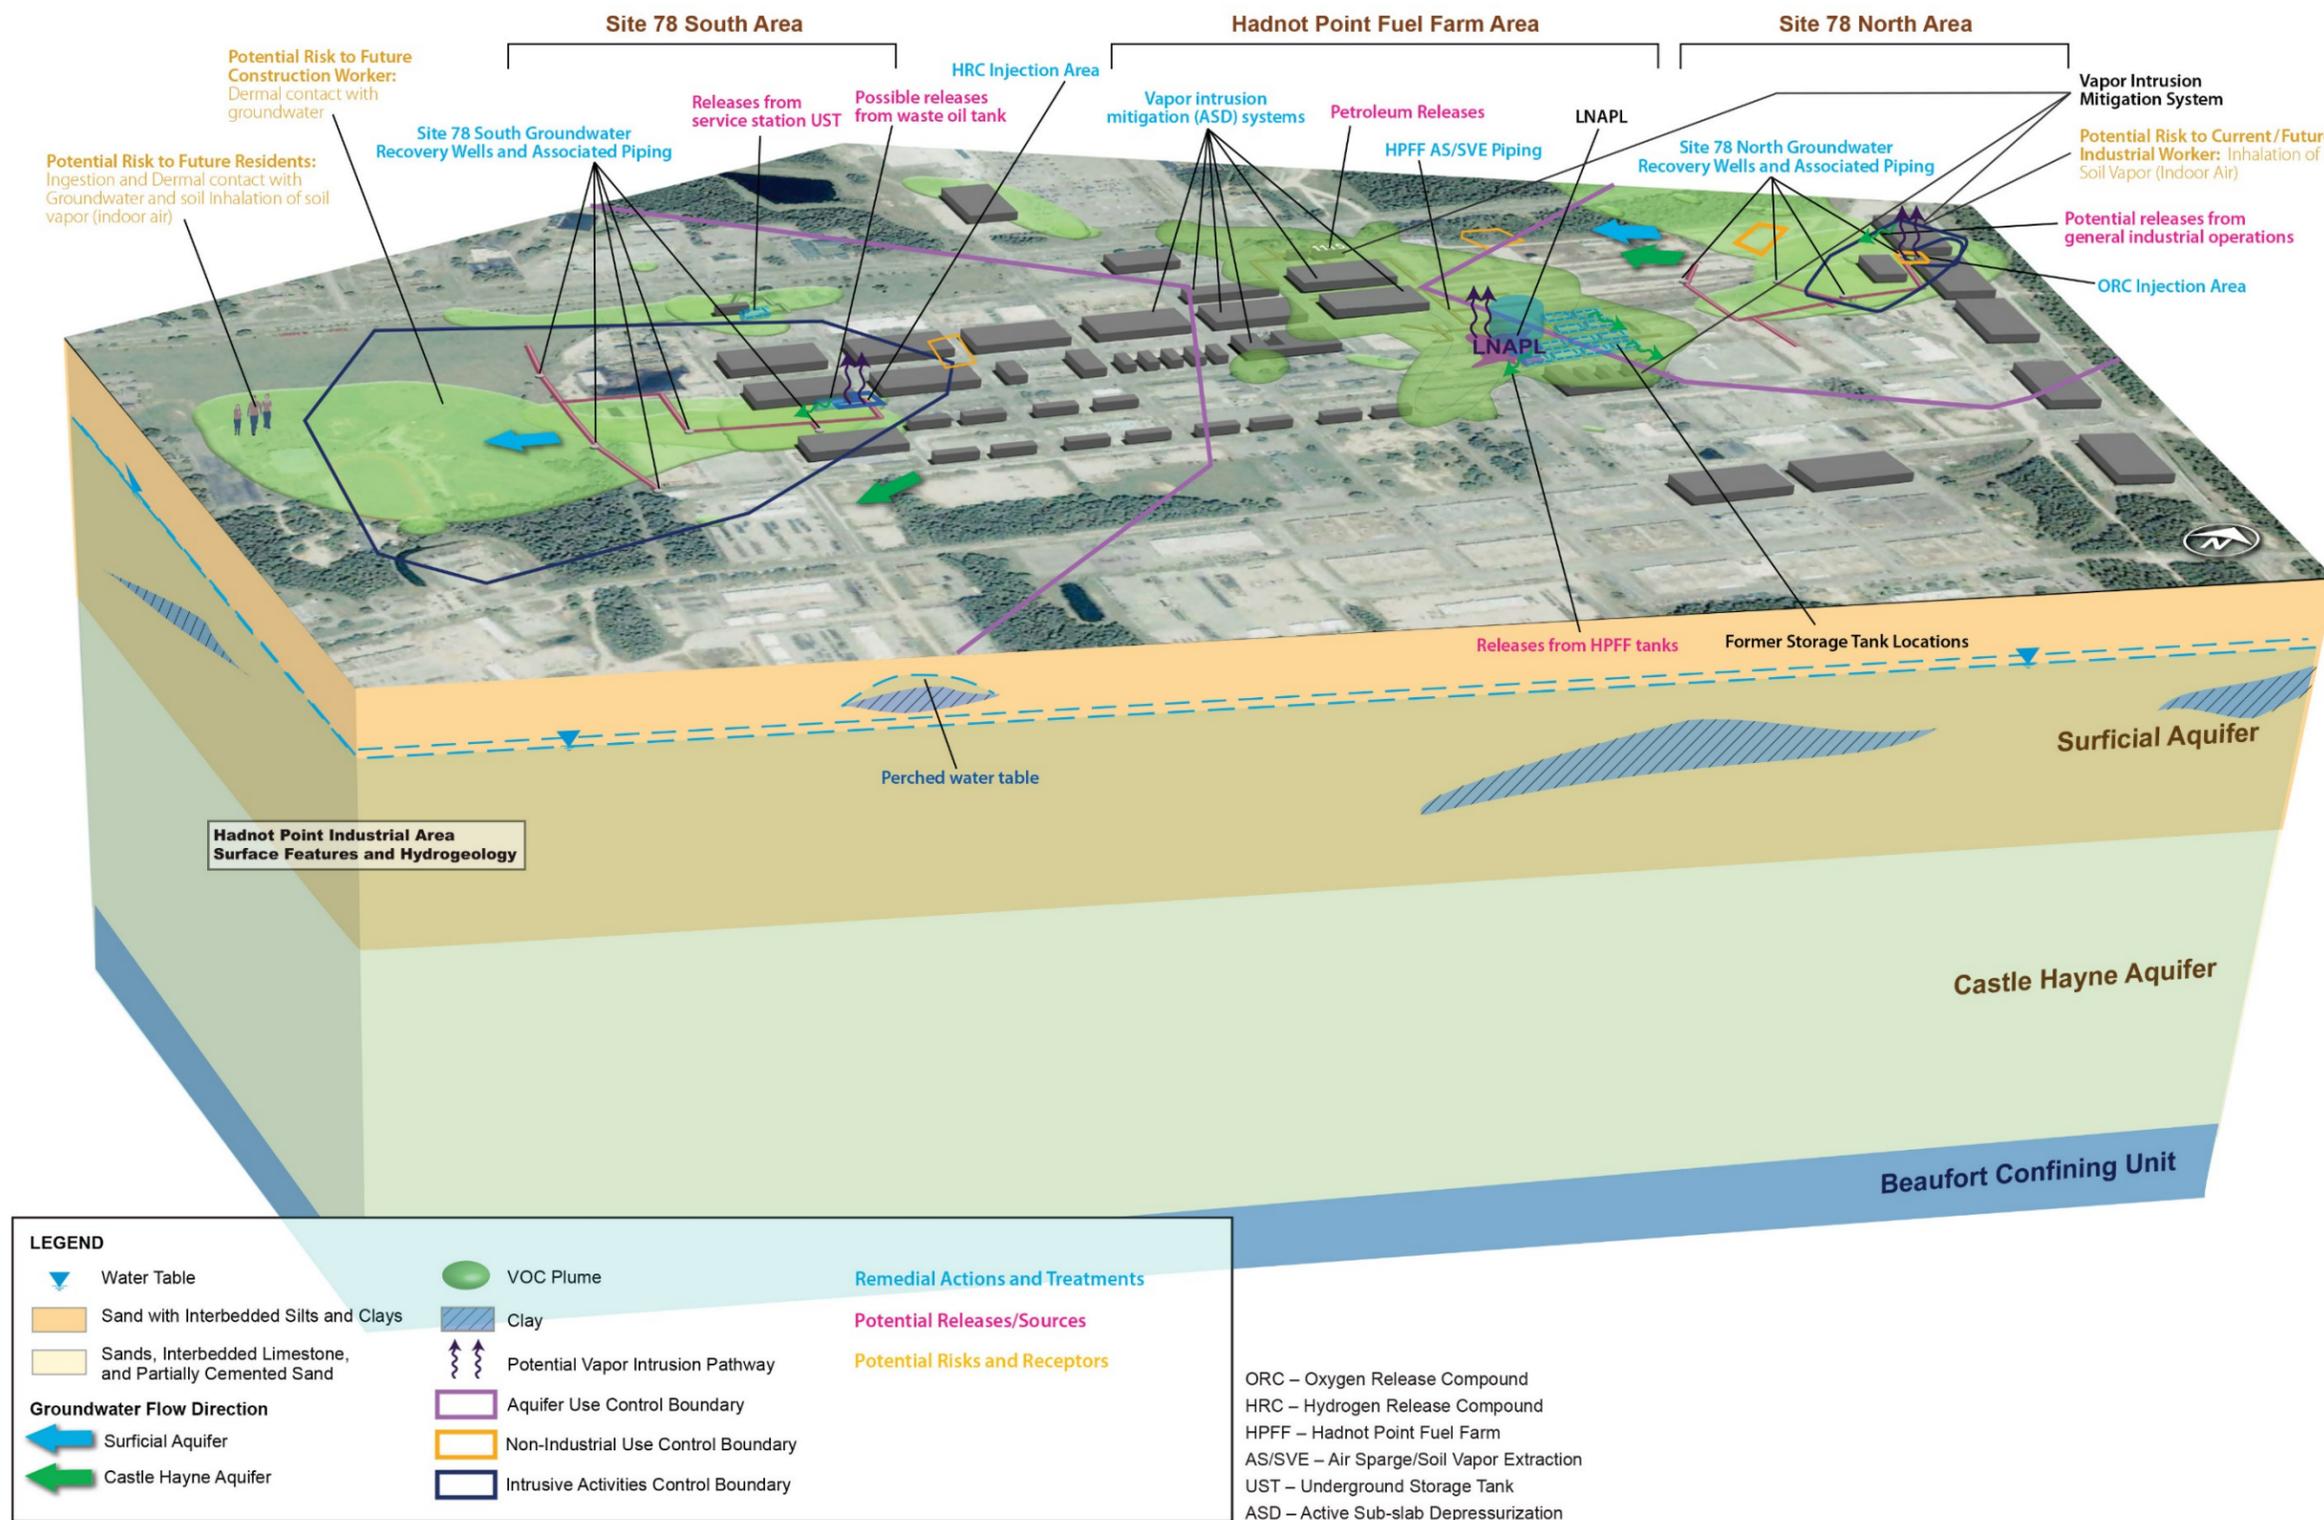

This page intentionally left blank.

8.1.22 Site 80 (OU 11)—Paradise Point Golf Course Maintenance Area

Site 80, the Paradise Point Golf Course Maintenance Area, encompasses approximately 3 acres northwest of Brewster Boulevard within OU 11 (**Figure 8-28**). OU 11 consists of two sites (Sites 7 and 80) that have been grouped together into one OU because of their similar disposal history and proximity to one another. Information regarding past maintenance procedures at Site 80 is unknown; however, the facility is currently in operation. Golf course maintenance operations which include the machine shop (a potential source of waste oils) and the routine spraying of pesticides and herbicides may have contributed to potential contamination at this site. It is unknown when the wash pad was constructed, and what the exact procedure was for cleaning the maintenance equipment prior to the construction of the wash pad. The facility is currently in operation as a maintenance facility for the Base golf course.

FIGURE 8-28
IRP Site 80, OU 11



Previous investigations are listed in **Table 8-43** and the LUC summary is presented in **Table 8-44**.

TABLE 8-43
Previous Investigations Summary, IRP Site 80

Previous Investigation/Action	Date	Activities
Site Investigation (Halliburton/NUS, 1991)	1991	An SI was conducted to determine the presence or absence of contamination at Site 80. Field activities included soil, groundwater, surface water, and sediment sampling for VOCs, SVOCs, pesticides/PCBs, herbicides, and TPH (surface water and sediment only). The analytical results identified pesticides and PCBs in soil, low level VOCs in groundwater and petroleum hydrocarbons in surface water. Based on these results, an RI was proposed.

TABLE 8-43
Previous Investigations Summary, IRP Site 80

Previous Investigation/Action	Date	Activities
Remedial Investigation (Baker, 1996)	1994 - 1996	An RI was completed to characterize the nature and extent of contamination and potential impacts to human health and the environment. Field activities consisted of a site survey, soil and groundwater sampling. Samples were analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. Pesticides were detected in soil samples. Low levels of pesticides, SVOCs, and metals were detected in groundwater. Potential unacceptable human health risks were identified due to the presence of pesticides in soil. No unacceptable ecological risks were identified.
Time-critical Removal Action (1996)	1996	Based on the potential human health risk identified in the RI, a TCRA was recommended to remove soil contaminated with pesticides to industrial levels. In July 1996, approximately 988 tons of contaminated soil was excavated and transported offsite to a disposal facility.
Proposed Remedial Action Plan (1996) and Record of Decision (Baker, 1997)	1996 - 1997	A PRAP was issued in November 1996 to solicit public input on the preferred alternative (no RAs) and a public meeting was held. The Final ROD for OU 11 (Sites 7 and 80) was issued and signed in August 1997.
Remedy-in-Place	2007 - present	Although the ROD did not require RA, the soil remediation goals for the TCRA were based on industrial risk-based concentrations; to protect human health and the environment, the Base implemented LUCs in May 2007 to prohibit future exposure to surface and subsurface soil within the site boundary, including the previous soil removal action area.
Explanation of Significant Differences (CH2M HILL, 2012)	2012	An ESD was submitted in 2012 to document the LUCs as the remedy at Site 80.

TABLE 8-44
Land Use Control Summary, IRP Site 80

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	3.2	May 2007	February 2007
Intrusive Activities Control Boundary (Soil)	3.2		

8.1.22.1 Future Activities

LUCs are in-place to prohibit soil intrusive activities and prohibit non-industrial use within the extent of the former soil removal action areas where pesticides remain in soil above levels that allow for UU/UE.

8.1.23 Site 82 (OU 2)—Piney Green Road VOC Area

Site 82, the Piney Green Road VOC Area, covers approximately 30 acres and is located within OU 2 (Figure 8-29). OU 2 covers approximately 210 acres and consists of three sites (Sites 6, 9, and 82) that have been grouped together because of their proximity to one another. Before the late 1980s, much of the site was reportedly used for storage, disposal, and handling of potentially hazardous waste and material. Site 82 was identified during the confirmatory sampling at Site 6 in 1986, when Site 82 was randomly littered with debris including spent ammunition casings and empty or rusted drums. Some of the drums were marked as “lubrication oil” and “anti-freeze.”

FIGURE 8-29
IRP Site 82, OU 2



Previous investigations are listed in **Table 8-45** and the LUC Summary is presented in **Table 8-46**.

TABLE 8-45
Previous Investigations Summary, IRP Site 82

Previous Investigation/Action	Date	Activities
Site Investigation (Halliburton/NUS, 1991)	1991	An SI was conducted to determine the presence or absence of contamination. Field activities included soil, groundwater, surface water, and sediment sampling. VOCs were detected in surface water samples, which were considered attributable to activities conducted at Site 82.

TABLE 8-45
Previous Investigations Summary, IRP Site 82

Previous Investigation/Action	Date	Activities
Remedial Investigation/ Feasibility Study and Proposed Remedial Action Plan and Record of Decision (Baker, 1993)	1992 - 1993	An RI was completed to characterize the nature and extent of contamination and potential impacts to human health and the environment. Field activities included a preliminary site survey, a geophysical survey, soil, groundwater, surface water and sediment sampling. Samples were analyzed for VOCs, SVOCs, pesticides, PCBs, and metals. Potential unacceptable human health risks were identified for current and future receptors due to exposure to soil and groundwater. Potential adverse ecological impacts were identified for Wallace Creek and Bearhead Creek. The FS was completed to address PCB and pesticide contaminated soil and VOC contaminated groundwater. The PRAP for OU 2 was submitted for public review and comment in August 1993. The preferred alternative was excavation and offsite disposal of pesticide and PCB contaminated soil to industrial cleanup levels, SVE to address vadose zone VOC contamination, groundwater extraction and treatment to address VOCs, LTM, and LUCs. The Final ROD for OU 2 was issued and signed in September 1993.
Remedy-in-Place	1994 - present	The soil excavation to remove pesticide- and PCB-contaminated soil was completed in 1994 and 1995. The SVE system operated for 6 months in 1996 to remediate residual VOC contamination in the vadose zone. The groundwater extraction and treatment system began full-scale operation in July 1996. Groundwater and surface water LTM began in 1997 and is ongoing. LUCs were implemented in 2001 and updated in 2002. The current CSM is shown on Figure 8-30 .
Groundwater Pilot Study (CH2M HILL, 2008)	2007 - 2008	In February 2007, a groundwater pilot study was initiated at Site 82 to evaluate the performance of ERD via EVO and lactate injection and to determine whether it is a viable alternative to supplement, enhance, or replace the current groundwater extraction and treatment system. After the treatment system was turned off to implement the study, higher concentrations were identified elsewhere. Although the location of the pilot study was not optimal, the study demonstrated that ERD is a viable remedial technology for contaminant mass removal.
Supplemental Source Investigation (Rhēa, 2011)	2008 - 2011	The SSI was initiated to identify additional potential sources of CVOC contamination in groundwater at Site 82. During vegetation clearing activities, MD was discovered and an ESS was submitted to remove and dispose of the MD. An ESS Amendment was also submitted for OU 2 to complete the SSI. A geophysical survey, monitoring well installation, groundwater sampling, and test pitting was conducted. Soil samples collected from the test pits and groundwater samples were analyzed for VOCs. Cis-1,2-DCE, TCE, PCE, ethylbenzene, and tetrachloroethane (PCA) were detected at concentrations exceeding screening criteria.
Basewide Vapor Intrusion Evaluation (CH2M HILL, AGVIQ, 2009)	2007 – 2011	A Basewide Vapor Intrusion Study was conducted to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. At OU 2, no buildings were identified within 100 feet of a monitoring well containing VOC concentrations above NCGWQS. If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.
Draft Supplemental Investigation Report (CH2M HILL, 2014)	2012-2014	In 2012 and 2013, a supplemental investigation was conducted to evaluate the potential for additional VOC source material in soil and groundwater. Field activities included hydrogeologic testing and soil, groundwater, pore water and passive soil gas samples were collected and analyzed for VOCs. VOCs were detected at concentrations exceeding screening criteria in soil and groundwater samples and an area of high VOC concentrations was identified. In 2012, an evaluation of metals in groundwater was conducted based on recommendations of the Five-year Review. Groundwater samples were collected from the surficial aquifer and analyzed for target analyte list metals. Nine of the 22 detected metals exceeded the cleanup levels and background threshold values. Based on the results of these activities, additional horizontal and vertical delineation, groundwater modeling, and optimization of the existing groundwater treatment system are planned.

TABLE 8-46
Land Use Control Summary, IRP Site 82

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	206.75		
Intrusive Activities Control Boundary (Soil)	206.75		
Intrusive Activities Control Boundary (Groundwater)	99.4	July 2002	February 2002
Aquifer Use Control Boundary (1,000 feet)	404.91		

8.1.23.1 Future Activities


The Supplemental Investigation Report will be finalized in FY 2015. Based on recommendations from the supplemental investigation an additional investigation to further delineate the current extent of groundwater contamination and optimize current remedies will be conducted in FY 2015. The remedy, including LUCs and LTM, may be updated based on the additional investigation results.

The groundwater extraction and treatment system, LTM, and LUCs will be maintained. LUCs are in place to prohibit soil and groundwater intrusive activities, aquifer use, and non-industrial use. If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.

Because MD was discovered and remains onsite, the OU 2 area is also being investigated under the MMRP as UXO-22 (**Section 4.1.2**).

This page intentionally left blank.

FIGURE 8-30
 Site 82 Conceptual Site Model
 FY 2015 Site Management Plan
 MCIEAST-MCB CAMLEJ
 North Carolina

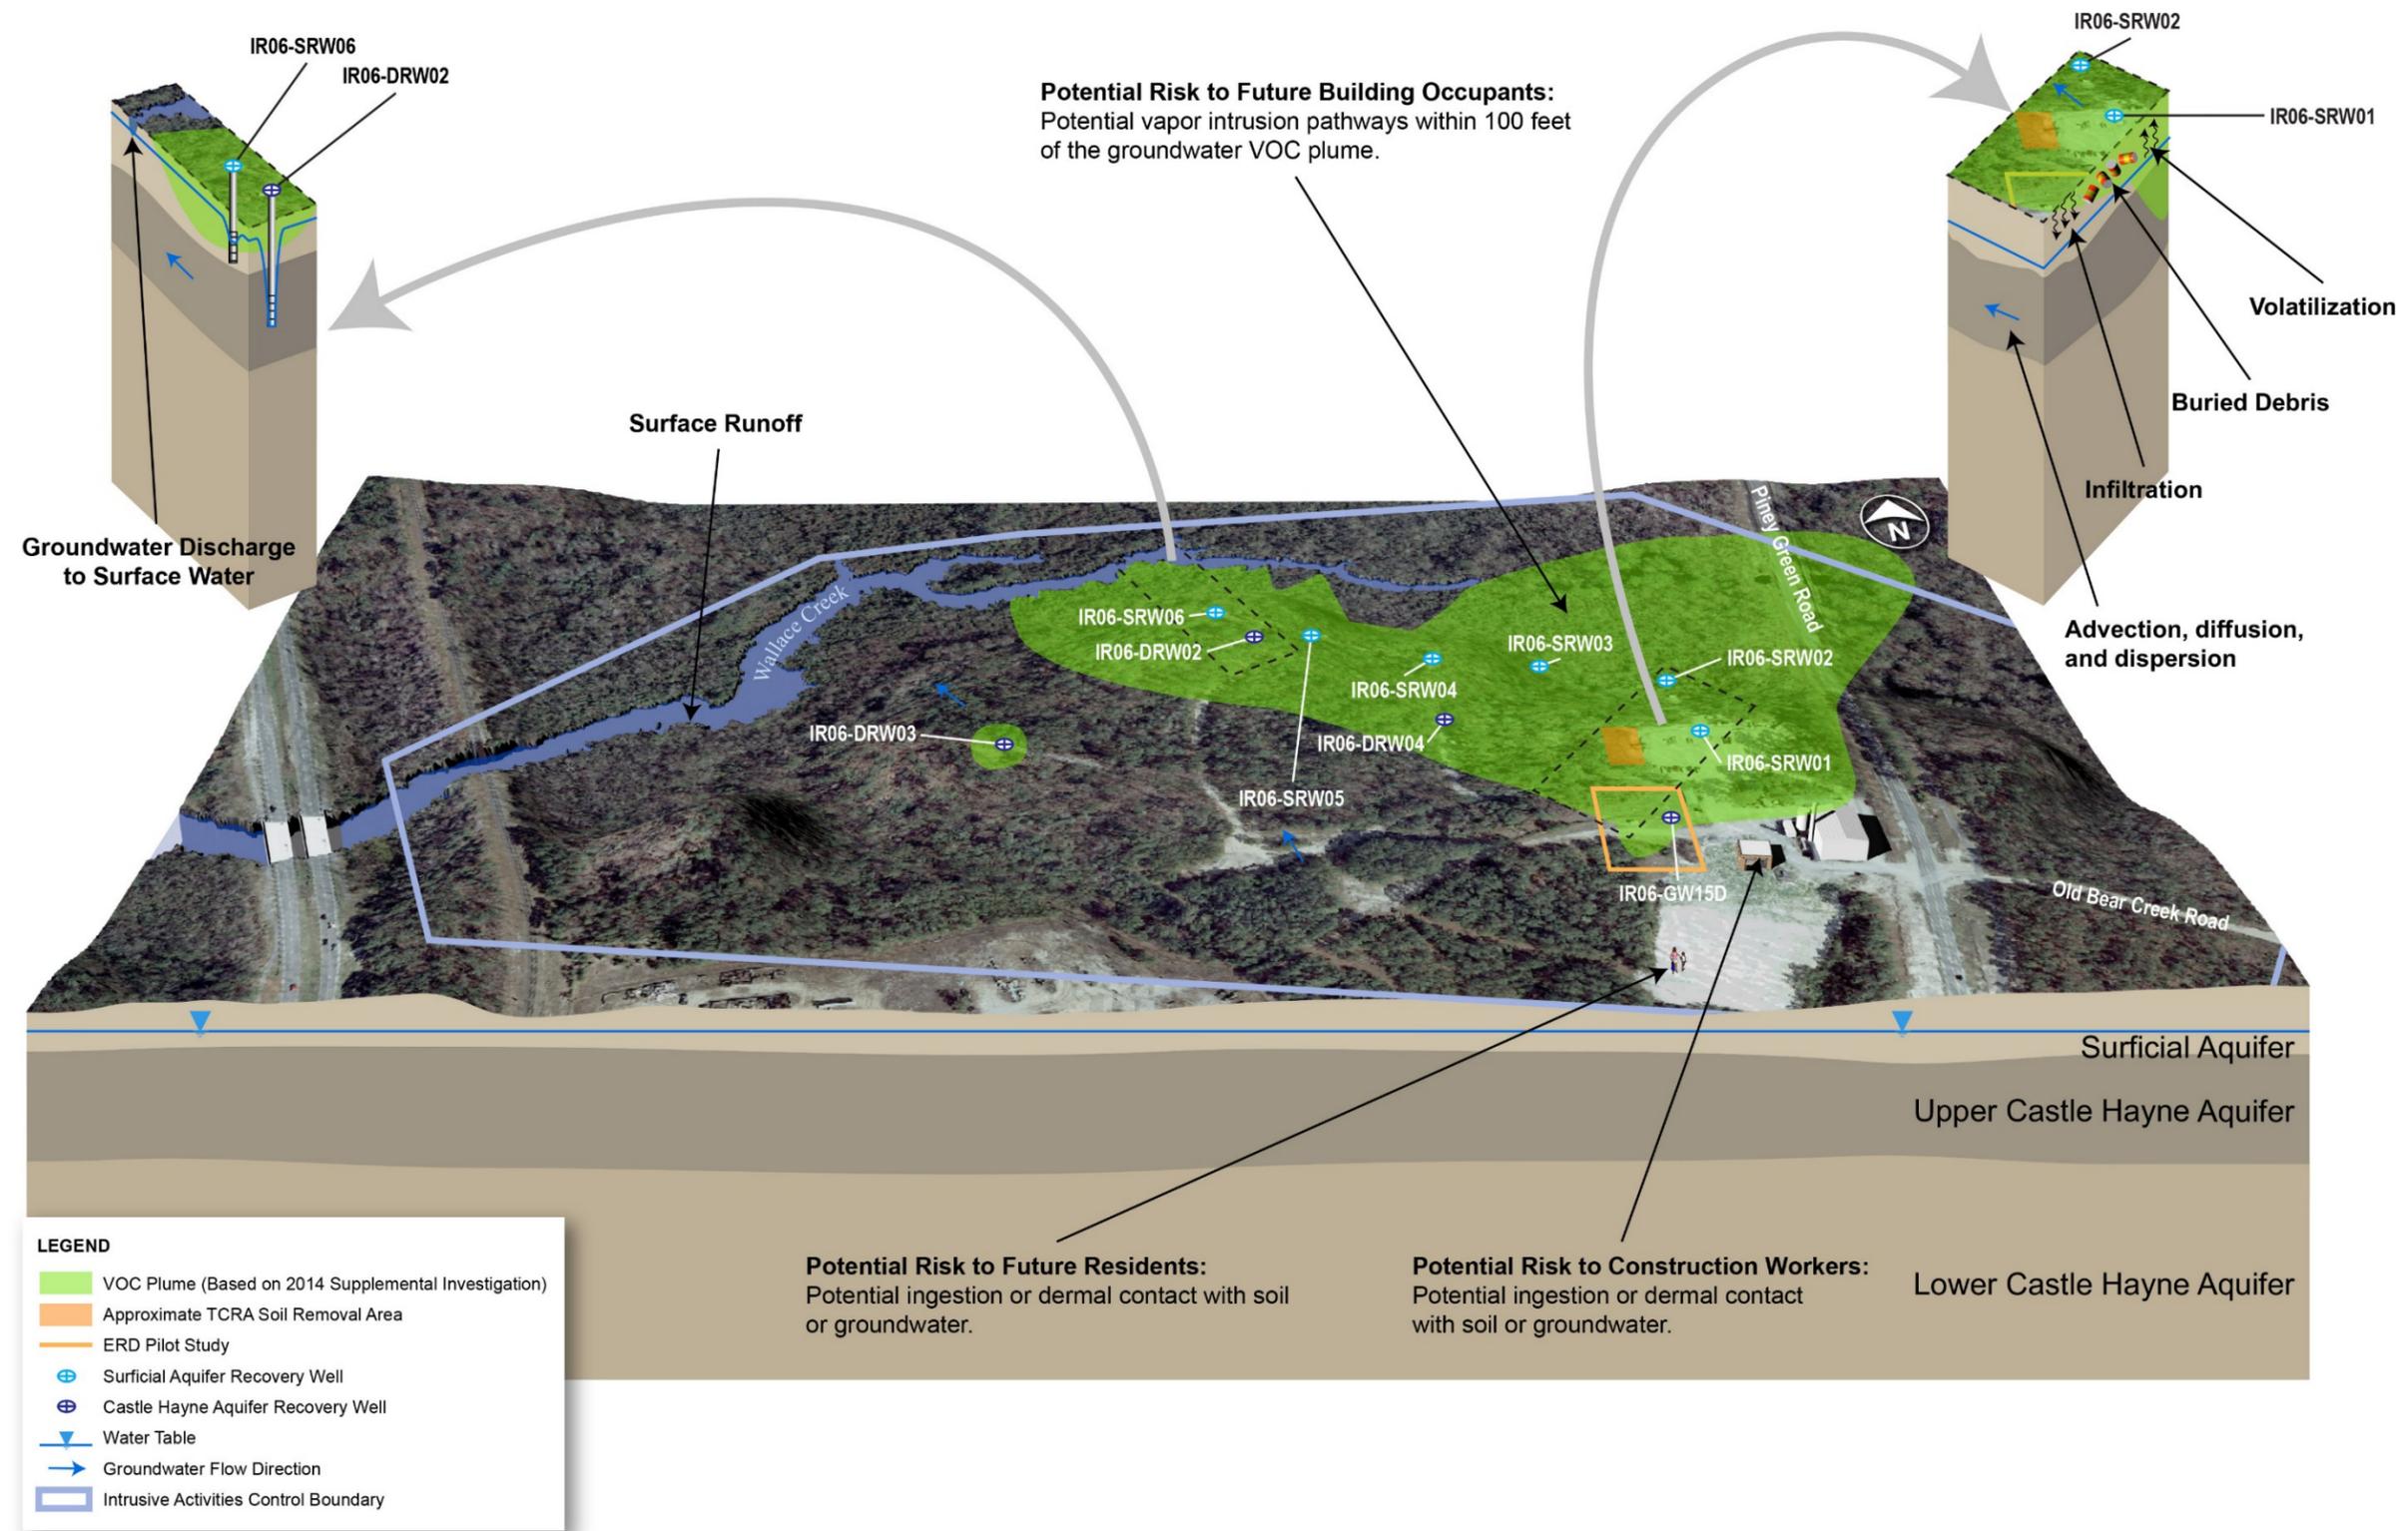

This page intentionally left blank.

8.1.24 Site 84 (OU 19)—Building 45

Site 84, Building 45, covers approximately 5 acres just south of State Route 24, one mile west of the Main Gate (Figure 8-31). The property was purchased by the federal government in 1941 and Building 45 was a former electric substation, where transformers reportedly containing PCBs were used and possibly stored. The building was constructed by the Navy soon after purchasing the property, and leased to Tidewater Electric, who operated the building through 1965. In 1965, Building 45 was converted to a maintenance facility for large machinery. While no official operational history exists for the building and the surrounding property, former employees recalled that site activities included PCB transformer maintenance, recycling, and onsite disposal of spent transformer casings. A transformer was discovered near a wooded area and additional transformers (approximately 20), potentially containing PCB dielectric oil, were discovered near the woods of the powerhouse. Maintenance personnel at Building 45 have previously reported that additional transformers may still be buried in areas near a former lagoon; however, an excavation is reported to have been performed by Public Works Center personnel and no waste materials were discovered. In 2012, portions of the site were developed with a photovoltaic farm.

FIGURE 8-31
IRP Site 84, OU 19



Previous investigations are listed in **Table 8-47** and the LUC summary is presented in **Table 8-48**.

TABLE 8-47
Previous Investigations Summary, IRP Site 84

Previous Investigation/Action	Date	Activities
UST Investigation	1992	During a UST Investigation conducted in 1992, low levels of PCBs were detected in a soil sample collected from the area where a transformer was discovered.
Pre-Remedial Investigation Screening Study (1995)	1995 - 1998	A Pre-RI screening study was conducted to analyze the nature and extent of contamination. Field activities included soil, groundwater, surface water, and sediment sampling. Samples were analyzed for PCBs. PCBs were detected at levels above 500 parts per billion in soil collected from around the lagoon, and in surface water and sediment (above 1,000 parts per billion) collected from within the lagoon. Based on the results of the Pre-RI, a Draft EE/CA was prepared to present removal action options for the NTCRA of PCB-contaminated sediments and soil at Site 84. The EE/CA was not finalized and the removal action was delayed to allow for more complete PCB delineation at the site.
UST Removal (1999)	1999	In July 1999, a 500-gallon UST used for storing heating oil was removed in the vicinity of Building 45. Confirmatory soil samples identified petroleum hydrocarbons in the soil. The UST removal report concluded that the detected petroleum hydrocarbons might not be from the UST but rather from other unidentified source(s), based on the long industrial operation history at Building 45.
Building 45 Removal (1999)	1999	Concrete sampling and surface soil sampling was conducted at Building 45 in August 1999 in preparation for razing and offsite disposal of material from the aboveground portions of Building 45. Analytical results identified PCBs in the concrete. As a result, the aboveground portion of Building 45 was removed between August and September 1999, with the foundation left in place.
Remedial Investigation / Feasibility Study (Baker, 2002)	2001 - 2002	An RI was conducted to assess the nature and extent of contamination and potential human health and environmental impacts of the site. Field activities included soil and groundwater investigation. Potential unacceptable human health risks were identified due to the presence of PCBs and PAHs in surface soil and pesticides and metals in groundwater. Potential unacceptable ecological risks were identified due to the presence of pesticides, PCBs, and metals in soils and VOCs, SVOCs, and PCBs in sediments. The Final RI recommended completion of a NTCRA to remove surface soils surrounding Building 45, in the lagoon area, and in the midfield area, as well as removing the Building 45 foundation materials. The Final FS was completed in June 2002, which developed and screened remedial alternatives for addressing soil contamination.
Proposed Remedial Action Plan and Engineering Evaluation/Cost Analysis (2002)	2002	A PRAP was issued in 2002 to solicit public input on the preferred alternative for soil and groundwater contamination and a public meeting was held. Excavation and landfill disposal was the preferred alternative for soil recommended in the PRAP. Owing to the national debate between USEPA and DoD regarding enforcement issues of the LUCs, the Navy decided not to implement the preferred alternative from the PRAP. Accordingly an AM proposing removal actions was developed to address sediment and soil contamination.
Phase I Non-time-critical Removal Action (2002)	2002	Based on the recommendations of previous documents, an NTCRA was completed to remove the remaining building foundation at Building 45 and some surrounding PCB-contaminated soil. 4,857 tons of non-hazardous PCB-contaminated soil and 142 tons of petroleum-contaminated soil were removed from the site.
Phase II Non-time-critical Removal Action (2004)	2002 - 2004	Excavation and offsite disposal of contaminated soil and lagoon sediments was completed. Approximately 12,000 tons of contaminated soil/sediment was removed from the site. However remediation goals were not met because the Phase II NTCRA uncovered additional areas of contamination.
Supplemental Investigation (Rhêa, 2006)	2005 - 2006	A supplemental investigation was conducted and the geophysical investigation uncovered two underground pipes originating from the area of former Building 45. One of the pipes corresponded to the location of a concrete-encased steel pipe partially excavated during the Phase II NTCRA. PCB concentrations in soil samples collected from both pipes were less than 10 milligrams per kilogram (mg/kg) and the pipes were left in place. A confirmation groundwater sample collected during the investigation indicated no exceedances of the NCGWQS.

TABLE 8-47
Previous Investigations Summary, IRP Site 84

Previous Investigation/Action	Date	Activities
Phase III Non-time-critical Removal Action and Construction Closeout Report (Rhēa, 2007)	2006 - 2007	The Phase III NTCRA was conducted to remove additional PCB-contaminated soil to the south and west of the previous NTCRA locations. Complete excavation was deemed impractical in areas with buried, active utility and communication lines. In these areas, a 2-foot-thick vegetative soil cover was placed over the PCB-contaminated soil.
Amended Feasibility Study, Proposed Remedial Action Plan, and Record of Decision (Rhēa, 2008 and 2009)	2008 - 2009	The Amended FS was conducted to evaluate remedial alternatives for addressing PCB soil contamination; the PRAP was completed followed, by a public meeting and public comment period to solicit community input on the preferred alternative: removal of PCB-contaminated soil and LUCs. The ROD was signed in 2009 and removal of PCB-contaminated soil and LUCs were identified as the selected remedy. Additionally, because the site is located within a utility corridor, the ROD indicated that once the utility corridor lease agreements are scheduled for renewal (2026), the affected utility companies will be notified of the contaminated area and given the option to either properly excavate and dispose of PCB contaminated soil and PCB waste soil or relocate their utilities outside of the PCB area of concern.
Remedy-in-Place and Remedial Action Completion Report (Rhēa, 2010)	2002 – 2010	Three NTCRAs were conducted from 2002 through 2006 to remove PCB-contaminated soil and a soil cover has been put in place across the site. In 2009, LUCs were implemented in the extent of PCB soil contamination greater than 10 mg/kg to restrict intrusive activities, and a fence and signs were installed to restrict access. LUCs were also implemented to prohibit non-industrial use in the extent of PCB soil contamination greater than 1 mg/kg.

TABLE 8-48
Land Use Control Summary, IRP Site 84

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Non-Industrial Use Control Boundary (Soil)	4.6		
Access Control Boundary	0.14	May 2009	March 2010
Intrusive Activities Control Boundary (Soil)	0.55		

8.1.24.1 Future Activities

LUCs are in-place to prohibit soil intrusive activities and prohibit non-industrial use within the extent of the former soil removal action areas where PCBs remain in soil above levels that allow for UU/UE. A fence and signs are also in-place to restrict access. Additionally, the utility corridor lease agreements are scheduled for renewal in 2026.


8.1.25 Site 89 (OU 16)—Former DRMO

Site 89, the former DRMO, covers approximately 50 acres within OU 16 (includes Site 89 and 93), which is located within Camp Geiger (**Figure 8-32**).

The Base motor pool operated on the site until 1988 and reportedly used solvents such as acetone, trichloroethene (TCE), and 2-butanone (methyl-ethyl-ketone) for cleaning parts and equipment. A steel 550-gallon UST was used to store waste oil from 1983 until its removal in 1993. During removal, visible signs of contamination were observed and the contaminated soil was removed until groundwater was encountered. Other structures historically located in the former UST area include Building STC-867, which was used to store hazardous soil, and a wash rack with an associated drain and oil and water separator.

The DRMO was operated by the Defense Logistics Agency on the site until 2000. The area was used as a storage yard for items such as scrap and surplus metal, electronic equipment, vehicles, rubber tires, and fuel bladders. The site has not been used since the DRMO relocated in 2000. The only site activity since that time has been related to environmental investigations and actions.

FIGURE 8-32
IRP Site 89, Operable Unit 16

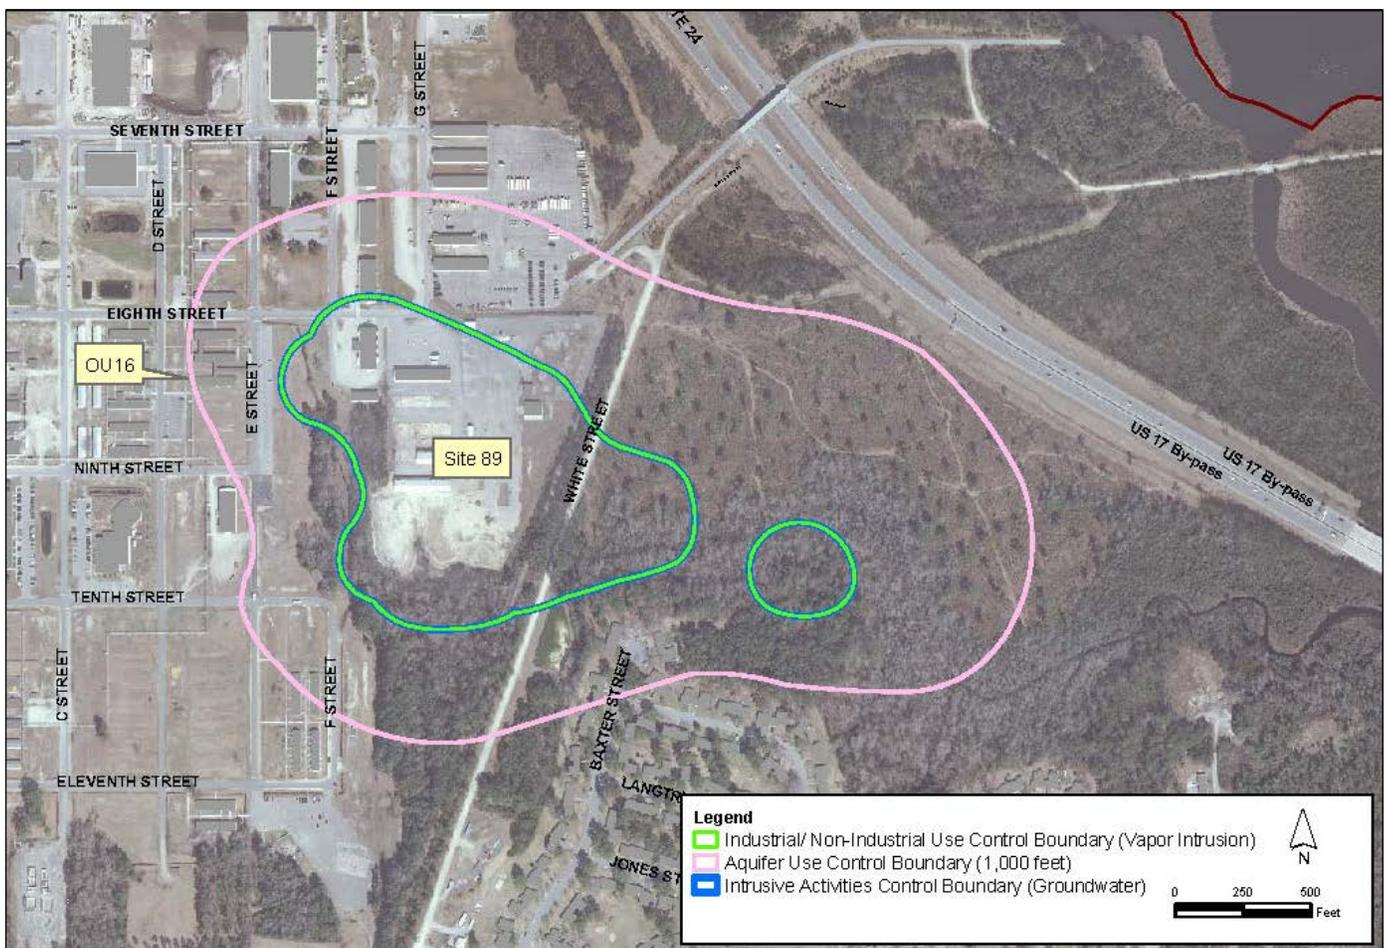

Previous investigations are listed in **Table 8-49** and the LUC summary is presented in **Table 8-50**.

TABLE 8-49
Previous Investigations Summary, IRP Site 89

Previous Investigation/Action	Date	Activities
UST STC-868 Investigation (R.E. Wright, 1994)	1994	A limited soil and groundwater investigation was conducted at UST STC-868 located within the Site 89 area. O&G was detected in soil and chlorinated solvents were detected in groundwater. The results were used to develop recommendations for additional assessment of Site 89 under the IRP.
Focused Remedial Investigation (Baker, 1998)	1996 - 1998	A Focused RI was conducted to characterize the nature and extent of soil and groundwater contamination. Field activities included the collection of soil, groundwater, surface water, and sediment samples. Samples were analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. Results identified chlorinated solvent contamination in soil and groundwater. Potential human health and environmental risks were identified for future receptors due to exposure to CVOCs in groundwater and sediment.
Long-term Monitoring	1999 - 2003	Based on the results of the RI, LTM was implemented in order to assess plume stability. LTM was discontinued in 2003 due to the ongoing SI.
Post-Remedial Investigation (Baker, 1999)	1999	A post-RI was conducted to further assess the VOC plume. Investigation activities included soil, groundwater, surface water, and sediment sampling. Samples were analyzed for VOCs. Results verified the extensive CVOCs contamination to the immediate and surrounding areas of the site. Soil sample results indicated that extremely high levels of CVOCs were affecting an extensive area within the southern portion of the site.
Low Temperature Thermal Desorption Time-critical Removal Action (2000)	2000	A TCRA was completed for the removal and treatment of vadose zone contaminants in the southern portion of the site. Low temperature thermal desorption units were used to treat the contaminated soil and roughly 32,000 tons were treated. In addition, an aeration system was installed in Edwards Creek to assist in the remediation of VOCs. The aeration system remains in place and is operational.
Supplemental Site Investigation (Baker, 2001)	2001	An SSI was conducted in an area south of the DRMO. Soil and groundwater samples were collected for VOCs analysis. Two separate DNAPL plumes were identified.
Electrical Resistive Heating Pilot Study (Shaw, 2005)	2003 - 2005	The electrical resistance heating pilot study was conducted to treat one of the DNAPL plumes identified during the SSI. An estimated 48,000 pounds of VOCs were removed from the subsurface.
Treatability Study (CH2M HILL, 2008)	2006 - 2008	A treatability study was implemented to evaluate the performance and effectiveness of four remedial alternatives, including air sparging using a HDD well; PRB, using mulch/compost as backfill; chemical reduction via ZVI injection through pneumatic fractures; and ERD using a combination of sodium lactate and EVO, with direct-push emplacement. While air sparging and ERD reduced contaminant mass for a similar cost per volume treated, air sparging was the most practical technology for full scale implementation. The results of the studies will be used to develop a better exit strategy for the site, and to provide options for future treatment train approaches.
Comprehensive Remedial Investigation (CH2M HILL, 2008)	2006 - 2008	A Comprehensive RI was conducted to address previous data gaps. Field activities included an MIP investigation; monitoring well installation; slug testing; groundwater, soil, vapor, sediment, surface water, and pore water sampling; and a benthic community survey. TCE and 1,1,2,2-PCA and their respective degradation products were detected at elevated concentrations in soil, groundwater, and adjacent surface water and sediment from Edwards Creek. The HHRA identified potential human health risks based on hypothetical potable use of the groundwater and future residential exposure to subsurface soil, primarily from exposure to VOCs. The ERA identified potential ecological risks to benthic-dwelling organisms and amphibians from exposure to PAHs and pesticides in sediment in an adjacent wetland area. The RI recommended an FS be performed to evaluate remedial alternatives.
Non-time-critical Removal Action (CH2M HILL, AGVIQ, 2010)	2007 - 2010	In 2007, an EE/CA was prepared to evaluate removal action alternatives to reduce risks to human health and environment in the DNAPL source area. Five alternatives were evaluated and soil mixing with ZVI-clay addition was the selected NTCRA. A bench-scale study was conducted to optimize the amount of ZVI and clay for treatment. The area treated was 32,000 square feet (ft ²) at a depth of 25 feet, resulting in a total treated volume of 30,000 yd ³ . Follow-up monitoring has indicated significant reduction in VOC concentrations in the soil, groundwater, and adjacent creek.

TABLE 8-49
Previous Investigations Summary, IRP Site 89

Previous Investigation/Action	Date	Activities
Baseline Ecological Risk Assessment Addendum (CH2M HILL, 2008)	2008	Based on the results of the RI, additional sediment and surface soil samples were collected for PAHs and pesticides (dichlorodiphenyldichloroethane, dichlorodiphenyldichloroethylene, and DDT) analysis. Results confirmed an isolated area of elevated sediment contaminant concentrations posing potential ecological risks. The Final Baseline ERA Addendum was completed to document the results and the identified isolated risk.
Non-time-critical Removal Action (CH2M HILL and Osage, 2010)	2009 - 2010	An EE/CA to address potential ecological risks in the adjacent western wetland area was submitted, identifying three alternatives for evaluation; no action, soil capping and LUCs, and excavation and offsite disposal. An AM was submitted documenting excavation and offsite disposal as the preferred NTCRA. The NTCRA was completed in 2009 to address the potential ecological risks in the western wetland area. After excavation, confirmation sampling was conducted and the results were below cleanup levels. Excavated soil was disposed of offsite.
Feasibility Study (CH2M HILL, 2012)	2011 - 2012	RAOs were developed to address VOC-impacted groundwater in the source and downgradient areas and surface water. The remedial alternatives evaluated for the source area were no action, ERD, ISCO, and air sparging. Downgradient groundwater alternatives were no action, MNA, and PRB with MNA. Surface water alternatives were no action, PRB, and aerators.
Proposed Remedial Action Plan and Record of Decision (CH2M HILL, 2012)	2012	A PRAP was issued to solicit public input on the preferred alternative (including horizontal air sparging for source area groundwater, PRB for downgradient groundwater, and aerators for surface water). The PRAP was submitted for public review and comment. General comments for informational purposes were addressed during the public meeting and no written comments were received. The ROD was signed in December 2012.
Remedial Design (CH2M HILL, 2012) and Remedial Action Work Plans (Osage, 2013; SEPI 2013)	2012	The RD presents the design of remedy as specified by the ROD, air sparging, PRBs, in-stream aeration, MNA, LTM, and LUCs. The current CSM is shown on Figure 8-33 . The RA components for air sparging and the PRBs were initiated in FY 2013.
Interim Remedial Action Completion Report (CH2M HILL, 2014)	2013-2014	Remedial action activities began in March 2013 and are ongoing. These activities included the installation of vertical and HDD air sparging wells in the source area, two PRBs in the downgradient area, and five in-creek aerators and baseline groundwater monitoring. The air sparging system was started in September 2013 and operation and maintenance reports are submitted monthly. LUCs were implemented and recorded with Onslow County in November 2013.
Basewide Vapor Intrusion Evaluation (CH2M HILL, AGVIQ, 2009; CH2M HILL, 2011, and CH2M HILL 2014)	2007 - 2014	Site 89 was included in the phased Basewide vapor intrusion evaluation, conducted from 2007-2011, to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. Vapor intrusion was not identified as a significant pathway of concern for any of the buildings located in the vicinity of Site 89. Additional sampling was recommended to further characterize temporal variability at Building TC864 and based on the 2013 results, the vapor intrusion pathway is not currently significant. However, due to the uncertainty about how operation of the air sparge system will affect the subslab concentrations long-term, subslab soil gas is included as part of the performance monitoring. If new buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.

TABLE 8-50
LUC Summary, IRP Site 89

LUC Boundary	Estimated Area	Final ROD	Onslow County Registration Date
Industrial/ Non-Industrial Use Control Boundary (Vapor Intrusion)	29.1 acres		
Intrusive Activities Control Boundary (Groundwater)	29.1 acres	August 2012	November 2013
Aquifer Use Control Boundary (1,000 feet)	105.2 acres		
Access Control	1,600 feet of fence line		

8.1.25.1 Future Activities

The air sparging system, PRB, and in-creek aerators will be maintained and documented by monthly operation and maintenance reports. LTM and MNA are ongoing to monitor treatment effectiveness and potential migration of COCs in groundwater and surface water. LUCs will be maintained to prohibit groundwater intrusive activities, aquifer use, and non-industrial use until cleanup levels are achieved. LUCs are also in-place to prohibit site access within the former DRMO area.

If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.

This page intentionally left blank.


This page intentionally left blank.

8.1.26 Site 93 (OU 16)—Building TC-942

Site 93, Building TC-942, covers approximately 16 acres and is located at the intersection of Ninth and “E” Streets in the Camp Geiger section of MCAS New River (**Figure 8-34**). OU 16 consists of two sites (Sites 89 and 93) that have been grouped together because of their proximity to one another and unique characteristic of suspected waste (solvents). The buildings in this portion of Camp Geiger were constructed during the Korean War and currently function as classrooms, barracks, and supply rooms for the Marine Infantry School. Historical records indicate that a 550-gallon UST storing waste oil was previously located on Site 93, off the southwest corner of Building TC-942. The UST was permanently closed in December 1993.

FIGURE 8-34

IRP Site 93, Operable Unit 16

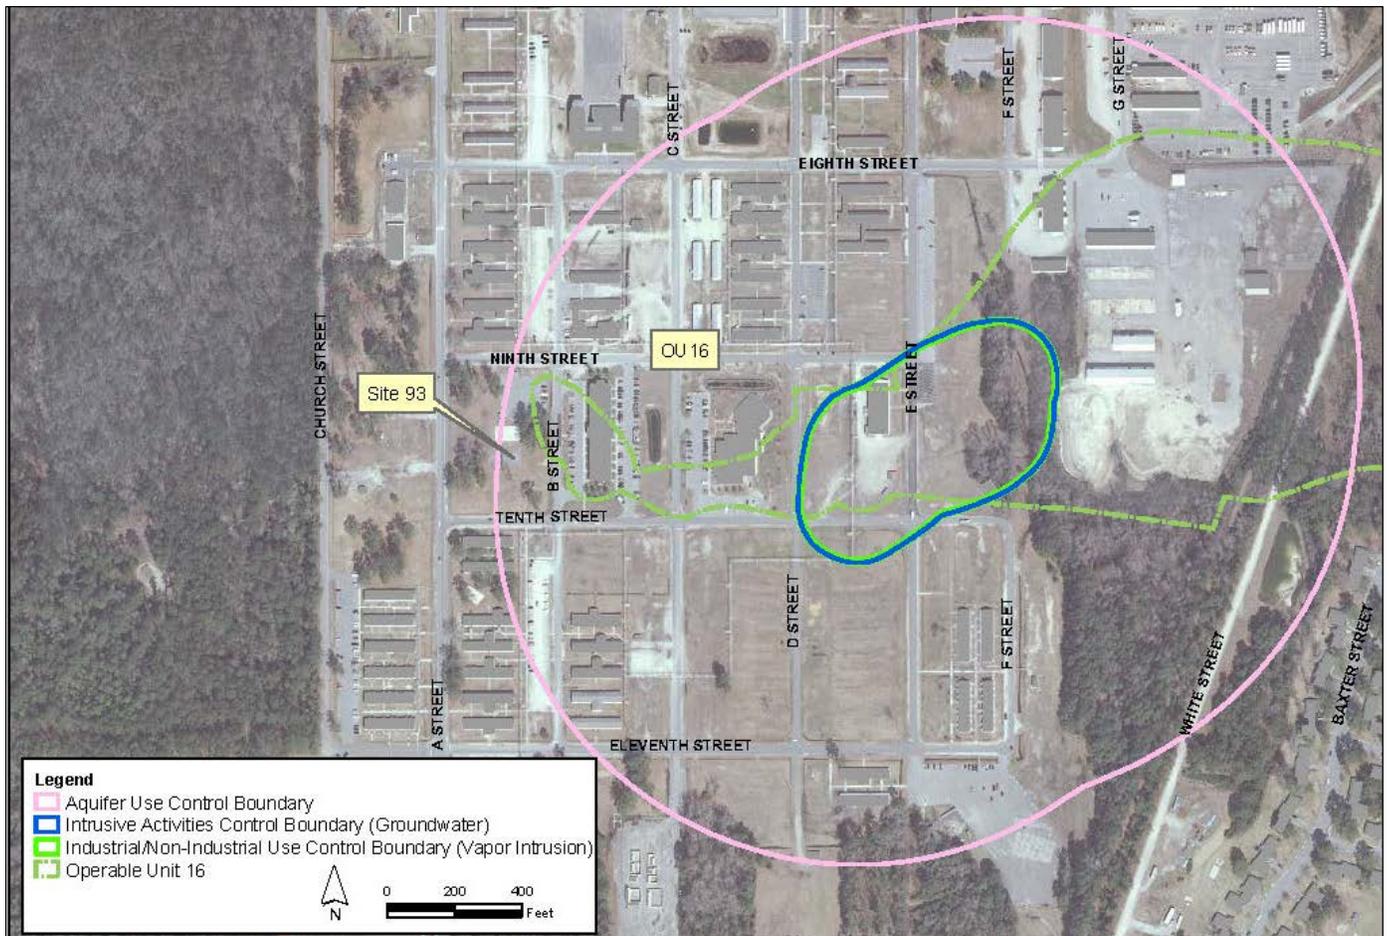

Previous investigations are listed in **Table 8-51** and the LUC summary is presented in **Table 8-52**.

TABLE 8-51

Previous Investigations Summary, IRP Site 93

Previous Investigation/Action	Date	Activities
Geotechnical Investigation (R.E. Wright, 1996)	1995 - 1996	To determine the presence or absence of contamination at the site, a geotechnical investigation and environmental screening were conducted near the barracks area. Field activities included soil and groundwater sampling. Soil samples were analyzed for O&G and halogenated solvents. Groundwater samples were analyzed for VOCs, SVOCs and metals. O&G, naphthalene, and PCE were detected in soil samples. CVOCs, SVOCs, and metals were detected in groundwater samples.

TABLE 8-51
Previous Investigations Summary, IRP Site 93

Previous Investigation/Action	Date	Activities
Remedial Investigation (Baker, 1998)	1996 - 1998	An RI was conducted to characterize the nature and extent of soil and groundwater contamination at OU 16. Field activities included the collection of soil and groundwater samples analyzed for VOCs. Groundwater analytical results identified CVOC contamination concentrated in the surficial aquifer within the immediate area of the former UST. Potential unacceptable human health risks were identified due to exposure to PCE and cis-1,2-DCE in groundwater. No potential unacceptable ecological risks were identified.
Natural Attenuation Evaluation (Baker, 2001)	2001	In 2001, a preliminary NAE was conducted to determine whether natural site conditions would encourage the natural attenuation process of degrading CVOCs. The results indicated limited natural attenuation was occurring and the reductive dechlorination process appeared to be stalling, indicating that the reduced state of the aquifer is not enough to encourage optimal dechlorination.
Additional Plume Characterization (Baker, 2002)	2002	Additional plume characterization activities were conducted in 2002 to further delineate groundwater contamination, and provide additional data to support the selection of an active remedial system. Field activities included groundwater sampling. The primary plume appeared related to the former UST area, with smaller "hot spot" areas downgradient. The results indicated horizontal migration of groundwater contamination had been minimal since 1995; however, vertical migration was observed.
Supplemental Site Investigation (2005)	2004 - 2005	An SSI was conducted to evaluate the current conditions of groundwater contamination in the surficial aquifer, and collect additional data to support the selection of a remedial alternative. Groundwater samples were collected from boring locations at three depths, and analyzed for VOCs and NAIPs. Once the groundwater screening results were analyzed, additional permanent monitoring wells were installed to complete the horizontal and vertical delineation of the shallow groundwater contamination.
Feasibility Study (CH2M HILL, 2005)	2005	In November 2005, the Final FS was completed for Site 93, which developed and screened remedial alternatives for addressing groundwater contamination (PCE, TCE, 1,2-DCE, PCA, and vinyl chloride).
Proposed Remedial Action Plan and Record of Decision (CH2M HILL, 2006)	2006	A PRAP was issued to solicit public input on the preferred alternative (ISCO via permanganate injections, MNA, and LUCs) and a public meeting was held. The final Site 93 ROD was issued and signed in October 2006.
Remedy-in-Place and Interim Remedial Action Completion Report (Shaw, 2009)	2006 - present	Phased ISCO injections were conducted from 2006 through 2008. After reviewing the baseline and follow-up data, it was determined that additional ISCO injections would not be cost effective and the quarterly monitoring of the groundwater would continue to verify achievement of the 90% reduction in constituents of concern concentrations through natural attenuation. LUCs to prohibit aquifer use and restrict intrusive activities within the extent of groundwater VOC contamination were established in 2009. An IRACR was prepared in 2009 to document the remedy was implemented and is operational. The current CSM is shown on Figure 8-35 .
Human Health Risk Screening Update	2013	MILCON was planned for utilities and soil borings in the western area of the intrusive activities (groundwater) LUC boundary at Site 93. Based on changes in CVOC concentrations over time (decreasing concentrations of PCE and TCE and increasing concentrations of breakdown products), construction worker risks were re-evaluated using the maximum CVOC concentrations detected in groundwater collected during the fiscal year 2013 LTM. No unacceptable human health risks were identified based on construction worker exposure to groundwater. Based on these results, the Partnering Team concurred that the proposed MILCON could proceed with no environmental controls related to the IRP site, unless evidence of previously unknown contamination was discovered.
Land Use Control Implementation Plan (CH2M HILL, 2014)	2013 - 2014	The LUCIP details how the existing LUCs established in 2009 were modified based on the recommendations from the Basewide Vapor Intrusion Evaluation and the results of the HHRS update. Based on those recommendations, the following LUC updates were registered with Onslow County in October 2014:: <ul style="list-style-type: none"> • Update the intrusive activities control boundary (groundwater) to be within 100 feet of the current groundwater plume • Institute a LUC to evaluate vapor intrusion pathways based on future changes in building and/or land use within 100 feet of the current groundwater plume • Update the aquifer use control boundary to be within 1,000 feet of the current groundwater CVOC plume

TABLE 8-51
Previous Investigations Summary, IRP Site 93

Previous Investigation/Action	Date	Activities
Basewide Vapor Intrusion Evaluation (CH2M HILL, AGVIQ, 2009, and CH2M HILL, 2014)	2007 - 2014	Site 93 was included in the phased Basewide vapor intrusion evaluation, conducted from 2007-2011, to determine if complete or significant exposure pathways exist for vapor intrusion into buildings. Building TC942 was unoccupied at the time; however, the building was recently confirmed to be occupied. Therefore, subslab soil gas sampling was conducted in 2013 and another round is recommended to evaluate temporal variability. If new buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed.

TABLE 8-52
Land Use Control Summary, IRP Site 93

LUC Boundary	Estimated Area (Acres)	Most Current LUCIP Date	Onslow County Registration Date
Industrial/Non-Industrial Use Control Boundary (Vapor Intrusion)	8.38		
Intrusive Activities Control Boundary (Groundwater)	8.38	October 2014	October 2014
Aquifer Use Control Boundary (1,000 feet)	114.6		


8.1.26.1 Future Activities

LTM is ongoing to monitor MNA of VOCs in groundwater and potential migration. LUCs are in place to prohibit groundwater intrusive activities and aquifer use until cleanup levels are achieved. LUCs to evaluate vapor intrusion pathways in industrial and non-industrial areas were registered with Onslow County in FY 2015. Based on recommendations from the FY 2012 LTM report, a pilot study is planned for FY 2015 to evaluate potential remedial technologies to reduce COC concentrations enhance MNA.

If buildings are planned for construction in the vicinity of the VOC groundwater plume, the potential for a vapor intrusion pathway will be evaluated and mitigated if needed. Base Master Planning maintains current groundwater plume data in the GIS, and all construction projects on-Base go through environmental review.

This page intentionally left blank.

FIGURE 8-35
Site 93 Conceptual Site Model

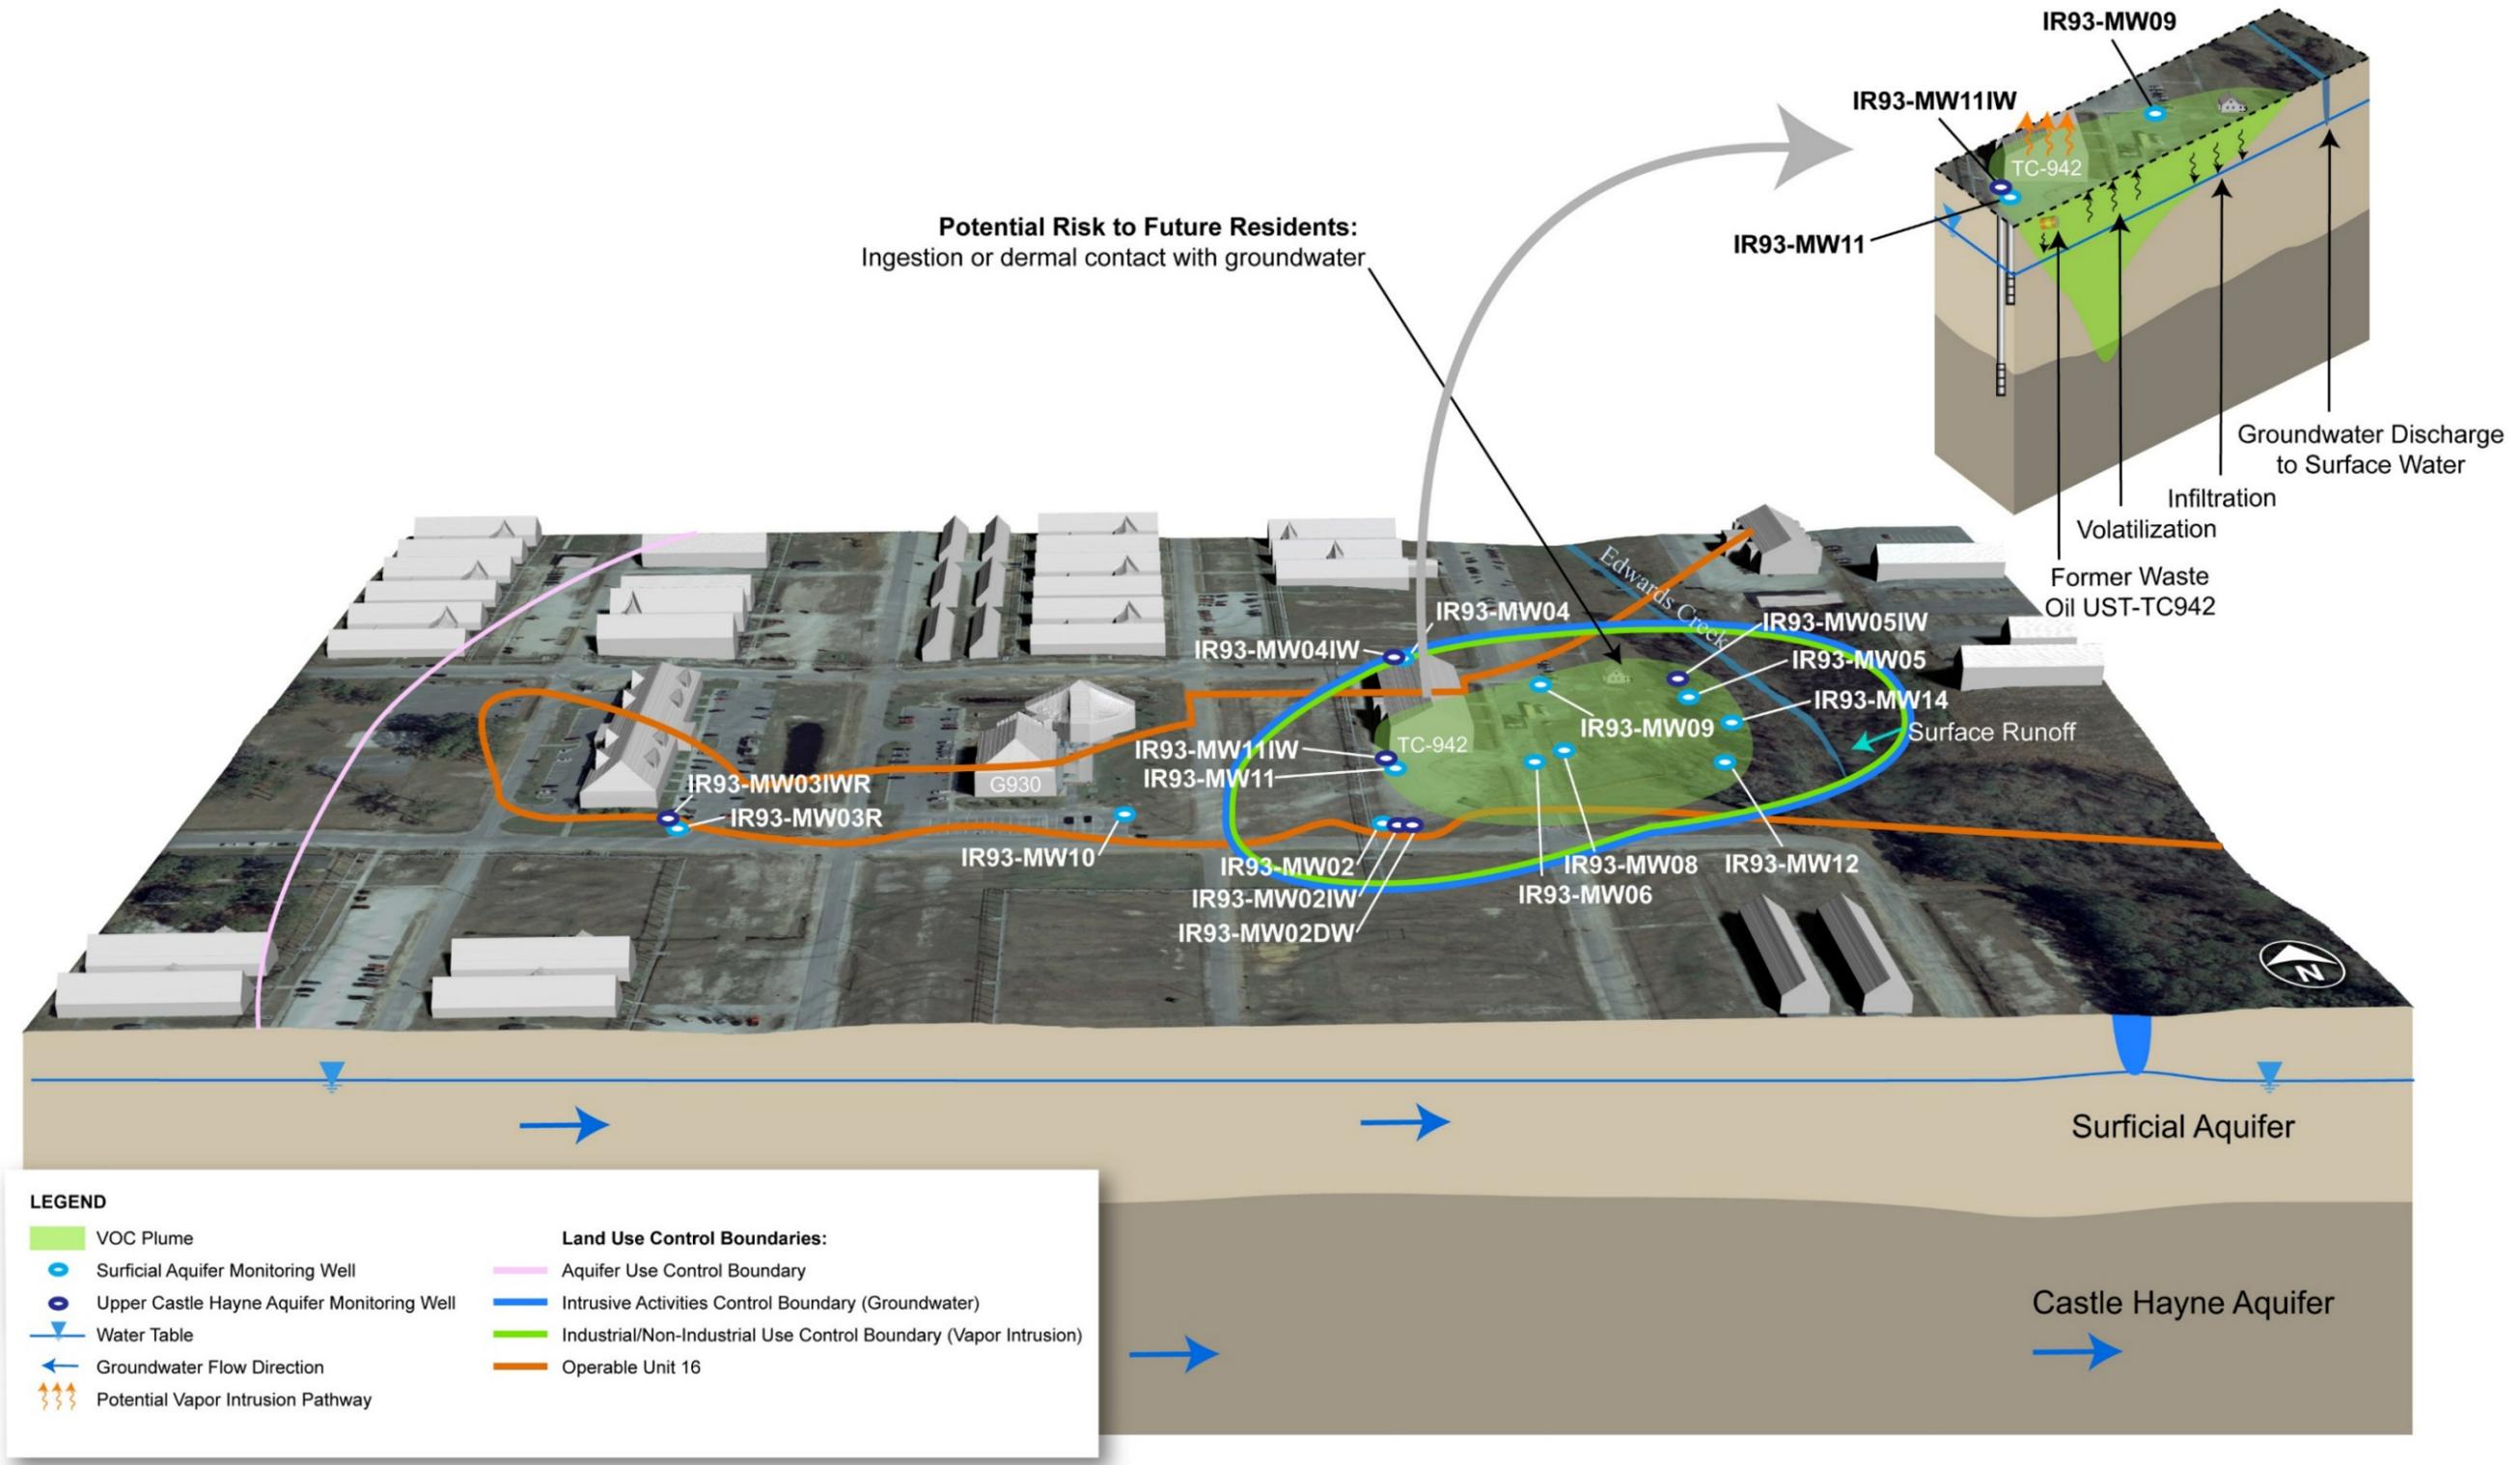

This page intentionally left blank.

8.2 IRP RC Sites

8.2.1 Montford Point Buildings M119 and M315

The Montford Point PA site encompasses less than half an acre and includes Buildings M119 and M315, located in the Montford Point portion of the Base (**Figure 8-36**). Building M119 was constructed in 1943 as a gun shed, most likely storing howitzers. Over the years the building has been renovated, and has been used as a classroom and vehicle repair shop. Several fuel oil tanks are used for heating this building. Known chemicals/compounds that were used or stored in Building M119 include solvents, waste oils, gasoline, and vehicle repair related materials. Potential vehicle repair-related materials used or stored at this building may include paint and paint thinners, parts cleaning wastes (solvents and parts washers), automotive batteries, automotive oils, and shop cleaning wastes (floor cleaning wastes, absorbents used for spills or leaks and shop rags). Building M315 was thought to be a former dry cleaning facility. However, no records were located that indicated past dry cleaner operations. Rather, the building was used as a laundry pick-up facility until the 1980s.

FIGURE 8-36
Montford Point (Buildings M119 and M315)



Previous investigations are listed in **Table 8-53**.

TABLE 8-53
 Previous Investigations Summary, Montford Point (Buildings M119 and M315)

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (Baker, CH2M HILL, 2006)	2002 - 2006	A PA/SI was conducted between 2002 and 2004 to identify sites that may have used, stored, or handled potentially hazardous materials and evaluate potential risks to human health and the environment. Buildings M119 and M315 at Montford Point were identified and soil and groundwater samples were collected for VOCs, SVOCs, pesticides/PCBs, and metals. The PA/SI recommended further investigation of metals in groundwater at both buildings.
Expanded Site Investigation (CH2M HILL, 2010)	2010	The ESI was conducted to confirm the results of the PA/SI and document the basis for recommendation of NFA where appropriate. Upon further review by the Partnering Team in 2009, it was concluded that the isolated detections of iron and lead in groundwater did not warrant additional investigation.
No Action Decision Document (CH2M HILL, 2010)	2010	The Final NADD was signed in December 2010.

8.2.2 MCAS New River Buildings SAS113, AS116, and AS119

The MCAS New River site encompasses less than half an acre and includes Buildings SAS113, AS116, and AS119, located in the northwest portion of the Base (**Figure 8-37**).

FIGURE 8-37

MCAS New River Buildings SAS113, AS116, and AS119



Building SAS113 is located 100 feet west of Bancroft Road and consists of a covered four-bay open metal structure constructed on a 6-inch thick slab. Building SAS113 was constructed in 1986 as a vehicle support area when surrounding buildings were converted into automotive hobby shops. A new automotive hobby shop opened at MCAS New River in 2009, and Building SAS113 is no longer actively used. The waste disposal practices are also unknown.

MCAS New River Building AS116 is a one-story metal frame building attached to a brick building on Bancroft Street. Fencing surrounds the building, with access from Bancroft Street only. Building AS116 was constructed to replace a temporary wooden building in 1954 and to provide the MCAS New River with vehicle maintenance facilities. From 1979 to 1981, Building AS116 served as a hazardous materials and flammables storage area. In the early 1980s, a new complex was constructed for the Vehicle Maintenance Shop, and Building AS116 was converted into an automotive hobby shop along with Buildings SAS113 and AS114. A new automotive hobby shop was opened at the MCAS New River in 2009, and Building AS116 has since been used as a storage facility.

Building AS119 is a single-story metal frame building located approximately 200 feet east of White Street. Building AS119 was constructed in 1963 as an automotive vehicle maintenance facility with parts storage, service bays, and exterior service or wash rack. Records indicate that during remodeling work performed in 1988, a number of structures, including a boiler and plumbing fixtures, were removed from the building. An existing oil heater and

associated piping and valves were replaced and a new fuel oil AST was installed. Currently, the building is used as a storage and vehicle maintenance facility. Previous investigations are listed in **Table 8-54**.

TABLE 8-54
 Previous Investigations Summary, MCAS New River Buildings SAS113, AS116, and AS119

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2006)	2001 - 2006	A PA/SI was conducted between 2002 and 2004 to identify sites that may have used, stored, or handled potentially hazardous materials and evaluate potential risks to human health and the environment. Based on the analytical results, further investigation of groundwater at Buildings SAS113, AS116, and AS119 due to the presence of metals was recommended. Although the PA/SI also recommended further investigation of soils at Building AS119 due to the presence of SVOCs, pesticides, and metals, concentrations were below background and/or regulatory screening criteria and the IRP Partnering Team concluded no further investigation of soil was necessary.
Expanded Site Investigation (CH2M HILL, 2010)	2009 - 2010	The ESI was conducted to confirm the presence or absence of elevated metals concentrations detected during the PA/SI. Although metals were detected at concentrations exceeding screening levels at two of the three buildings, no unacceptable risks to human health or the environment were identified. The ESI concluded that NFA was necessary. In 2009, the IRP Partnering Team concurred with this conclusion.
No Action Decision Document (CH2M HILL, 2010)	2010	The Final NADD was signed in December 2010.

8.2.3 Hadnot Point Industrial Area Buildings 1120, 1409, and 1512

The HPIA site encompasses less than half an acre and includes Buildings 1120, 1409, and 1512, located in the HPIA. Building HP1120 is located between Hammond Road, Birch Street, and Ash Street (**Figure 8-38**). It was constructed as an automobile hobby shop in 1955 with additions to the building constructed in 1964 and 1969. Building HP1120 has historically been used for auto body repair and painting.

Building HP1409 is located on Gibb Road. The building was constructed in 1943 and was used as the upholstery and carpenter shop in the late 1940s. Since that time, Building HP1409 has been used as a classroom, Public Works storage, and a furniture repair shop.

Building HP1512 was historically located between Buildings HP1504 and HP1503 on Hammond Road. The operational history of the building is unknown; however, it is assumed that it was used as an automotive repair support structure for the series of vehicle maintenance buildings in the surrounding area. Building HP1512 is no longer present. The date of demolition is unknown.

FIGURE 8-38
Hadnot Point Industrial Area (Buildings 1120, 1409, and 1512)



Previous investigations are listed in **Table 8-55**.

TABLE 8-55
 Previous Investigations Summary, Hadnot Point Industrial Area (Buildings 1120, 1409, and 1512)

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (2006)	2001 - 2006	A PA/SI was conducted between 2002 and 2004 to identify sites that may have used, stored, or handled potentially hazardous materials and evaluate potential risks to human health and the environment. Field activities included soil and groundwater investigations. The analytical results indicated that there was no impact to the area from past site operations, and no further investigation was recommended at the buildings. In 2002, the IRP Partnering Team concurred with this conclusion (CH2M HILL, 2002).

8.2.4 Site 4—Sawmill Road Construction Debris Dump

Site 4, the Sawmill Road Construction Debris Dump, encompasses approximately 0.3 acre and is located on the Mainside of the Base (**Figure 8-39**). The dates of operation are unknown, but Site 4 was reportedly used for surface disposal of construction debris including asphalt, old bricks, and concrete.

FIGURE 8-39
IRP Site 4



Previous investigations are listed in **Table 8-56**.

TABLE 8-56
Previous Investigations Summary, IRP Site 4

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at Site 4, and no further assessment was recommended.
Confirmatory Site Assessment (CH2M HILL, 2011)	2009 - 2011	To verify the presence or absence of contamination, a Confirmatory Site Assessment was conducted due to the site's history as a dump. Soil and groundwater sampling for VOCs, SVOCs, and metals was completed. Based on the results, no human health or ecological risks were identified and NFA was recommended.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.5 Site 7 (OU 11)—Tarawa Terrace Dump

Site 7, the Tarawa Terrace Dump, encompasses approximately 5 acres within OU 11. OU 11 consists of two sites (Sites 7 and 80) that have been grouped together into one OU because of their similar disposal history and proximity to one another (**Figure 8-40**). Site 7 is a former dump that was used during the construction of the Base housing located in Tarawa Terrace. Precise years of operation are unknown, but it has been reported that the dump was closed in 1972. Historical records do not indicate that hazardous materials were disposed at this facility—only construction debris, water treatment plant filter media, and household trash.

FIGURE 8-40
IRP Site 7, OU 11



Previous investigations are listed in **Table 8-57**.


TABLE 8-57
Previous Investigations Summary, IRP Site 7

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCEAST-MCB CAMLEJ. The quantity of any waste reportedly disposed of at the site was insignificant and did not warrant further investigation.
Site Investigation (Halliburton/NUS, 1991)	1991	To determine the presence or absence of site-related contamination, an SI was conducted. Field activities included soil and groundwater investigations. Samples were analyzed for SVOCs, VOCs, pesticides/PCBs, and metals. The analytical results identified SVOCs and pesticides in soil and groundwater. Based on these results, an RI was proposed.
Remedial Investigation (Baker, 1996)	1994 - 1996	An RI was completed to characterize the nature and extent of contamination and potential impacts to human health and the environment. Field activities included a site survey, soil, groundwater, surface water, and sediment sampling, a habitat evaluation, and an earthworm bioaccumulation study. Samples were analyzed for volatile and semivolatle organic analytes, pesticides/PCBs, and metals. No site-related contamination and no unacceptable risks to human health and the environment were identified.
Proposed Remedial Action Plan (1996) and Record of Decision (Baker, 1997)	1996 - 1997	Based on the findings of the RI, a PRAP was issued in 1996 to solicit public input on the preferred alternative (no RA) and a public meeting was held. The Final ROD was issued and signed in August 1997, and the site was closed with NFA.

8.2.6 Site 9 (OU 2)—Fire Fighting Training Pit at Piney Green Road

Site 9, the Fire Fighting Training Pit at Piney Green Road, encompasses approximately 2.6 acres in the Mainside area of the Base. From the early 1960s to 1981, training exercises were conducted in an 800-ft² unlined fire training pit, located in the southern area of the site (**Figure 8-41**). In 1981 the pit was lined with asphalt and an OWS was installed next to the pit; and in 2002 the pit was lined with concrete. Flammable liquids including solvents, used oil, and contaminated fuels were used as accelerants during the training exercises. In addition, approximately 30,000 to 40,000 gallons of JP-4 and JP-5 fuels were burned in the training pit. Four 500-gallon ASTs were located near the training area but are no longer present. The site is still currently used as a fire training facility with a concrete-lined pit.

FIGURE 8-41
IRP Site 9, OU 2

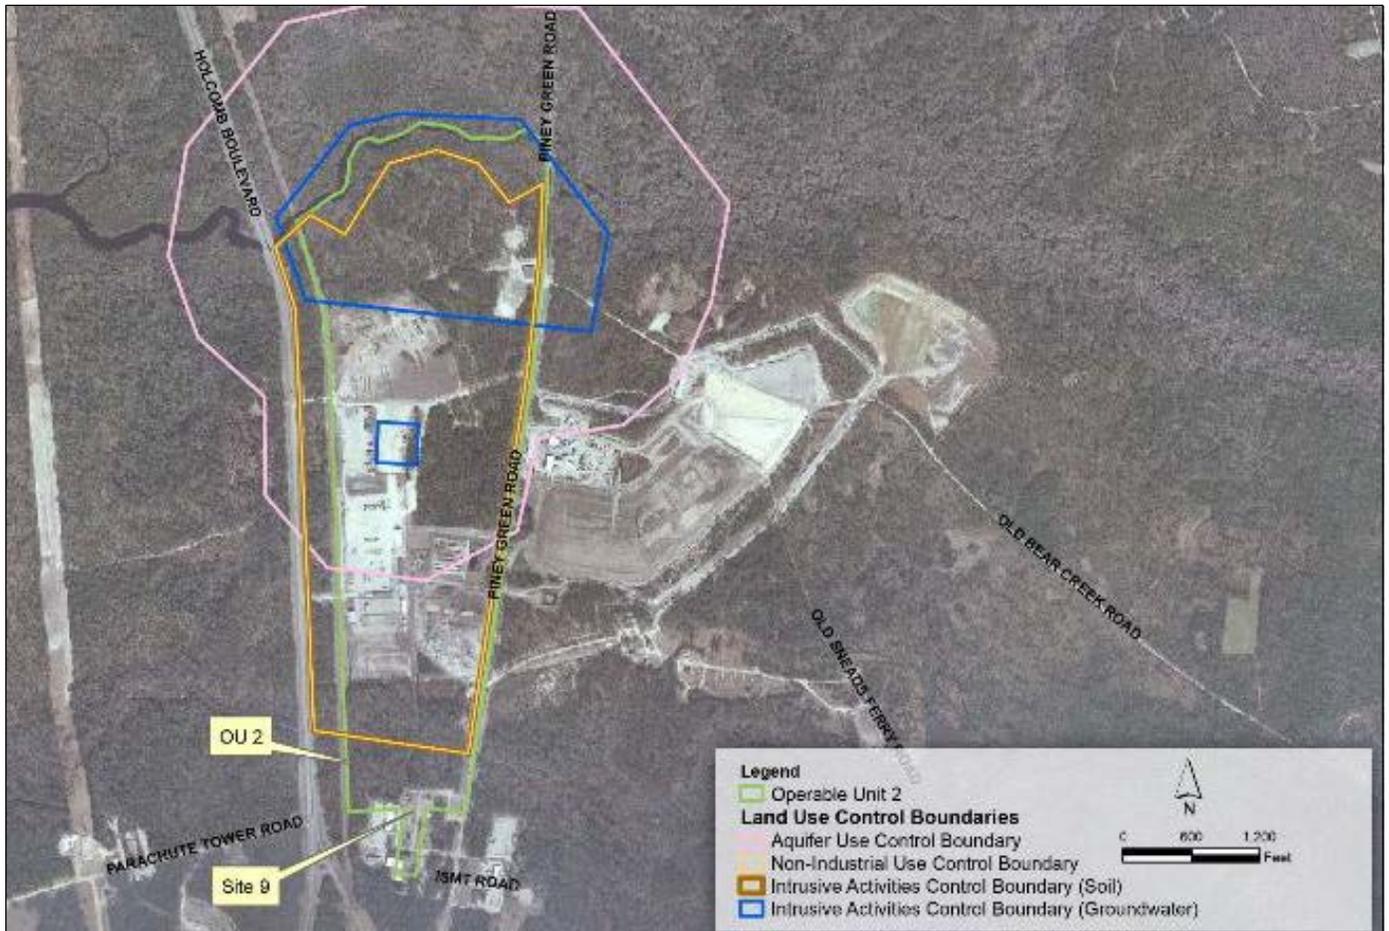

Previous investigations are listed in **Table 8-58**.


TABLE 8-58
Previous Investigations Summary, IRP Site 9

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. An estimated 30,000 gallons per year of used oil, solvents, and contaminated fuels were burned during training exercises. Based on its findings, the IAS recommended that a Confirmation Study be conducted to verify the presence of contamination and determine whether migration was occurring.
Confirmation Study (ESE, 1990)	1984 - 1987	A Confirmation Study was conducted to confirm the presence of contamination discovered during the IAS. Field activities included soil, groundwater, sediment, and surface water sampling. Chromium, lead, phenols, and ethylene dibromide were detected in groundwater samples.
Remedial Investigation (Baker, 1993)	1992 - 1993	An RI was conducted to further investigate AOCs at OU 2. Field activities consisted of a preliminary site survey and soil and groundwater sampling for VOCs, SVOCs, pesticide/PCBs, and metals. Analytical results did not reveal extensive contamination. Soil and groundwater samples collected during the RI did not reveal extensive contamination at Site 9 and no potential sources of contamination were identified.
Proposed Remedial Action Plan and Record of Decision (Baker, 1993)	1993	A PRAP was issued in August 1993 to solicit public input on the preferred alternative (no RA) and a public meeting was held. The Final ROD for OU 2 was issued and signed in September 1993 and the site was closed with NFA.
Removal Action (2000)	2000	A new Fire Training Pit was completed in 2000. The new training facility employed a petroleum source for burning operations and the pit was lined with high-temperature concrete. During the installation of the new facility, POL-contaminated soil was excavated and removed from the site.

8.2.7 Site 12 (Pre-RI)—EOD Detonation Area

Site 12, the EOD Detonation Area, covers approximately 8 to 10 acres on the Mainside of the Base (**Figure 8-42**). Since the early 1960s, Site 12 has operated as an EOD detonation area. Ordnance is disposed by burning or detonating when it is found to be inert, unserviceable, or defective. Materials disposed at Site 12 include ordnance, colored smokes, and white phosphorus. Any undestroyed residues are typically less than 1 pound. Because Site 12 is an active range, it now falls under the Navy's Active Range Program.

FIGURE 8-42
IRP Site 12

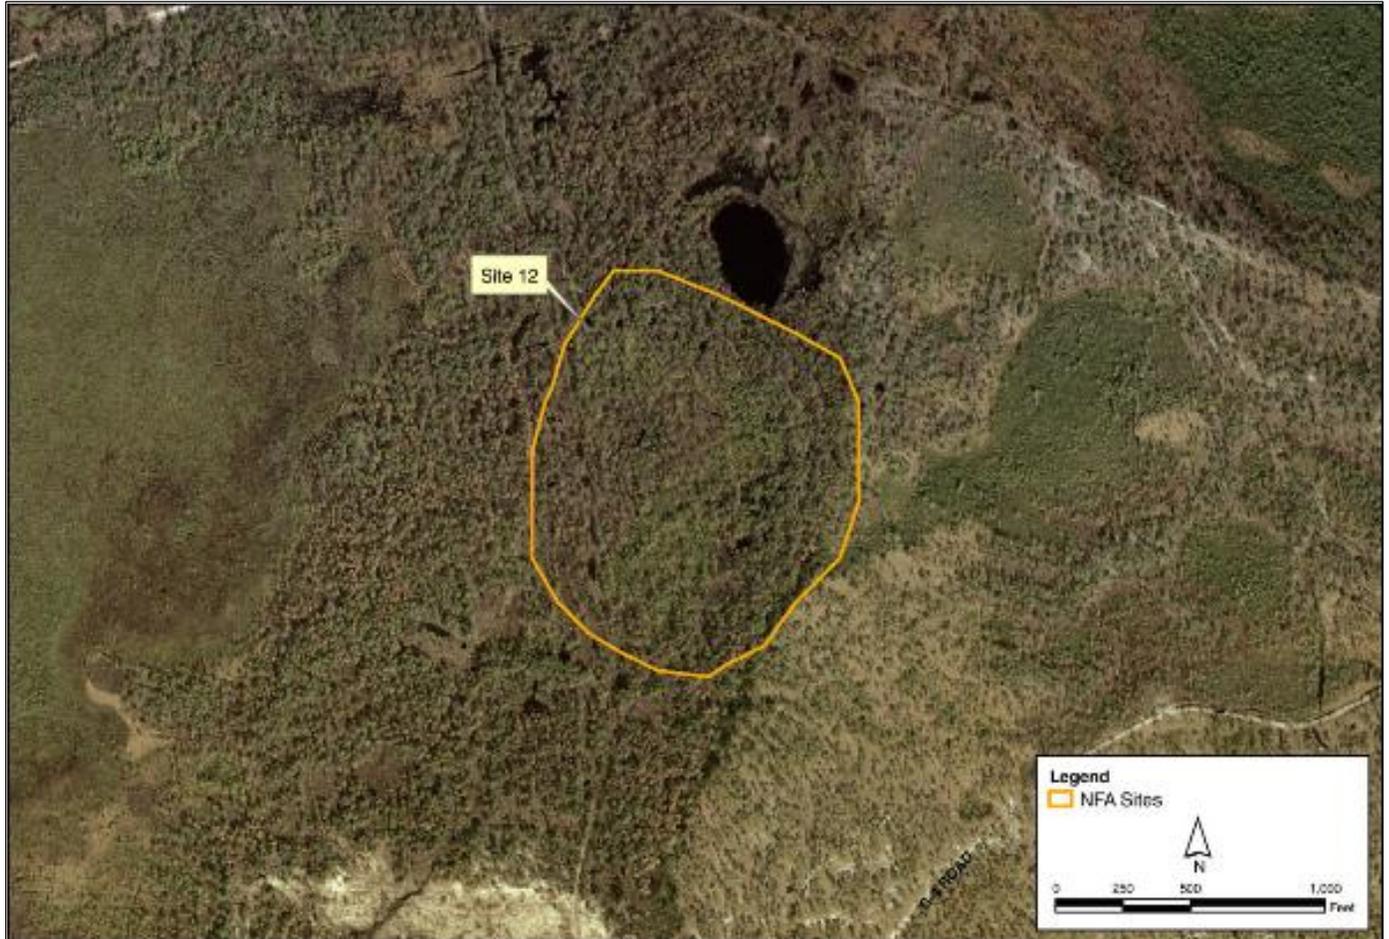

Previous investigations are listed in **Table 8-59**.


TABLE 8-59
Previous Investigations Summary, IRP Site 12

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCI-EAST-MCB CAMLEJ. The quantity of any waste reportedly disposed of at the site was insignificant and did not warrant further investigation. However, during a disposal exercise in 1992, an explosive crater (approximately 8 feet deep) uncovered an oily sheen and a suspected petroleum odor was noted.
Pre-Remedial Investigation Screening Study (1998)	1995 - 1998	An RI was initiated to assess the nature and extent of contamination. During the Pre-RI field investigation, EOD personnel stated that disposal of small arms ammunition was carried out by piling up the rounds, sometimes inside a crater from a past disposal, dousing the pile with diesel fuel, and exploding the pile with a small explosive. EOD personnel also stated that the range had been used for a brief time as a target range for aircraft to drop "dummy" bombs onto. Soil and groundwater samples were collected and analytical results indicated that soil and groundwater had not been impacted by site activities. As a result, the Pre-RI recommended SC.
No Action Decision Document (2001)	2001	The Final NADD was completed May 8, 2001.

8.2.8 Site 13—Golf Course Construction Dump Site

Site 13, the Golf Course Construction Dump Site, encompasses approximately 10 acres in the Paradise Point area of the Base (**Figure 8-43**). In 1944, Site 13 was reportedly used for surface disposal of construction debris including clippings, branches, and asphalt associated with golf course construction.

FIGURE 8-43
IRP Site 13

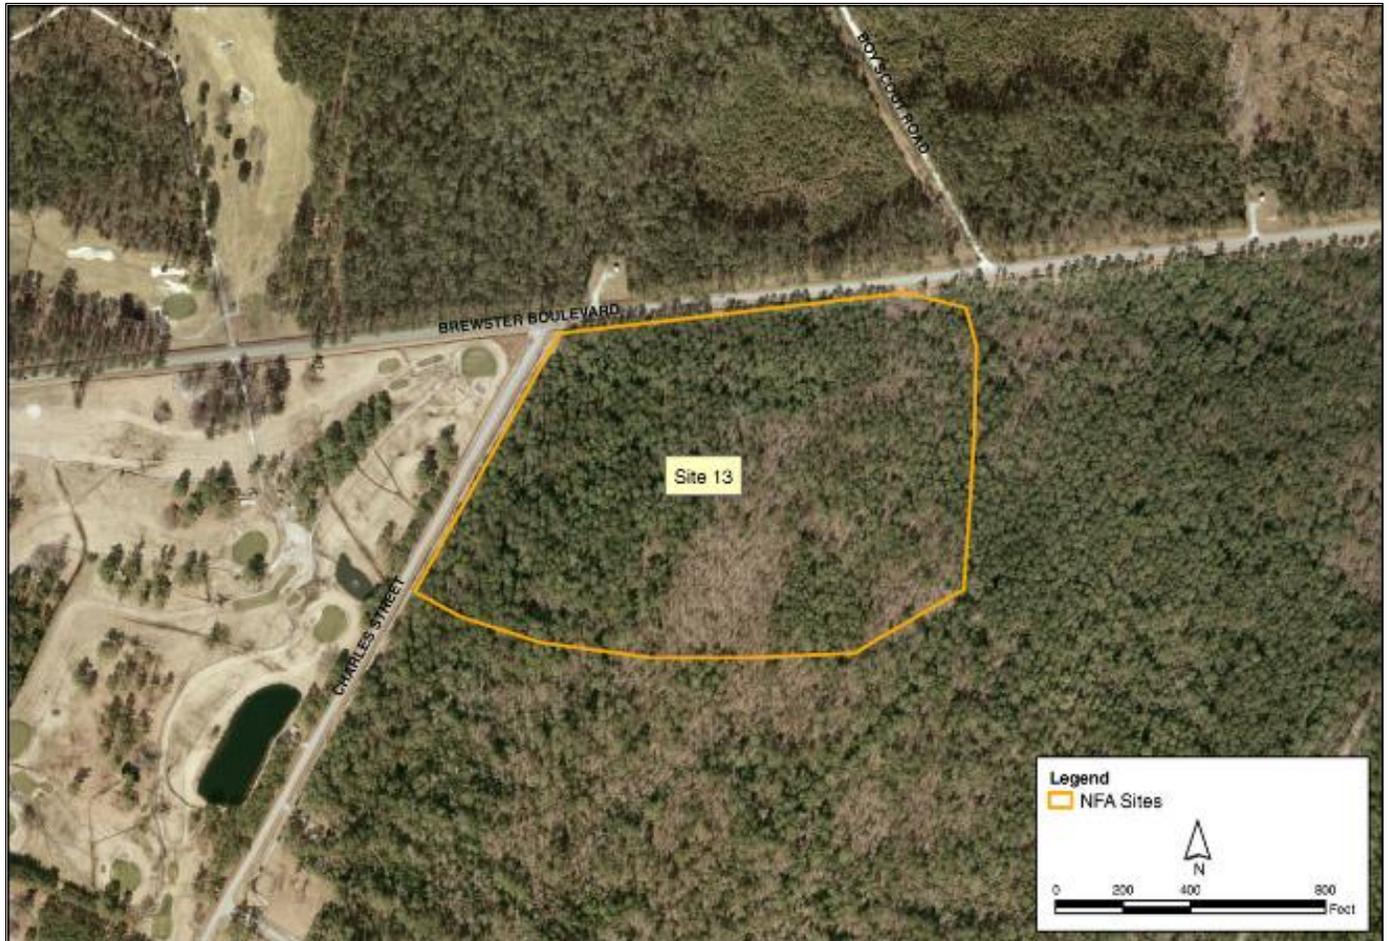

Previous investigations are listed in **Table 8-60**.

TABLE 8-60
Previous Investigations Summary, IRP Site 13

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at the site, and the IAS concluded that NFA was necessary.
Limited Site Assessment (Osage, 2008)	2008	A Limited Site Assessment was conducted to substantiate the NFA status. Representative soil and groundwater samples were collected from across the site and analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. The soil and groundwater analytical results indicated no compounds were detected above regulatory screening levels and the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.9 Site 18—Watkins Village (E) Site

Site 18, Watkins Village (E) Site, includes approximately 1 acre in the Paradise Point area of the Base (**Figure 8-44**). From 1976 to 1978, construction materials and debris were reportedly buried at Site 18.

FIGURE 8-44
IRP Site 18



Previous investigations are listed in **Table 8-61**.

TABLE 8-61
Previous Investigations Summary, IRP Site 18

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCI-EAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at Site 18, and no further assessment was recommended.
Confirmatory Site Assessment (Osage, 2011)	2009-2011	To verify the presence or absence of contamination, a Confirmatory Site Assessment was conducted due to the site's history as a dump. Field activities included soil and groundwater sampling for VOCs, SVOCs, herbicides, pesticides/PCBs, and metals. Metals were detected in soil at concentrations exceeding regulatory screening criteria and background; however, no human health or ecological risks were identified and the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.10 Site 19—Naval Research Laboratory Dump

Site 19, the Naval Research Laboratory Dump, is located within the Former Naval Research Laboratory boundary which encompasses approximately 4 acres on the Mainside of the Base. From 1947 to 1976, the Naval Research Laboratory was located in the area of the Pest Control Shop (**Figure 8-45**). Activities at the laboratory included using radionuclides (Iodine 131) for metabolic studies on small animals. From 1956 to 1960, approximately 100 dogs were disposed of. Because Iodine 131 has a half-life of only 8 days, potential for residual radiological contamination was considered to be negligible. In November 1980, strontium-90 beta buttons ((self-illuminating markers containing strontium-90 used on naval vessels to light pathways and entrances) were found while grading a parking lot. The area was surveyed and contaminated items were recovered. Soil samples were obtained and the site was cleaned of radioactive substances. Five 55-gallon drums of soil and animal residues were collected, along with 499 beta buttons, and were appropriately disposed offsite.

FIGURE 8-45
IRP Site 19



Previous investigations are listed in **Table 8-62**.

TABLE 8-62
Previous Investigations Summary, IRP Site 19

Previous Investigation/Action	Date	Activities
Report of Radiological Affairs Technical Assistance Visit (NEESA, 1981)	1981	Based on the discovery of beta buttons an evaluation of former burial pits was conducted. Approximately 500 beta buttons, animal carcasses, and 160 pounds of soil contaminated with strontium-90 were removed. The contaminated material was stored in an onsite building until it was transported to the Nuclear Regulatory Commission for disposal. The former burial area was radiologically surveyed in situ for beta contamination and soil samples were collected from the burial site and sent to Naval Energy and Environmental Support Activity (NEESA) for isotope analysis. Results confirmed that the contamination was removed and that the site was available for unrestricted use.
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Based on historical documentation, Site 19 was identified as a potential hazard to human health and the environment based on past use as a dump and radiological site use. Based on the results of the 1981 radiological investigation and the small quantity of waste reportedly buried, Site 19 was not recommended for further investigation.
Focused Site Investigation (CH2M HILL, 2008)	2007	The Focused SI was initiated to evaluate the presence or absence of chemical impacts to human health and the environment in support of future MILCON activities. Surface soil, subsurface soil, and groundwater samples were collected and analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. Metals, VOCs, SVOCs, and pesticides/PCBs were detected in soil and groundwater at levels exceeding screening criteria. An HHRA was recommended to confirm that no unacceptable risk is present.
Radiological Survey (Radiological Affairs Service Office, 2007)	2007 - 2008	The Radiological Affairs Service Office collected surface and subsurface soil samples from the former burial pit area. Laboratory analysis for strontium-90 did not detect radioactivity above natural background levels in any of the soil samples.
Wallace Creek Expanded Site Investigation (CH2M HILL, 2010)	2009 - 2010	An HHRS and an ERS were performed on the data collected during the Focused SI in 2007, and no unacceptable risks to human health or ecological risk receptors were identified. Therefore, the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2011)	2011	The Final NADD was signed in November 2011.

8.2.11 Site 20—Naval Research Lab Incinerator

Site 20, the Naval Research Lab Incinerator, is located within the Former Naval Research Laboratory boundary, which encompasses approximately 4 acres on the Mainside of the Base (**Figure 8-46**). From 1947 to 1976, the Naval Research Laboratory was located in the area of the Pest Control Shop. Activities at the laboratory included using radionuclides (Iodine 131) for metabolic studies on small animals. From 1956 to 1960, Site 20 was used for the incineration of burnable wastes.

FIGURE 8-46
IRP Site 20



Previous investigations are listed in **Table 8-63**.

TABLE 8-63
Previous Investigations Summary, IRP Site 20

Previous Investigation/ Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Site 20 was identified as a potential hazard to human health and the environment based on past use as an incinerator and the potential for radiological contamination from past activities at the Laboratory. Due to the small quantity of waste reportedly burned, NFA was recommended.
Radiological Survey (Radiological Affairs Service Office, 2007)	2007	Radiological Affairs Service Office collected samples from the concrete pad for analysis of strontium-90. No radioactivity was detected above natural background levels. No unacceptable risks were expected to future site workers.

TABLE 8-63
Previous Investigations Summary, IRP Site 20

Previous Investigation/ Action	Date	Activities
Focused Site Investigation (CH2M HILL, 2008)	2007 - 2008	The Focused SI was initiated to evaluate the presence or absence of impacts to human health and the environment to support future MILCON activities. Surface soil, subsurface soil, and groundwater samples were collected and analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. Metals, VOCs, SVOCs, and pesticides/PCBs were detected in soil and groundwater at levels exceeding screening criteria. As a result, confirmatory sampling for TCE and an HHRA were recommended.
Radiological Investigation (Aleut World Solutions, LLC, 2009)	2008 - 2009	The Navy requested a more-detailed radiological investigation to be performed. Radiological surveying and surface and subsurface soil samples were collected within the footprint of the former incinerator for analysis of strontium -90 and Ra-226. Two soil samples were reported slightly above natural background levels for strontium -90; however, no radioactivity was detected above background for Ra-226. Based upon the results, no unacceptable risks were expected to future site workers.
Wallace Creek Expanded Site Investigation (CH2M HILL, 2010)	2009 - 2010	An HHRS and an ERS were performed on the data collected during the Focused SI in 2007, and no unacceptable risks to human health or ecological receptors were identified. Confirmatory sampling was also conducted, and TCE was not detected. Therefore, the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2011)	2011	The Final NADD was signed in November 2011.

8.2.12 Site 23—Roads and Grounds Building 1105

Site 23, the Roads and Grounds Building 1105, is located in the HPIA, within the boundaries of IRP Site 78, covering less than a half of an acre (**Figure 8-47**). In 1958, the Pest Control Shop moved its activities to Building 1105. From 1958 until 1977, Building 1105 was used for storage of insecticides and herbicides, while mixing of the chemicals was performed at Lot 140 (IRP Site 21). Storage and handling procedures at Building 1105 were reportedly adequate to prevent any large spills and to ensure a current safe working environment. Chemicals reportedly stored in Building 1105 included chlorinated hydrocarbons such as DDT and chlordane, as well as diazinon, malathion, lindane, mirex, 2,4-D, dalapon, and dursban.

FIGURE 8-47
IRP Site 23



Previous investigations are listed in **Table 8-64**.

TABLE 8-64
Previous Investigations Summary, IRP Site 23

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Although the site had been listed as a potential hazardous waste site, no spills or disposal of materials had been reported and no further assessment was recommended.
Confirmatory Site Assessment (CH2M HILL, 2011)	2009 - 2011	To verify the presence or absence of contamination, a Confirmatory Site Assessment was conducted to determine impacts of previous pesticide and herbicide storage. Field activities included collection of soil samples for SVOCs, VOCs, pesticides, herbicides, and metals. No pesticides or herbicides were detected above screening criteria; however, VOCs were detected in groundwater and potential human health risks were identified attributable to Site 78; therefore, the site was closed with NFA.

TABLE 8-64
Previous Investigations Summary, IRP Site 23

Previous Investigation/Action	Date	Activities
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

TABLE 8-65
Previous Investigations Summary, IRP Site 24

Previous Investigation/Action	Date	Activities
Remedial Investigation/ Feasibility Study (Baker, 1994)	1994	RI field activities included a site survey, groundwater, soil, sediment, and surface water sampling. Analytical results identified pesticides and metals in soil and groundwater. Potential unacceptable human health risks were identified due to pesticides in groundwater. No unacceptable ecological risks were identified. An FS was conducted to screen remedial alternatives for addressing groundwater contamination.
Proposed Remedial Action Plan and Record of Decision (Baker, 1994)	1994	The PRAP was submitted for public review and comment in July 1994. The Final ROD was signed in September 1994. The selected remedial alternative was LTM for groundwater.
Long-term Monitoring	1996 - 1997	LTM was implemented in 1996 and discontinued in 1997 after evaluating the analytical results collected over four consecutive quarters that indicated no pesticides or metals concentrations in groundwater exceeded the cleanup levels. In 2001, the LTM report documented the completion of LTM.

8.2.14 Site 25—Base Incinerator

Site 25 encompasses approximately half an acre on the Mainside of the Base. From 1940 to 1960, Site 25 operated as the Base Incinerator, burning trash and classified materials (**Figure 8-49**). Potential materials present at the site include burned trash, ashes, and melted glass.

FIGURE 8-49
IRP Site 25



Previous investigations are listed in **Table 8-66**.

TABLE 8-66
Previous Investigations Summary, IRP Site 25

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Site 25 was identified based on past use as an incinerator. However, historical records indicated that nonhazardous materials were disposed of (trash and glass) and NFA was recommended.
Focused Site Investigation (CH2M HILL, 2008)	2007 - 2008	To evaluate the presence or absence of chemical impacts to human health and the environment in order to support future MILCON activities, soil and groundwater samples were collected and analyzed for VOCs, SVOCs, Pesticides/PCBs, and metals. Arsenic was detected in surface soil samples above screening levels, and an HHRA was recommended.
Wallace Creek Expanded Site Investigation (CH2M HILL, 2009)	2009 - 2010	An HHRS and an ERS were performed on the data collected during the Focused SI in 2007, and no unacceptable risks to human health or ecological receptors were identified. Therefore, the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2011)	2011	The Final NADD was signed in November 2011.

8.2.15 Site 30 (OU 7)—Sneads Ferry Road Fuel Tank Sludge Area

Site 30, the Sneads Ferry Road Fuel Tank Sludge Area, is located within OU 7 on the Mainside of the Base and covers approximately 1 acre (**Figure 8-50**). OU 7 consists of three sites (Sites 1, 28, and 30) that have been grouped together into one OU because of their unique characteristics of suspected waste (POL) and geographic location. Site 30 was reportedly used by a private contractor in 1970 to clean out two 12,000-gallon emptied fuel storage tanks when the contents of the tanks were converted from leaded gasoline to unleaded gasoline. Sludge and/or washout was reportedly drained from the tanks and disposed of along a tank trail that intersects Sneads Ferry Road. The composition of the waste is unknown, but it may have contained cleansing compounds and possibly diluted tetraethyl lead. An estimated minimum of 600 gallons was reportedly disposed.

FIGURE 8-50
IRP Site 30, Operable Unit 7



Previous investigations are listed in **Table 8-67**.

TABLE 8-67
Previous Investigations Summary, IRP Site 30

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The IAS concluded that sludge deposits could potentially impact groundwater and recommended an additional investigation to determine the boundaries of the impacted area and verify the presence of hazardous wastes.
Confirmation Study (ESE, 1990)	1984 - 1987	Confirmation Study field activities included groundwater, surface water, and sediment investigations. Analytical results identified O&G in the disposal area and in stream bed sediments as well as lead in groundwater.
Remedial Investigation (Baker, 1994)	1994	To further characterize the nature and extent of contamination an RI was conducted. Field activities consisted of a site survey and soil, groundwater, surface water, and sediment sampling. No unacceptable human health or ecological risks were identified at Site 30.

TABLE 8-67
Previous Investigations Summary, IRP Site 30

Previous Investigation/Action	Date	Activities
Proposed Remedial Action Plan (1995) and Record of Decision (Baker, 1996)	1995 - 1996	The PRAP was submitted for public review and comment in July 1995. The Final ROD was signed in May 1996, and due to the absence of contamination the site was closed with NFA.

8.2.16 Site 38—Camp Geiger Construction Dump

Site 38, the Camp Geiger Area Surface Dump, encompasses approximately 3 acres in the Camp Geiger area of the Base (**Figure 8-51**). The dates of operation are unknown, but Site 38 was reportedly used for surface disposal of construction debris and branches. During the IAS, evidence of dumping activities was observed.

FIGURE 8-51
IRP Site 38



Previous investigations are listed in **Table 8-68**.


TABLE 8-68
Previous Investigations Summary, IRP Site 38

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at Site 38, and concluded that no further assessment was necessary.
Confirmatory Site Assessment (CH2M HILL, 2011)	2010-2011	To verify the presence or absence of contamination due to the site's history as a dump, confirmatory sampling was conducted. Soil and groundwater samples were collected and analyzed for VOCs, SVOCs, and metals. No unacceptable risks to human health or the environment were identified and the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.17 Site 40—Camp Geiger Area Borrow Pit

Site 40, the Camp Geiger Area Borrow Pit, encompasses approximately 22 acres (**Figure 8-52**). Starting in 1969, Site 40 was reportedly used for disposal of auto parts and metal. The former borrow pit dump was reported to have covered an area of approximately 4 to 5 acres within Site 40.

FIGURE 8-52
IRP Site 40

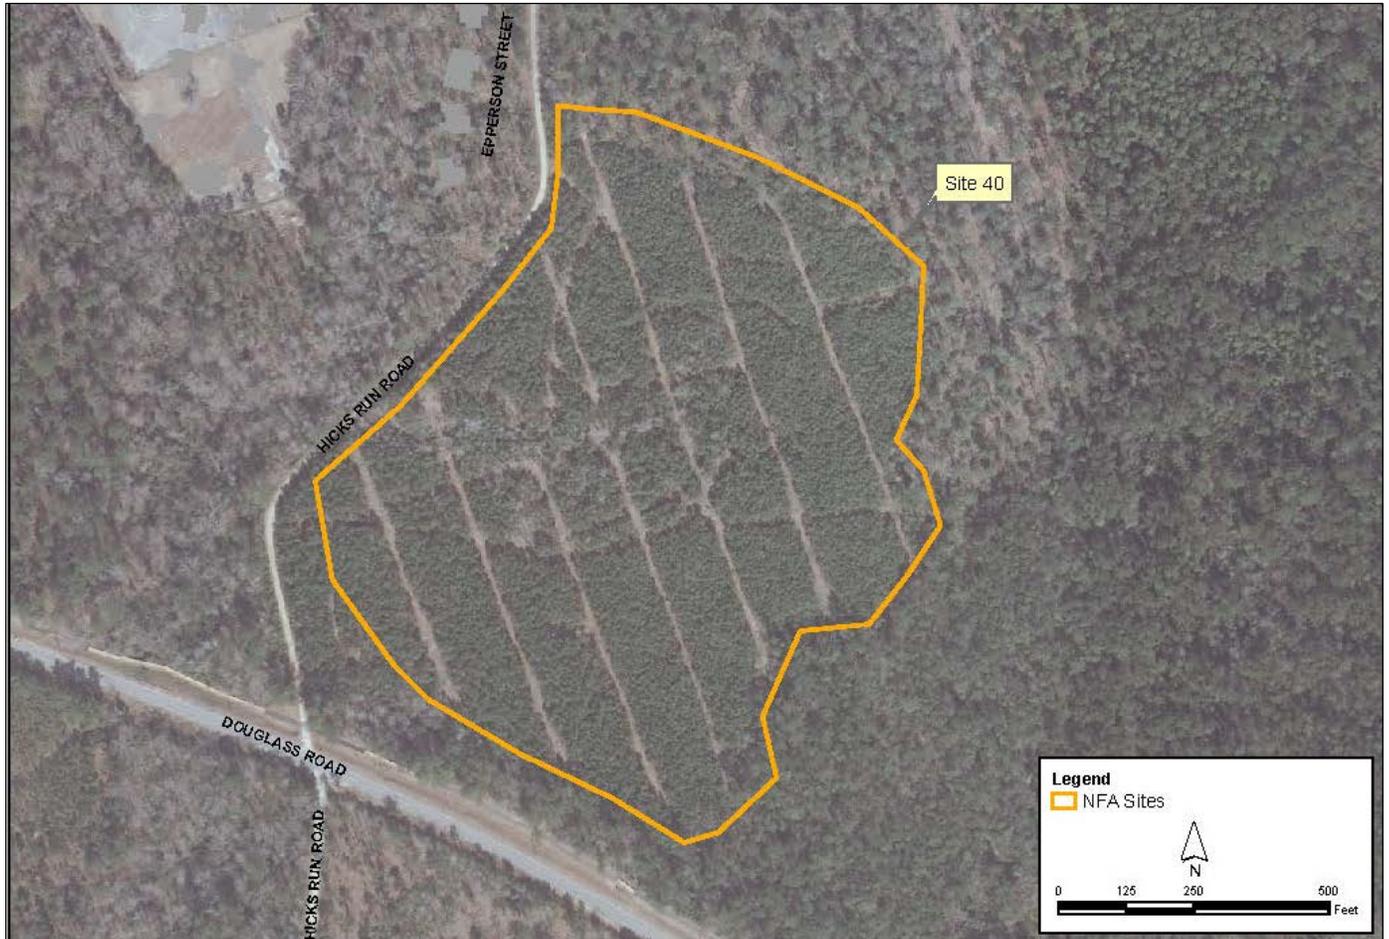

Previous investigations are listed in **Table 8-69**.

TABLE 8-69
Previous Investigations Summary, IRP Site 40

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Site 40 was identified as being a waste disposal site for automobile parts and scrap metal. Site 40 was recommended for NFA because there was insufficient evidence that hazardous substances were associated with the site.
Preliminary Assessment/Site Investigation (CH2M HILL, 2009)	2008 - 2009	A PA/SI was conducted to characterize potential contamination at Site 40 based on prospective MILCON projects in the vicinity. Field activities included soil, groundwater, surface water, and sediment sampling and test pitting to delineate the former dump area. Samples were analyzed for VOCs, SVOCs, pesticides/PCBs, and metals. No wastes were encountered and no risks to human health or the environment were identified. The site was closed with NFA.
No Action Decision Document (2010)	2010	The Final NADD was signed in August 2010.

8.2.18 Site 42—Building 705 Bachelor Officers' Quarters Dump

Site 42, the Building 705 Bachelor Officers' Quarters Dump, encompasses approximately 2.8 acres in the MCAS New River portion of the Base (**Figure 8-53**). From 1950 to 1960, Site 42 was reportedly used for surface disposal of debris, including trees, tree stumps, and boards.

FIGURE 8-53
IRP Site 42



Previous investigations are listed in **Table 8-70**.

TABLE 8-70
Previous Investigations Summary, IRP Site 42

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at Site 42 and no further assessment was recommended.
Confirmatory Site Assessment (CH2M HILL, 2011)	2009-2011	To verify the presence or absence of contamination due to the site's history as a dump, confirmatory sampling was conducted in FY 2009. Soil and groundwater samples were collected and analyzed for VOCs, SVOCs, and metals. Based on the results, no unacceptable human health or ecological risks were identified and the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.19 Site 46—MCAS Main Gate Dump

Site 46, the MCAS Main Gate Dump, encompasses less than 1 acre in MCAS New River, in the northwest portion of the Base (**Figure 8-54**). From 1958 to 1962, Site 46 was reportedly used for disposal of construction and demolition debris.

FIGURE 8-54
IRP Site 46



Previous investigations are listed in **Table 8-71**.

TABLE 8-71
Previous Investigations Summary, IRP Site 46

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at Site 46 and no further assessment was recommended.
Confirmatory Site Assessment (Osage, 2011)	2009-2011	To verify the presence or absence of contamination due to the site’s history as a dump, confirmatory sampling was conducted. Soil and groundwater samples were collected and analyzed for VOCs, SVOCs, herbicides, pesticides, and metals. No unacceptable risks to human health or the environment were identified and the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.20 Site 48 (OU 3)—MCAS Mercury Dump

Site 48, the MCAS Mercury Dump, encompasses approximately 5 acres within MCAS New River in the northwest portion of the Base. Building AS-804 was constructed in 1955 and was used as the Administration Office and Photographic Lab from 1955 to 1990 (**Figure 8-55**). From 1956 to 1966, mercury was drained from radar units and disposed in small quantities behind the building. It was reported that approximately 1 gallon of mercury per year over a 10-year period was disposed in this manner.

FIGURE 8-55
IRP Site 48, OU 3



Previous investigations are listed in **Table 8-72**.

TABLE 8-72
Previous Investigations Summary, IRP Site 48

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. An estimated 1,000 pounds of mercury was possibly dispersed over approximately 20,000 ft ² adjacent to the New River. It was concluded that mercury disposal practices could potentially impact the New River and a Confirmation Study was recommended to verify the presence of mercury.
Confirmation Study (ESE, 1990)	1984 - 1987	A Confirmation Study was conducted to verify the presence of mercury. Field activities included soil and sediment investigations. Low levels of mercury were identified in both media, and further characterization was recommended.

TABLE 8-72
 Previous Investigations Summary, IRP Site 48

Previous Investigation/Action	Date	Activities
Supplemental Characterization (1991)	1991	A Supplemental Characterization investigation was conducted based on results of the Confirmation Study. Field activities included surface water and sediment sampling. Mercury was not detected in any samples collected during the investigation. The risk evaluation identified several metals (not mercury) as COPCs.
Remedial Investigation (1992)	1992	To further characterize the nature and extent of contamination, an RI was conducted. Field activities included a geophysical investigation and soil, groundwater, surface water, and sediment sampling. The geophysical investigation did not identify any objects associated with mercury disposal, and analytical results did not identify mercury in any media sampled. Pesticides and metals were detected in surface soil samples. Low levels of organics and metals were detected in groundwater and surface water samples, and pesticides, PAHs, and metals were detected in sediment samples. No potential unacceptable human health or ecological risks were identified.
Proposed Remedial Action Plan and Record of Decision (Baker, 1993)	1993	A PRAP was issued to solicit public input on the preferred alternative (no action) and a public meeting was held. The Final ROD was issued and signed in September 1993. Because no RAs were required in the ROD, the site was closed with NFA.

8.2.21 Site 51—MCAS Football Field

Site 51, the MCAS Football Field, encompasses approximately 20 to 30 acres in MCAS New River in the northwest portion of the Base. Site 51 was reportedly the site of empty container disposal between approximately 1967 and 1968 (**Figure 8-56**). Paint cans and hydraulic fluid cans were reportedly disposed.

FIGURE 8-56
IRP Site 51



Previous investigations are listed in **Table 8-73**.

TABLE 8-73
Previous Investigations Summary, IRP Site 51

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCEAST-MCB CAMLEJ. The quantity of any waste reportedly disposed of at IRP Site 51 was determined to be insignificant and did not warrant further investigation.
Confirmatory Site Assessment (Osage, 2011)	2009-2011	To verify the presence or absence of waste, confirmatory sampling was conducted. Soil and groundwater samples were collected and analyzed for SVOCs, VOCs, pesticides/PCBs, and metals. No unacceptable human health or environmental risks were identified and the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.22 Site 53—MCAS Warehouse Building 3525 Area

IRP Site 53, the MCAS Warehouse Building 3525 Area, encompasses approximately 3 miles of roadway in MCAS New River in the northwest portion of the Base (**Figure 8-57**). From 1970 to 1975, liquid wastes were sprayed on the unimproved dirt roads in the vicinity of IRP Site 53 to control dust. The liquid waste mixture reportedly contained crankcase waste oil, JP fuels, and paint thinners.

FIGURE 8-57
IRP Site 53



Previous investigations are listed in **Table 8-74**.

TABLE 8-74
Previous Investigations Summary, IRP Site 53

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The quantity of any waste reportedly disposed of at IRP Site 53 was determined to be insignificant and did not warrant further investigation.
Confirmatory Site Assessment (CH2M HILL, 2011)	2009-2011	To verify the presence or absence of waste, confirmatory sampling was conducted. Soil and groundwater samples were collected and analyzed for SVOCs, VOCs, PCBs, and metals. Potential human health risks were identified from arsenic groundwater at one temporary well location. A permanent monitoring well was installed, a groundwater sample was collected to confirm the results, and arsenic was not detected. Therefore, the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.23 Site 55—Air Station East Perimeter Dump

IRP Site 55, the Air Station East Perimeter Dump, encompasses approximately 6 acres in MCAS New River in the northwest portion of the Base (**Figure 8-58**). From the 1950s to the 1960s, IRP Site 55 was reportedly used as a disposal area for barrels, tires, trash, metal planking, and telephone poles. The area is currently used as a marina and recreation area by the Air Station.

FIGURE 8-58
IRP Site 55



Previous investigations are listed in **Table 8-75**.


TABLE 8-75
Previous Investigations Summary, IRP Site 55

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at IRP Site 55, and no further assessment was recommended.
Confirmatory Site Assessment (CH2M HILL, 2011)	2009-2011	To verify the presence or absence of contamination due to the site's history as a dump, confirmatory sampling was conducted. Groundwater and soil samples were collected and analyzed for SVOCs, VOCs, pesticides/PCBs, herbicides, and metals and no unacceptable risks to human health or the environment were identified. The site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.24 Site 61—Rhodes Point Road Dump

IRP Site 61, the Rhodes Point Road Dump, encompasses approximately 8 to 10 acres and is located nearly 5 miles south of the MCAS New River operations area (**Figure 8-59**). The exact dates of operation are unknown; however, it was reported that IRP Site 61 has been used as a disposal area for wastes generated during bivouac exercises. The site is currently used for training activities.

FIGURE 8-59
IRP Site 61

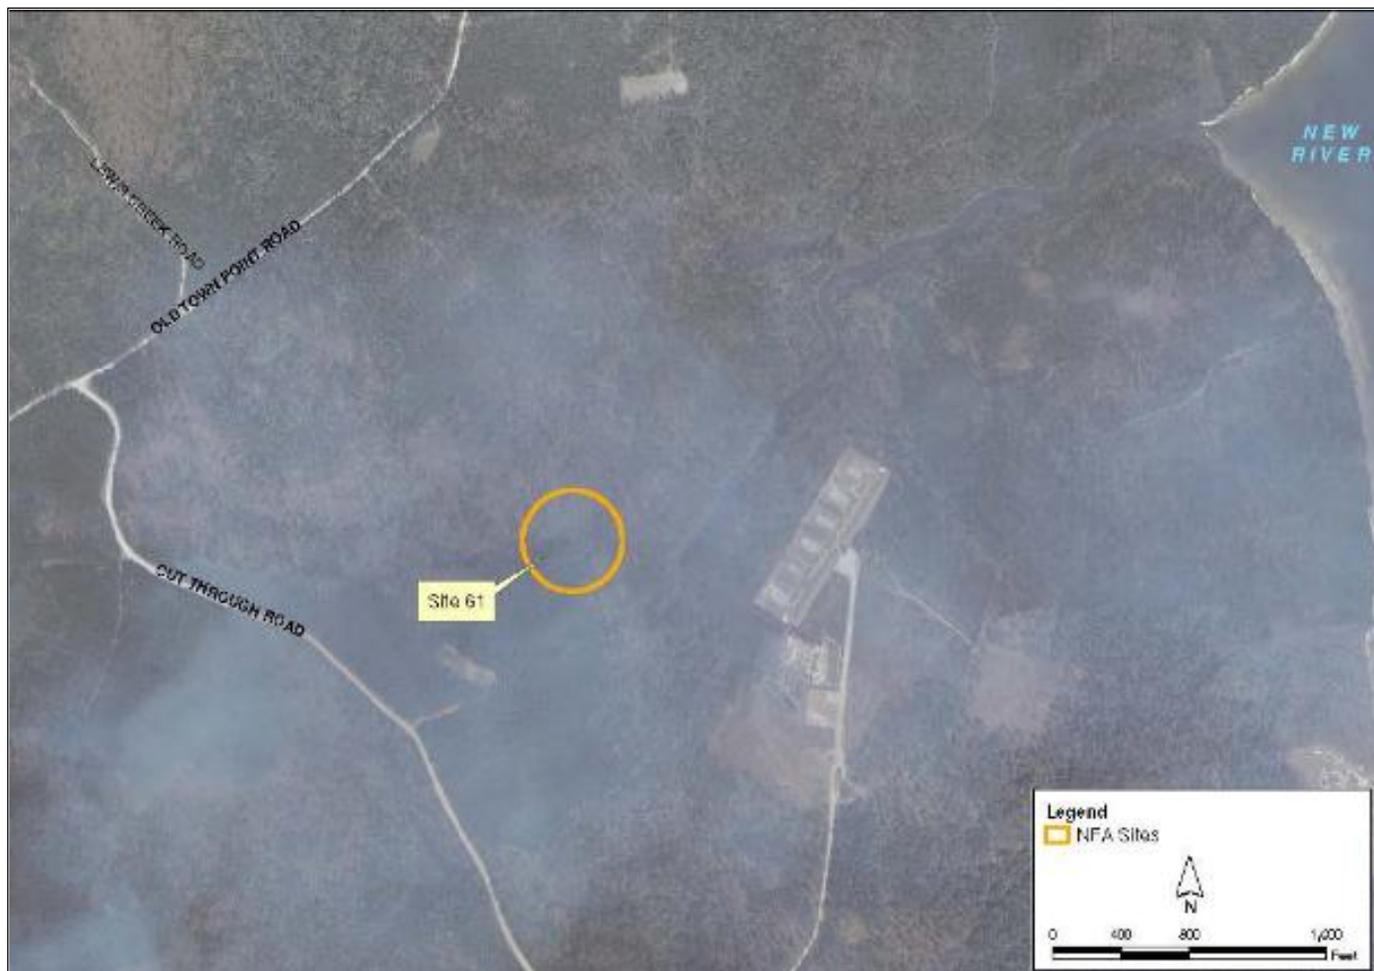

Previous investigations are listed in **Table 8-76**.


TABLE 8-76
Previous Investigations Summary, IRP Site 61

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at IRP Site 61, and no further assessment was recommended.
Confirmatory Site Assessment (CH2M HILL, 2011)	2009-2011	To verify the presence or absence of waste, confirmatory sampling was conducted. Soil and groundwater samples were collected and analyzed for SVOCs, VOCs, PCBs, and metals. Potential human health risks were identified from arsenic groundwater at one temporary well location. A permanent monitoring well was installed, a groundwater sample was collected to confirm the results, and arsenic was detected below regulatory criteria and background. Therefore, the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.25 Site 62—Race Course Area Dump

IRP Site 62, the Race Course Area Dump, encompasses approximately 1 to 2 acres nearly 2 miles south of the MCAS New River operations area (**Figure 8-60**). The exact dates of operation are unknown; however, it was reported that IRP Site 62 has been used as a disposal area for wastes generated during bivouac exercises. The site is currently used for war games, so site access/use is restricted.

FIGURE 8-60
IRP Site 62

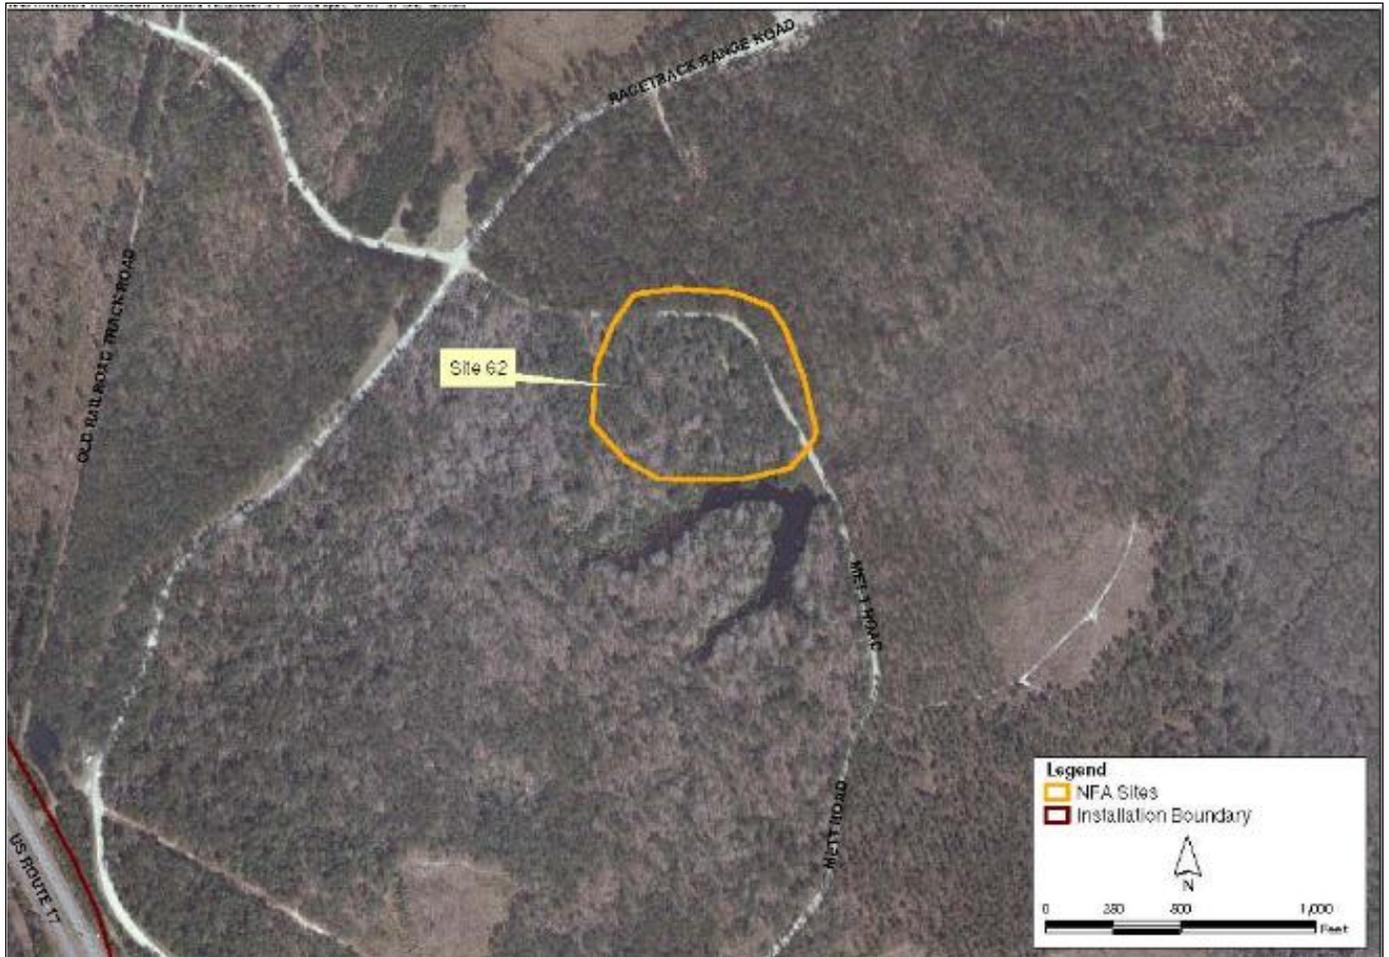

Previous investigations are listed in **Table 8-77**.

TABLE 8-77
Previous Investigations Summary, IRP Site 62

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at IRP Site 62, and no further assessment was recommended.
Confirmatory Site Assessment (CH2M HILL, 2011)	2009-2011	To verify the presence or absence of contamination due to the site's history as a dump, confirmatory sampling was completed. Soil and groundwater samples were analyzed for VOCs, SVOCs, and metals. No unacceptable risks to human health or the environment were identified. The site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.26 Site 65 (OU 9)—Engineer Area Dump

Site 65, the Engineer Area Dump, is located in the Courthouse Bay area of MCIEAST-MCB CAMLEJ and covers approximately 2 acres (**Figure 8-61**). Two separate disposal areas have been reported at Site 65, a battery acid disposal area and a liquid disposal area. The liquids that have been disposed are reported to have been POL types. In addition, the dump was used to burn construction debris. The dump was in operation from at least 1958 until 1972. In 2013, during MILCON activities within Site 65, buried waste including asbestos containing material and oversized debris and lead impacted soil were encountered and disposed of offsite. As a result, LUCs will be implemented by the Base within the former waste disposal area.

FIGURE 8-61
IRP Site 65, Operable Unit 9



Previous investigations are listed in **Table 8-78**.

TABLE 8-78
Previous Investigations Summary, IRP Site 65

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. No hazardous wastes were reportedly disposed of at the site, and no further assessment was recommended. However, USEPA requested an additional investigation to determine whether hazardous waste contamination existed.
Site Investigation (Baker, 1991)	1991	An SI was conducted to verify the presence or absence of contamination. Field activities included soil, groundwater, surface water, and sediment sampling. Fill materials were encountered in site soils, confirming that waste material was disposed of at the site. Pesticides and metals were detected in groundwater and sediment samples. Based on these findings, the SI recommended further evaluation.
Remedial Investigation (Baker, 1995)	1995	An RI was conducted to evaluate the nature and extent of contamination and potential risks to human health and the environment. Field activities included soil, groundwater, surface water, and sediment sampling, and ecological investigations. Findings from the RI indicated that there were no releases of hazardous substances from the waste disposal areas and no unacceptable human health or ecological risks were identified.
Post-Remedial Investigation Monitoring (Baker, 2001)	2001	Several discarded containers were discovered near the site in 2001. The containers were heavily corroded and no materials were observed in the containers. Groundwater, soil, surface water, and sediment were collected to determine if surrounding media had been impacted by potential releases. Analytical results indicated there were no effects caused by the containers.
Proposed Remedial Action Plan and Record of Decision (Baker, 2001)	2002	A PRAP was issued to solicit public input on the preferred alternative (no action) and a public meeting was held. The Final ROD was issued and signed in September 2001. The ROD for Site 65 stipulated that no additional RA or monitoring was required.

8.2.27 Site 66—Amphibious Tractors Landing Site and Storage Area

IRP Site 66, the Amphibious Tractors Landing Site and Storage Area, encompasses approximately 40 acres in the Courthouse Bay area of the Base (**Figure 8-62**). Beginning in the 1950s, IRP Site 66 was used for vehicle maintenance during training activities. Exact operations are unknown; however, it is likely that vehicle maintenance operations resulted in release of POL, and battery acid.

FIGURE 8-62
IRP Site 66



Previous investigations are listed in **Table 8-79**.

TABLE 8-79
Previous Investigations Summary, IRP Site 66

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. Although spills of POL had likely occurred at IRP Site 66, the quantity was insignificant and did not warrant further investigation.
Confirmatory Site Assessment (CH2M HILL, 2011)	2009-2011	To verify the presence or absence of contamination, confirmatory sampling was conducted. Groundwater, soil, sediment, and surface water samples were collected and analyzed for SVOCs, VOCs, and metals. Potential ecological risks were identified from metals in surface water. Confirmation surface water sampling was conducted and the metals were not detected. Therefore, the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.28 Site 67—Engineer’s Trinitrotoluene Burn Site

IRP Site 67, Engineer’s Trinitrotoluene (TNT) Burn Site, encompasses approximately 7 acres in the Courthouse Bay area of the Base (**Figure 8-63**). In 1951, IRP Site 67 was reportedly used for TNT disposal. Deep pits (2 to 3 feet deep) were dug and unwanted TNT was opened and burned. Complete consumption of all TNT was reported during these procedures.

FIGURE 8-63
IRP Site 67



Previous investigations are listed in **Table 8-80**.

TABLE 8-80
Previous Investigations Summary, IRP Site 67

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The quantity of any waste reportedly disposed of at IRP Site 67 was insignificant and did not warrant further investigation.
Confirmatory Site Assessment (CH2M HILL, 2010)	2009-2010	To verify the presence or absence of contamination due to the site’s history, confirmatory sampling was completed in FY 2010. Soil and groundwater samples were analyzed for TNT and breakdown products. 2-Amino-4,6-DNT was detected in groundwater at one temporary well location. The concentration was below regulatory screening criteria; therefore, the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in July 2012.

8.2.29 Site 75 (Pre-RI)—MCAS Basketball Court Site

Site 75, the MCAS Basketball Court Site, encompasses approximately 1 acre in the MCAS New River operations area (Figure 8-64). Site 75 was reportedly a drum burial area that was used in the early 1950s. The excavation area was an oval-shaped pit approximately 90 feet long by 70 feet wide and was sufficiently deep to have encountered the water table. An estimated 75 to 100 55-gallon drums were placed in this pit. The drums reportedly contained a chloroacetophenone tear gas solution used for training. Additional organic chemicals, such as chloroform, carbon tetrachloride, benzene, and chloropicrin, may have been present in the solution.

FIGURE 8-64
IRP Site 75



Previous investigations are listed in **Table 8-81**.


TABLE 8-81
Previous Investigations Summary, IRP Site 75

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The IAS concluded that degradation of buried drums could result in the release of suspected materials into the groundwater, potentially impacting water supply wells within the area. Based on these findings, the IAS recommended additional investigation.
Pre-Remedial Investigation Screening Study (Baker, 1995)	1995	A Pre-RI screening study was conducted to determine whether contamination was present at the site. Field activities included a geophysical investigation and soil and groundwater sampling. The geophysical survey did not detect any major subsurface anomalies that could have been the suspected drums. SVOCs, pesticides, and metals were detected in soil samples and metals were detected in groundwater samples. No potential, unacceptable ecological risks were identified, and the Pre-RI recommended NFA.
No Action Decision Document (CH2M HILL, 2001)	2001	The Final NADD was completed May 8, 2001.

8.2.30 Site 76 (Pre-RI)—MCAS Curtis Road Site

Site 76, the MCAS Curtis Road Site, is located in the MCAS New River operations area and covers approximately 3 acres (**Figure 8-65**). There are several Base housing units to the immediate north of the Site 76 study area. The site was reportedly used as a drum disposal area on two occasions in 1949. The estimated area of the disposal unit is a quarter-acre, and approximately 25 to 75 55-gallon drums were allegedly disposed at this site. The drums reportedly contained a chloroacetophenone tear gas solution used for training similar to that allegedly buried at Site 75. Additional organic chemicals, such as chloroform, carbon tetrachloride, benzene, and chloropicrin, may have been present in the solution.

FIGURE 8-65
IRP Site 76

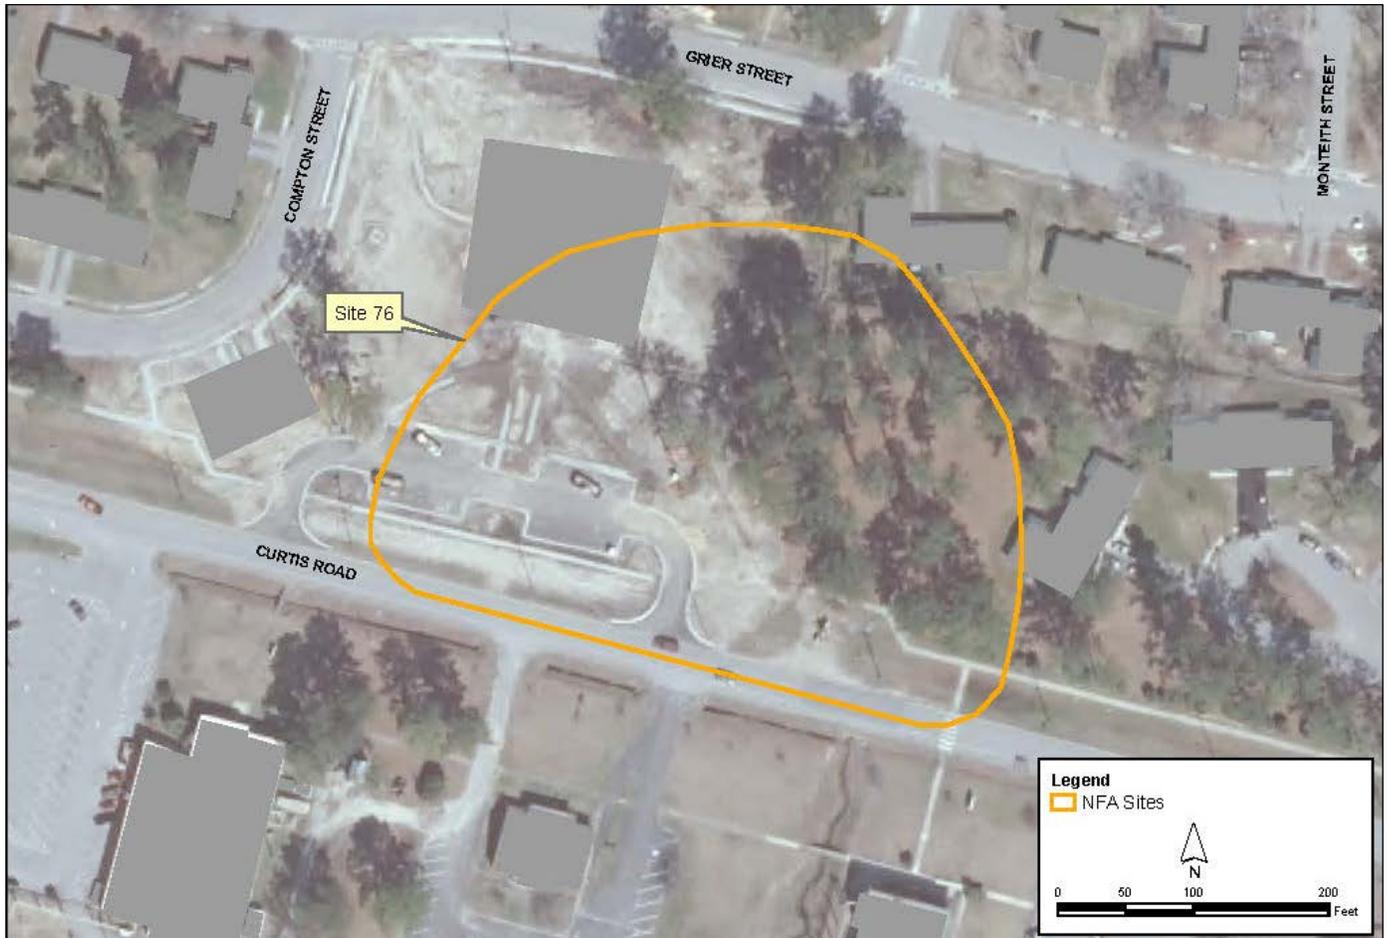

Previous investigations are listed in **Table 8-82**.

TABLE 8-82
Previous Investigations Summary, IRP Site 76

Previous Investigation/Action	Date	Activities
Initial Assessment Study (WAR, 1983)	1983	The IAS was conducted to identify potential hazardous sites at MCIEAST-MCB CAMLEJ. The IAS concluded that degradation of buried drums could potentially result in the release of suspected materials into groundwater. Based on these findings, the IAS recommended an additional investigation.
Pre-RI Screening Study (Baker, 1998)	1995 - 1998	A Pre-RI screening study was conducted to determine whether contamination was present at the site. Field activities included a geophysical investigation, soil, and groundwater sampling. The geophysical survey did not detect any major subsurface anomalies that could have been the suspected drums. VOCs, SVOCs, and pesticides were detected in soil samples. Metals were detected in groundwater samples. No unacceptable human health risks were identified due to the presence of metals in groundwater. As a result, the Pre-RI recommended NFA.
Additional Groundwater Sampling (Baker, 1999)	1999	In response to an agency comment and because metals were previously detected above screening criteria, groundwater was resampled in October 1999. Only aluminum and iron were detected above screening criteria and no unacceptable human health risks were identified.
No Action Decision Document (CH2M HILL, 2001)	2001	The Final NADD was completed May 8, 2001.

8.2.31 Site 85—Former Camp Johnson Battery Dump

Site 85 covers approximately 5 acres of heavily vegetated land (Figure 8-66) in the Camp Johnson area of the MCIEAST-MCB CAMLEJ. During the 1950s, Site 85 was used for battery disposal. The site was discovered in 1992 when decomposed batteries used in military communication equipment during the Korean War era were unearthed as a roadway was being widened. Discarded charcoal canisters from air purifying respirators and battery packs were also discovered throughout the site.

FIGURE 8-66
IRP Site 85



Previous investigations are listed in Table 8-83.

TABLE 8-83
Previous Investigations Summary, IRP Site 85

Previous Investigation/Action	Date	Activities
Pre-Remedial Investigation Screening Study (Baker, 1998)	1995 - 1998	A Pre-RI was initiated to assess the nature and extent of contamination. Field activities included a site survey, installation of temporary monitoring wells, and soil and groundwater sampling. Metals were detected in soil and groundwater samples collected near battery piles and a Baseline HHRA identified potential risks to human receptors. The Pre-RI recommended an EE/CA for the battery piles and associated soil.
Engineering Evaluation/Cost Analysis (Baker, 1999)	1999	An EE/CA was prepared to evaluate remedial alternatives for metals in soil and groundwater at Site 85. The three alternatives were institutional controls, excavation and on-Base disposal, and treatment (ex-Situ soil washing). A public notice was issued and public meeting was held in October 1998. The recommended alternative in the EE/CA included removal of soil and batteries through a NTCRA, followed by re-evaluation of groundwater.
Action Memorandum (Baker, 1999)	1999	An AM was completed to propose excavation with on-Base disposal as the NTCRA to address metals in soil and the battery piles.

TABLE 8-83
Previous Investigations Summary, IRP Site 85

Previous Investigation/Action	Date	Activities
Non-time-critical Removal Action (OHM, 2000)	2000	The NTCRA was conducted and 158 tons of soil and debris were removed from 16 separate battery pile locations. Confirmation soil sampling was conducted.
Long-term Monitoring (Baker, 2002)	2001-2002	Groundwater LTM was initiated in July 2001 and included sampling of five monitoring wells on a quarterly basis for metals analysis. In July 2002, the concentrations of metals were below the cleanup levels for at least four consecutive quarters, and LTM was discontinued at Site 85.
No Action Decision Document (Baker, 2005)	2005	Based on results of previous investigations at Site 85, no further RA was recommended. USEPA and NCDENR concurred with NFA status.
Preliminary Assessment/Site Investigation (CH2M HILL, 2010)	2009-2010	To characterize potential environmental impacts associated with the past use of Site 85, a PA/SI was initiated. Field activities included test pitting and collection of soil and groundwater samples for metals analysis. Four test pits were excavated from 2 to 6 feet bgs; batteries were identified at the surface of each test pit, but were not observed deeper than 2 feet bgs. A battery sample was collected for metals analysis. Lead and mercury were detected at concentrations in exceedance of USEPA maximum toxicity values. The batteries and soil were placed in separate 55-gallon drums and removed from the site. Several metals were detected in soil and groundwater at concentrations exceeding screening criteria. Potential unacceptable risks were identified in groundwater due to exposure to chromium and unacceptable risks for ecological were identified due to exposure to select metals in soil. Further assessment of soil and groundwater was recommended.
Expanded Site Investigation (CH2M HILL, 2011)	2010-2011	To assess the nature and extent of metals in soil at Site 85, an ESI was initiated. Field activities included composite surface soil, discrete surface soil, and groundwater sampling. Samples were analyzed for select metals. No unacceptable human health or ecological risks were identified during risk assessments. Based on the results of the PA/SI and ESI, the NFA decision was confirmed.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in March 2012.

8.2.32 Site 87 (Pre-RI)—MCAS Officers’ Housing Area

Site 87, the MCAS Officers' Housing Area site (formerly Site A), is located on the west bank of the New River and covers less than 1 acre (**Figure 8-67**). The area was identified in 1986 when waste was identified eroding out of a cut bank along the New River near an officers' housing area. The materials were tentatively identified as hospital wastes. Various hospital waste materials were noted, including hypodermic needles and vials of white powder that were believed to contain a chlorine-based substance. No information was available regarding the volume of the waste or the mode of disposal and it is unclear how the materials got into the river bank.

FIGURE 8-67
IRP Site 87



Previous investigations are listed in **Table 8-84**.

TABLE 8-84
Previous Investigations Summary, IRP Site 87

Previous Investigation/Action	Date	Activities
Pre-Remedial Investigation Screening Study (Baker, 1998)	1995 - 1998	A Pre-RI was initiated to assess the nature and extent of contamination. Field activities included a site survey, exploratory test pits, and soil, groundwater, surface water, and sediment sampling. No potential unacceptable human health or ecological risks were identified. As a result, the Pre-RI recommended NFA.
Confirmatory Groundwater Sampling (Baker, 1999)	1999	One groundwater sample collected during the Pre-RI detected PCP above the screening criteria and the location was sampled again in 1999. No PCP was detected.
No Action Decision Document (CH2M HILL, 2001)	2001	The Final NADD was completed May 8, 2001.

8.2.33 Site 90 (OU 17)—Building BB-9

Site 90, Building BB-9, encompasses approximately 6 acres within OU 17, in the southeast portion of the Base in the Courthouse Bay Complex (**Figure 8-68**). OU 17 consists of three sites (Sites 90, 91, and 92) that have been grouped together based on the unique characteristic of suspected waste. All three sites were formerly part of the UST program, but were transferred to the IRP because petroleum-related contamination was not identified. Site 90 is a former UST basin where three 1,000-gallon steel USTs containing heating oil were previously located between a dry cleaning distribution facility and a heating plant. The USTs were removed in March 1993. Dry-cleaning processes were performed at this location for an unknown period of time, but were subsequently discontinued. During the years that dry cleaning operations were conducted at this location, a 250-gallon AST was located onsite.

FIGURE 8-68
IRP Site 90, OU 17



Previous investigations are listed in **Table 8-85**.

TABLE 8-85
Previous Investigations Summary, IRP Site 90

Previous Investigation/Action	Date	Activities
Focused Remedial Investigation (Baker, 1999)	1997 - 1999	A Focused RI was conducted to assess the nature and extent of contamination at OU 17. Field activities included a site survey and soil and groundwater sampling. Analytical results identified the presence of toluene in soil samples and PCE and chloroform were detected in groundwater. Potential unacceptable human health risks were identified due to the presence of PCE in groundwater. Additional groundwater sampling was conducted in 1999 and 2000. Only TCE was detected above screening criteria at one location, and there is no evidence of a large-scale PCE impact of the area; NFA was recommended.
Proposed Remedial Action Plan and Record of Decision (Baker, 2001)	2001	A Final PRAP was issued in July 2001 to solicit public input on the preferred alternative (no RAs) and a public meeting was held. The Final ROD was issued and signed on September 30, 2001.

8.2.34 Site 91 (OU 17)—Building BB-51

Site 91, Building BB-51, encompasses approximately 8 acres within OU 17 in the southeast portion of the Base in the Courthouse Bay Complex (**Figure 8-69**). OU 17 consists of three sites (Sites 90, 91, and 92) that have been grouped together based on the unique characteristic of suspected waste. All three sites were formerly part of the UST program, but were transferred to the IRP because petroleum-related contamination was not identified. Site 91 is currently used by the Marine Corps School of Engineering to train personnel. The site is a former UST basin where two 300-gallon steel USTs used to store waste oil were previously located northeast of Building BB-51. The USTs were removed in August 1992. At the time of the UST closure, TPH contamination was detected in the soil samples.

FIGURE 8-69
IRP Site 91, OU 17



Previous investigations are listed in **Table 8-86**.

TABLE 8-86

Previous Investigations Summary, IRP Site 91

Previous Investigation/Action	Date	Activities
Focused Remedial Investigation (Baker, 1997)	1997	A Focused RI was conducted to assess the nature and extent of contamination at OU 17. Field activities included a site survey and soil and groundwater sampling. Potential risks to human health were identified from chloroform, arsenic, iron, and manganese in groundwater. Chloroform and iron were determined not to be site related.
Supplemental Groundwater Investigation (Baker, 1999)	1999	Additional groundwater sampling was conducted in 1999 to confirm the presence of VOCs or SVOCs. Post-RI monitoring was recommended.
Post-Remedial Investigation Groundwater Monitoring (Baker, 2001)	2000 - 2001	Post-RI groundwater monitoring was initiated in July 2000, and included quarterly groundwater sampling for VOCs, SVOCs, iron, and arsenic. The results indicated that the constituents detected were naturally occurring and not site related.
Proposed Remedial Action Plan and Record of Decision (Baker, 2001)	2001	A Final PRAP was issued in July 2001 to solicit public input on the preferred alternative (no RAs) and a public meeting was held. The Final ROD was issued and signed in September.

8.2.35 Site 92 (OU 17)—Building BB-246

Site 92, formerly Building BB-246, is located within OU 17 in the southeast portion of the Base in the Courthouse Bay Complex and covers approximately 1 acre (**Figure 8-70**). OU 17 consists of three sites (Sites 90, 91, and 92) that have been grouped together based on the unique characteristic of suspected waste. All three sites were formerly part of the UST program, but were transferred to the IRP because petroleum-related contamination was not identified. Site 92 is a former UST basin where one 1,000-gallon steel UST containing gasoline was previously located. The UST was installed in 1980, deactivated in 1989, and removed in January 1994. A subsequent SI identified the presence of chlorinated hydrocarbons in the groundwater.

FIGURE 8-70
IRP Site 92, OU 17



Previous investigations are listed in **Table 8-87**.

TABLE 8-87
Previous Investigations Summary, IRP Site 92

Previous Investigation/Action	Date	Activities
Focused Remedial Investigation (Baker, 1997)	1997	A Focused RI was conducted to assess the nature and extent of contamination at OU 17. Field activities at Site 92 included a site survey and soil and groundwater sampling. Potential human health risks were identified from acetone, arsenic, and iron in soil and chloroform in groundwater. However, the concentrations were either comparable with background or reflective of the sample decontamination process.
Post-Remedial Investigation Groundwater Monitoring (Baker, 2001)	2000 - 2001	Based on the findings of the Focused RI, Post-RI groundwater monitoring was conducted quarterly for VOCs, SVOCs, iron, arsenic, and manganese. The results indicated that the constituents detected were naturally occurring and not site related.
Proposed Remedial Action Plan and Record of Decision (Baker, 2001)	2001	A Final PRAP was issued in July 2001 to solicit public input on the preferred alternative (no RA) and a public meeting was held. The Final ROD was issued and signed in September 2001.

8.2.36 Site 94 (OU 18)—PCX Service Station

Site 94, the PCX Service Station, covers approximately 2 acres and is located within the HPIA on the Mainside of the Base within the western portion of Site 78 (OU 1) (**Figure 8-71**). The PCX Service Station is an active facility, providing refueling services for private vehicles, and consists of a single-story brick structure flanked by three concrete pump islands on two sides. Historical records indicate that two 10,000-gallon and two 30,000-gallon USTs storing various grades of gasoline were installed during the 1950s. The USTs and associated petroleum-contaminated soil were removed in January 1995. During subsequent phases of investigation, free phase hydrocarbons and chlorinated organic contaminants were detected in groundwater. Soil and groundwater contamination resulting from the petroleum releases at the site is currently being remediated under NCDENR's UST program.

FIGURE 8-71
IRP Site 94, OU 18



Previous investigations are listed in **Table 8-88**.

TABLE 8-88
Previous Investigations Summary, IRP Site 94

Previous Investigation/Action	Date	Activities
Groundwater Investigation (OHM, 2000)	2000	An Investigation was conducted to evaluate groundwater conditions. Analytical results identified VOCs (primarily BTEX and methyl tert-butyl ethylene) and PAHs at concentrations exceeding NCGWQS. A December 1, 2000, letter from the Base to NCDENR requested the transfer of the PCX Service Station to the IRP, which resulted in the subsequent CERCLA investigation activities.

TABLE 8-88
 Previous Investigations Summary, IRP Site 94

Previous Investigation/Action	Date	Activities
Remedial Investigation Baseline Groundwater Sampling (CH2M HILL, 2003)	2003	To obtain the most current groundwater quality data, baseline groundwater sampling was conducted. Samples were analyzed for VOCs and several VOCs exceeded screening criteria.
Remedial Investigation (CH2M HILL, 2005)	2004 - 2005	An RI was conducted to further evaluate contamination near Site 94. Field activities included soil and groundwater sampling for SVOC and VOC analysis. Potential unacceptable human health risks were identified due to VOCs in groundwater. No potential unacceptable ecological risks were identified. The Final RI concluded that groundwater contamination was from an upgradient source and will be addressed as part of Site 78.
Proposed Remedial Action Plan and Record of Decision (CH2M HILL, 2006)	2006	The PRAP was issued to solicit public input on the preferred alternative (no RA) and a public meeting was held. The ROD for OU 18 was issued for NFA and signed in August 2006.

8.2.37 Site 95—Dipping Vat Sites

IRP Site 95, the Dipping Vat sites, consists of three separate areas, which are identified by their locations (Jaybird Road, Magnolia Road, and Lyman Road), and encompass a total of approximately 4 acres (**Figure 8-72**). The IRP Site 95 dipping vats were in operation from approximately 1900 through 1960 and were used to submerge livestock in a pesticide solution consisting of arsenic and synthetic pesticides, such as DDT and toxaphene. The dipping vats were discovered during an archaeological review of MCIEAST-MCB CAMLEJ. The dipping vats were approximately 25 to 30 feet long, 4 to 5 feet deep, and 2.5 to 3.5 feet wide, each able to hold approximately 1,500 to 2,000 gallons of dipping solution. A drip pad, approximately 12 feet by 15 feet, was constructed at the exit of each vat. Holding pens, approximately 50 feet by 50 feet, were also associated with the dipping vats.

FIGURE 8-72
IRP Site 95



Previous investigations are listed in **Table 8-89**.

TABLE 8-89
Previous Investigations Summary, IRP Site 95

Previous Investigation/Action	Date	Activities
Initial Assessment (Baker, 2004)	2004	Vats were initially identified during an archaeological investigation of the Base. Following their discovery, an initial assessment was performed on two of the three dipping vat sites (Jaybird Road and Magnolia Road), which included soil sampling for pesticides and metals. Arsenic exceeded screening criteria, and additional assessment was recommended. The third site (Lyman Road) was identified after the initial investigation.
Site Investigation (CH2M HILL, 2007)	2006 - 2007	Based on results from the Initial Assessment, an SI field investigation was conducted. Field activities included soil and groundwater sampling for VOCs, SVOCs, pesticides/PCBs, and metals. An HHRS was completed and did not identify any unacceptable risks to human health at the Jaybird Road and Lyman Road Sites; therefore, NFA was recommended at these two locations. Potential risks to human health and the environment were identified from arsenic in soil at the Magnolia Road location and a removal action was recommended.
Engineering Evaluation/Cost Analysis (Rhēa, 2010)	2010	An EE/CA was prepared to evaluate alternatives for the NTCRA at the Magnolia Road site. The three alternatives were no action, excavation and offsite disposal, and in situ phytoremediation. A public notice was issued and public meeting was held in February 2010 to present the EE/CA. No written questions or comments were received.
Action Memorandum (CH2M HILL, 2010)	2010	An AM was completed to propose excavation with offsite disposal as the NTCRA to address the arsenic contaminated soil.
Non-time-critical Removal Action (Rhēa, 2010)	2010	The NTCRA was conducted and a second vault was identified and removed from beneath the original dipping vat at the depth of the water table. Confirmation soil sampling was conducted to confirm arsenic concentrations below the cleanup level. A permanent monitoring well was installed to conduct groundwater sampling for arsenic. Arsenic concentrations in soil and groundwater were below North Carolina standards and/or background and the site was closed with NFA.
No Action Decision Document (CH2M HILL, 2011)	2011	The Final NADD was signed in November 2011.

8.3 MMRP RC Sites

8.3.1 UXO-01—Former Live Hand Grenade Course (ASR #2.23)

The Former Live Hand Grenade Course encompasses approximately 10 acres on the Mainside of the Base (Figure 8-73). The Live Hand Grenade Course was established under Camp Training Order Number 7-1945, dated March 19, 1945, and was disestablished in March 1946 and no longer used for firing live ammunition. During operation of the site, munitions used included fragmentation, offensive, and practice grenades.

FIGURE 8-73
MMRP Site UXO-01, ASR #2.23



Previous investigations are listed in **Table 8-90**.

TABLE 8-90
Previous Investigations Summary, MMRP Site UXO-01, ASR #2.23

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2009)	2008 - 2009	A field investigation was conducted to identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC. Field activities included soil and groundwater sampling and 10 percent DGM. Samples were analyzed for explosives, metals, and perchlorate. No unacceptable risks to human health or the environment were identified in site media. 249 geophysical anomalies were identified at the site, and an intrusive investigation of subsurface anomalies was recommended.
Expanded Site Investigation (CH2M HILL, 2012)	2011 - 2012	An ESI was conducted to further investigate the 249 geophysical anomalies identified during the PA/SI. An intrusive investigation was conducted, and no MEC or MPPEH was identified; NFA was recommended.
No Action Decision Document (CH2M HILL, 2013)	2013	The Final NADD was signed in July 2013.

8.3.2 UXO-01—D-6 50-Foot Indoor Rifle and Pistol Range (ASR #2.64)

The D-6 50-Foot Indoor Rifle and Pistol Range consists of approximately 1 acre and is identified as a former .22-caliber indoor range, which included eight manually operated targets (**Figure 8-74**). The range was in use since before 1954, but exact dates are not known. The building was demolished in 1998.

FIGURE 8-74
MMRP Site UXO-01, ASR #2.64



Previous investigations are listed in **Table 8-91**.

TABLE 8-91
Previous Investigations Summary, MMRP Site UXO-01, ASR #2.64

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (Tetra Tech, 2009)	2009 -2010	A field investigation was conducted to identify the presence or absence of contamination at the site. XRF and confirmation soil sampling was conducted to identify potential metals contamination. Three drainage soil samples were collected for metals analysis, and four groundwater samples were collected for metals and perchlorate analysis. Lead concentrations were identified as potential risk to human and ecological receptors in soil and groundwater. A removal action to address the antimony, arsenic, and lead in soil was recommended.
Engineering Evaluation/Cost Analysis (Tetra Tech, 2010) and Action Memorandum (Tetra Tech, 2011)	2010-2011	An EE/CA was prepared to identify removal action alternatives to address the antimony, arsenic, and lead in soil. Excavation and offsite disposal was the preferred alternative presented to the public in November 2010. The public comment period was held from November to December 2010 and no comments were received. The AM documented excavation and offsite disposal as the selected remedy.

TABLE 8-91
Previous Investigations Summary, MMRP Site UXO-01, ASR #2.64

Previous Investigation/Action	Date	Activities
Non-time-critical Removal Action Construction Completion Report (Osage, 2013)	2013	An NTCRA was initiated to address antimony, arsenic, and lead in soil. Pre-excavation soil sampling results indicated the lead concentrations would require that the soil be disposed of as hazardous waste. Therefore, soil within the excavation area was treated in place to render non-hazardous. Approximately 970 tons of soil, brush, and debris were excavated for offsite disposal. Post-excavation samples from the base of the excavation were collected and analyzed for antimony, arsenic, and lead. Antimony and lead were detected at concentrations in exceedance of the preliminary remediation goals at one location; therefore, the soil at this location was treated, excavated, and resampled; and the results were below the preliminary remediation goals. Additionally, follow-up groundwater sampling was conducted for lead analysis, and lead was not detected. Based on the results of the NTCRA and groundwater sampling, NFA was recommended.
No Action Decision Document (Osage, 2014)	2014	The Final NADD was signed in March 2014.

8.3.3 UXO-02—Unnamed Explosive Range (ASR #2.201)

Site UXO-02, the Unnamed Explosive Range, encompasses approximately 127 acres along the west bank of the New River in the Rifle Range Area of the Base (**Figure 8-75**). UXO-02 encompasses IRP Site 69 (**Section 7.1.1**). UXO-02 was used as an explosive range from 1973 to 2002; however, the types of munitions employed at this range are unknown.

FIGURE 8-75
MMRP Site UXO-02, ASR #2.201



Previous investigations are listed in **Table 8-92**.

TABLE 8-92
Previous Investigations Summary, MMRP Site UXO-02, ASR #2.201

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2012)	2009 - 2012	To identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC, field activities were conducted (concurrently with Site 69 field activities [Section 6.1.2]). Soil, groundwater, surface water, and sediment samples were collected and analyzed for explosives, metals, and perchlorate. Approximately 1,100 geophysical anomalies were identified during DGM, potentially representing subsurface MEC. Potential unacceptable risks to human health and the environment were identified due to exposure to metals in groundwater and pesticides in soil and sediment. Further investigation of groundwater and geophysical anomalies was recommended.

TABLE 8-92
Previous Investigations Summary, MMRP Site UXO-02, ASR #2.201

Previous Investigation/Action	Date	Activities
Expanded Site Investigation (CH2M HILL, 2012)	2011 - 2012	An ESI was conducted at UXO-02, including Site 69, to further investigate potential unacceptable risks identified during the UXO-02 PA/SI and Site 69 supplemental investigation. Field activities included an intrusive anomaly investigation, monitoring well installation, and soil, groundwater, surface water, and sediment sampling for pesticides, metals, and/or explosives analyses. No unacceptable human health or ecological risks were identified from potential exposure to soil, surface water, sediment, or metals in the surficial aquifer groundwater. NFA was recommended for the portion of UXO-02 located outside of the Site 69 perimeter fence and a NADD was submitted in FY 2013. The remaining environmental impacts to be further assessed are associated with potential risks from exposure to waste and the VOC groundwater plume associated with Site 69.
No Action Decision Document (CH2M HILL, 2013)	2013	The Final NADD was signed in July 2013.

8.3.4 UXO-03—Practice Hand Grenade Course (ASR #2.78a and #2.78b)

Site UXO-03, the former Practice Hand Grenade Course including the northern boundary area, covers approximately 12 acres of wooded and developed land (**Figure 8-76**). The site contains two former range areas (ASR Area 2.78a and ASR Area 2.78b) along Birch Street, north of the Hadnot Point area. The northern boundary area was identified to be addressed as part of UXO-03, based on the uncertainty associated with historical range boundaries and planned MILCON. Site UXO-03 was used as the practice hand grenade range between 1953 and 1959. Although the specific types of munitions used at the site are unknown, the proximity to adjacent buildings and activities would substantiate the likely use of practice munitions. It was therefore concluded to be unlikely that pyrotechnics or high-explosive munitions were used at the site.

FIGURE 8-76
MMRP Site UXO-03, ASR #2.78a and #2.78b



Previous investigations are listed in **Table 8-93**.

TABLE 8-93
Previous Investigations Summary, MMRP Site UXO-03, ASR #2.78a and #2.78b

Previous Investigation/Action	Date	Activities
Focused Site Investigation, Northern Boundary (CH2M HILL, 2008)	2008	A Focused SI was conducted within the northern boundary area to evaluate the potential for MEC and environmental impacts based on planned MILCON activities adjacent to the identified UXO-03 boundary. Soil and groundwater samples were collected and analyzed for explosives and metals. No exceedances of screening criteria and background were identified in soil or groundwater. A 10 percent DGM survey was also conducted and identified 189 geophysical anomalies representing potential subsurface MEC/MPPEH. A spent pyrotechnic signaling device was discovered on the ground surface during the investigation. Further investigation of the anomalies was recommended.

TABLE 8-93
Previous Investigations Summary, MMRP Site UXO-03, ASR #2.78a and #2.78b

Expanded Site Investigation, Northern Boundary (CH2M HILL, 2011)	2009-2011	An ESI was conducted within the northern boundary area, including 100 percent DGM and intrusive anomaly investigation (except the wetland areas). 368 geophysical anomalies were identified and one MEC item and 19 MPPEH items were found during the intrusive investigation.
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2007-2011	A PA/SI was conducted to assess the potential presence and nature of site-related impacts to human health and the environment. Field activities included DGM and intrusive anomaly investigation over 11 percent of the accessible UXO-03 area; and surface and subsurface soil sampling, groundwater sampling, and surface water and sediment sampling in an unnamed drainage feature in the northern boundary area. The samples were analyzed for explosives and metals. There were no unacceptable risks to human health or the environment over that of background concentrations from exposure to site media based on current and potential future use. 68 geophysical anomalies were identified and three MPPEH items (a flare and small arms ammunition) were found during the intrusive investigation. Based on the results of northern boundary area investigations and the PA/SI, no munitions or MD related to high explosives or hand grenades were found. The only munitions or MD found within UXO-03 was a flare on the ground surface and flares have been found in other areas of the Base and are not necessarily related to the use of the site as a hand grenade range. Small arms ammunition was found, but does not pose an excessive risk to those who may come into contact with it. Therefore, NFA was recommended.
No Action Decision Document (CH2M HILL, 2012)	2012	The Final NADD was signed in August 2012.

8.3.5 UXO-04—Knox Trailer Park

Site UXO-04, Knox Trailer Park, encompasses approximately 134 acres in the northern portion of the Base (Figure 8-77). The Knox Trailer Park area began as a Civilian Conservation Corps Camp in 1941, housing workers who were responsible for eliminating the source of endemic malaria by draining all surrounding wetlands. This was accomplished by ditching, using dynamite, and spraying diesel oil on water surfaces as a larvicide. Additionally, a dog-training school was located in the southernmost area of the site from 1942 to 1946. The dogs were subjected to overhead rifle and machine gun fire and explosions of charges of dynamite and TNT to simulate battlefield conditions. It has also been reported that the research facilities at Camp Knox conducted testing on body armor during World War II (WW II) through the early 1950s. The research was likely performed indoors, and the amount of ammunition expended for testing purposes is expected to be minimal. From the early 1950s until 2006, the area has been used for residential housing. Sometime between 1974 and 1976, an EOD technician responded to the discovery of UXO in the Knox Trailer Park area. A bulldozer operator uncovered a live WW II MK-II high-explosive hand grenade while conducting excavation activities. A visual inspection of the Knox Trailer Park was conducted in November 2002 by the Base’s EOD team, and no UXO was discovered.

FIGURE 8-77
MMRP Site UXO-04



Previous investigations are listed in **Table 8-94**.

TABLE 8-94
Previous Investigations Summary, MMRP Site UXO-04

Previous Investigation/Action	Date	Activities
Expanded Site Investigation (CH2M HILL, 2009)	2005 - 2009	A phased field investigation was conducted to identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC. Field activities included a geophysical survey, intrusive investigation, soil, groundwater, sediment and surface water sampling. Samples were analyzed for VOCs, SVOCs, pesticides/PCBs, explosives, perchlorate, and metals. No munitions-related material that would indicate historical site use as an active range was found, and the sources of all other geophysical anomalies were found to be scrap metal. No potential unacceptable human health or ecological risks were identified. As a result, the site was recommended for NFA and removal from the MMRP. The ESI report was submitted in 2009 documenting the NFA decision.
No Action Decision Document (2010)	2010	The Final NADD was signed in August 2010.


8.3.6 UXO-05—Mini Anti-Tank Range (ASR #2.7a, #2.7b, and #2.7c)

Site UXO-05 consists of three areas that cover approximately 70 acres. Two areas (ASR #2.7a and #2.7b) overlap and are located at the main entrance of the New River Air Station, just south of the intersection of Curtis Road and U.S. Highway 17 (**Figure 8-78**). The other area of Site UXO-05 (ASR #2.7c) is located north of ASR #2.7a and #2.7b in the Camp Geiger area. Site UXO-05 was used as the Miniature Anti-Tank Range between 1942 and 1944. Small arms (.22-caliber rifles) were fired at a moving target car located on a transverse track.

A 500-gallon UST was located at the former Building CG1, in the southern portion of ASR #2.7a. The tank (UST-CG1-1) was installed in 1985 and reportedly contained used oil until it was removed in February 1994.

The northern area of Site UXO-05 (ASR #2.7c) overlaps a portion of MMRP Site UXO-26 (**Section 8.3.22**), the Former B-3 Gas Chamber (ASR #2.79b), which was reopened as an operational range in 2014.

FIGURE 8-78
MMRP Site UXO-05, ASR #2.7a, #2.7b, and #2.7c

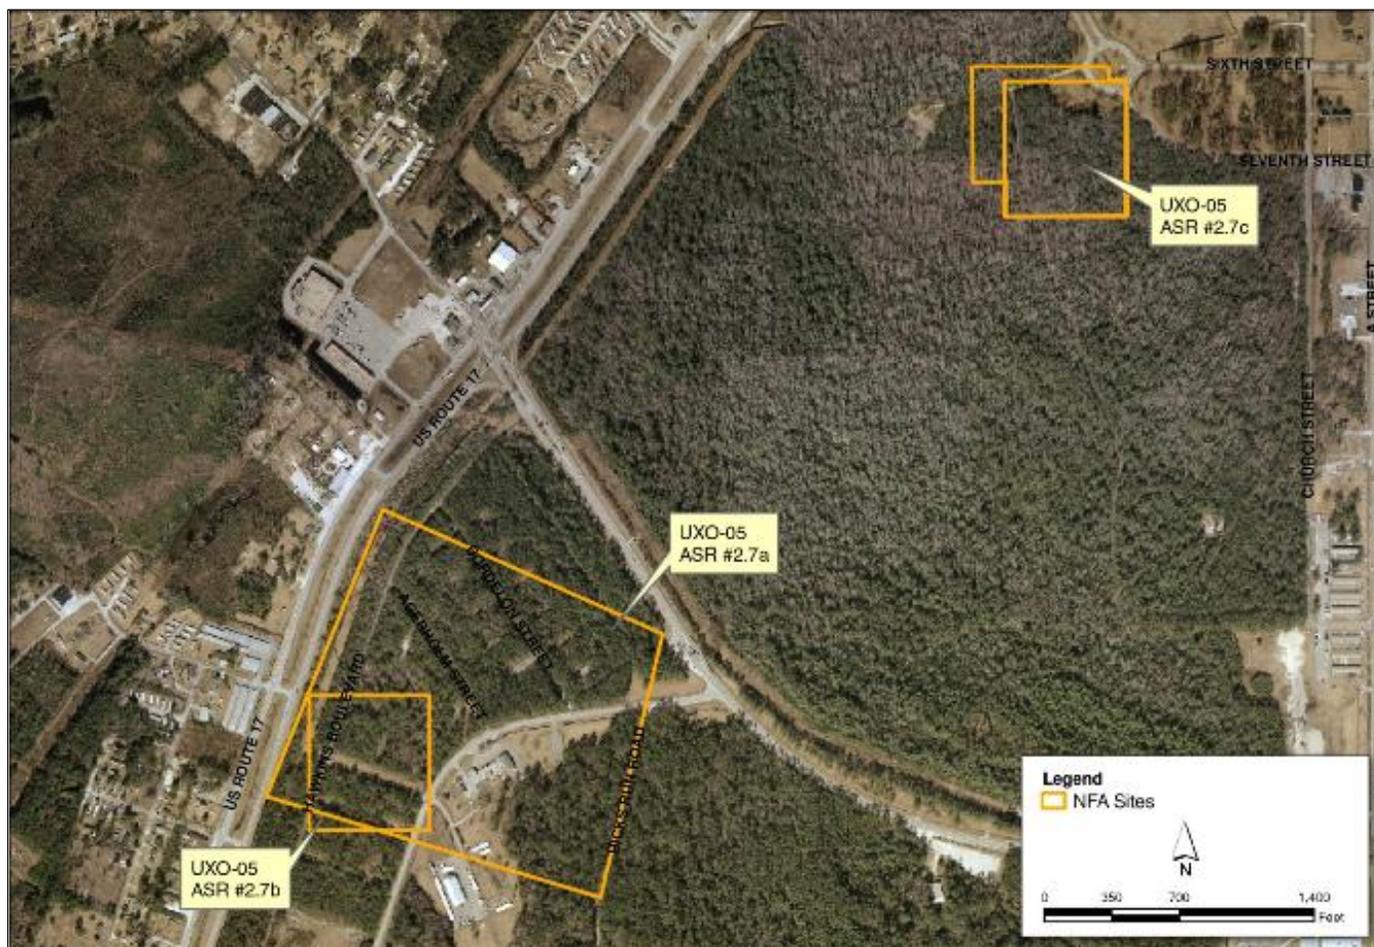

Previous investigations are listed in **Table 8-95**.

TABLE 8-95
Previous Investigations Summary, MMRP Site UXO-05

Previous Investigation/Action	Date	Activities
Limited Site Assessment Former UST CG1-1 (Law and Catlin, 2000)	2000	In February 1994, the 500-gallon used oil UST was removed from the vicinity of Building CG1. Post removal soil samples exceeded action levels for O&G; as a result, four shallow monitoring wells were installed within a 40 foot radius of the UST location and groundwater samples were collected and analyzed for volatile petroleum hydrocarbon and extractable petroleum hydrocarbon, VOCs, SVOC, chromium, and lead. Benzene, p-isopropyl toluene, and bis(2-ethylhexyl)phthalate were detected at concentrations exceeding NCGWQS but below gross contaminant levels. Soil samples collected during well installation did not exceed North Carolina Soil Screening Levels. Based on these results, the site was issued NFA status by NCDENR in July 2000.
Onslow County Water and Sewer Authority Focused Preliminary Assessment/Site Investigation (Arcadis, 2007)	2007	A focused PA/SI was conducted to evaluate the potential presence of MEC and impacted soil or groundwater within a proposed water line easement traversing ASR #2.7a of Site UXO-05. To characterize the subsurface conditions, DGM, soil sampling, and groundwater sampling was conducted. Samples were analyzed for VOCs, SVOCs, TPH- diesel-range organics, TPH- gasoline-range organics, pesticides, PCBs, metals, total organic carbon, total organic halogen, perchlorate, and explosives residues. No unacceptable risks to construction workers were identified.
Preliminary Assessment/Site Investigation (CH2M HILL, 2009)	2008 - 2009	A PA/SI was conducted at Site UXO-05 to assess the potential presence and nature of site-related impacts to human health and the environment. Field activities included surface and subsurface soil sampling, groundwater sampling, and surface water and sediment sampling. The samples were analyzed for explosives residue, perchlorate, SVOCs, and metals. No unacceptable risks to human health or the environment over that of background concentrations from exposure to site media were identified and NFA was recommended. The geophysical anomalies identified in the northern area of Site UXO-05 (ASR #2.7c) were attributed to Site UXO-26 and were addressed during the Site UXO-26 ESI.
No Action Decision Document (2009)	2009	The Final NADD was signed in October 2009.

8.3.7 UXO-07—Practice Hand Grenade Course (ASR #2.77a and #2.77b)

Site UXO-07, the Practice Hand Grenade Course, encompasses approximately 2 acres in the HPIA (Figure 8-79). UXO-07 was reportedly used as a range in 1953. The types of munitions employed at the site are unknown; however, based on the name of the site it is assumed that practice hand grenades were used.

FIGURE 8-79
MMRP Site UXO-07, ASR #2.77a and #2.77b



Previous investigations are listed in Table 8-96.

TABLE 8-96
Previous Investigations Summary, MMRP Site UXO-07, ASR #2.77a and #2.77b

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2009 - 2011	A field investigation was conducted to identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC. Field activities included soil, groundwater, surface water, and sediment sampling and 10 percent DGM. Samples were analyzed for SVOCs, explosives, metals, and perchlorate. Metals detections exceeded screening criteria in all media except surface water. Nitrobenzene and perchlorate detections also exceeded screening criteria in groundwater. No unacceptable human health or ecological risks were identified during the HRS and ERS. 1,118 geophysical anomalies were present at the site, and an intrusive investigation was recommended.
Expanded Site Investigation (CH2M HILL, 2011)	2011 - 2011	An ESI was conducted to address the PA/SI recommendations to intrusively investigate the sources of geophysical anomalies identified as representing potential subsurface MEC. No MEC items were found. The MPPEH items that were excavated were inspected, certified, and verified as MDAS. Based on the environmental and MEC investigation results, NFA was recommended at Site UXO-07.
No Action Decision Document (CH2M HILL, 2013)	2013	The Final NADD was signed in July 2013.

8.3.8 UXO-08—2.36-inch Bazooka Range, Base Chemical Smoke Chamber, and Nuclear, Biological, and Chemical Training Trail (ASR #2.182), and D-7 Gas Chamber (ASR #2.80)

Located within the boundaries of IRP Site 78, Site UXO-08 encompasses approximately 144 acres in the HPIA (Figure 8-80). Areas within UXO-08 include the 2.36-inch Bazooka Range, the D-7 Gas Chamber, and the Base Chemical Smoke Chamber and Nuclear, Biological, and Chemical Training Trail. The Range Identification and PA report (U.S. Army Corps of Engineers, 2001) identified the D-7 Gas Chamber as being located at Building 756. The D-7 Gas Chamber is estimated to have been used from 1953 to 1961 and is thought to have primarily used tear gas. Base maps and the Range Identification and PA report indicate that the operation of the Base Chemical Smoke Chamber and Nuclear, Biological, and Chemical Training Trail took place from 1985 to 1987. The amount of chemical stimulants used during the facilities operation is unknown. Reports have indicated the presence of a suspected firing range, designated as the MCIEAST-MCB CAMLEJ Cantonment 2.36-inch Bazooka Range. Retired Base EOD personnel have reported the findings of bazooka rounds on several occasions and at various locations within Parade Grounds during the 1970s and 1990s.

FIGURE 8-80

MMRP Site UXO-08, ASR #2.182 and ASR #2.80



Previous investigations are listed in **Table 8-97**.

TABLE 8-97
 Previous Investigations Summary, MMRP Site UXO-08, ASR #2.182 and ASR #2.80

Previous Investigation/Action	Date	Activities
Focused Preliminary Assessment/Site Investigation (CH2M HILL, 2010)	2009-2011	In support of MILCON activities for the HPCA, Post Office Intersection Area, and Fitness Center, soil, groundwater, surface water, and sediment sampling was conducted, along with 100 percent DGM. Samples were analyzed for VOCs, SVOCs, explosives, perchlorate, and metals. No unacceptable human health or ecological risks were identified in site media in the Fitness Center and Post Office Intersection Area. In the HPCA, potential unacceptable human health and ecological risks were identified from exposure to metals and PAHs in a drainage area and in soil. These risks are likely attributable to the industrial area and will be addressed as part of Site 78. Approximately 900 anomalies were identified in the MILCON areas and further investigation was recommended.
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2007 - 2011	To identify the presence and nature of MC contamination and evaluate the number and density of anomalies that could represent potential subsurface MEC, a field investigation was conducted. Field activities included soil, groundwater, surface water, and sediment sampling for explosives, metals, perchlorate, VOCs, SVOCs, and pesticides/PCBs, 100 percent DGM, and 10 percent intrusive investigation in MILCON areas. Based on the results from the PA/SI, NFA is recommended for Site UXO-08. No unacceptable human health or ecological risks from historical munitions activities were identified. Potential ecological risks identified in surface water and sediment resulted from historical industrial activities and will be addressed as part of the FY 2015 Five-year Review for Site 78. NFA was recommended at UXO-08.
No Action Decision Document (CH2M HILL, 2013)	2013	The Final NADD was signed in July 2013.

8.3.9 UXO-09—F-9, Triangulation Range (ASR #2.83)

Site UXO-09 encompasses approximately 3 acres in the HPIA (**Figure 8-81**). The F-9 Triangulation Range area was established in or prior to 1953. As reported in the ASR report, Base personnel stated that the range was used for M-1 rifle target practice. Base personnel also stated that the original range was most likely 100 feet wide and approximately 25 to 50 feet long, and may have contained a large dirt berm as a bullet stop. Based on interviews with Base personnel, former munitions use was reportedly limited to small arms ammunition.

FIGURE 8-81
MMRP Site UXO-09, ASR #2.83



Previous investigations are listed in **Table 8-98**.


TABLE 8-98
Previous Investigations Summary, MMRP Site UXO-09

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2009)	2008 - 2009	A PA/SI was conducted to assess the potential presence and nature of site-related impacts to human health and the environment. Field activities included surface and subsurface soil sampling and groundwater sampling. The samples were analyzed for explosives residue, perchlorate, and total metals. No unacceptable risks to human health or the environment from exposure to site media were identified based on current and potential future land uses at Site UXO-09 and NFA was warranted.
No Action Decision Document (2010)	2010	The Final NADD was signed in August 2010.

8.3.10 UXO-10—D-11A, Flame Tank and Flame Thrower Range (ASR #2.136)

Site UXO-10, the Flame Tank and Flame Thrower Range, encompasses approximately 10 acres on the Mainside of the Base (**Figure 8-82**). UXO-10 was reportedly used as a range from 1970 to 1977. The types of munitions used at the range included flame throwers and small arms blank ammunition, which was reportedly used on tanks for demonstration purposes. Demolitions (C-4), white smoke grenades, white phosphorus hand grenades, flame thrower weapons, and blank ammunition for small arms were also used on the course.

FIGURE 8-82
MMRP Site UXO-10, ASR #2.136

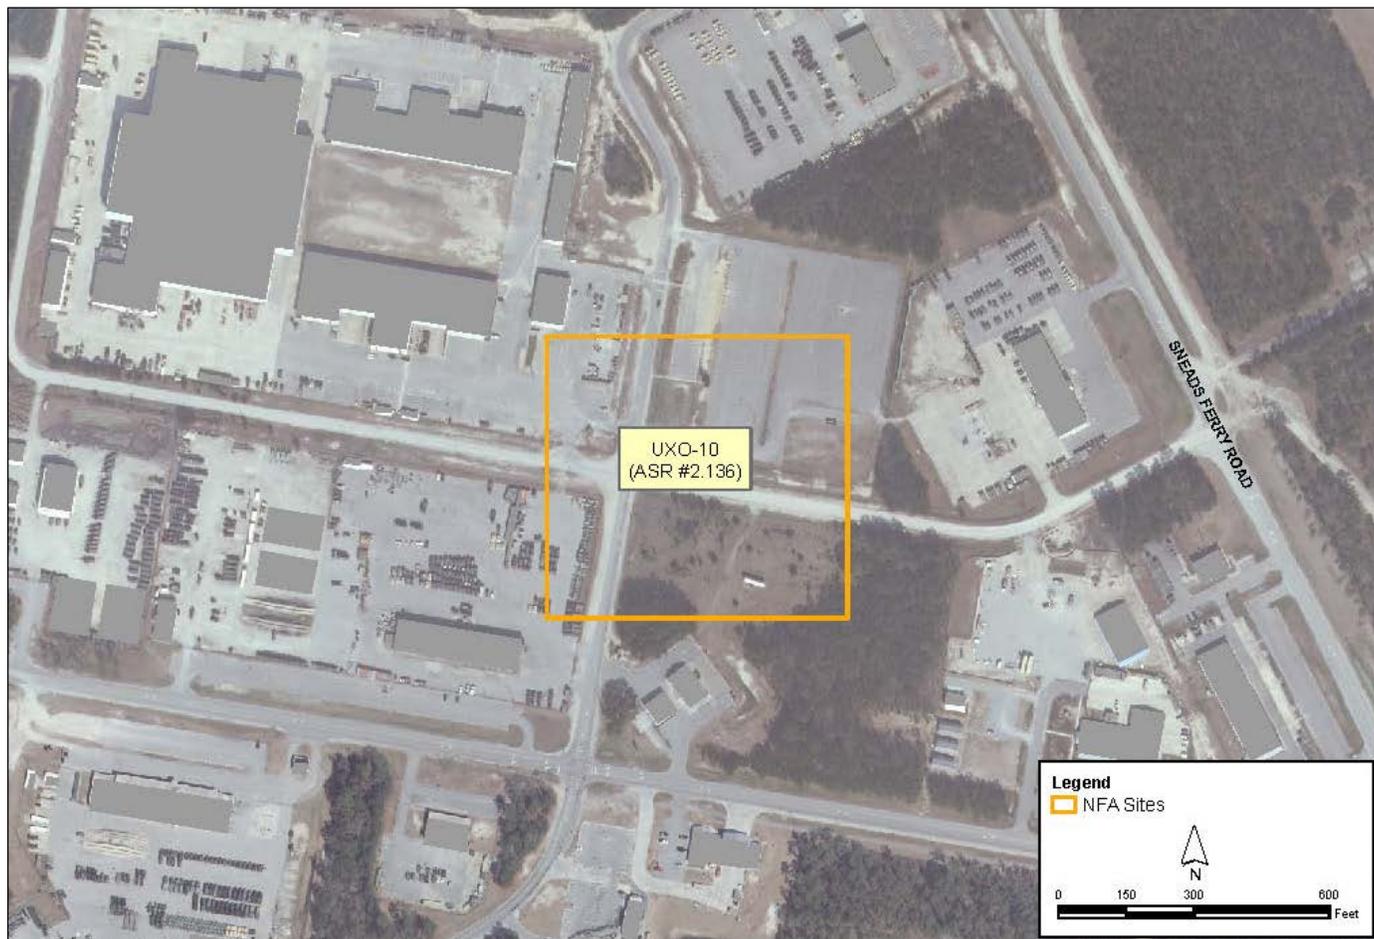

Previous investigations are listed in **Table 8-99**.

TABLE 8-99
Previous Investigations Summary, MMRP Site UXO-10, ASR #2.136

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2009 - 2011	A field investigation was conducted to identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC. Field activities included soil and groundwater sampling and 10 percent DGM. Samples were analyzed for VOCs, SVOCs, TPH, explosives, metals, and perchlorate. No unacceptable human health or ecological risks were identified. 1,228 geophysical anomalies were present at the site, and an intrusive investigation was recommended.
Expanded Site Investigation (CH2M HILL, 2012)	2011 - 2012	An ESI was conducted to further investigate geophysical anomalies identified during the PA/SI. Field activities consisted of an intrusive investigation. Two MPPEH items were identified; however, no MEC or MPPEH containing explosive material were identified, and NFA was recommended.
No Action Decision Document (CH2M HILL, 2013)	2013	The Final NADD was signed in July 2013.

8.3.15 UXO-11—B-5, Practice Hand Grenade Course (ASR #2.281)

Site UXO-11, the Practice Hand Grenade Course, encompasses approximately 2 acres in Camp Geiger in the northwest portion of the Base (**Figure 8-83**). UXO-11 was reportedly used as a range in 1953. The types of munitions employed at the site are unknown; however, it is assumed that practice hand grenades were used.

FIGURE 8-83

MMRP Site UXO-11, ASR #2.281



Previous investigations are listed in **Table 8-100**.

TABLE 8-100

Previous Investigations Summary, MMRP Site UXO-11, ASR #2.281

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2009 - 2011	A field investigation was conducted to identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC. Field activities included soil, groundwater, surface water, and sediment sampling and 10 percent DGM. Samples were analyzed for explosives, metals, and perchlorate. Explosives were detected in site media; however, no unacceptable human health or ecological risks were identified. 70 geophysical anomalies were present at the site, and an intrusive investigation was recommended.


TABLE 8-100
 Previous Investigations Summary, MMRP Site UXO-11, ASR #2.281

Previous Investigation/Action	Date	Activities
Expanded Site Investigation (CH2M HILL, 2012)	2011 - 2012	An ESI was conducted to further evaluate the geophysical anomalies identified during the PA/SI. Additional investigation was also recommended to delineate the extent of identified impacts related to MC and to delineate chromium in surface and subsurface soil. Field activities included an intrusive investigation and soil sampling for chromium and explosives. An HHRS and ERS were conducted to evaluate data collected during the PA/SI and the ESI. No unacceptable human health or ecological risks were identified due to exposure to site media. No MEC items were identified during the intrusive investigation and six MPPEH items (including inert training hand grenades and small arms casings) were removed from the site for disposal. These results indicate that the potential for encountering unidentified subsurface MEC at Site UXO-11 is likely to be low. NFA was recommended.
No Action Decision Document (CH2M HILL, 2013)	2013	The Final NADD was signed in July 2013.

8.3.12 UXO-12—1,000-inch Range (ASR #2.5)

Site UXO-12, the 1,000-inch Range, encompasses approximately 30 acres and is generally located west of Camp Geiger, in the northwest portion of the Base (**Figure 8-84**). The 1,000-inch Range was established under Camp Training Order Number 7-1945, dated March 19, 1945, and was disestablished in March 1946 and no longer used for firing live ammunition. During operation of the site, munitions used included small caliber munitions (.30-caliber weapons firing). The site was investigated as part of Site UXO-18 (**Section 8.3.18**) based on its location within the boundaries of the former B-6 small arms ranges.

FIGURE 8-84
MMRP Site UXO-12, ASR #2.5

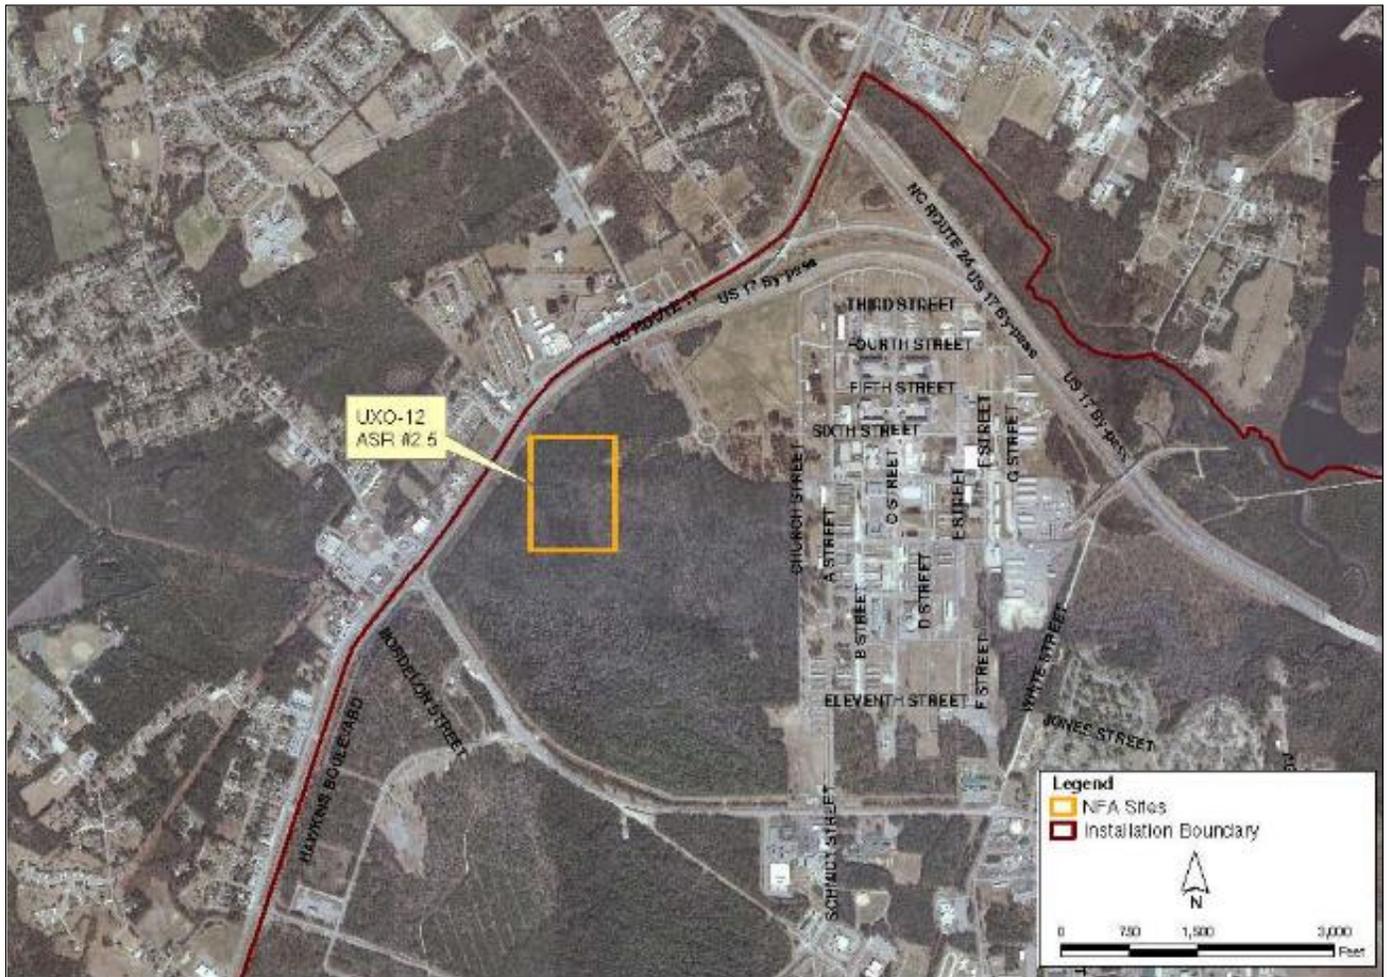

Previous investigations are listed in **Table 8-101**.

TABLE 8-101
Previous Investigations Summary, MMRP Site UXO-12, ASR #2.5

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2009 - 2011	A field investigation was conducted to identify the presence or absence of contamination at the site. An XRF survey was conducted and surface water, sediment, and soil samples were collected and analyzed for select metals. No unacceptable human health or ecological risks were identified and the site was closed with NFA.
No Action Decision Document 2011	2011	The Final NADD was signed in November 2011.

8.3.13 UXO-13—Naval Regional Medical Center

Site UXO-13, the Naval Regional Medical Center, encompasses approximately 176 acres on the Mainside of the Base (**Figure 8-85**). No known historical live fire activities were conducted within this area; rather it was designated as a “Maneuver Training Area” used to train troops in non-live fire operations. UXO-13 was administratively closed on March 24, 2004, due to no known historical live-fire activities on this range.

FIGURE 8-85
MMRP Site UXO-13



8.3.14 UXO-14—Indoor Pistol Range (ASR #2.199) and Gas Chamber (ASR #2.200)

Site UXO-14, the Indoor Pistol Range and Gas Chamber, encompasses less than 1 acre within the Rifle Range area of the Base (**Figure 8-86**). The Indoor Pistol Range (Building RR-53) was reportedly in use from 1950 to 1996. During operation of the range, small arms were used to fire at a fixed target. The Gas Chamber (Building RR-63) was reportedly in use from 1950 through 1954, and is thought to have primarily used tear gas.

FIGURE 8-86
MMRP Site UXO-14, ASR #2.199 and ASR #2.200



Previous investigations are listed in **Table 8-102**.

TABLE 8-102
Previous Investigations Summary, MMRP Site UXO-14, ASR #2.199 and #2.200

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2009 - 2011	A field investigation was conducted to identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC. Field activities included soil and groundwater sampling and 10 percent DGM. Samples were analyzed for metals and SVOCs. Potentially unacceptable human health risks were identified due to exposure to antimony, mercury, and lead in soil. No unacceptable ecological risks were identified. 17 geophysical anomalies were present at the site, and an intrusive investigation was recommended.
Expanded Site Investigation (CH2M HILL, 2012)	2011 - 2012	An ESI was conducted to evaluate potentially unacceptable human health risks previously identified in soil at the former Indoor Pistol range and assess the nature of geophysical anomalies in the former Gas Chamber area. Field activities included an intrusive investigation and surface and subsurface soil sampling for antimony, lead, and mercury. Potentially unacceptable human health and ecological risks were confirmed due to exposure to lead and antimony in soil at the Indoor Pistol Range. No MEC was identified during the intrusive investigation at the former Gas Chamber.

TABLE 8-102
 Previous Investigations Summary, MMRP Site UXO-14, ASR #2.199 and #2.200

Previous Investigation/Action	Date	Activities
		Pistol Range. No MEC was identified during the intrusive investigation at the former Gas Chamber. No further investigation of the Gas Chamber and an interim action and/or an RI/FS to address antimony and lead in soil at the Indoor Pistol Range was recommended.
Engineering Evaluation/Cost Analysis (CH2M HILL, 2012)	2012	The EE/CA evaluated alternatives for a NTCRA to address potential unacceptable risks from antimony and lead in soil. The alternatives were no action, excavation and offsite disposal, and in situ soil stabilization with excavation and offsite disposal.
Action Memorandum (CH2M HILL, 2013)	2013	An AM was completed to propose in situ soil stabilization with excavation and offsite disposal as the NTCRA to address antimony and lead in soil.
Non-time-critical Removal Action (Osage, 2013)	2013	An NTCRA was initiated to address antimony and lead in soil. Pre-excavation soil sampling was conducted to define the lateral extent of contamination. Soil within the excavation area was treated in place to render the soil non-hazardous for offsite disposal. Approximately 333 tons of soil was excavated for offsite disposal. Post-excavation samples were collected from the base of the excavation and the results were below the cleanup levels. Based on the results of the NTCRA, NFA was recommended in the closeout report.
No Further Action Decision Document (Osage, CH2M HILL, 2014)	2014	Based on recommendations from the ESI and completion of the NTCRA, a No Further Action Decision Document was completed to document NFA for the site and was signed in August 2014.

8.3.15 UXO-15—1,000-inch Range (ASR #2.19)

The Former 1,000-inch Range (ASR #2.19) comprises approximately 9 acres in the northern portion of the Courthouse Bay Amphibious Area where a MILCON project is proposed (**Figure 8-87**). Small arms, including M1 rifles and .30- and .45-caliber pistols, were typically fired at the 1,000-inch ranges. The 1,000-inch Range was disestablished on March 19, 1946, and is no longer used for firing live ammunition. The Courthouse Bay Amphibious Area (including the Former 1,000-inch Range) is currently used by the Amphibian Assault Battalion to evaluate track vehicle performance as part of the Joint College Training Area.

FIGURE 8-87
MMRP Site UXO-15, ASR #2.19



Previous investigations are listed in **Table 8-103**.

TABLE 8-103
Previous Investigations Summary, MMRP Site UXO-15, ASR #2.19

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2010)	2008 - 2010	In support of proposed MILCON activities, a field investigation was conducted to identify the presence and nature of MC contamination. Field activities included soil sampling for metals and perchlorate. Arsenic and antimony were detected at levels exceeding screening criteria; however, no MC-related contamination was identified in soil. No potential unacceptable human health or ecological risks were identified and NFA was recommended.
No Action Decision Document (2010)	2010	The Final NADD was signed in August 2010.

8.3.16 UXO-16—Former Gun Positions 41A and 41B (ASR #2.212)

Site UXO-16, also referred to as Former Gun Positions 41A and 41B, encompasses approximately 4 acres in the Stone Bay area of the Base. UXO-16 was first established during WW II as a training ground and was also used during the Korean War-era as a training ground (**Figure 8-88**). Howitzers were reportedly positioned at Site UXO-16 and fired 105-mm and 155-mm munitions into the K-2 and G-10 Impact Areas; other munitions suspected to be used at Site UXO-16 are 4.2-inch, 81-mm, 120-mm, 175-mm, 4.2-inch, and 8-inch munitions.

FIGURE 8-88
MMRP Site UXO-16, ASR #2.212



Previous investigations are listed in **Table 8-104**.

TABLE 8-104
Previous Investigations Summary, MMRP Site UXO-16, ASR #2.212

Previous Investigation/Action	Date	Activities
Focused Preliminary Assessment/Site Investigation (CH2M HILL, 2009)	2008 - 2009	In support of proposed MILCON activities, a field investigation was conducted to identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC. Field activities included DGM and soil and groundwater sampling for explosives, perchlorate, and metals. A total of 895 geophysical anomalies potentially representing subsurface MEC were identified and intrusively investigated. All items were found to be MD or cultural debris. No further MEC investigations were recommended; however, because it is not possible to provide 100 percent assurance that all MEC items were removed, training and on-call support during construction activities were recommended. No MC-related contamination was identified in site media. No unacceptable risks to human health or the environment were identified. NFA was recommended.
No Action Decision Document (2010)	2010	The Final NADD was signed in August 2010.

8.3.17 UXO-17—Firing Position #2 (ASR #2.212)

Site UXO-17, Firing Position #2, encompasses approximately 16 acres in the Mainside area of the Base. UXO-17 was a gun position used for military training, which fired into the G-10 impact area (**Figure 8-89**). As a result of the type of training conducted at the site, there should be no DMM, although ammunition packaging, range residue, barbed wire, and buried garbage may be present. Firing Position #2 covers 16 acres and was reportedly used from the 1950s through at least 1985. 105-mm and 155-mm howitzer guns were used at this site.

FIGURE 8-89
MMRP Site UXO-17, ASR #2.212



Previous investigations are listed in **Table 8-105**.

TABLE 8-105
 Previous Investigations Summary, MMRP Site UXO-17, ASR #2.212

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2012)	2008 - 2012	<p>The PA/SI was completed in three phases. Phase I consisted of 100 percent DGM and intrusive investigation of a 4-acre area in the center of the site and environmental sampling of soil and groundwater. Phase II consisted of 9 percent DGM and intrusive investigation of the surrounding 12 acres and environmental sampling of soil and groundwater. Phase III consisted of groundwater sampling in the vicinity of a buried leaking drum discovered and removed during Phase I.</p> <p>Approximately 31.5 percent of Site UXO-17 was surveyed, yielding a total of 1,992 geophysical anomalies and 21 saturated response areas potentially representing subsurface MEC. Intrusive investigation resulted in the identification of 1 MEC item and 279 MPPEH items. The MEC item was determined to be DMM associated with the historical use as a firing position. Other MPPEH was consistent with the site's use for training. Other than DMM, the firing position and surrounding training area were not determined to be a source of MEC. Based on the estimated 263,500 pounds of other debris items (concrete, metal drums, and scrap metal) encountered, it is likely that portions of the site were used for disposal. The risk screening results indicated that exposure to soil, sediment, surface water, and groundwater would not result in unacceptable human health or ecological risks. Based on these results and because the site will be used as an above grade expansion area for the Base landfill, potentially covering any remaining subsurface debris, no further investigation was recommended. Prior to MILCON proceeding at the site, all site personnel conducting subsurface/ intrusive activities were recommended to receive "3R" munitions awareness training for recognizing, retreating, and reporting potential MEC hazards. On-call construction support was also recommended for inspection and disposal of suspected MEC/MPPEH that may be unearthed.</p>
No Action Decision Document (CH2M HILL, 2013)	2013	The Final NADD was signed in July 2013.

8.3.18 UXO-18—B-6, 50-foot Small Arms Range (ASR #2.44)

Site UXO-18, covers approximately 176 acres and consists of several small ranges (**Figure 8-90**). The B-6 ranges were used between 1950 and 1961. Twenty-five target stations were reportedly used for .22-caliber (rifle and pistol) ammunition and 10 target stations were used for .32-, .38-, and .45-caliber (pistol) ammunition. The B-6 ranges, located north of Curtis Road and Hicks Run Road, were identified for closure. Site UXO-12 (**Section 8.3.12**) is located within the boundaries of the former B-6 small arms ranges and was investigated as part of Site UXO-18.

FIGURE 8-90
MMRP Site UXO-18, ASR #2.44



Previous investigations are listed in **Table 8-106**.


TABLE 8-106
Previous Investigations Summary, MMRP Site UXO-18, ASR #2.44

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2010 - 2011	A field investigation was conducted to identify the presence or absence of contamination at the site. An XRF survey was conducted and surface water, sediment, and soil samples were collected and analyzed for select metals. No unacceptable human health or ecological risks were identified and the site was closed with NFA.
No Action Decision Document (2010)	2010	The Final NADD was signed in November 2011.

8.3.19 UXO-20—1,000-inch Range Montford Point (ASR #2.32) A-1, 50-foot .22 Caliber Range (ASR #2.87)

Site UXO-20, includes two former small arms ranges in the Camp Johnson (Montford Point) area covering approximately 75 acres (**Figure 8-91**). The 1,000-inch Range (ASR #2.32) was used from the 1940s until the mid-1950s as a Familiarization Range for .30-caliber Browning automatic rifles. The A-1, 50-foot .22 Caliber Range (ASR #2.87) was used during the 1950s and is believed to have been inactive since 1957 and is adjacent to and overlapping the 1000-inch range delineation.

FIGURE 8-91
MMRP Site UXO-20, ASR #2.32 and #2.87

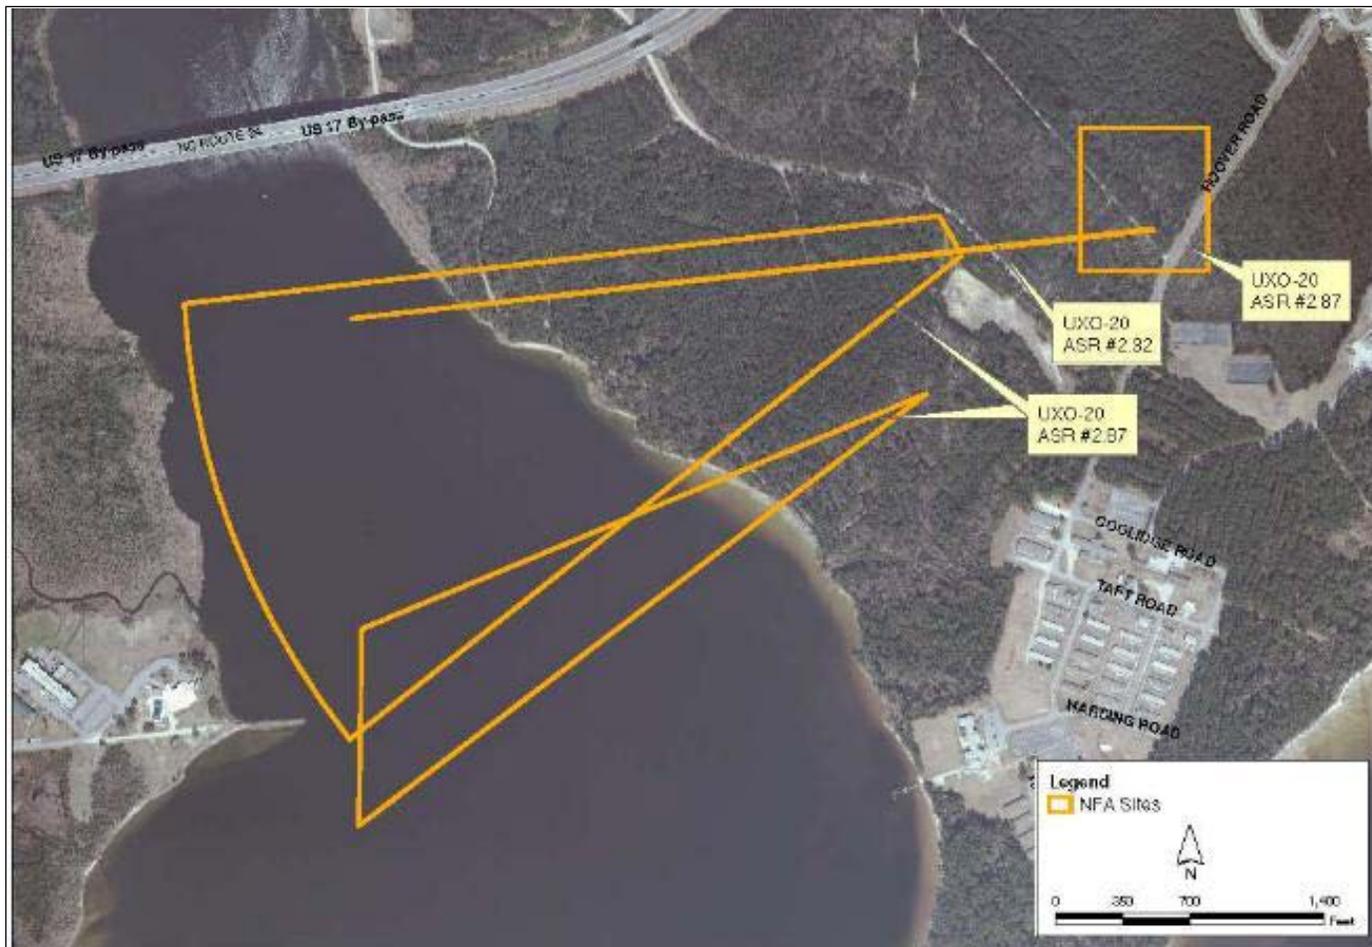

Previous investigations are listed in **Table 8-107**.

TABLE 8-107
Previous Investigations Summary, MMRP Site UXO-20, ASR #2.32 and #2.87

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2009 - 2011	In support of potential MILCON activities within the Camp Johnson area, a field investigation was conducted in FY 2009. Groundwater and soil samples were collected and analyzed for select metals. Although arsenic was detected above screening levels throughout the range area, no unacceptable human health or ecological risks were identified in site media. Based on the results of the PA/SI, the site was closed with NFA.
No Action Decision Document (2010)	2010	The Final NADD was signed in November 2011.

8.3.20 UXO-21—Gas Chamber (2nd Marine Division) (ASR #2.204)

The Former Tear Gas Chamber, 2nd Marine Division site encompasses 17 acres and was used as a gas chamber in the 1970s (**Figure 8-92**). Based on the operational history of the site, chemical warfare training agents (tear gas) would have been used. The Preliminary Range Assessment/Archive Search Report (USACE 2001) stated that chemical agent identification sets (CAIS) and riot-control hand grenades may have been used at the site; however, this statement was a speculation based on areas surrounding other gas chambers often being used for other chemical training. There is no documentation or other historical indications that CAIS or riot-control hand grenades were used at the former D-Area Gas Chamber, and the Preliminary Assessment/Site Inspection (PA/SI) (CH2M HILL, 2011), Phase I ESI (CH2M HILL, 2012), and the Phase II ESI (CH2M HILL, 2014) found no evidence that these items are present at the site. Adjacent and overlapping ranges that may have impacted Site UXO-21 include the Impact Area located east of Sneads Ferry Road, the F-6 Live Grenade Range (ASR #2.55), the F-13 Flame Thrower Range (ASR #2.139), the F-7 Flame Thrower Range (ASR #2.128), and the F-13 Field Firing Range (ASR #2.54).

FIGURE 8-92
MMRP Site UXO-21, ASR #2.204

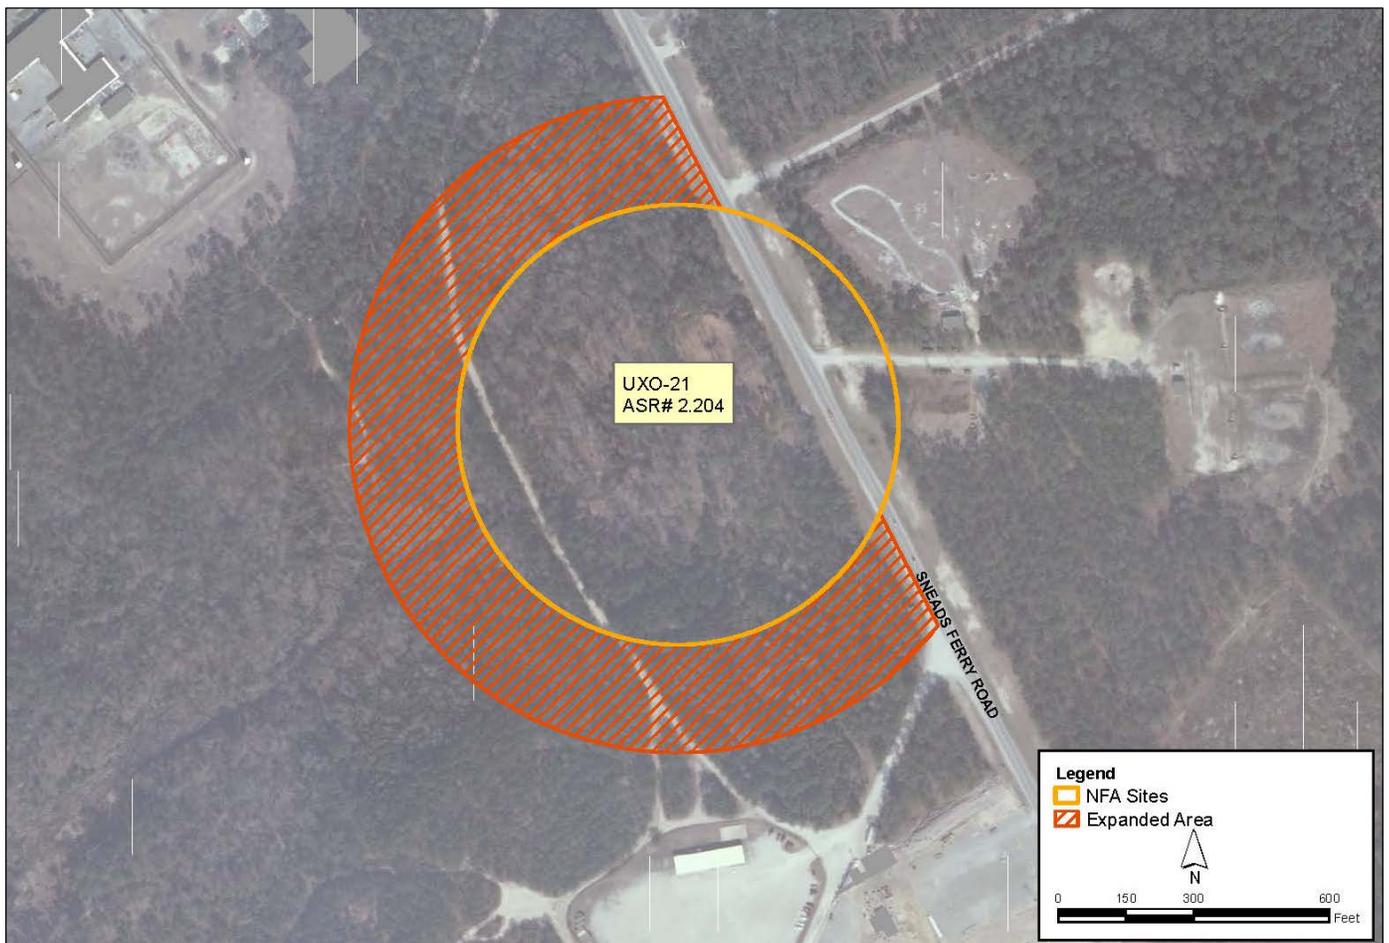


TABLE 8-108


Previous Investigations Summary, MMRP Site UXO-21, ASR #2.204

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2011)	2007 - 2011	<p>In support of MILCON activities a PA/SI was conducted in a phased approach. In the interior 5-acre area of the site, soil and groundwater sampling and DGM were conducted as part of Phase I field activities. Samples were analyzed for VOCs, SVOCs, tear gas constituents, and metals. 569 geophysical anomalies representing potential subsurface MEC were identified during Phase I DGM. An intrusive investigation was conducted, and approximately 6 percent of the anomalies were determined to be MPPEH. MPPEH was inspected, identified as MDAS, and removed for offsite disposal.</p> <p>Phase II field activities included 10 percent DGM of the surrounding 9.5 acres and soil, groundwater, surface water, and sediment sampling for VOCs, SVOCs, explosives, perchlorate, and metals. 738 geophysical anomalies that represented potential subsurface MEC were identified during Phase I DGM.</p> <p>No unacceptable human health or ecological risks were identified from exposure to environmental media; however, further investigation of the geophysical anomalies identified during Phase II DGM was recommended.</p>
Expanded Site Investigation (CH2M HILL, 2012)	2011 - 2012	<p>An ESI was conducted to further assess the nature and extent geophysical anomalies identified during Phase II of the PA/SI. Field activities included an intrusive investigation of the 1,307 geophysical anomalies identified during the PA/SI. One MEC item was discovered and destroyed through a controlled detonation, and more than 60 MPPEH items were identified. Additional DGM and an intrusive investigation were recommended to define the extent of MEC/MPPEH beyond the boundaries of Site UXO-21.</p>
MILCON Technical Memorandum (CH2M HILL, 2013)	2012-2013	<p>An intrusive investigation was conducted to identify and remove surface and subsurface MEC and MPPEH prior to initiation of MILCON activities.</p> <p>Field work was conducted within the footprint of a planned expansion of Sneads Ferry Road including a planned utility corridor and a vehicle turn lane along Sneads Ferry Road, and within the tank trail area. Field activities consisted of an intrusive investigation and post detonation soil sampling. One MEC item and 55 MPPEH items were identified and removed. Based on these result of this investigation, the planned MILCON activities proceeded.</p>
Phase II Expanded Site Investigation (CH2M HILL, 2014)	2014	<p>Based on recommendations of the ESI, additional field activities were conducted in 2013 to define the extent of MEC/MPPEH in the MRS adjacent to UXO-21. Field activities included DGM and an intrusive investigation over approximately 7 percent of the MRS. The MEC items and MPPEH items recovered to date were inconsistent with items expected at a former gas chamber (such as expended tear gas canisters, riot control hand grenades, or war gas identification sets). The items found (e.g., pyrotechnic, screening, and marking devices) are likely a result of general military training maneuvers and exercises at overlapping and adjacent ranges. The explosives hazard analysis indicated that the probability of contact with MEC and MPPEH and the risk from explosives hazards are both low.</p> <p>Based on the environmental sampling results of the PA/SI, the intrusive investigations completed to date, and the explosives hazard analysis, NFA was recommended.</p>
No Action Decision Document	2014-2015	An NADD will be finalized in 2015 to document NFA.

8.3.21 UXO-25—Verona Loop

UXO-25 encompasses approximately 25 acres just south of MCAS New River (**Figure 8-93**) near the township of Verona, North Carolina. UXO-25 lies within portions of two former ranges, the Impact Area “M” range and the M-16, Outdoor Classroom range. The Impact Area “M” range was in use as a live fire range with maneuver exercises with the use of mortars, recoilless rifles, 2.36-inch rockets, and hand and rifle grenades from 1941 to approximately 1945. Historical information indicates that 0.30-caliber blanks may have been used, along with pyrotechnics at the M-16, Outdoor Classroom range. This area is no longer used for firing live ammunition. UXO-25 is relatively flat and heavily vegetated with trees and dense undergrowth. The area within UXO-25 is undeveloped, with a small residential area and church located adjacent to the central portion of the site where it is bisected by Verona Loop Road.

FIGURE 8-93
MMRP Site UXO-25

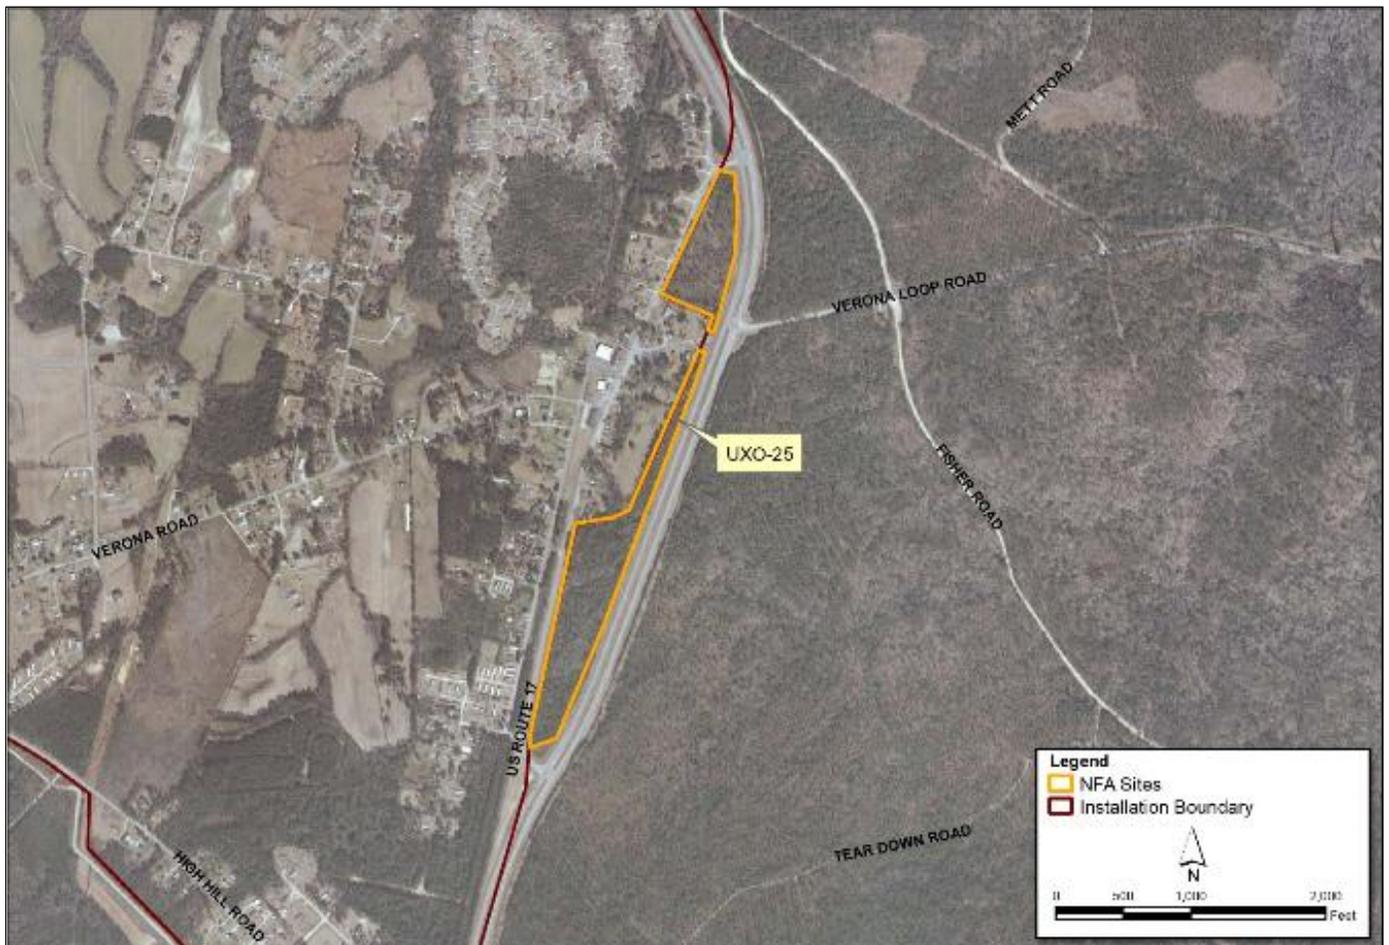

Previous investigations are listed in **Table 8-109**.

TABLE 8-109
Previous Investigations Summary, MMRP Site UXO-25

Previous Investigation/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2013)	2012-2013	A PA/SI was conducted to evaluate the presence of potential subsurface MEC and potential impacts to soil and groundwater. Field activities included 10% DGM, intrusive MEC investigations and surface soil, subsurface soil, and groundwater samples were collected and analyzed for explosives and metals. Metals were detected at concentrations above screening criteria in soil samples. However, an HHRS and ERS were conducted and no unacceptable risks were identified. The DGM investigation identified 361 potential targets but no MEC or MPPEH were identified during the intrusive investigation. Based on these results, NFA was recommended.

TABLE 8-109
 Previous Investigations Summary, MMRP Site UXO-25

Previous Investigation/Action	Date	Activities
No Action Decision Document (CH2M HILL, 2014)	2014	The Final NADD was signed in February 2014.

8.3.22 UXO-26—B-3 Gas Chamber (ASR #2.79a and #2.79c)

Site UXO-26, the Former B-3 Gas Chamber, is located at the main entrance of the MCAS New River. UXO-26 was entered in the MMRP as UXO-01; however, based on UXO-01 investigation results, separate MMRP site numbers (UXO-21 and UXO-26) were designated. UXO-26 encompasses approximately 14 acres (**Figure 8-94**). The B-3 Gas Chamber facility was used between 1953 and 1958. As part of operational training activities CAs, war gas identification sets, and riot control hand grenades may have been used. Although ASR #2.79a and 2.79c were closed with NFA, ASR #2.79b was re-opened in 2014 and is currently an operational range.

FIGURE 8-94
MMRP Site UXO-26, ASR #2.79a and #2.79c



Previous investigations are listed in **Table 8-110**.

TABLE 8-110
 Previous Investigations Summary, MMRP Site UXO-26, ASR #2.79a and #2.79c

Previous Investigations/Action	Date	Activities
Preliminary Assessment/Site Investigation (CH2M HILL, 2009)	2008 - 2009	A field investigation was conducted to identify the presence and nature of MC contamination and evaluate the number and density of anomalies that represent potential subsurface MEC. Field activities included soil, groundwater, surface water, and sediment sampling and 10 percent DGM. Samples were analyzed for SVOCs, including tear gas constituents, explosives, metals, and perchlorate. No unacceptable human health or ecological risks were identified in site media. 353 geophysical anomalies were present at the site, and an intrusive investigation was recommended.
Expanded Site Investigation (CH2M HILL, 2012)	2011-2012	The ESI field investigation was completed to assess, through intrusive investigation, the nature of the 353 geophysical anomalies identified during the PA/SI. No MPPEH was found during the intrusive investigation of areas ASR #2.79a or ASR #2.79c. In the ASR #2.79b area, M6A3 2.36-inch rockets, rocket motors, and pieces of rockets were found indicating a potential target area. However, in 2012 Base Range Control identified the area encompassing ASR #2.79b to be reopened. If the area is reopened, it will fall under the responsibility and management of Range Control, and MEC clearance activities were recommended to minimize explosive risks. If the area is not reopened, an RI is recommended under the MMRP for ASR #2.79b. Additionally, it was recommended to maintain the existing warning signs and conduct a surface sweep for MEC/MPPEH to minimize explosive risks.
Range Reopening Activities (United States Marine Corps, 2014)	2014	In March 2014, the area encompassing ASR #2.79b was reopened as an operational range for use as a School of Infantry training area. Prior to reopening, UXO clearance activities were conducted by Range Control and resulted in recovery and disposal of 15,480 pounds of munitions debris and 6,800 pounds of range-related debris, demolition and disposal of three concrete targets, and identification, demolition, and disposal of 226 MEC items.
No Further Action Decision Document (CH2M HILL, 2014)	2014	Based on recommendations from the ESI, a No Further Action Decision Document was completed to document NFA for ASR #2.79a and #2.79c.

Additional Site Investigations

The following sections discuss the site history, summary of previous investigations, and future activities of the additional sites that have not been assigned IRP or MMRP site designations but are being investigated following the CERCLA/RCRA process (**Figure 2-8**).

9.1 Off-Base Surface Danger Zones

Four historical off-Base surface danger zones (SDZs) were identified based on historical range maps and documents reviewed by the Base. The former SDZs (Rocket Range Number 1 (ASR #2.33), Direct Fire Artillery Range (G-7) (ASR #2.61), G-6 Artillery Range (ASR #2.62), and Impact Area N-1 (ASR #2.207) including Bomb Target-3 and Bomb Target-5 were of various configurations from the 1940s to 2007. SDZs are safety buffers and not impact areas. The SDZs are adjacent to the southeastern boundary of MCIEAST-MCB CAMLEJ (**Figure 2-8**), and encompass approximately 1,632 acres encroaching on off-Base property consisting of private, state-administered, and state-owned parcels.

A PA/SI was initiated in 2009 to identify potential historical activities that may have impacted environmental media from MEC and/or MC, assess geophysical anomalies that represent the potential presence and density of MEC, and evaluate potential risks to human health or the environment relating to historical range activities (CH2M HILL, 2011). Community notification and involvement activities included contacting the land owners regarding the SDZs and for access approval, issuing a fact sheet, and holding a public meeting. Field activities included an aerial geophysical survey; DGM on dry land areas; soil, groundwater, sediment, and surface water/pore water sampling; and explosives and metals analysis. The results of the risk screenings indicate that there are no unacceptable risks to either human or ecological receptors due to site media. More than 5,000 anomalies were identified based on the geophysical surveys. An intrusive investigation was conducted on the 200 acres of Bear Island. One MEC item (aircraft flare) was found on the ground surface and several munitions-related items were found during the intrusive anomaly investigation on Bear Island.

An ESI was conducted in FY 2013 to further investigate the nature of geophysical anomalies in areas outside of Bear Island (CH2M HILL, 2014). MEC items were only found within the southwestern portion of the site, near the former Browns Island target area. Only MPPEH or cultural debris were found within the remaining areas of the off-Base SDZs. The probability of contact with MEC is low, primarily because the MEC items found were located within areas that were difficult to access due to marshy conditions.

The ESI recommended the following:

- Amend the ESS and reduce the current size of the off-Base SDZs to include only the southwestern portion of the site where MEC was found, near the former Browns Island target area.
- Prepare an EE/CA to evaluate future actions that may be used to mitigate potential munitions in the reduced area. The EE/CA would evaluate the relative effectiveness, ease of implementation, and cost of each alternative.

Based on the recommendations of the ESI, an EE/CA will be completed in FY 2015.

9.2 Base Boundary Survey

A Base boundary survey was initiated in 2009 to identify current and historical activities at the properties adjacent to MCIEAST-MCB CAMLEJ that may have resulted in environmental impacts to the Base and to evaluate potential on-Base impacts to soil and groundwater in the vicinity of identified off-Base areas of potential concern (AOPCs). After conducting a public database search and field reconnaissance, 12 AOPCs were identified. Environmental sampling was conducted at the AOPCs to evaluate the presence or absence of soil and/or groundwater contamination onto MCIEAST-MCB CAMLEJ. Based on the results, potential on-Base impacts to groundwater were identified at three of the AOPC (9, 10, and 11) (**Figure 2-8**). The *Base Boundary Report for Potential Off-Base*

Contamination Encroachment, Marine Corps Base Camp Lejeune (CH2M HILL, 2010) documents the results of the records review and field investigation. In 2010, the Base notified USEPA and NCDENR of the results. Additional delineation sampling was conducted in 2011-2012 and was documented in the *Base Boundary Report Addendum for Potential Off-Base Contamination Encroachment* (CH2M HILL, 2012). A summary of background information and future activities is provided below for each site.

9.2.1 AOPC 9—Camp Knox Road and North Carolina Highway 24

AOPC 9 is located near the intersection of Highway 24 and Bell Fork Road. Groundwater sampling for VOCs, SVOCs, and lead was conducted and methyl tert-butyl ethylene, a gasoline additive commonly associated with petroleum releases, was detected above the NCGWQS in deep groundwater. Potential off-Base sources include the former Chico's Tires leaking underground storage tank (LUST) site, FastFare 557 UST site, and Ronnie Henderson UST site. All of these sites are located directly across the U.S. Highway 24/Lejeune Boulevard right-of-way, approximately 100 feet north of the Base boundary. NCDENR issued NFA for the former Chico's Tires and Lejeune Exxon/Handy Mart 52 LUST sites, and there no known releases associated with the FastFare 557 or Ronnie Henderson UST sites. Due to MILCON activities, several AOPC 9 groundwater monitoring wells were abandoned and will be re-installed once MILCON activities have been completed.

9.2.2 AOPC 10—Tarawa Boulevard and North Carolina Highway 24

AOPC 10 is located at the intersection of North Carolina Highway 24 and Tarawa Boulevard. Groundwater sampling for VOCs, SVOCs, and lead was conducted and petroleum-related compounds and CVOCs were identified in shallow and deep groundwater. Potential off-Base sources include petroleum contamination associated with the Silance Service Station LUST release and an unknown source of CVOCs. The Silance Service Station is classified as a low risk site according to the NCDENR UST Section. There are also active gasoline stations and former dry cleaning facilities located on the northern side of North Carolina Highway 24. LTM was conducted in January 2014 and the report was finalized in FY 2015.

9.2.3 AOPC 11—Former Dogwood Variety Store

AOPC 11 is located off of Highway 172 in Hubert, North Carolina. Groundwater sampling for VOCs, SVOCs, and lead was conducted, and petroleum-related compounds have been identified in groundwater. The potential off-Base source is a petroleum release associated with the former Dogwood Variety Store LUST site that has been issued NFA by NCDENR. LTM was conducted in January 2014 and the report was finalized in FY 2015.

9.2.4 SWMU 350—Former ASTs STT-61 through STT-66

The former AST facility, which consisted of Tanks STT-61 through STT-66, is located approximately 400 feet east of Iwo Jima Boulevard, a former entrance to the Tarawa Terrace housing development of MCIEAST-MCB CAMLEJ (**Figure 2-8**). The six ASTs (each with approximately 30,000-gallon capacity) at the facility were installed in 1942 and used for liquid propane storage until 1984. Rail cars would deliver and off-load liquid propane to the ASTs and the propane would subsequently be transferred from the tanks to delivery tanker trucks for service to MCIEAST-MCB CAMLEJ. In 1984, the AST piping system was modified and the facility was changed to waste oil storage. The six ASTs were removed in 1993, and the associated subsurface fuel lines for the tank system were left in-place.

Starting in 1990, environmental investigations conducted in the vicinity of the ASTs reported chlorinated and petroleum compounds in residual product collected from Tank STT-66, as well as in soil samples. Petroleum hydrocarbons and CVOCs were identified in groundwater located south and southwest of the SWMU. An IM soil removal was completed in 2006, consisting of the removal of fuel lines and impacted soils associated with the former AST system. Approximately 200 tons of soil were removed from the SWMU 350 trenches and disposed of as a non-hazardous waste material. In 2007, a CSI was conducted to further evaluate potentially impacted soil and groundwater at SWMU 350. Only arsenic and mercury were detected in soil at concentrations exceeding screening levels. In groundwater, benzene and naphthalene were detected at concentrations exceeding the NCGWQS. In July 2007, groundwater sampling was conducted around Building TT-84, located downgradient from the site and there were no detections above the NCGWQS.

An RFI was initiated in 2009 to identify a potential source area for VOCs and to define the extent of groundwater impacts and was completed in 2012 (AGVIQ/CH2M HILL, 2012). The analytical data indicate the presence of two separate groundwater plumes posing potential future risks to human health if groundwater were used as a potable water supply. One plume, presumed to originate from an off-Base gasoline release, contained concentrations of BTEX, 1,2-dichloroethane, and naphthalene that exceeded the NCGWQS. The second plume contained concentrations of naphthalene that exceeded the NCGWQS. An investigation upgradient and off-Base was recommended to evaluate the nature of the AOC plume source area. The off-Base UST sites north of North Carolina Highway 24 have been referred to the NCDENR UST Section for possible future investigation. The site at 2003 Lejeune Boulevard (Former John's Mobil Service Gas Station) was accepted into the NCDENR UST State Lead Program in October 2011 as Incident Number 32724.

The IM concluded in May 2013 with a second round of injections and the biosparging treatability study and a sitewide groundwater sampling event were completed in November 2013. Based on the results, a CMS will be completed in FY 2015 to evaluate possible alternative RAs at SWMU 350 and the AOC to mitigate the risk to future residents or industrial workers in the unlikely scenario that groundwater becomes a potable water supply.

Sites Transferred

This section discusses the site history for two sites that were transferred from the IRP to the UST program (Figure 2-9).

10.1 IRP Sites Transferred

10.1.1 Site 22—Industrial Area Tank Farm

Site 22, the Hadnot Point Fuel Farm, is located within the HPIA on the Mainside of the Base (Figure 2-9). All sampling events in and around Site 22 indicated that petroleum-related products from tanks were the only apparent source of contamination. Further, the tanks at Site 22 contain only jet fuel and the site is exempt from CERCLA under the petroleum exclusion. In a letter dated April 21, 1992, the Superfund Section of NCDENR suggested that all further remediation work at Site 22 would be appropriately performed under the UST program of the State of North Carolina. Previous investigations are listed in **Table 10-1**.

TABLE 10-1
Previous Investigations Summary, Site 22

Previous Investigations/Actions	Date	Activities
Confirmation Study (1987)	1984 - 1988	A Confirmation Study was conducted to determine the presence or absence of contamination at the site. Field activities included groundwater sampling. The Confirmation Study confirmed the presence of VOCs related to fuels and/or solvents in groundwater and nearby water supply wells that were immediately shut down. Three groundwater plumes were identified in the shallow portion of the surficial aquifer.
Hadnot Point Fuel Farm Groundwater Study (O'Brien and Gere, 1990)	1990	A groundwater study was conducted at Site 22 as part of the MCIEAST-MCB CAMLEJ UST Program. The study concluded that fuel losses likely occurred predominantly through leaks in the transfer lines or valves. Analysis indicated that floating product had contributed significant levels of dissolved petroleum compounds including BTEX into the groundwater. Trace levels of non-petroleum VOCs, including TCE and PCE, were also detected within the fuel farm area. Based on the results of this study, a product recovery/groundwater treatment system was designed for the fuel farm and began operation in 1991.
Supplemental Characterization Study (1991)	1990 - 1991	A Supplemental Characterization Study was performed to further evaluate the extent of contamination in the shallow and deeper portions of the aquifer and to characterize the contamination within the shallow soils at suspected source locations. The study concluded that TCE was only present in soils associated with a UST, which was reportedly used to store spent solvents. The results of the shallow groundwater sampling confirmed findings from previous investigations; and the results from the intermediate and deep monitoring wells identified BTEX downgradient of the fuel farm and at other areas of the site.

10.1.2 Site 45—Campbell Street Underground Aviation Gas Storage and Adjacent JP Fuel Farm

The Campbell Street Underground Aviation Gas Storage and Adjacent JP Fuel Farm (Site 45) is located at the intersection of Campbell and White Streets aboard MCAS New River (Figure 2-9). The Campbell Street Fuel Farm is an active fuel storage facility, with four 215,000-gallon steel ASTs that hold JP-5 jet fuel, which is pumped to the tarmac helicopter refueling station via an underground delivery line. Although Site 45 was initially identified for inclusion on the NPL, petroleum-related contamination is exempt from CERCLA and remediation work at Site 45 will be appropriately performed under the UST program of the State of North Carolina.

SECTION 11

References

- AGVIQ/CH2M HILL. 2006. *Pilot Study Report, Site 86, Operable Unit No. 20, Marine Corps Base Camp Lejeune, North Carolina*. September.
- AGVIQ/CH2M HILL. 2006. *Site 88 Building 25 Source Removal Non-Time Critical Removal Action Report, Operable Unit No. 15, Marine Corps Base, Camp Lejeune, North Carolina*. August.
- AGVIQ/CH2M HILL. 2008. *Phase 2 Pilot Study Report, Site 73, Operable Unit 21, Marine Corps Base, Camp Lejeune, North Carolina*. October.
- AGVIQ/CH2M HILL. 2009. *Final Vapor Intrusion Evaluation Report, Volumes 1 through 6. Marine Corps Base Camp Lejeune, Jacksonville, North Carolina*. November.
- AGVIQ/CH2M HILL. 2010. *Non-Time-Critical Removal Action Summary Report, Site 89, Operable Unit 16, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina*. January.
- AGVIQ/CH2M. 2012. *RCRA Facility Investigation Report SWMU 350, marine Corps Base Camp Lejeune Jacksonville North Carolina*. May.
- Aleut World Solutions, LLC. 2009. *Radiological Investigation, Former Naval Medical Research Facility Laboratory, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina*. September.
- Arcadis. 2007. *Focused Preliminary Assessment/Site Inspection, AOC #1, Proposed Water Line Easement Near MMRP Site UXO-05 (Mini Anti-tank Range), Marine Corps Base Camp Lejeune*. August.
- Baker Environmental, Inc. (Baker). 1991. *Site Investigation for Operable Unit No. 9, Site 65, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1992. *Interim Remedial Investigation for Operable Unit No. 1, Site 78, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1992. *Interim Feasibility Study for Operable Unit No. 1, Site 78, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1992. *Interim Proposed Remedial Action Plan for Operable Unit No. 1, Site 78, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1992. *Interim Record of Decision for Operable Unit No. 1, Site 78, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1993. *Proposed Remedial Action Plan for Operable Unit No. 2 (Sites 6, 9, and 82), Marine Corps Base Camp Lejeune, North Carolina*. August.
- Baker. 1993. *Record of Decision for Operable Unit No. 2 (Sites 6, 9, and 82), Marine Corps Base Camp Lejeune, North Carolina*. September.
- Baker. 1993. *Proposed Remedial Action Plan for Operable Unit No. 3, Site 48, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1993. *Record of Decision for Operable Unit No. 3, Site 48. Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1993. *Remedial Investigation, Operable Unit 12, Site 3, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1993. *Final Remedial Investigation Report for Operable Unit No. 2 (Sites 6, 9 and 82), Marine Corps Base Camp Lejeune, North Carolina*. August.
- Baker. 1994. *Proposed Remedial Action Plan, Operable Unit No. 1 (Site 21), Marine Corps Base, MCB Camp Lejeune, North Carolina*.

- Baker. 1994. *Site Inspection Report, Site 63, Verona Loop Dump, Marine Corps Base, MCB Camp Lejeune, North Carolina*. January.
- Baker. 1994. *Feasibility Study Report, Operable Unit Number 5 – Site 2, Marine Corps Base Camp Lejeune, North Carolina*. May.
- Baker. 1994. *Proposed Remedial Action Plan, Operable Unit No. 5 (Site 2), Marine Corps Base, MCB Camp Lejeune, North Carolina*. May.
- Baker. 1994. *Remedial Investigation Report, Operable Unit Number 5 (Site 2), Marine Corps Base Camp Lejeune, North Carolina*. May.
- Baker. 1994. *Remedial Investigation Report, Operable Unit No. 1 (Sites 21, 24, and 78), Marine Corps Base Camp Lejeune, North Carolina*. June.
- Baker. 1994. *Interim Remedial Action, Remedial Investigation, Operable Unit No. 10, Site 35 – Camp Geiger Fuel Farm, Marine Corps Base Camp Lejeune, North Carolina*. July.
- Baker. 1994. *Remedial Investigation for Operable Unit No. 1 (Sites 21, 24, and 78), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1994. *Feasibility Study for Operable Unit No. 1 (Sites 21, 24, and 78), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1994. *Proposed Remedial Action Plan for Operable Unit No. 1 (Sites 21, 24, and 78), Marine Corps Base Camp Lejeune, North Carolina*. July.
- Baker. 1994. *Remedial Investigation for Operable Unit No. 7 (Site 30), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1994. *Record of Decision for Operable Unit No. 1 (Sites 21, 24, and 78), Marine Corps Base Camp Lejeune, North Carolina*. September.
- Baker. 1994. *Record of Decision for Operable Unit No. 5 (Site 2), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1994. *Soil Interim Record of Decision for Operable Unit No. 10 (Site 35), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1995. *Interim Feasibility Study, Operable Unit No. 10 (Site 35, Camp Geiger Area Fuel Farm), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1995. *Proposed Remedial Action Plan, Operable Unit No. 4 (Sites 41 and 74), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1995. *Remedial Investigation, Operable Unit No. 6 (Sites 36, 43, 44, and 54). Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1995. *Feasibility Study Operable Unit No. 6 (Sites 36, 43, 44, and 54). Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1995. *Pre-Remedial Investigation Screening Study, Site 75, MCAS Basketball Court Site, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1995. *Groundwater Interim Record of Decision for Operable Unit No. 10 (Site 35), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1995. *Remedial Investigation Report Operable Unit No 4. (Sites 41 and 74), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1995. *Feasibility Study Report, Operable Unit No 4. (Sites 41 and 74), Marine Corps Base Camp Lejeune, North Carolina*.

- Baker. 1995. *Remedial Investigation at Operable Unit No. 10 (Site 35, Camp Geiger Area Fuel Farm), Marine Corps Base Camp Lejeune, North Carolina*. May.
- Baker. 1995. *Remedial Investigation Report, Operable Unit No. 7 (Sites 1, 28, and 30), Marine Corps Base Camp Lejeune, North Carolina*. June.
- Baker. 1995. *Feasibility Study Report, Operable Unit No. 7 (Sites 1, 28, and 30). Marine Corps Base, Camp Lejeune, North Carolina*. July.
- Baker. 1995. *Proposed Remedial Action Plan, Operable Unit No. 7 (Sites 1, 28 and 30). Marine Corps Base, Camp Lejeune, North Carolina*. July.
- Baker. 1995. *Interim Record of Decision for Surficial Groundwater for a Portion of Operable Unit No. 10, Site 35 – Camp Geiger Area Fuel Farm. Marine Corps Base, Camp Lejeune, North Carolina*. September.
- Baker. 1995. *Explanation of Significant Difference, Operable Unit No. 1. Marine Corps Base Camp Lejeune*. October.
- Baker. 1995. *Remedial Investigation Report, Operable Unit No. 9 (OU 9) Site 65, Volume I of II, Marine Corps Base Camp Lejeune, North Carolina*. November.
- Baker. 1995. *Record of Decision for Operable Unit No. 4 (Sites 41 and 74), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1996. *Proposed Remedial Action Plan Operable Unit No. 8, Site 16. Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1996. *Proposed Remedial Action Plan Operable Unit No. 11, Site 7, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1996. *Remedial Investigation Report, Operable Unit No. 8 Site 16. Marine Corps Base Camp Lejeune, North Carolina*. January.
- Baker. 1996. *Remedial Investigation Report, Operable Unit No. 11 Site 80. Marine Corps Base Camp Lejeune, North Carolina*. April.
- Baker. 1996. *Remedial Investigation Report, Operable Unit No. 20 (Site 86), Marine Corps Base Camp Lejeune, North Carolina*. August.
- Baker. 1996. *Remedial Investigation Report, Operable Unit No. 13 Site 63. Marine Corps Base Camp Lejeune, North Carolina*. October.
- Baker. 1996. *Draft Supplemental Groundwater Investigation, Operable Unit No. 10 (Site 35, Camp Geiger Area Fuel Farm), Marine Corps Base Camp Lejeune, North Carolina*. November.
- Baker. 1996. *Draft In-situ Air Sparging Treatability Study Report Operable Unit No. 10 (Site 35). Marine Corps Base Camp Lejeune, North Carolina*. November.
- Baker. 1996. *Record of Decision for Operable Unit No. 7 (Sites 1, 28, and 30), Marine Corps Base Camp Lejeune, North Carolina. Marine Corps Base, Camp Lejeune, North Carolina*.
- Baker. 1996. *Record of Decision for Operable Unit No. 8 (Site 16), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1996. *Remedial Investigation Report Operable Unit No. 11 (Site 7), Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 1996. *Remedial Investigation Report, Operable Unit No. 12 (Site 3), Marine Corps Base Camp Lejeune, North Carolina*. July.
- Baker. 1996. *Proposed Remedial Action Plan Operable Unit No. 12 Site 3. Marine Corps Base Camp Lejeune, North Carolina*. November.

- Baker. 1996. *Remedial Investigation Report, Operable Unit No. 6 Site 36. Marine Corps Base Camp Lejeune, North Carolina.* August.
- Baker. 1996. *Remedial Investigation Report, Operable Unit No. 6 Site 44. Marine Corps Base Camp Lejeune, North Carolina.* August.
- Baker. 1996. *Remedial Investigation Report, Operable Unit No. 6 Site 54. Marine Corps Base Camp Lejeune, North Carolina.* August.
- Baker. 1996. *Proposed Remedial Action Plan Operable Unit No. 13 Site 63. Marine Corps Base Camp Lejeune, North Carolina.* November.
- Baker. 1996. *Proposed Remedial Action Plan Operable Unit No. 11, Site 80, Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 1997. *Remedial Investigation Report, Operable Unit No. 14 (Site 69) Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 1997. *Focused Remedial Investigation Site 92, Building BB-246, Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 1997. *Remedial Investigation Report, Site 73 Amphibious Vehicle Maintenance Facility, Marine Corps Base Camp Lejeune, North Carolina.* November.
- Baker. 1997. *Record of Decision for Operable Unit No. 11 (Sites 7 and 80), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 1997. *Record of Decision for Operable Unit No. 13 (Site 63), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 1997. *Record of Decision for Operable Unit No. 12 (Site 3), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 1998. *Proposed Remedial Action Plan, Operable Unit No. 6 (Site 36), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 1998. *Feasibility Study Operable Unit No. 9 Site 73 – Amphibious Vehicle Maintenance facility Marine Corps Base Camp Lejeune, North Carolina.* July.
- Baker. 1998. *Groundwater Modeling Report, Operable Unit No. 21, Site 73, Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 1998. *Phase I and II Treatability Report, Operable Unit No. 14 (Site 69), Marine Corps Base Camp Lejeune, North Carolina.* January.
- Baker. 1998. *Groundwater Modeling Report, Operable Unit No. 9, Site 73 – Amphibious Vehicle Maintenance Facility, Marine Corps Base Camp Lejeune, North Carolina.* April.
- Baker. 1998. *Focused Remedial Investigation Report for Operable Unit No. 15 (Site 88), Marine Corps Base Camp Lejeune, North Carolina.* May.
- Baker. 1998. *Feasibility Study, Operable Unit No. 9, Site 73 – Amphibious Vehicle Maintenance Facility, Marine Corps Base Camp Lejeune, North Carolina.* July.
- Baker. 1998. *Pre-Remedial Investigation Screening Study, Sites 12, 68, 75, 76, 84, 85, and 87 Marine Corps Base Camp Lejeune, North Carolina.* November.
- Baker. 1998. *Focused Remedial Investigation Report for Operable Unit No. 16 (Sites 89 and 93), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 1998. *Proposed Remedial Action Plan, Operable Unit No. 14 (Sites 69), Marine Corps Base, Camp Lejeune, North Carolina.* May.

- Baker. 1999. *Engineering Evaluation/Cost Analysis, Site 85, Former Camp Johnson Battery Dump, Marine Corps Base, Camp Lejeune, North Carolina.*
- Baker. 1999. *Action Memorandum, Site 85, Former Camp Johnson Battery Dump, Marine Corps Base, Camp Lejeune, North Carolina.*
- Baker. 1999. *Additional groundwater sampling, Site 76, MCAS Curtis Road Site, Marine Corps Base, Camp Lejeune, North Carolina.*
- Baker. 1999. *Confirmatory Groundwater Sampling, Site 87, MCAS Officers' Housing Area, Marine Corps Base, Camp Lejeune, North Carolina.*
- Baker. 1999. *Supplemental Groundwater Investigation, Site 91, Operable Unit 17, Marine Corps Base, Camp Lejeune, North Carolina.*
- Baker. 1999. *Five-year Review. Marine Corps Base, Camp Lejeune, North Carolina.* August.
- Baker. 2000. *Interim Record of Decision for Operable Unit No. 14 (Site 69), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 2000. *Amended Record of Decision for Operable Unit No. 12 (Site 3), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 2000. *Land Use Control Implementation Plan, OU No. 1, (Sites 21, 24 and 78), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 2001. *Post-Remedial Investigation Monitoring for Operable Unit No. 9 (Site 65), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 2001. *Proposed Remedial Action Plan for Operable Unit No. 9 (Site 65), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 2001. *Proposed Remedial Action Plan for Site 90, Building BB-9, Marine Corps Base Camp Lejeune, North Carolina.* July.
- Baker. 2001. *Post-Remedial Investigation Groundwater Monitoring for Operable Unit No.17 (Site 91), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 2001. *Post-Remedial Investigation Groundwater Monitoring for Operable Unit No.17 (Site 92), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 2001. *Focused Remedial Investigation (4 Parts) Operable Unit 17 Sites 90, 91, and 92 Including Appendices A-J.8, Marine Corps Base Camp Lejeune, North Carolina.* April.
- Baker. 2001. *Site Investigation Report for Site 10 – Original Base Landfill, Marine Corps Base Camp Lejeune, North Carolina.* July.
- Baker. 2001. *Record of Decision for Site 90, Building BB-9, Marine Corps Base Camp Lejeune, North Carolina.* September.
- Baker. 2001. *Proposed Remedial Action Plan for Site 92, Building BB-246, Marine Corps Base Camp Lejeune, North Carolina.* July.
- Baker. 2001. *Record of Decision for Site 92, Building BB-246, Marine Corps Base Camp Lejeune, North Carolina.* September.
- Baker. 2001. *Record of Decision for Operable Unit No. 9 (Site 65), Marine Corps Base Camp Lejeune, North Carolina.*
- Baker. 2001. *Record of Decision for Operable Unit No. 17 (Sites 90, 91, and 92), Marine Corps Base Camp Lejeune, North Carolina.* July.

- Baker. 2001. *Supplemental Investigation Site 89, Operable Unit 16, Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 2001. *Phase I Confirmatory Sampling Report, Marine Corps Base Camp Lejeune*. November
- Baker. 2002. Long-term monitoring, Site 85, Former Camp Johnson Battery Dump, *Marine Corps Base, Camp Lejeune, North Carolina*.
- Baker. 2002. *Proposed Remedial Action Plan, Operable Unit No. 6 (Sites 36, 43, 44, and 54), Marine Corps Base, Camp Lejeune, North Carolina*.
- Baker. 2002. *Site 93 Additional Plume Characterization Letter Report for Site 93, Marine Corps Base Camp Lejeune, North Carolina*. March.
- Baker. 2002. *Remedial Investigation, Site 84, Operable Unit No. 19, Marine Corps Base Camp Lejeune, North Carolina*. May.
- Baker. 2002. *Feasibility Study, Operable Unit No. 6 (Sites 36, 43, 44, and 54). Marine Corps Base Camp Lejeune, North Carolina*.
- Baker. 2002. *Phase II Confirmatory Site Investigation, Marine Corps Base Camp Lejeune*. November.
- Baker. 2003. *Amended Remedial Investigation (RI) Operable Unit No. 20 (Site 86, Tank Area AS419-AS421)*. May.
- Baker. 2003. *Site 35 Hot Spot Characterization Letter Report*. February.
- Baker 2003. *Technology Evaluation, Operable Unit 21, Site 73, Marine Corps Base, Camp Lejeune, North Carolina*. May.
- Baker. 2004. *Suspected Dipping Vat Sampling and Suspected Asbestos Shingle/Transit Board Sampling*. June.
- Baker. 2005. *No Action Decision Document, Site 85, Former Camp Johnson Battery Dump, Marine Corps Base, Camp Lejeune, North Carolina*.
- Baker. 2005. *Record of Decision for Operable Unit No. 6 (Sites 36, 43, 44, and 54), Marine Corps Base, Camp Lejeune, North Carolina*. January.
- Baker. 2005. *Five Year Review, Marine Corps Base Camp Lejeune Jacksonville, North Carolina*. January.
- Baker. 2005. *Phase II SWMU Confirmatory Sampling Report, Marine Corps Base at Camp Lejeune, North Carolina*. April.
- Baker Environmental, Inc., and CH2M HILL (Baker and CH2M HILL). 2002. *Feasibility Study, Operable Unit No. 6, Sites 36, 43, 44, and 54 Marine Corps Base Camp Lejeune North Carolina*. July.
- Baker and CH2M HILL. 2005. *No Action Decision Document, Site 10, MCB Camp Lejeune North Carolina*. May.
- Baker and CH2M HILL. 2005. *SWMU 360 RCRA Facility Investigation Report, RCRA Program, Marine Corps Base Camp Lejeune North Carolina*. October.
- Baker and CH2M HILL. 2006. *Preliminary Assessment/Site Investigation. Montford Point Buildings M119 and M315, Marine Corps Base Camp Lejeune, North Carolina*.
- Battelle Memorial Institute. 2001. *Reductive Anaerobic Biological In-Situ Treatment Technology Treatability Test Report*.
- Catlin. 1997. *Leaking Underground Storage Tank Well Installation and Monitoring, Limited Site Assessments, Marine Corps Base at Camp Lejeune, North Carolina*. December.
- CH2M HILL. 2001. *No Action Decision Document, Site 12, Marine Corps Base Camp Lejeune, North Carolina*. May.
- CH2M HILL. 2001. *No Action Decision Document, Site 75, Marine Corps Base Camp Lejeune, North Carolina*. May.
- CH2M HILL. 2001. *No Action Decision Document, Site 76, Marine Corps Base Camp Lejeune, North Carolina*. May.

- CH2M HILL. 2001. *No Action Decision Document, Site 87, Marine Corps Base Camp Lejeune, North Carolina*. May.
- CH2M HILL. 2002. *Natural Attenuation Evaluation Report, Operable Unit No. 21 (Site 73), Amphibious Vehicle Maintenance Facility, Marine Corps Base Camp Lejeune, North Carolina*. January.
- CH2M HILL. 2002. *Feasibility Study, Operable Unit (OU) 6, Sites 36, 43, 44, and 54, Marine Corps Base Camp Lejeune, North Carolina*. July.
- CH2M HILL. 2002. *Closeout Report. Operable Unit No. 7, Sites 1 & 28, Marine Corps Base Camp Lejeune, North Carolina*. September.
- CH2M HILL. 2002. *Meeting Minutes, MCB Camp Lejeune Partnering Team, October 8 and 9, 2002*. October.
- CH2M HILL. 2002. *Natural Attenuation Evaluation Report, Site 78 North, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2003. *Remedial Investigation Groundwater Sampling, Site 94, OU-18: PXS Service Station, Camp Lejeune, North Carolina*.
- CH2M HILL. 2003. *Technology Evaluation Operable Unit No. 10 (Site 35), Marine Corps Base Camp Lejeune, North Carolina*. June.
- CH2M HILL. 2003. *Pilot Study Project Plans, Site 73 Operable Unit No. 21, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2003. *Supplemental Site Investigation Report, Operable Unit No. 15, Site 88, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2004. *Site 88 Building 25 Source Removal Engineering Evaluation/ Cost Estimate Operable Unit No. 15 Marine Corps Base Camp Lejeune, North Carolina*. September.
- CH2M HILL. 2005. *Site 78/OU 1 - Oxygen Release Compound and Hydrogen Release Compound Pilot Studies*.
- CH2M HILL. 2005. *No Action Decision Document, Site 10, Marine Corps Base Camp Lejeune, North Carolina*. May.
- CH2M HILL. 2005. *Site 93 Feasibility Study, Marine Corps Base Camp Lejeune, North Carolina*. November.
- CH2M HILL. 2005. *Remedial Investigation, Site 94, OU-18: PXS Service Station, Camp Lejeune, North Carolina*.
- CH2M HILL. 2005. *Optimization of the Long-Term Monitoring Program, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2005. *Pilot Study Report, Site 78, Operable Unit 1, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2006. *Preliminary Assessment/Site Inspection, MCAS New River Buildings SAS113, AS116, and AS119, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2006. *Proposed Remedial Action Plan, Site 94, OU-18: PXS Service Station, Camp Lejeune, North Carolina*.
- CH2M HILL. 2006. *Preliminary Assessment/Site Inspection, Montford Point. Marine Corps Base Camp Lejeune, North Carolina*. February.
- CH2M HILL. 2006. *Proposed Remedial Action Plan, Site 93, Operable Unit No. 16. Marine Corps Base Camp Lejeune, North Carolina*. February.
- CH2M HILL. 2006. *Pilot Study Report, Site 35, Operable Unit No. 10. Marine Corps Base Camp Lejeune, North Carolina*. March.
- CH2M HILL. 2006. *Closeout Report for Operable Unit No. 4, Sites 41 & 74, Marine Corps Base Camp Lejeune, North Carolina*. July.
- CH2M HILL. 2006. *Record of Decision for Operable Unit No. 18, Site 94, Marine Corps Base Camp Lejeune, North Carolina*. August.

- CH2M HILL. 2006. *Amended RCRA Facility Investigation Report SWMU 360, Marine Corps Base Camp Lejeune, North Carolina*. September.
- CH2M HILL. 2006. *Pilot Study Report, Site 86, Operable Unit No. 20, Marine Corps Base Camp Lejeune*.
- CH2M HILL. 2006. *Record of Decision for Operable Unit No. 16, Site 93, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2006. *Technical Memorandum, Site Reconnaissance and Soil Sampling Activities, SWMU 46 (Montford Point Dump Site); MCB Camp Lejeune*. September.
- CH2M HILL. 2007. *Corrective Measures Study SWMU 360, Marine Corps Base Camp Lejeune, North Carolina*. October.
- CH2M HILL. 2007. *Site Investigation Report. Site 95, Historical Livestock Dipping Vats, Marine Corps Base Camp Lejeune*.
- CH2M HILL. 2007. *Engineering Evaluation/Cost Analysis, Site 35, Operable Unit No. 10, Building G533, Marine Corps Base Camp Lejeune*.
- CH2M HILL. 2007. *Interim Remedial Action Completion Report for Operable Unit No. 6, Sites 36, 43, 44 and 54, Marine Corps Base Camp Lejeune*.
- CH2M HILL. 2007. *Land Use Control Implementation Plan for Operable Unit No. 11, Site 80. Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2007. *Focused Site Inspection Report, Site UXO-06 MILCON Area, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina*. March.
- CH2M HILL. 2008. *Treatability Studies Report, Site 89, Operable Unit 16, Marine Corps Base Camp Lejeune, North Carolina*. February.
- CH2M HILL. 2008. *Closeout Report Operable Unit No. 5 (Site 2), Marine Corps Base Camp Lejeune, North Carolina*. September.
- CH2M HILL. 2008. *Pilot Study Report Operable Unit No. 2 (Site 82). Marine Corps Base Camp Lejeune, North Carolina*. December.
- CH2M HILL. 2008. *Baseline Ecological Risk Assessment Addendum for the Western Wetland, Site 89 – Operable Unit 16, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2008. *Comprehensive Remedial Investigation Site 89 – Operable Unit 16, Former Defense Reauthorization and Marketing Office (DRMO), Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2008. *Focused Site Inspection MILCON Environmental Support, Northern Boundary Investigation Area of Site UXO-03, Former Practice Hand Grenade Range (ASR Site 2.78) Former Tear Gas Chamber 2nd Marine Division (ASR Site 2.204) Base Skeet Range IRP Sites 19 (Naval Research Lab Dump), 20 (Naval Research Lab Incinerator) and 25 (Former Base Incinerator). Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2008. *Non-time-critical Removal Action, Site 35, Operable Unit No. 10. Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2008. *Remedial Investigation, Site 88, Operable Unit 15, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2008. *Site Management Plan Fiscal Year 2009, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina*.
- CH2M HILL. 2009. *Supplemental Remedial Investigation, Site 35 – Operable Unit No. 10, Camp Geiger Area Fuel Farm. Marine Corps Base Camp Lejeune, North Carolina*. March.

- CH2M HILL. 2009. *Supplemental Remedial Investigation, Site 73 – Operable Unit No. 21. Marine Corps Base Camp Lejeune, North Carolina.* March.
- CH2M HILL. 2009. *Proposed Remedial Action Plan, Site 73: Operable Unit No. 21, Marine Corps Base Camp Lejeune, North Carolina.* April.
- CH2M HILL. 2009. *Preliminary Assessment/Site Investigation Report, MMRP Site UXO-05, Former Miniature Anti-tank Range and Site UXO-01, Former Live Hand Grenade Course, Marine Corps Base Camp Lejeune, North Carolina.* July.
- CH2M HILL. 2009. *Preliminary Assessment/Site Inspection Report MMRP Site UXO-09, Former F-9, Triangulation Range, Marine Corps Base Camp Lejeune, North Carolina.* July.
- CH2M HILL. 2009. *Focused Site Inspection Work Plan Addendum for Site UXO-6 Base Borrow Pit Expansion, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina. ESS-106.* August.
- CH2M HILL. 2009. *Focused Preliminary Assessment/Site Inspection Report MMRP Site UXO-16, Former Gun Positions 41A and 41B, Marine Corps Base Camp Lejeune, North Carolina.* August.
- CH2M HILL. 2009. *Basewide Vapor Intrusion Evaluation Report. Marine Corps Base Camp Lejeune, North Carolina.* November.
- CH2M HILL. 2009. *Record of Decision, Operable Unit 10, Site 35. Marine Corps Base Camp Lejeune, North Carolina.* December.
- CH2M HILL. 2009. *Preliminary Assessment/Site Inspection Report, MMRP Site UXO-01, Former Live Hand Grenade Course. Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2009. *Feasibility Study, Site 35, Operable Unit No. 10, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2009. *Proposed Remedial Action Plan, Site 35: Operable Unit No. 10, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2009. *Feasibility Study, Site 73, Operable Unit No. 21, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2009. *Preliminary Assessment/Site Inspection Report, Site 40, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2009. *Expanded Site Inspection Report, MMRP Site UXO-04, Knox Park, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2009. *Preliminary Assessment/Site Inspection Report, Former Gun Positions 41A and 41B. Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2009. *Engineering Evaluation/Cost Assessment Western Wetland at Operable Unit 16 (Site 89) Former Defense Reutilization and Marketing Office. Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2010. *Non-time-critical Removal Action Summary, Site 89 - Western Wetland, Operable Unit No. 16, Marine Corps Base Camp Lejeune, North Carolina.* July.
- CH2M HILL. 2010. *Expanded Site Investigation, MCAS New River Buildings SAS113, AS116, and AS 119, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.*
- CH2M HILL. 2010. *No Action Decision Document, MCAS New River Buildings SAS113, AS116, and AS 119, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.*
- CH2M HILL. 2010. *Preliminary Assessment/Site Inspection, Site 15, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.*

- CH2M HILL. 2010. *Action Memorandum Site 95 Magnolia Road Dipping Vat Site. Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2010. *Hadnot Point Industrial Area Groundwater Evaluation Report, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.*
- CH2M HILL. 2010. *Confirmatory Site Assessment, Site 67, Engineer's Trinitrotoluene Burn Site, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2010. *Preliminary Assessment/Site Investigation, Site 85, Former Camp Johnson Battery Dump, Marine Corps Base, Camp Lejeune, North Carolina.*
- CH2M HILL. 2010. *Focused Preliminary Assessment/Site Inspection, MMRP Site UXO-08, 2.36-inch Bazooka Range, Base Chemical Smoke Chamber, and Nuclear, Biological, and Chemical Training Trail (ASR #2.182), and D-7 Gas Chamber (ASR #2.80) , Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.*
- CH2M HILL. 2010. *Preliminary Assessment/Site Inspection Report Former 1,000-inch Range (Amphibious Base Area) UXO-15, Marine Corps Base Camp Lejeune, North Carolina.* February.
- CH2M HILL. 2010. *Action Memorandum Site 95 Magnolia Road Dipping Vat Site. Marine Corps Base Camp Lejeune, North Carolina.* March.
- CH2M HILL. 2010. *Focused Site Inspection – Site UXO-06 Borrow Pit Expansion Area Phase 1 , Marine Corps Base Camp Lejeune, North Carolina.* March.
- CH2M HILL. 2010. *Base Boundary Report for Potential Off-Base Contamination Encroachment, Marine Corps Base Camp Lejeune.* April.
- CH2M HILL. 2010. *Expanded Site Inspection Report MCAS New River Buildings SAS113, AS116, and AS119 and Montford Point Buildings M119 and M315, Marine Corps Base Camp Lejeune, North Carolina.* April.
- CH2M HILL. 2010. *Focused Preliminary Assessment/Site Inspection, D-9 Skeet Range Proposed MILCON Area, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.* April.
- CH2M HILL. 2010. *Focused Preliminary Assessment/Site Inspection Report, Hadnot Point Construction Area, Post Office Intersection Area, and Fitness Center, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.* June.
- CH2M HILL. 2010. *No Action Decision Document Installation Restoration Program Site 40-Former Camp Geiger Borrow Pit Dump, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.* July.
- CH2M HILL. 2010. *Five-year Review.* Marine Corps Base Camp Lejeune, North Carolina. August.
- CH2M HILL. 2010. *No Action Decision Document, MMRP Site UXO -04, Knox Trailer Park, Marine Corps Base Camp Lejeune, North Carolina.* August.
- CH2M HILL. 2010. *Expanded Supplemental Remedial Investigation Site 86—Operable Unit No. 20, Marine Corps Base Camp Lejeune, North Carolina.* September.
- CH2M HILL. 2010. *Expanded Site Inspection Report Wallace Creek MILCON Environmental Support Former Naval Research Lab Area (IRP Sites 19 and 20), IRP Site 25, and D-9 Skeet Range South Area. Marine Corps Base Camp Lejeune, North Carolina.* October.
- CH2M HILL. 2010. *Focused Preliminary Assessment/Site Inspection Report Camp Devil Dog Construction Area and Military Munitions Response Program UXO-19, Marine Corps Base Camp Lejeune, North Carolina.* October.
- CH2M HILL. 2010. *No Action Decision Document, Montford Point Buildings M119 and M315, Marine Corps Base Camp Lejeune, North Carolina.* December.
- CH2M HILL. 2011. *Confirmatory Site Assessment, Site 4, Sawmill Road Construction Debris Dump, Marine Corps Base Camp Lejeune, North Carolina.*

- CH2M HILL. 2011. *Confirmatory Site Assessment, Site 23, Roads and Grounds Building 1105, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2011. *Confirmatory Site Assessment, Site 38, Camp Geiger Construction Dump, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2011. *Confirmatory Site Assessment, Site 42, Building 705 Bachelor Officers' Quarters Dump, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2011. *Confirmatory Site Assessment, Site 53, MCAS Warehouse Building 3525 Area, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2011. *Confirmatory Site Assessment, Site 55, Air Station East Perimeter Dump, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2011. *Confirmatory Site Assessment, Site 61, Rhodes Point Road Dump, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2011. *Confirmatory Site Assessment, Site 62, Race Course Area Dump, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2011. *Confirmatory Site Assessment, Site 66, Amphibious Tractors Landing Site and Storage Area, Marine Corps Base Camp Lejeune, North Carolina.*
- CH2M HILL. 2011. *Expanded Supplemental Remedial Investigation, Site 85, Former Camp Johnson Battery Dump, Marine Corps Base, Camp Lejeune, North Carolina.*
- CH2M HILL. 2011. *Expanded Site Investigation, MMRP Site UXO-03, Practice Hand Grenade Course (ASR #2.78a and #2.78b), Marine Corps Base Camp Lejeune Jacksonville, North Carolina.*
- CH2M HILL. 2011. *Preliminary Assessment/Site Investigation, MMRP Site UXO-18—B-6, 50-foot Small Arms Range (ASR #2.44), Marine Corps Base Camp Lejeune Jacksonville, North Carolina.*
- CH2M HILL. 2011. *Preliminary Assessment/Site Investigation, MMRP Site UXO--20—1,000-inch Range Montford Point (ASR #2.32) A-1, 50-foot .22 Caliber Range (ASR #2.87), Marine Corps Base Camp Lejeune Jacksonville, North Carolina.*
- CH2M HILL. 2011. *Technical Memorandum, Summary of ISCO, ERD, and Biobarrier Pilot Studies OU 15, Site 88, Marine Corps Base, Camp Lejeune, North Carolina.* January.
- CH2M HILL. 2011. *Expanded Supplemental Remedial Investigation, Site 86-Operable Unit No. 20, Marine Corps Base, Camp Lejeune, North Carolina.* February.
- CH2M HILL. 2011. *Community Involvement Plan Update Marine Corps Base, Camp Lejeune, North Carolina.* February.
- CH2M HILL. 2011. *No Action Decision Document, Installation Restoration Program Site 19-Former Naval Research Laboratory Dump, Site 20-Former Naval Research Laboratory Incinerator, and Site 25-Former Base Incinerator, Marine Corps Base, Camp Lejeune, North Carolina.* February.
- CH2M HILL. 2011. *Preliminary Assessment/Site Inspection Report, Site 49, Marine Corps Air Station, Suspected Minor Dump. Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.* March.
- CH2M HILL. 2011. *Focused Site Inspection – Site UXO-06 Borrow Pit Expansion Area Phase 1A Subarea 1, Marine Corps Base Camp Lejeune, North Carolina.* April.
- CH2M HILL. 2011. *Focused Preliminary Assessment/Site Inspection Camp Johnson MILCON Area and Military Munitions Response Program UXO-20, Marine Corps Base Camp Lejeune, North Carolina.* April.
- CH2M HILL. 2011. *Action Memorandum, Site 6 Storage Lots 201 and 203, Time-Critical Removal Action, Marine Corps Base, Camp Lejeune, North Carolina.* April.

- CH2M HILL. 2011. *Preliminary Site Assessment/Site Inspection Report, MMRP Site UXO-14, Former Indoor Pistol Range (ASR# 2.199) and Gas Chamber (ASR# 2.200)(Rifle Range Area), Marine Corps Base, Camp Lejeune, North Carolina.* April.
- CH2M HILL. 2011. *Preliminary Assessment/Site Inspection Report Site UXO-12 New River 1,000-inch Range (ASR #2.5) and UXO-18 50-foot Small Bore Range (ASR #2.44), Marine Corps Base Camp Lejeune, North Carolina.* April.
- CH2M HILL. 2011. *Preliminary Site Assessment/Site Inspection Report MMRP Site UXO-07, Former D-6 Practice Hand Grenade Course (ASR# 2.77), Marine Corps Base, Camp Lejeune, North Carolina.* June.
- CH2M HILL. 2011. *Preliminary Site Assessment/Site Inspection Report, MMRP Site UXO-11, B-5 Practice Hand Grenade Course (ASR# 2.81), Marine Corps Base, Camp Lejeune, North Carolina.* June.
- CH2M HILL. 2011. *Preliminary Site Assessment/Site Inspection Report, MMRP Site UXO-10, Former D-11A Flame Tank and Flame Thrower Range (ASR# 2.136), Marine Corps Base, Camp Lejeune, North Carolina.* July.
- CH2M HILL. 2011. *Focused Site Inspection – Site UXO-06 Borrow Pit Expansion Area Phase 2 Subarea 1 , Marine Corps Base Camp Lejeune, North Carolina.* July.
- CH2M HILL. 2011. *Time-Critical Removal Action Summary Report, Site 6 Storage Lots 201 and 203, Marine Corps Base, Camp Lejeune, North Carolina.* August.
- CH2M HILL. 2011. *No Action Decision Document Military Munitions Response Program Site UXO-20 (ASR Areas 2.87 and 2.32), Marine Corps Base, Camp Lejeune, North Carolina.* August.
- CH2M HILL. 2011. *Supplemental Investigation, Site 69, Operable Unit No. 14 – Rifle Range Chemical Dump, Marine Corps Base, Camp Lejeune, Jacksonville, North Carolina.* August.
- CH2M HILL. 2011. *Phase III Vapor Intrusion Evaluation Report. Marine Corps Base Camp Lejeune, North Carolina.* October.
- CH2M HILL. 2011. *Technical Memorandum, Environmental Update Summary, D-9 Skeet Range, Marine Corps Base, Camp Lejeune, North Carolina.* October.
- CH2M HILL. 2011. *Site Management Plan, Fiscal Year 2012, Marine Corps Base, Camp Lejeune, North Carolina.* October.
- CH2M HILL. 2011. *No Action Decision Document, Site 95, Dipping Vat Sites, Marine Corps Base Camp Lejeune, North Carolina.* November.
- CH2M HILL. 2011. *Preliminary Assessment/Site Inspection Report, Site UXO-08, Former Lejeune Cantonment 2.36-inch Bazooka Range, Base CS Chamber, and NBC Training Trial (ASR# 2.182), and D-7 Gas Chamber (ASR #2.80), Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.* December.
- CH2M HILL. 2011. *Preliminary Assessment/Site Inspection Report, MMRP Site UXO-03, Former D-3 Practice Hand Grenade Course, Marine Corps Base Camp Lejeune, North Carolina.* December.
- CH2M HILL. 2011. *Expanded Site Investigation Report MMRP Site UXO-07, Practice Hand Grenade Course (ASR #2.77a and #2.77b), Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* December.
- CH2M HILL. 2011. *Update to the Operable Unit No. 5 - Site 2 Closeout Report Technical Memorandum.* December.
- CH2M HILL. 2012. *Hadnot Point Construction Area Risk Evaluation Update.*
- CH2M HILL. 2012. *Chlorobenzene Test Pitting Investigation Technical Memorandum Site 6/OU 2.*
- CH2M HILL. 2012. *Site 6 Supplemental Investigation – Interim Results, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.* February.
- CH2M HILL. 2012. *Expanded Site Investigation Report, MMRP Site UXO-01, Former Live Hand Grenade Course (ASR #2.23), Marine Corps Base, Camp Lejeune, Jacksonville, North Carolina.*

- CH2M HILL. 2012. *Expanded Site Investigation Report, MMRP Site UXO-02, Unnamed Explosive Contaminated Range, ASR# 2.201, Marine Corps Base Camp Lejeune Jacksonville, North Carolina.*
- CH2M HILL. 2012. *Expanded Site Investigation Report, MMRP Site UXO-10, D-11A, Flame Tank and Flame Thrower Range (ASR #2.136), Marine Corps Base, Camp Lejeune, Jacksonville, North Carolina.*
- CH2M HILL. 2012. *No Action Decision Document, Installation Restoration Program Site 85-Former Camp Johnson Battery Dump, Marine Corps Base, Camp Lejeune, Jacksonville, North Carolina.* January.
- CH2M HILL. 2012. *Expanded Site Investigation Report MMRP Site UXO-11, Practice Hand Grenade Course (ASR #2.281), Marine Corps Base, Camp Lejeune.* January.
- CH2M HILL. 2012. *Focused Site Inspection – Site UXO-06 Borrow Pit Expansion Area Phase 1A/2 Subarea 2 , Marine Corps Base Camp Lejeune, North Carolina.* January.
- CH2M HILL. 2012. *Engineering Evaluation/Cost Analysis, D-9 Skeet Range Soil Removal, Marine Corps Base, Camp Lejeune, Jacksonville, North Carolina.* February.
- CH2M HILL. 2012. *Expanded Site Investigation Report, Military Munitions Response Program Site UXO-14, Former Indoor Pistol Range (ASR# 2.199) and Former Gas Chamber (ASR #2.200) Marine Corps Base, Camp Lejeune, Jacksonville, North Carolina.* February.
- CH2M HILL. 2012. *Expanded Site Investigation Report, Military Munitions Response Program Site UXO-21 (ASR 2.204), Former D-Area Gas Chamber (2D MAR DIV), Marine Corps Base, Camp Lejeune, Jacksonville, North Carolina.* February.
- CH2M HILL. 2012. *Feasibility Study, Site 89, Operable Unit No. 16, Marine Corps Base, Camp Lejeune, Jacksonville, North Carolina.* February.
- CH2M HILL. 2012. *Preliminary Site Assessment/Site Inspection Report MMRP Site UXO-06, Former Fortified Beach Assault Area, Marine Corps Base, Camp Lejeune, North Carolina.* February.
- CH2M HILL. 2012. *Preliminary Site Assessment/Site Inspection Report MMRP Site UXO-17, Former Firing Position 2 (ASR #2.212), Marine Corps Base, Camp Lejeune, North Carolina.* February.
- CH2M HILL. 2012. *Technical Memorandum, Confirmatory Sampling Investigation, IR Site 74 – Henderson Pond, Marine Corps Base, Camp Lejeune, North Carolina.* February.
- CH2M HILL. 2012. *Draft Feasibility Study, Site 88 Operable Unit No. 15, Marine Corps Base, Camp Lejeune, North Carolina.* March.
- CH2M HILL. 2012. *Action Memorandum, Site UXO-23 D-9 Skeet Range Soil Removal Non-Time-Critical Removal Action, Marine Corps Base, Camp Lejeune; Jacksonville, North Carolina.* March.
- CH2M HILL. 2012. *Technical Memorandum, Wallace Creek BEQ MILCON Confirmation Sampling, Marine Corps Base, Camp Lejeune; Jacksonville, North Carolina.* March.
- CH2M HILL. 2012. *Expanded Site Investigation, Site 15, Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* April.
- CH2M HILL. 2012. *Feasibility Study, Site 69, Operable Unit No. 14, Marine Corps Base, Camp Lejeune, North Carolina.* April.
- CH2M HILL. 2012. *No Action Decision Document, IRP Sites 4, 13, 18, 23, 38, 42, 46, 51, 53, 55, 61, 62, 66, and 67, Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* April.
- CH2M HILL. 2012. *Remedial Investigation / Feasibility Study, Operable Unit No. 23, Site 49-Suspected Minor Dump Site, Marine Corps Installations East - Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* August.
- CH2M HILL. 2012. *Proposed Remedial Action Plan, Site 89: Operable Unit No. 16, Marine Corps Installations East - Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* May.

- CH2M HILL. 2012. *Technical Memorandum, Hadnot Point Construction Area Risk Evaluation Update, Operable Unit 1 (Site 78), Marine Corps Installations East - Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* May.
- CH2M HILL. 2012. *Engineering Evaluation/Cost Analysis, UXO-14 – Former Indoor Pistol Range RR-53, Marine Corps Installations East - Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* August.
- CH2M HILL. 2012. *Explanation of Significant Difference Operable Units 8 (Site 16), 11 (Site 80), and 13 (Site 63), Marine Corps Installations East - Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* July.
- CH2M HILL. 2012. *Proposed Remedial Action Plan, Site 69; Operable Unit No. 14, Marine Corps Installations East - Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* August.
- CH2M HILL. 2012. *No Action Decision Document, MMRP Site UXO-03, Practice Hand Grenade Course (ASR #2.78a and #2.78b), Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* August.
- CH2M HILL. 2012. *Base Boundary Report Addendum for Potential Off-Base Contamination Encroachment Marine Corps Installations East – Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* September.
- CH2M HILL. 2012. *Expanded Site Investigation Report MMRP Site UXO-26, (ASR #2.79) - Former B-3 Gas Chamber, Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* October.
- CH2M HILL. 2012. *Preliminary Assessment/Site Inspection Report, MMRP Site UXO-02, Unnamed Explosive Contaminated Range, ASR# 2.201, Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* October.
- CH2M HILL. 2012. *No Action Decision Document Installation Restoration Program, Site 15 – Former Montford Point Burn Dump Marine Corps Installations East – Marine Corps Base Camp Lejeune, Jacksonville, north Carolina.* November.
- CH2M HILL. 2012. *Remedial Design Site 89, Operable Unit No. 16 Marine Corps Installations East – Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* November.
- CH2M HILL. 2012. *Record of Decision, Site 89: Operable Unit No. 16, Marine Corps Installations East - Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* December.
- CH2M HILL. 2013. *No Action Decision Document, MMRP Site UXO-01, Former Live Hand Grenade Course (ASR #2.23), Marine Corps Base, Camp Lejeune, Jacksonville, North Carolina.*
- CH2M HILL. 2013. *Site Management Plan Fiscal Year 2013, Marine Corps Installations East – Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* January.
- CH2M HILL. 2013. *Henderson Pond/Hickory Pond Investigation Report Marine Corps Installations East - Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* January.
- CH2M HILL. 2013. *Action Memorandum, Site UXO-14 – Former Indoor Pistol Range RR-53, Non-Time-Critical Removal Action Marine Corps Installations East – Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* February.
- CH2M HILL. 2013. *Preliminary Assessment/Site Inspection Report, Site UXO-25 – Verona Loop, Marine Corps Installations East – Marine Corps Base Camp Lejeune Jacksonville North Carolina.* February.
- CH2M HILL. 2013. *Proposed Remedial Action Plan Site 49: Operable Unit No. 23, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina.* February.
- CH2M HILL. 2013. *Remedial Design Site 69 Operable Unit No. 14 Marine Corps Installations East – Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* February.
- CH2M HILL. 2013. *Record of Decision Operable Unit 14, Site 69 Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina.* March.
- CH2M HILL. 2013. *Preliminary Assessment/Site Inspection Report Site UXO-22 – Former Munitions Disposal Area Marine Corps Base Camp Lejeune Jacksonville, North Carolina.* April.

- CH2M HILL. 2013. *No Action Decision Document, MMRP Sites UXO-02, UXO-07, UXO-08, UXO-10, UXO-11, and UXO-17, Marine Corps Base Camp Lejeune Jacksonville, North Carolina*. July.
- CH2M HILL. 2013. *Historical Metals Evaluation, Operable Unit Number 1 Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. July.
- CH2M HILL. 2013. *Pilot Study Report Site 86, Operable Unit No. 20. Marine Corps Installations East – Marine Corps Base Camp Lejeune Jacksonville, North Carolina*. September.
- CH2M HILL. 2013. *Land Use Control Implementation Plan Site 93, Operable Unit No. 16 Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. October.
- CH2M HILL. 2013. *Technical Memorandum Site UXO-21 Construction Report. Marine Corps Installations East – Marine Corps Base Camp Lejeune Jacksonville, North Carolina*. October.
- CH2M HILL. 2013. *Feasibility Study, Site 86 Operable Unit No. 20 Marine Corps Installations East – Marine Corps Base Camp Lejeune Jacksonville, North Carolina*. October.
- CH2M HILL. 2014. *Remedial Design, Site 49 Operable Unit No. 23, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. January.
- CH2M HILL. 2014. *Supplemental Groundwater Investigation Operable Unit 1, Site 78, Marine Corps Installations East-Marine Corps Base Camp Lejeune North Carolina*. March.
- CH2M HILL. 2014. *Proposed Remedial Action Plan Site 86 Operable Unit 20. Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. January.
- CH2M HILL. 2014. *Non-time-critical Removal Action Technical Memorandum Site UXO-23 D9 Skeet Range Marine Corps Base Camp Lejeune, Jacksonville, North Carolina*. June.
- CH2M HILL. 2014. *Record of Decision Operable Unit No. 20 Site 86 Marine Corps Base Camp Lejeune, Jacksonville, North Carolina*. October.
- CH2M HILL. 2014. *Record of Decision Site 49: Operable Unit No. 23, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. March.
- CH2M HILL. 2014. *Land Use Control Implementation Plan Site 28, Operable Unit No. 7 Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. March.
- CH2M HILL. 2014. *Phase 2 Expanded Site Investigation Report Military Munitions Program Site UXO-21 (ASR #2.204) – Former D-Area Gas Chamber (2D MAR DIV) Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. April.
- CH2M HILL. 2014. *Summary of the Munitions Response Investigation at the Marine Corps Air Station New River Runway Expansion Area within and Adjacent to Site UXO-29, Marine Corps Installations East – Marine Corps Base Camp Lejeune*. April.
- CH2M HILL. 2014. *Expanded Site Investigation Off-Base Surface Danger Zones – Marine Corps Installations East-Marine Corps Base Camp Lejeune, North Carolina*. May.
- CH2M HILL. 2014. *Draft Remedial Investigation Report, Operable Unit 24/Site UXO-06, Former Fortified Beach Assault Area (ASR# 2.65), Marine Corps Installations East-Marine Corps Base Camp Lejeune, North Carolina*. August.
- CH2M HILL. 2014. *Draft Supplemental Investigation Report, Sites 6 and 82 – Operable Unit 2, Marine Corps Installations East-Marine Corps Base Camp Lejeune, North Carolina*. August.
- CH2M HILL. 2014. *Land Use Control Implementation Plan Site 16, Operable Unit No. 8 Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. August.
- CH2M HILL. 2014. *Land Use Control Implementation Plan Site 63, Operable Unit No. 13 Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. August.

- CH2M HILL. 2014. *Interim Remedial Action Completion Report, Operable Unit 16, Site 89, Marine Corps Installations East-Marine Corps Base Camp Lejeune, North Carolina*. September.
- CH2M HILL. 2014. *Supplemental Groundwater Investigation Technical Memorandum, Operable Unit 1, Marine Corps Installations East-Marine Corps Base Camp Lejeune*. May.
- CH2M HILL. 2014. *Draft Interim Remedial Action Completion Report, Operable Unit 20, Site 86, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. June.
- CH2M HILL. 2014. *Remedial Investigation Report Operable Unit 24/Site UXO-06, Former Fortified Beach Assault Area (ASR #2.65). Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2014. *Remedial Investigation/Feasibility Study Report Operable Unit 25/Site UXO-19, Camp Devil Dog Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2014. *Proposed Remedial Action Plan Operable Unit 25/Site UXO-19, Camp Devil Dog. Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2014. *Record of Decision Operable Unit 25/Site UXO-19, Camp Devil Dog, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2014. *Expanded Site Investigation Report Military Munitions Response Program Site UXO-22 - Former Munitions Disposal Area Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2014. *No Action Decision Document for UXO-26 Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL. 2014. *Preliminary Assessment/Site Inspection Report, Military Munitions Response Program Site UXO-24 and Installation Restoration Program Site 37, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. October.
- CH2M HILL. 2014. *Interim Remedial Action Completion Report, Operable Unit 23, Site 49, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. November.
- CH2M HILL. 2014. *Remedial Design, Operable Unit 20, Site 86, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. December.
- CH2M HILL. 2015. *Vapor Intrusion Monitoring, Installation Restoration Program, Marine Corps Installations East-Marine Corps Base Camp Lejeune*. January.
- CH2M HILL. 2015. *Land Use Control Implementation Plan Update, Site 78, Operable Unit 1, Marine Corps Installations East-Marine Corps Base Camp Lejeune*. January.
- CH2M HILL. 2015. *Draft Remedial Action Completion Report, Operable Unit 7, Site 1, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. January.
- CH2M HILL, Baker, and CDM. 2002. *Natural Attenuation Evaluation Report, Operable Unit 21, Site 73, Marine Corps Base Camp Lejeune, North Carolina*.
- CH2M HILL, Baker, and CDM. 2003. *Natural Attenuation Evaluation Report, Operable Unit 10, Site 35, Former Camp Geiger Fuel Farm, Marine Corps Base Camp Lejeune, North Carolina*. April.
- Duke Engineering and Services. 1999. *DNAPL Site Characterization using a Partitioning Interwell Tracer Test at Site 88, Marine Corps Base, Camp Lejeune, North Carolina*. July.
- Environmental Science and Engineering, Inc. (ESE). 1990. *Site Summary Report Final, Marine Corps Base Camp Lejeune, North Carolina*. September.
- Law. 1992. *Underground Fuel Investigation and Comprehensive Site Assessment. Camp Geiger Fuel Farm. Marine Corps Base, Camp Lejeune, North Carolina*.

- Law and Catlin. 2000. *Phase I Limited Site Assessment and Recommendation for “No Further Action” Former UST CG1-1, Base Game Warden and Arcehry Club Offices, Marine Corps Air Station New River, North Carolina*. May.
- Marine Corps Installations East-Marine Corps Base Camp Lejeune (MCIEAST-MCB CAMLEJ). 1991. *Federal Facilities Agreement*.
- MicroPact, Baker. 2006. *Pilot Study Report, Site 73, Operable Unit 21, Marine Corps Base, Camp Lejeune, North Carolina*. May.
- Naval Energy and Environmental Support Activity (NEESA). 1981. *Radiological Affairs Technical Assistance Visit to Insect Vector Control Center and Chemical Landfill Site, Marine Corps Base Camp Lejeune, North Carolina*.
- NUS Corporation. 1990. *Focused Feasibility Study Site Camp Geiger Fuel Spill Site, Camp Lejeune, Onslow County, North Carolina*, NUS Project No. 2F67, December.
- O’Brien and Gere. 1990. *Product Recovery System Design, Hadnot Point Fuel Farm, Marine Corps Base Camp Lejeune, North Carolina*. January.
- O’Brien and Gere. 1992. *Site Assessment Tanks AS419 – A421, New River, North Carolina*. June.
- OHM Remediation Corp. (OHM). 2000. *Non-time-critical Removal Action, Site 85, Former Camp Johnson Battery Dump, Marine Corps Base, Camp Lejeune, North Carolina*.
- OHM. 2000. *Groundwater Investigation, Site 94, OU-18: PXS Service Station, Camp Lejeune, North Carolina*.
- OHM. 1995. *Contractor’s Closeout Report, Soil Remediation, Operable Unit 10 Site 35, Marine Corps Base Camp Lejeune, North Carolina*.
- OHM. 1995. *Contractor’s Closeout Report Time Critical Removal Action for Pesticide Contaminated Soil Operable Unit 5 Site 2, Marine Corps Base, MCB Camp Lejeune, North Carolina*.
- Osage of Virginia (Osage). 2008. *Limited Site Assessment, Site 13, Golf Course Construction Dump Site, Marine Corps Base Camp Lejeune, North Carolina*.
- Osage. 2009. *Technical Memorandum, SWMU 360 Groundwater Delineation*. September.
- Osage. 2011. *Confirmatory Site Assessment, Site 18, Watkins Village (E) Site, Marine Corps Base Camp Lejeune, North Carolina*.
- Osage. 2011. *Confirmatory Site Assessment, Site 46, MCAS Main Gate Dump, Marine Corps Base Camp Lejeune, North Carolina*.
- Osage. 2011. *Confirmatory Site Assessment, Site 51, MCAS Football Field, Marine Corps Base Camp Lejeune, North Carolina*.
- Osage. 2013. *Work Plan Site 89, operable Unit No. 16 Remedial Action: Air Sparging, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. March.
- Osage. 2013. *Non-Time Critical Removal Action Construction Completion Report for D-6, 50-Foot Indoor Rifle and Pistol Range – UXO-01, Former Building 451, Marine Corps Base Camp Lejeune, North Carolina*. May.
- Osage. 2014. *Interim Remedial Action Activities Summary at Site 73 (OU 21) – Second Round of Bio-Barrier Injections, Marine Corps Installations East-Marine Corps Base Camp Lejeune, Jacksonville, North Carolina*. March.
- Osage. 2014. *No Action Decision Document for Site UXO-01, ASR 2.64 (D-6, Former Small Arms Range), Marine Corps Installations East-Marine Corps Base Camp Lejeune, Jacksonville, North Carolina*. March.
- Radiological Affairs Service Office. 2007. Radiation Survey Site 69
- Radiological Affairs Service Office. 2007. Radiation Survey Site 19.
- Rhēa Engineers and Consultants (Rhēa). 2006. *Recommendations Report, Review, Recommendations, and Removal Report, Operable Unit No. 19 Site 84, Marine Corps Base Camp Lejeune, North Carolina*. September.

- Rhēa. 2006. *Supplemental investigation – Site 84, Operable Unit No. 19, Marine Corps Base Camp Lejeune, North Carolina.*
- Rhēa. 2007. *Non-time-critical Removal Action Report, Site 84, Operable Unit 19. Marine Corps Base Camp Lejeune, North Carolina.*
- Rhēa. 2007. *Project Closeout Report: Review, Recommendations and Removal Action, Site 84, Operable Unit 19. Marine Corps Base Camp Lejeune, North Carolina.* November.
- Rhēa. 2008. *Feasibility Study Amendment, Site 84, Operable Unit No. 19, Marine Corps Base Camp Lejeune, North Carolina.*
- Rhēa. 2008. *Proposed Remedial Action Plan, Site 84, Operable Unit No. 19, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.*
- Rhēa. 2008. *Record of Decision, Site 84, Operable Unit No. 19, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.*
- Rhēa. 2010. *Remedial Action Completion Report, Site 84, Operable Unit No. 19, Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.*
- Rhēa. 2010. *Engineering Evaluation/Cost Analysis (EE/CA), Site 95, Marine Corps Base, Camp Lejeune, North Carolina.* Rhēa Engineers & Consultants, Inc. January.
- Rhēa. 2010. *Non Time Critical Removal Action Summary, Site 95, Marine Corps Base, Camp Lejeune, North Carolina.* August.
- SEPI Engineering & Construction (SEPI). 2013. *Remedial Action Work Plan Permeable Reactive Barrier Installation Site 89: Operable Unit No. 16 MCIEAST-MCB Camp Lejeune Jacksonville, North Carolina.* March.
- Shaw Environmental, Inc. (Shaw). 2003. *Interim Removal Action Report Operable Unit No. 6, Sites 36 and 43, Marine Corps Base Camp Lejeune, North Carolina.*
- Shaw Environmental, Inc. (Shaw). 2005. *OU-16 (Site 89) Electrical Resistance Heating Pilot Test Implementation Report, Marine Corps Base Camp Lejeune, North Carolina.* July.
- Shaw. 2007. *Interim Remedial Measures Implementation Report, Solid Waste Management Unit 46, Marine Corps Base Camp Lejeune, North Carolina.*
- Shaw. 2009. *Interim Remedial Action Completion Report for Operable Unit 16 – Site 93, Marine Corps Base Camp Lejeune, North Carolina.*
- Shaw. 2011. *Interim Remedial Action Completion Report for Operable Unit 10 – Site 35, Marine Corps Base Camp Lejeune, North Carolina.* May.
- Shaw. 2011. *Interim Remedial Action Completion Report for Operable Unit 21 – Site 73, Marine Corps Base Camp Lejeune, North Carolina.* August.
- Shaw. 2014. *Draft Interim Remedial Action Activities Summary at Site 73 (OU 21) – Second Round of Bio-Barrier Injections Marine Corps Installations East – Marine Corps Base Camp Lejeune, Jacksonville, North Carolina.* March.
- Tetra Tech. 2009. *Site Inspection Report for D-6, 50-Foot Indoor Rifle and Pistol Range Former Building 451, Marine Corps Base Camp Lejeune, North Carolina.* October.
- Tetra Tech. 2010. *Engineering Evaluation/Cost Analysis for Non-Time Critical Removal Action at D-6, 50-Foot Indoor Rifle and Pistol Range – UXO-01, Former Building 451, Marine Corps Base Camp Lejeune, North Carolina.* October.
- Tetra Tech. 2011. *Action Memorandum for D-6, 50-Foot Indoor Rifle and Pistol Range – UXO-01, Former Building 451, Marine Corps Base Camp Lejeune, North Carolina.*

- Tetra Tech. 2014. *Draft Remedial Action Completion Report, Operative Unit 14, Site 69, Marine Corps Installations East – Marine Corps Base Camp Lejeune, North Carolina*. CH2M HILL. 2014. October.
- United States Army Corps of Engineers. 2001. *Range Identification and Preliminary Assessment Report UXO-08*.
- United States Marine Corps. 1997. *Notice of Non-Significant Changes: OU 1 (Sites 24 and 78) and OU 5 (Site 2)*. July.
- United States Marine Corps. 2014. *Letter to NCDENR Re: Re-Opening of ASR# 2.79b*. March 31.
- Water and Air Research, Inc. (WAR). 1983. *Initial Assessment Study for MCB Camp Lejeune, North Carolina*.
- Wright, R.E. 1994. UST STC-868 Investigation.
- Wright, R.E. 1996. Geotechnical Investigation.