

N60200.AR.000834
NAS CECIL FIELD, FL
5090.3a

SAMPLING AND ANALYSIS OUTLINE FOR BUILDING 290 BASE REALIGNMENT AND
CLOSURE ZONE H UNDEVELOPED EASTERN AREA GROUP 7 NAS CECIL FIELD FL
3/1/1996
ABB ENVIRONMENTAL SERVICES INC

**SAMPLING AND ANALYSIS OUTLINE
BUILDING 290
BASE REALIGNMENT AND CLOSURE
ZONE H, UNDEVELOPED EASTERN AREA
GROUP VII**

**NAVAL AIR STATION CECIL FIELD
JACKSONVILLE, FLORIDA**

Unit Identification No. N60200

Contract No. N62467-89-D-0317/090

Prepared by:

**ABB Environmental Services, Inc.
2590 Executive Center Circle, East
Tallahassee, Florida 32301**

Prepared for:

**Department of the Navy, Southern Division
Naval Facilities Engineering Command
2155 Eagle Drive
North Charleston, South Carolina 29419**

Steve Wilson, Code 18B9, BRAC Environmental Coordinator

March 1996

TABLE OF CONTENTS

Sampling and Analysis Outline
Building 290
Base Realignment and Closure
Zone H, Undeveloped Eastern Area Group VII
Naval Air Station Cecil Field
Jacksonville, Florida

<u>Chapter</u>	<u>Title</u>	<u>Page No.</u>
1.0	SITE DESCRIPTION	1
2.0	ENVIRONMENTAL BASELINE SURVEY COLOR DESIGNATION	1
3.0	RECOMMENDATIONS	1
4.0	SELECTED REFERENCES	3

LIST OF FIGURES

<u>Figure</u>	<u>Title</u>	<u>Page No.</u>
1	Building 290 Transmitter Building	2

GLOSSARY

ABB-ES ABB Environmental Services, Inc.
BCT BRAC cleanup team
BRAC Base Realignment and Closure

1.0 SITE DESCRIPTION

This Base Realignment and Closure (BRAC) Phase II Sampling and Analysis Outline briefly describes and proposes a plan for assessment of Building 290 at Naval Air Station Cecil Field. Building 290 is a radio transmitter station, located along Perimeter Road, southeast of the intersection of Runways 36R and 9R (Figure 1).

2.0 ENVIRONMENTAL BASELINE SURVEY COLOR DESIGNATION


Building 290 was color-coded Grey in the Environmental Baseline Survey Report (ABB Environmental Services, Inc. [ABB-ES], 1994) because one active and one abandoned septic tank are located on the property. The BRAC cleanup team (BCT) regards septic tank and leachfield systems as potential pathways for contaminants to enter the groundwater, if improperly used.

3.0 RECOMMENDATIONS

A Phase II Sampling and Analysis program is recommended to assess whether or not groundwater has been affected by releases from the septic system. Analytical results, a contamination assessment, and recommendations for reclassification of the property will be reported in a draft Site Summary report for Building 290. The project team will seek concurrence from the BCT before completing and submitting a final Site Summary report.


The recommended data quality objective for the Phase II Sampling and Analysis program is Level III, to meet the potential need for input to a preliminary risk evaluation, if required. Sample collection techniques, quality assurance objectives, quality control requirements, and sample handling and shipping procedures are outlined in the BRAC Project Operations Plan (ABB-ES, 1994b). Analysis for the full Contract Laboratory program suite of target compound list organics and target analyte list inorganics is recommended.

A groundwater monitoring well will be installed downgradient of both septic systems. One groundwater sample will be collected and analyzed to evaluate whether or not groundwater has been affected by releases from the septic systems. The proposed sample location is shown on Figure 1.

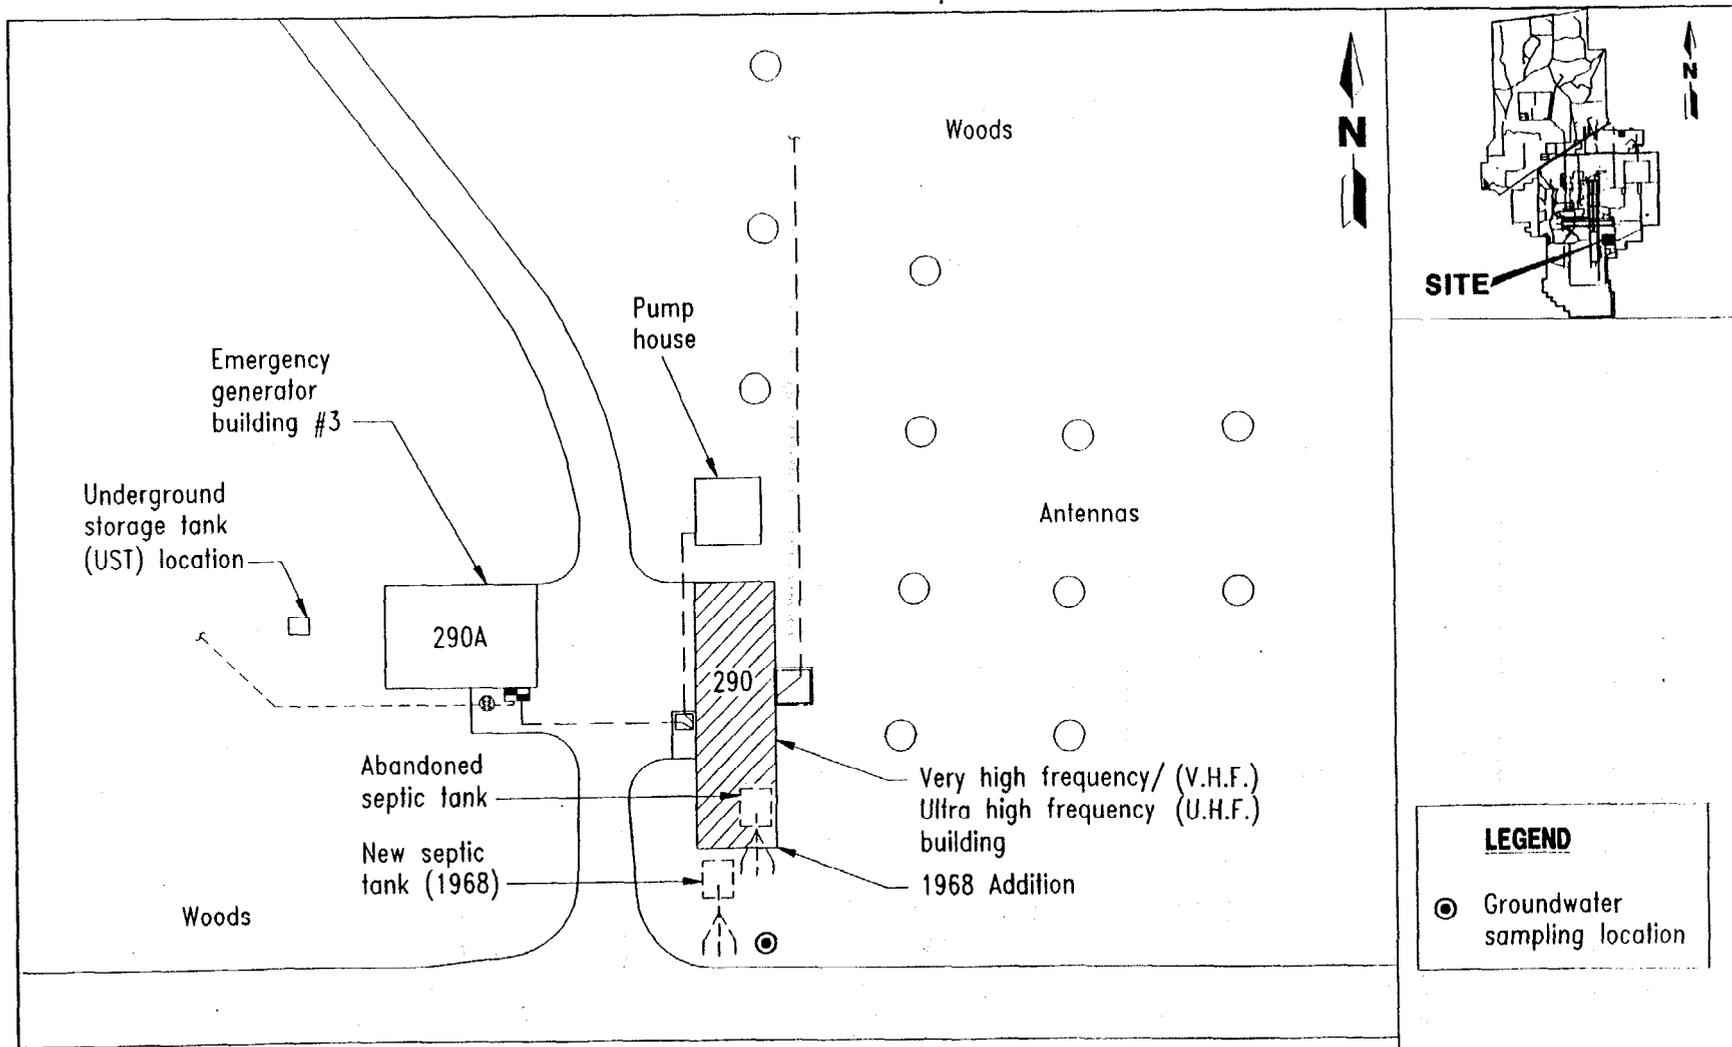

LEGEND

⊙ Groundwater sampling location



**FIGURE 1
BUILDING 290
TRANSMITTER BUILDING**



**GROUP VII SAMPLING AND
ANALYSIS OUTLINE**

**NAS CECIL FIELD
JACKSONVILLE, FLORIDA**

4.0 SELECTED REFERENCES

ABB Environmental Services, Inc. (ABB-ES), 1994a, Base Realignment and Closure Environmental Baseline Survey Report, Naval Air Station (NAS) Cecil Field, Jacksonville, Florida: prepared for Southern Division, Naval Facilities Engineering Command (SOUTHNAVFACENGCOC), November.

ABB-ES, 1994b, Project Operations Plan for Cecil Field and Health and Safety Plan: prepared for SOUTHNAVFACENGCOC, December.

ABB-ES, in press, Base Realignment and Closure Tank Management Plan for NAS Cecil Field, Jacksonville, Florida: prepared for SOUTHNAVFACENGCOC.