

N60200.AR.002114
NAS CECIL FIELD, FL
5090.3a

PHASE 3 SAMPLING AND ANALYSIS WORK PLAN FOR POTENTIAL SOURCE OF
CONTAMINATION 39 MB-18 FLIGHT LINE OUTFALLS NAS CECIL FIELD FL
9/28/1999
TETRA TECH NUS INC

**Phase III Sampling and Analysis Work Plan
PSC 39, MB-18 Flightline Outfalls
Naval Air Station Cecil Field
Jacksonville, Florida**

September 28, 1999

Phase III sampling and analysis of sediment is proposed for PSC 39, Flightline Outfalls, as shown in Figure A. Sampling and analysis will be conducted to further delineate polychlorinated biphenyl (PCB) contamination identified during previous sampling activities. Previously detected concentrations of PCBs exceeded ecological screening criteria in sediment from one outfall. Two sediment samples will be collected from the outfall drainageway along the east-west runway as shown in Figure A. The samples will be analyzed for PCBs as specified in the Table 1.

Because of the proximity to active runways and taxiways, this sampling must be coordinated with NAS Cecil Field Air Operations. Ramp Safety requirements must be followed. At least one field crew member shall have ramp training.

The sampling activities and procedures described in this Work Plan will be performed in accordance with the U. S. EPA Region 4 Environmental Investigation Standard Operating Procedures and Quality Assurance Manual (EISOPQAM) and the Base-Wide Generic Work Plan for Naval Air Station (NAS) Cecil Field. Specifically, the Base-Wide Generic Work Plan includes procedures for management of investigation-derived wastes in Volume I and standard operating procedures in the Project Operations Plan in Volume II.

The sediment samples will be collected as grab samples. The sampling equipment used will be disposable or equipment that can be easily decontaminated. Since disposable equipment is preferable for this sampling activity, decontamination of sampling equipment will not be required. The location of the proposed samples will be located by a registered surveyor in the field and marked with a wooden stake labeled with the sample identification. Also, attach survey tape to a tree nearby the sample locations to assist in finding them in the future. The sampling crew will work with the survey crew to establish the best procedures to limit the time the wooden stakes or pin flags are in the area. The sample crew will collect the sample from the location identified.

Personnel protection equipment and other waste trash (e.g. disposable trowels) will not be considered hazardous and will be disposed in a municipal landfill. Such trash will be collected in a plastic bag and disposed in a suitable trash receptacle. Removed sample materials in excess of sampling volume requirements will be placed back in the area where the sample was obtained.

Sample handling requirements, the bottleware required, preservation, and holding time requirements for the analysis proposed for this sampling event are as identified in the following table:

Analysis	Analytical Method	Bottleware	Preservation	Holding Time⁽¹⁾
PCBs	SW-846 8082	8-oz. glass jar	Cool to 4°C	14 days to extraction; 40 days to analysis

1 Holding times are measured from the date/time of sample collection.

Analytical results will be provided on a 14-day turn around basis.

The laboratory contracted to do this work is as follows:

ACCUTEST SOUTHEAST
4405 Vineland Road, Suite C-15
Orlando, Florida 32881
Attention: Susan Gaudios

(407) 425-5700
Fax: (407) 425-0707

As agreed upon by the BCT, the collection of rinsate and trip blanks has been eliminated at NAS Cecil Field. In addition, field blanks will not be collected during this sampling program because there will be minimal decontamination of sampling equipment. In accordance with these changes, the following table summarizes the frequency and type of field Quality Assurance/Quality Control (QA/QC) samples to be collected for this sampling program.

Type of Samples	Frequency	Samples to be Collected
Field Duplicate	1/10 sample/matrix	0
Lab MS/MSD	1/20 samples/matrix	1 ⁽¹⁾


1 MS/MSD is a Laboratory QA/QC requirement, separate sample not required, only additional volume. Surface water sample requires twice the sample volume identified for MS/MSD analysis

As agreed upon by the BCT, formal data validation has been eliminated from the installation restoration program at NAS Cecil Field. However, the analytical data packages generated by the analytical laboratory will be reviewed by Tetra Tech NUS personnel to eliminate false positives and false negative results.

TABLE 1
PHASE III SAMPLING AND ANALYSIS
PSC 39, MB-18 FLIGHTLINE OUTFALLS


Sample ID	Location	Analysis
		PCBs
CEF-P39-SD-201	Approximately 75' downstream of CEF-P39-SD-107; approximately 150' downstream of CEF-P39-SD-024	X
CEF-P39-SD-202	Approximately 75' downstream of CEF-P39-SD-201; approximately 225' downstream of CEF-P39-SD-024	X

9-28-99

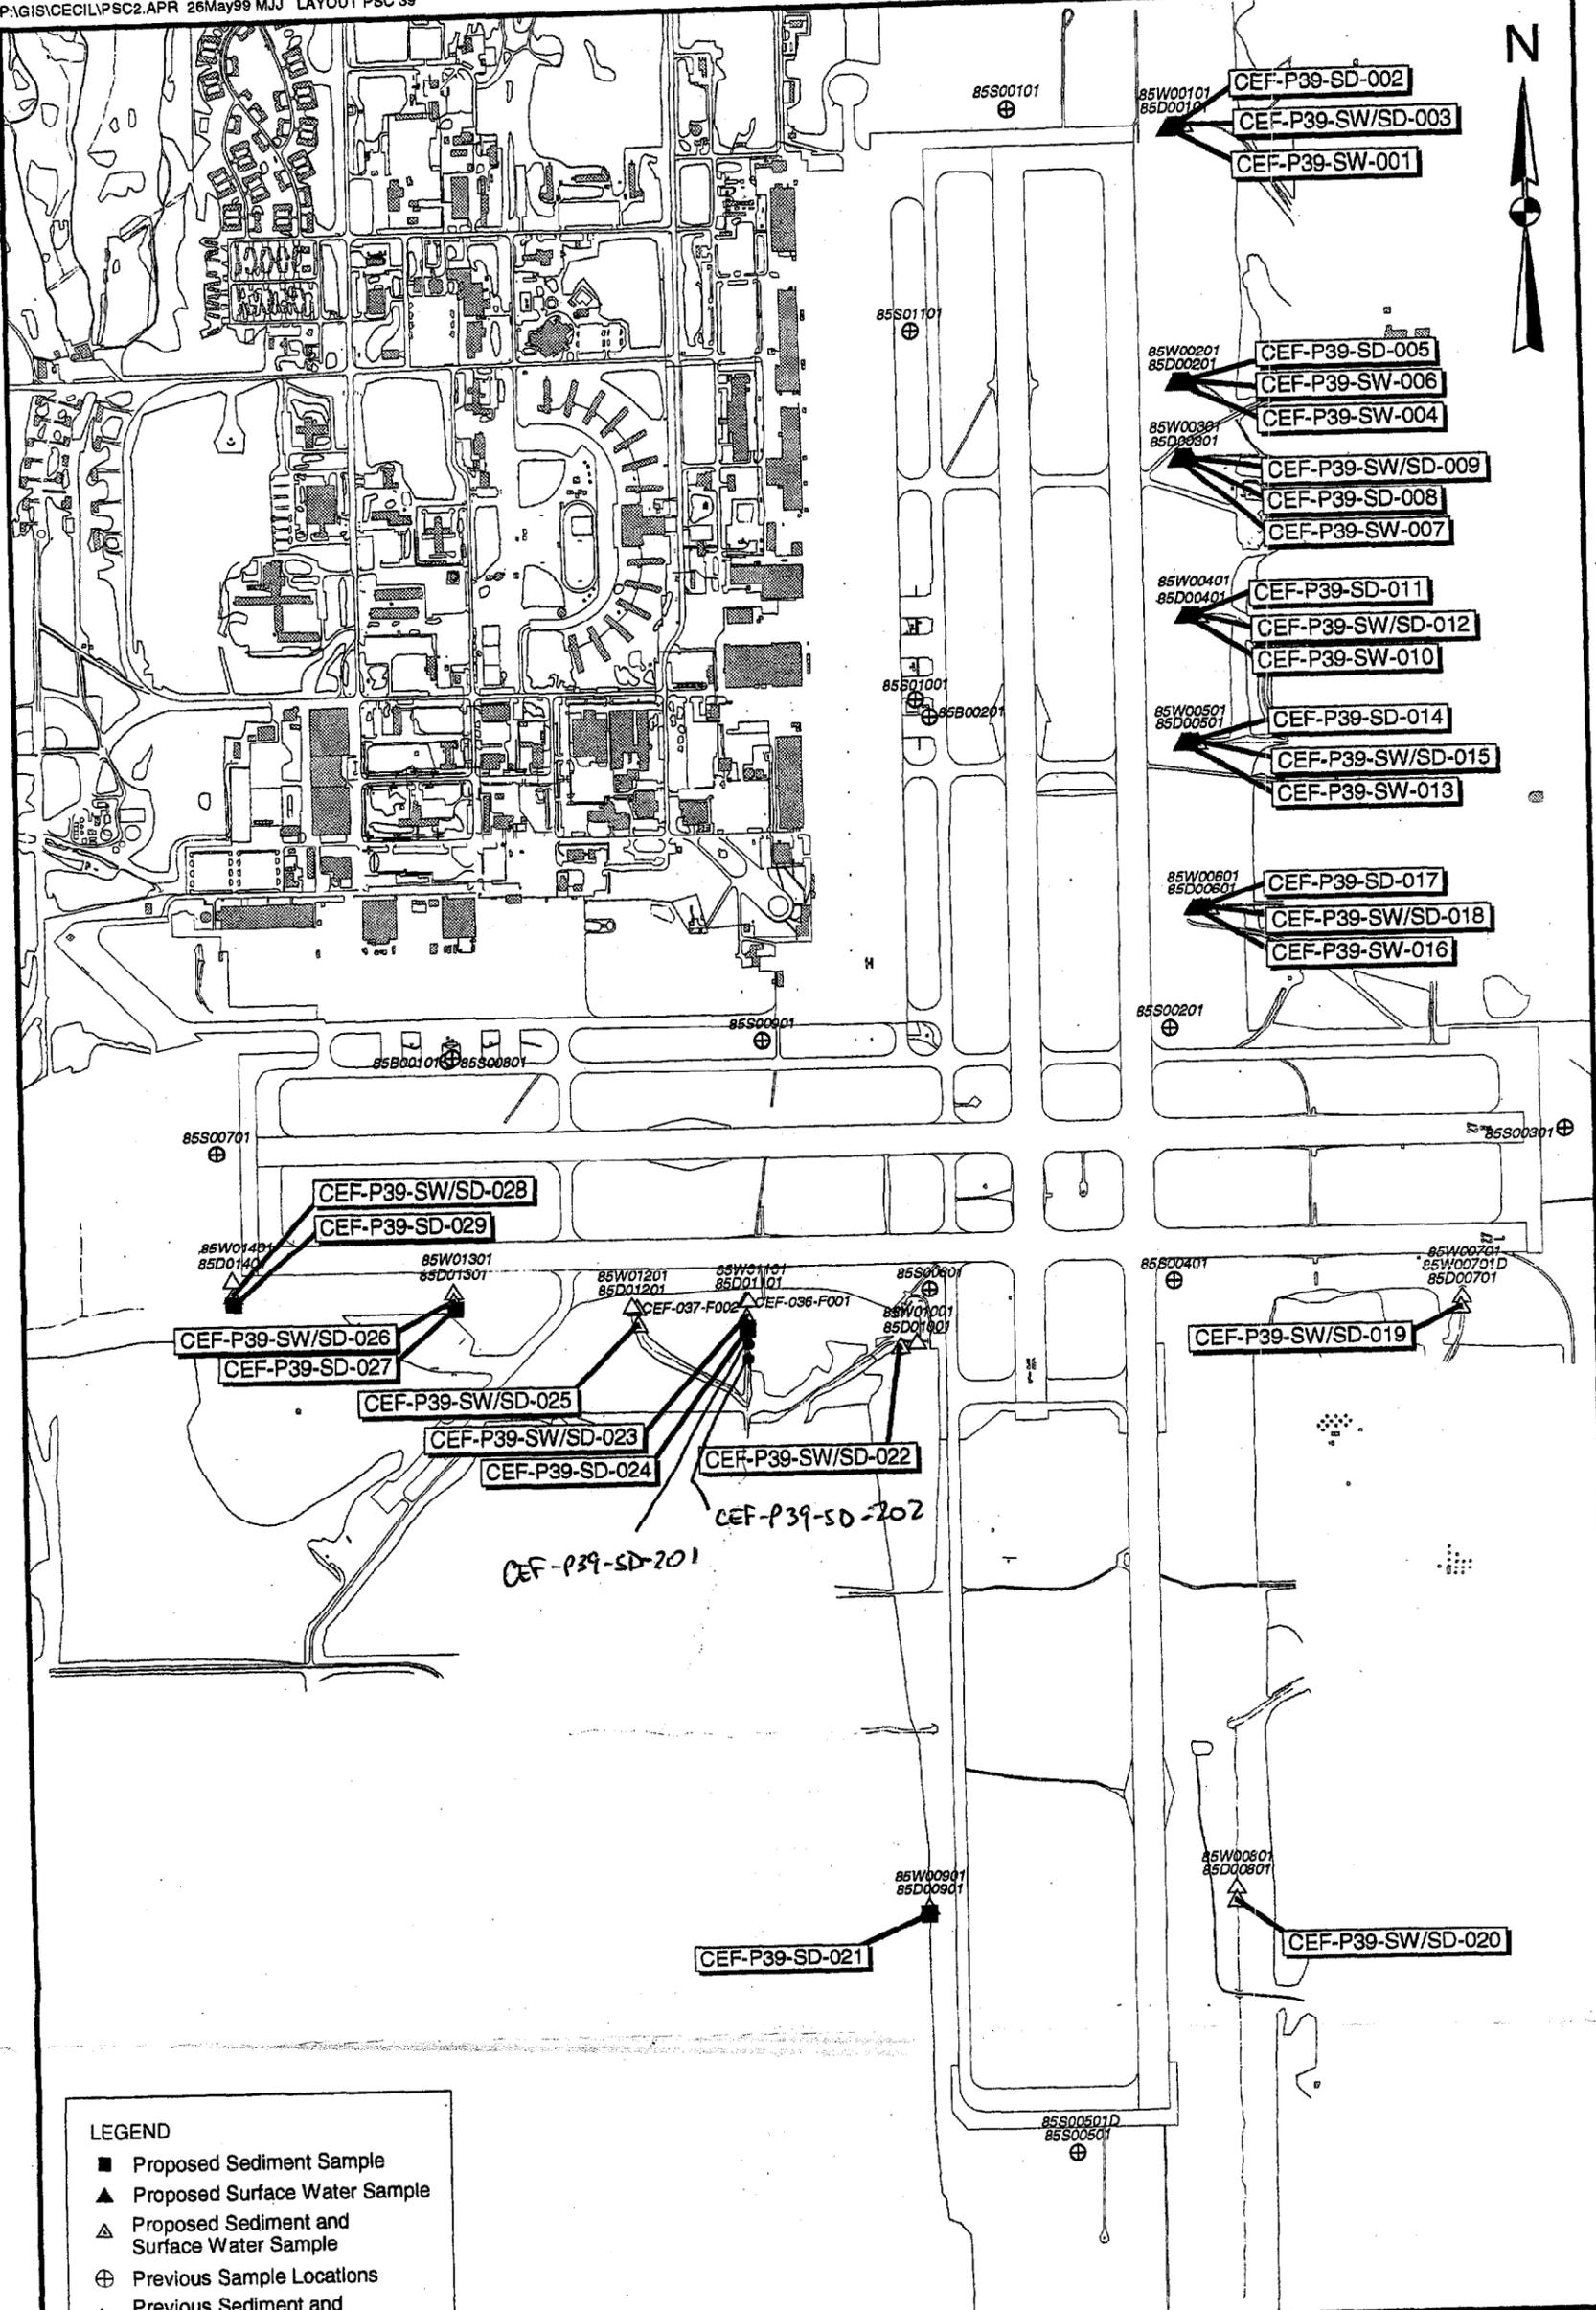

LEGEND

- Proposed Sediment Sample
- ▲ Proposed Surface Water Sample
- △ Proposed Sediment and Surface Water Sample
- ⊕ Previous Sample Locations
- △ Previous Sediment and Surface Water Sample
- ▨ Buildings



DRAWN BY YLI	DATE 07/04/99
CHECKED BY RD	DATE 1/13/99
COST/SCHEDULE-AREA	
SCALE AS NOTED	



PHASE III
 PROPOSED SAMPLE LOCATION
 PSC 39, MB-18 FLIGHTLINE OUTFALLS
 NAVAL AIR STATION CECIL FIELD
 JACKSONVILLE, FLORIDA

CONTRACT NUMBER 0039	
APPROVED BY	DATE
APPROVED BY	DATE
DRAWING NO. FIGURE A	REV 0

04470F01Z