

N61165.AR.004996
CNC CHARLESTON
5090.3a

HEALTH AND SAFETY PLAN (HASP) FOR SOIL REMEDIATION AND FREE PRODUCT
RECOVERY AT CHICORA TANK FARM CNC CHARLESTON SC
10/01/2002
SOLUTIONS TO ENVIRONMENTAL PROBLEMS, INC.

**Health and Safety Plan (HASP)
for
Soil Remediation and Free Product Recovery
at Chicora Tank Farm,
Charleston Naval Shipyard,
Charleston, South Carolina**

October 2002

**Submitted to:
Department of the Navy
Southern Division
Naval Facilities Engineering Command**

Under Contract No. N62467-02-R-0466

**Prepared by:
Solutions To Environmental Problems, Inc.
1006 Floyd Culler Court
Oak Ridge, Tennessee 37830**

**Site Health and Safety Plan
Table of Contents**

**Soil Remediation and Free Product Recovery at Chicora Tank Farm,
Charleston Naval Shipyard, Charleston, South Carolina**

List of Acronyms	iv
1.0 INTRODUCTION.....	1
2.0 SITE DESCRIPTION AND SCOPE OF WORK	1
3.0 SAFETY PROGRAM ADMINISTRATION.....	3
4.0 PROJECT SAFETY GOALS	3
5.0 SAFETY BRIEFING/MEETINGS.....	3
5.1 SITE ORIENTATION BRIEFING	3
5.2 PRE-WORK BRIEFINGS.....	4
5.3 WEEKLY SAFETY MEETINGS	4
6.0 SAFETY INSPECTIONS.....	4
6.1 INITIAL EQUIPMENT INSPECTION	4
7.0 JOB SITE POSTING.....	5
8.0 HAZARD ANALYSIS 5	
8.1 HAZARD CONTROL MEASURES	6
8.2 CHEMICAL HAZARDS 6	
8.2.1 Chemical Exposure Hazards.....	6
8.2.2 Primary Routes of Exposure	6
8.2.3 Exposure Limits.....	7
8.2.4 Petroleum Distillates.....	7
8.3 PHYSICAL HAZARDS.....	7
8.3.1 Noise	7
8.3.2 Heat Stress	8
8.3.3 Lightning.....	8
8.4 OPERATIONAL HAZARDS	8
8.4.1 Fires/Explosions.....	9
8.4.2 Heavy Equipment	9
8.4.3 Material Handling	10
8.4.4 Vehicular Traffic.....	10
8.4.5 Electrical	10
8.4.6 Excavations.....	11
9.0 TRAINING	12
10.0 GENERAL SAFE WORK PRACTICES.....	12
11.0 MEDICAL SURVEILLANCE REQUIREMENTS.....	13
11.1 RESPIRATOR FIT AND TRAINING.....	13

12.0	SITE CONTROL	13
12.1	VISITORS	13
12.2	TRAFFIC.....	14
13.0	ACCIDENT/INJURY REPORTING.....	14
14.0	HAZARD COMMUNICATIONS	14
15.0	PERSONAL PROTECTIVE EQUIPMENT	14
15.1	LEVEL “D” PPE.....	15
15.2	MODIFIED LEVEL “D” PPE.....	15
16.0	PROTECTIVE CLOTHING DONNING/DOFFING PROCEDURES	16
16.1	PROTECTIVE CLOTHING DONNING PROCEDURE.....	16
16.2	PROTECTIVE CLOTHING DOFFING PROCEDURE	16
17.0	DECONTAMINATION	16
17.1	PERSONNEL DECONTAMINATION.....	16
17.2	EQUIPMENT DECONTAMINATION.....	17
18.0	DISCIPLINARY POLICY.....	17
19.0	SAFE OPERATING CONDITIONS.....	17
20.0	SANITATION/ILLUMINATION	18
21.0	MONITORING/SAMPLING.....	18
21.1	INDUSTRIAL HYGIENE MONITORING/SAMPLING EQUIPMENT	18
21.2	INDUSTRIAL HYGIENE MONITORING ACTION LEVELS	19
21.3	DOCUMENTATION OF MONITORING	19
22.0	PROJECT DOCUMENTATION	19
23.0	EMERGENCY RESPONSE	19
23.1	PRE-EMERGENCY PLANNING	19
23.2	EMERGENCY MEDICAL TREATMENT AND FIRST AID	20
23.3	EMERGENCY CONTACT/LISTING.....	20
24.0	REFERENCES.....	21

APPENDICES

Appendix A - Activity Hazard Analysis

ATTACHMENTS

- Attachment 1 - Weekly Jobsite Checklist
- Attachment 2 - Equipment Daily Inspection Checklist
- Attachment 3 - Route to Hospital

List of Acronyms

ACGIH	American Conference of Governmental Industrial Hygienists
AHA	Activity Hazard Analysis
ANSI	American National Standard Institute
CFR	<i>Code of Federal Regulations</i>
CPR	cardio pulmonary resuscitation
CTF	Chicora Tank Farm
EPA	U.S. Environmental Protection Agency
FSM	field services manager
GFCI	ground fault circuit interrupter
HASP	health and safety plan
HAZWOPER	hazardous waste operations
MSDS	material safety data sheet
OSHA	Occupational Safety and Health Administration
PHA	preliminary hazard analysis
PPE	personal protective equipment
ppm	parts per million
SCDHEC	South Carolina Department of Health and Environmental Control
SOP	standard operating procedure
STEP	Solutions To Environmental Problems, Inc.
TWA	time weighted average

1.0 INTRODUCTION

This document has been prepared by Solutions To Environmental Problems, Inc. (STEP) to provide a site health and safety plan (HASP) for the soil remediation and free product recovery at Chicora Tank Farm (CTF), Charleston, South Carolina. For this project STEP is under contract to the Department of the Navy, Naval Facilities Engineering Command.

The purpose of this document is to establish standard safety and health procedures for STEP and their subcontractors during this project. All project activities shall be performed in accordance with STEP safety and health policies and procedures; U.S. Army Corps of Engineers Safety and Health Requirements Manual, EM 385-1-1; Occupational Safety and Health Administration (OSHA) Standards 29 *Code of Federal Regulations* (CFR) Part 1910 and 1926; South Carolina Department of Health and Environmental Control (SCDHEC) regulations; applicable U.S. Environmental Protection Agency (EPA) requirements; and consensus standards.

The levels of personal protection and the control measures specified in this plan are based on the best information available from reference documents and site characterization data. Therefore, these recommendations represent the minimum safety and health requirements to be observed by all personnel engaged in this project. Unforeseeable site conditions or changes in scope of work may warrant a reassessment of protection levels and controls stated. All adjustments to the HASP must have prior approval from Mr. Mike Palmer who provides oversight for STEP's safety and health efforts.

All personnel involved in this project must review this document carefully. Any questions or concerns that are not adequately addressed should be brought to the immediate attention of the STEP Site/Project Manager.


2.0 SITE DESCRIPTION AND SCOPE OF WORK

The CTF is a 23-acre site located approximately 500 yards west of the Charleston Naval Shipyard. The tank farm formerly supplied fuel and lubricants to the Naval Shipyard. The tank farm is in the city of North Charleston, near the west bank of the Cooper River in Charleston County, South Carolina.

The CTF consisted of 6 cut-and-cover storage tanks. Five of the tanks had a capacity of 50,000 barrels, and one tank had a capacity of 27,000 barrels. Each tank interior was approximately 25 feet in height and was constructed of 24-inch reinforced concrete walls and a domed roof. Each tank was connected to a pump room and had an exterior coating of gunite to minimize infiltration of groundwater into the tanks.

The objective of this project is to remove and properly dispose of petroleum-contaminated soil and free phase petroleum product from three areas at the CTF. In addition, STEP will perform backfilling, compacting and grading, soil sampling, well abandonment, and installation of monitoring wells. Removal and disposal of petroleum-contaminated soil and free phase petroleum product at the CTF are required in accordance with the *Active Corrective Action Plan for Chicora Tank Farm* (Tetra Tech NUS, Inc., May 2002).

Figure 2-1 shows the site layout.

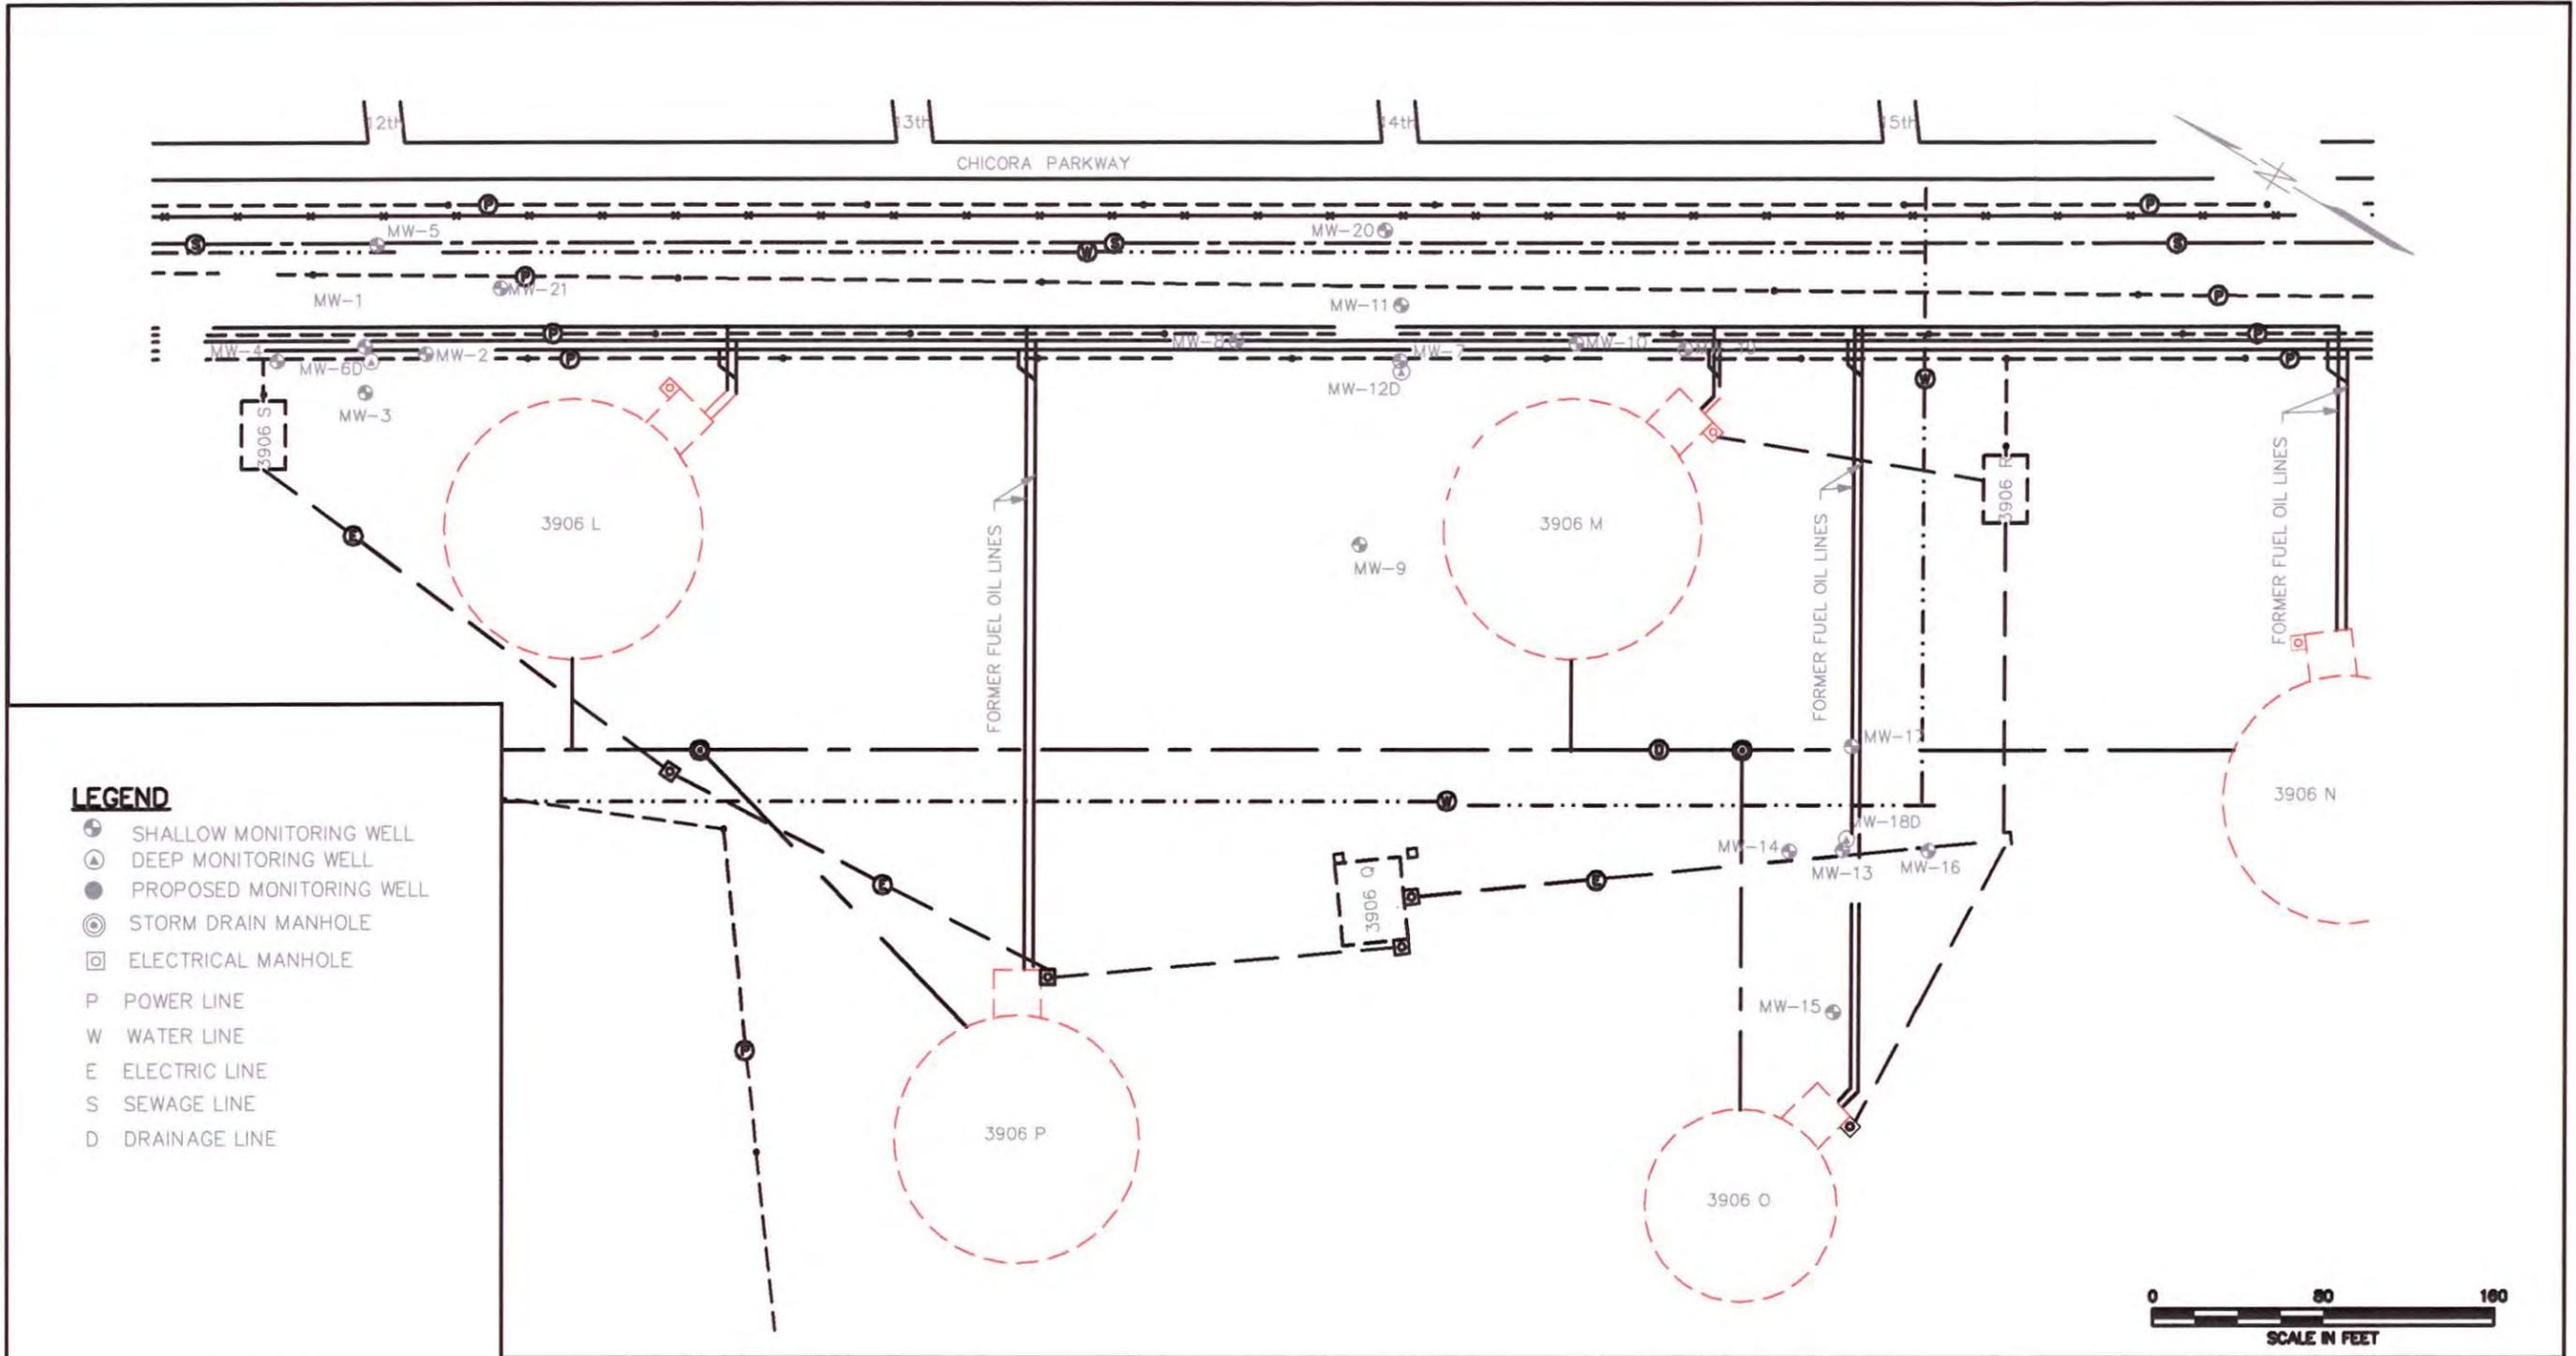

LEGEND

- SHALLOW MONITORING WELL
- ⊕ DEEP MONITORING WELL
- PROPOSED MONITORING WELL
- ⊙ STORM DRAIN MANHOLE
- ⊠ ELECTRICAL MANHOLE
- P POWER LINE
- W WATER LINE
- E ELECTRIC LINE
- S SEWAGE LINE
- D DRAINAGE LINE



NO.	DATE	REVISIONS	BY	CHKD	APPD	REFERENCES	DRAWN BY	DATE	SITE LAYOUT CHICORA TANK FARM – SITE 42 CHARLESTON NAVAL SHIPYARD CHARLESTON, SOUTH CAROLINA	CONTRACT NO. 4015	
							CHECKED BY	DATE		APPROVED BY	DATE
							COST/SCHED-AREA			APPROVED BY	DATE
							SCALE AS NOTED			DRAWING NO. FIGURE 2-1	REV. 0

3.0 SAFETY PROGRAM ADMINISTRATION

Mr. Mike Palmer, CSP, CIH, CHMM provides administration support for the STEP Safety Program. Mr. Palmer is certified by both the American Board of Industrial Hygiene and by the Board of Certified Safety Professionals. For the duration of this project, the STEP Project Manager, Mr. Roy Hoekstra, has been assigned the responsibility and accountability for compliance with project specific safety and health requirements. The Field Services Manager (FSM) or an alternate will be present on the worksite during the performance of any project work activities. They will promote jobsite safety over production goals at all times. The FSM has been charged with the following daily project safety responsibilities:

- coordinating all planned work activities / tasks with site employees for safety input and planning;
- conducting all required weekly and daily inspections and implementing prompt corrective action regarding safety and other noncompliance issues; and
- administering and actively promoting daily safety meetings and pre-work safety briefings.

The FSM will be responsible for overall daily implementation of this plan and compliance with 29 CFR 1926 and 1910 requirements.

4.0 PROJECT SAFETY GOALS

It is STEP's policy to execute all reasonable precautions in the performance of work and to protect the environment, as well as the safety and health of employees and members of the public. STEP intends to comply with all applicable environmental, safety and health regulations and requirements. Without exception, worker safety and health will take precedence over production goals for the duration of the project. STEP safety performance goals for the project include:

- **no OSHA-recordable injury/illness;**
- **no "lost-time" injuries or accidents;**
- **no crane, rigging, or other heavy equipment accidents;**
- **no vehicle/equipment incidents resulting in personal injury or property damage; and**
- **no worker fatalities.**

Every attempt will be made by STEP and each employee to reduce the possibility of accident occurrence.

5.0 SAFETY BRIEFING/MEETINGS

5.1 Site Orientation Briefing

The STEP FSM will conduct initial site entry safety briefings to apprise visitors and workers of hazards to be encountered at the job site and to review the required safety precautions/control measures to be utilized. This briefing will include a review of the activity hazard analysis (AHA) (Appendix A) and attendance will be documented on the AHA Log. Training and medical surveillance requirements will be reviewed, and verification of qualifications shall be performed prior to entry to the site. The initial access safety briefing will include as a minimum:

- a review of the preliminary hazard analysis, and other pertinent sections contained within this plan;
- a review of posted permits applicable to the visitor or worker during their site access;
- a review of hazards which may be encountered on site that day; and
- emergency notification procedures.

5.2 Pre-Work Briefings

Prior to initial job task assignments, each employee will be required to review this HASP.

5.3 Weekly Safety Meetings

The STEP FSM will conduct and document a weekly safety meeting of approximately 15 minutes duration. These meetings will be conducted at the beginning of the scheduled work shift and will address safety and fire prevention issues pertaining to the upcoming operations. At a minimum, the issues and objectives of the meetings will be concerned with an overview of the work planned, potential hazards associated with the work, and suggested methods for reducing or controlling the hazards.

Past inspection findings, corrective actions taken, and lessons learned will also be addressed. An attendance roster will be maintained weekly for documentation purposes. Copies of the safety meeting records will be maintained at the job site.

6.0 SAFETY INSPECTIONS

The STEP FSM has been delegated responsibility for conducting daily formal job site inspections to ensure compliance with the safety program. The safety inspections will be conducted to identify non-compliance items including: unsafe equipment/tools; unsafe conditions (hazardous materials, atmospheric, etc.); and unsafe acts [violation of standard operating procedures (SOPs)]. These inspections will be conducted to include immediate work areas and all equipment/materials storage or staging areas (inclusive of vehicles, tool boxes, and storage trailers). In addition, the STEP FSM shall conduct a formal weekly job site inspection and document the results of that inspection on the Weekly Jobsite Checklist (Attachment 1).

Imminent danger findings shall result in immediate work suspension of the affected operation until such dangers are corrected. Other findings shall be corrected immediately or preventive measures taken to protect the employees. Any identified non-compliance items or safety violations by employees will be recorded on an inspection report, in accordance with STEP's Corporate Safety Program, and will be submitted with the Daily Activity Report. File copies will also be maintained at the job site office for review, and shall be reviewed with affected employees during pre-work briefings and weekly safety meetings.

6.1 Initial Equipment Inspection

Prior to initial entry to the project site, all equipment must be inspected for safety conformance to include proper operation and functioning. The Project Manager, or designated alternative, shall be responsible for the initial inspection prior to use on site. The items to be inspected shall include all equipment, backhoes, welding/cutting equipment, hoisting and rigging devices and apparatus, and all portable electric tools. All heavy construction equipment, including rental equipment, shall be identified with STEP or their subcontractor's name. Prior to use, the equipment operator is required to complete a daily equipment inspection checklist. A copy of this form is provided in Attachment 2 of this plan.

Defective or otherwise unsafe equipment or tools shall be tagged “DO NOT USE”. Items tagged “DO NOT USE” shall either be repaired and made acceptable or shall be removed from the site. All repaired items shall be inspected prior to entering the site. Any hoisting/rigging equipment or other equipment that cannot be repaired shall be destroyed or otherwise made inoperable to prevent inadvertent use by others at another project. The Project Manager shall maintain equipment inspection reports and equipment inventory data at the job site trailer for review.

7.0 JOB SITE POSTING

In areas where anticipated hazards may occur, warning signs shall be posted to promote worker and visitor awareness. The following posted signs are anticipated for this project:

Signs Posted	(✓) If applicable
“Construction Area-Hard Hat & Safety Glasses Required”	✓
“Authorized Personnel Only”	✓
“Open Excavation Area, Restricted Access”	✓

The following information will be posted at the indicated job site locations:

SIGN	LOCATION POSTED
State of South Carolina Department of Labor Posting	Job Site
State of South Carolina Workman’s Compensation Posting	Job Site
Employee Right to Know Laws and MSDS	Job Site
Site-Specific and Corporate Safety Program	Job Site
Required Excavation Permit (Utilities)	Job Site

MSDS = Material Data Safety Sheet

8.0 HAZARD ANALYSIS

A preliminary hazard analysis (PHA) has been performed to identify the safety concerns for tasks outlined in the project scope of work. The preliminary hazards identified for this project include the following:

- Chemical Hazards
- Physical Hazards
- Operational Hazards

In addition to the PHA, each task has been evaluated to identify specific activity hazards. An Activity Hazard Analysis (AHA) for scheduled tasks is provided in Appendix A.

8.1 Hazard Control Measures

Personnel hazard exposure mitigation/reduction control measures to be implemented during performance of work tasks in completion of the project shall include:

- **Administrative controls** (i.e., worker training, safety meetings/briefings, AHA briefings, work area hazard postings, competent person surveillance, inspections, management oversight, and industrial hygiene monitoring);
- **Engineering controls** (i.e., ventilation); and
- **Personal protective equipment (PPE)** (i.e., hard hat, safety glasses, hearing protection, hand protection, foot protection, respiratory protection, tyvek or other protective clothing).

8.2 Chemical Hazards

Worker exposure to dust, sediment, soil, and petroleum distillates is possible when performing tasks such as installing boring wells, well abandonment, and soil excavation. Exposure to these chemical compounds in the form of fumes, mists, vapors, and liquids may cause health problems by inhalation, absorption, contact, or ingestion. Unprotected exposure to these hazards may cause a variety of toxic effects. Workers will be apprised of the potential hazards, and the specific control measures necessary to avoid or minimize exposure.

8.2.1 Chemical Exposure Hazards

Some chemical exposure effects, such as burning eyes, coughing, nausea, and skin rashes, may become obvious during or shortly after an exposure. These effects are termed “**acute**”. These effects may be temporary and reversible, or they may be more serious and cause permanent disability or death.

Some chemicals can cause permanent health damage without any short-term warning signs. This is particularly true for repeated exposures to low levels of very toxic chemicals. These “**chronic**” health effects, such as cancer, liver damage, or respiratory disease, may not manifest themselves for several years or even decades after exposure. The susceptibility of an individual to adverse health effects from chemical exposure may be influenced by a number of personal factors including smoking, alcohol consumption, medication use, nutrition, age, sex, fitness, and genetic predisposition.

8.2.2 Primary Routes of Exposure

The primary exposure route of concern on this project is **inhalation**. With a surface area of 70 to 100 m², the lungs are extremely vulnerable to chemical agents. Direct **contact** by gaseous, liquid, or solid substances is another important route of exposure. Some chemicals directly injure the skin. This local effect is true of strong acids and bases and many organic chemicals that contact the skin. Some pass through the skin into the bloodstream where they are transported to vulnerable organs. Skin **absorption** is enhanced by abrasions, cuts, heat, and moisture and may occur as a result of direct contact or as a vapor. Although **ingestion** should be the least significant route of exposure on this project, it may occur if standard operating procedures are not observed. Personal habits such as chewing gum or tobacco, drinking, eating, and smoking may provide a route of entry for chemicals.

8.2.3 Exposure Limits

<u>Contaminant</u>	<u>Exposure Limit/Action Level</u>
Petroleum Distillates	TWA - 100 ppm / TWA - 50 ppm

TWA = time weighted average
PPM = parts per million

8.2.4 Petroleum Distillates

As stated, personnel exposures to fumes, mists, vapors, and liquids may be possible during various stages of this project. The use of personal protective equipment, following provisions of this plan, and observing safe work practices are expected to reduce the risk of exposure.

In addition to these precautions, the FSM shall implement the following control measures to ensure compliance with OSHA 1926.65 and USACE EM385-1-1, Section 28:

- ensure workers have received Hazard Communications training in accordance with the STEP Corporate Hazard Communications Program and meet the training requirements outlined in this plan;
- ensure workers are medically qualified and have received a quantitative fit test using an air-purifying respirator in accordance with the STEP Respiratory Protection Program;
- ensure personnel are currently included in the STEP Corporate Medical Surveillance Program;
- ensure personnel use appropriate personal protective equipment (PPE); and
- conduct personnel exposure monitoring and perimeter environmental monitoring as outlined in this plan.

8.3 Physical Hazards

Personnel performing work tasks during this project may anticipate potential exposures to physical agents. These may include hazards such as noise, and temperature extremes (heat stress). Control measures will be implemented to minimize or prevent exposures to such physical hazards when identified. However, variations in individual susceptibility may result in low tolerance leading to aggravation of a pre-existing condition, or physiological damage - even with controls implemented. Individuals may also be hyper-susceptible or otherwise unusually responsive to some physical agents because of genetic factors, age, personal habits (smoking, alcohol or drug use), medication, or previous exposures. In case of such conditions, an occupational physician should evaluate the extent to which such workers require additional protection.

8.3.1 Noise

Anticipated work activities on-site may routinely involve the use of noise-producing equipment (construction equipment, decontamination activities, etc.) that may present a noise hazard exposure to workers. Safeguarding personnel from potential injury due to noise exposure will be implemented by the FSM in the following manner.

- Sound level measurements may be taken to determine work areas and equipment that may subject personnel to hazardous noise.

- Personnel subjected to excessive noise shall be trained in the hazards associated with acute and chronic noise exposures.
- Suitable hearing protection devices shall be used by personnel when exposed to excessive noise.
- Work areas with noise levels greater than an 8-hour time weighted average (TWA) of 85 dBA will be posted as a high noise area, requiring the use of hearing protection. Specific precautions to be taken for noise exposures shall be in compliance with OSHA 29 CFR 1926.101.
- Whenever possible, removal or reduction of noise hazards will be accomplished through the implementation of administrative and engineering controls.

8.3.2 Heat Stress

Site operations may be conducted during periods of hot ambient temperatures. Since workers may not be acclimated to heat, during periods with ambient temperatures exceeding 72.5°F, a potential for heat stress exists. The use of PPE, work tasks involving strenuous activities, and elevated ambient temperatures can further increase potential heat stress hazards.

Measures to prevent or minimize heat stress hazards include personnel monitoring, work/rest periods, sufficient supplies of electrolyte fluid for use during rest periods, and adherence to American Conference of Governmental Industrial Hygienists (ACGIH) guidelines. Work/rest periods may require adjustment based on results of personnel monitoring (i.e., pulse rate or body temperature).

The warning symptoms of heat exhaustion include fatigue; loss of strength; reduced accuracy; loss of comprehension and retention; and reduced alertness and mental capacity. Heat stroke represents advanced stages of heat stress. Symptoms associated with heat stroke include hot, dry skin; elevated body temperature (>104°F); rapid pulse rate; and advanced symptoms of dizziness, nausea, confusion, convulsions, coma, and possible death. Personnel exhibiting symptoms of heat stress shall be required to increase rest periods and consume electrolyte fluids. Personnel displaying heat stroke symptoms shall be removed from work areas immediately, and will be required to seek prompt medical attention. Heat stress monitoring will be coordinated and documented by the FSM.

8.3.3 Lightning

Due to the severe nature of lightning (may discharge up to 50,000 volts), all personnel shall remain indoors during periods of expected lightning.

8.4 Operational Hazards

During the course of the project activities, personnel will be subjected to a number of potential operational hazards. These hazards will be controlled through the identification and evaluation of potential hazards, and adhering to administrative controls, engineering controls, personal protective equipment, and safe work practices. Operational hazards identified for this project include:

- fire/explosion hazards,
- heavy equipment hazards,
- material handling hazards,
- vehicular traffic,
- electrical hazards, and
- excavation hazards.

8.4.1 Fires/Explosions

Fire/explosion hazards could be encountered from the diesel fuel located on site. A truck-mounted tank will be on site during the project for fueling, excavating, and material hauling equipment. These hazards will be mitigated through the implementation of general safe work practices, worker hazard awareness training, the use of suitable protective systems/equipment, and strictly adhering to the following control measures.

- All personnel will know how to summon for emergency assistance from the local Fire Department (911).
- A permit will be obtained for all site activities with the potential to generate sparks (e.g., welding, metal cutting).
- All flammable liquids and solvents to be used on-site shall be transported and stored in UL listed and FM approved containers.
- Portable (not truck-mounted) flammable liquid containers will be removed from truck bed liners or other similar locations and placed on the ground before filling.
- Suitable containers with lids shall be provided for collection of waste materials and trash.
- Combustible materials will be removed at regular intervals to avoid poor housekeeping conditions.
- Flammable and combustible materials will be stored away from sources of ignition.
- NO SMOKING is permitted inside work zones. Follow area postings.
- Electrical equipment will be inspected and maintained to ensure proper functioning and that service cords are not damaged.
- At least one 10-lb ABC fire extinguisher shall be located on site (not in a vehicle) at all times.
- Fire extinguisher equipment shall be inspected routinely to ensure it is properly charged. Monthly inspection records shall be maintained for all fire extinguisher equipment.

8.4.2 Heavy Equipment

Heavy equipment to be utilized on this project is expected to include a drill rig and excavating equipment. The potential hazards associated with the use of heavy equipment can generally be attributed to unsafe conditions involving the equipment or equipment components, or unsafe use of the equipment by the operator. Adhering to the following provisions will minimize these hazards.

- All heavy equipment shall be operated by experienced, qualified operators only. All high profile equipment shall be located and operated in a safe manner.
- Whenever heavy equipment is operated in an area where contact with energized lines (underground/aboveground) may be possible, the equipment shall be grounded to protect personnel from possible electrocution hazards.
- A minimum of ten feet of clearance is required for overhead lines.
- Utility clearances will be obtained prior to intrusive activities.
- Prior to entry to the site, all heavy equipment will be inspected by the FSM. All heavy equipment shall be inspected by the qualified equipment operator on a daily basis for unsafe conditions including faulty components, worn/leaking hydraulic or fuel lines, missing pins/bolts or attachments.
- All inspection records (annual inspection certifications and daily inspection reports) shall be maintained on site by the equipment operator and must be immediately available for review.

8.4.3 Material Handling

A variety of materials and material handling equipment will be required during this project. Hazards presented to workers during material handling tasks include shifting, sliding, and falling of stored construction materials and equipment, or loads. Potential injuries and accidents resulting from these activities will be minimized by adhering to applicable provisions within 29 CFR 1926.250, and the following requirements.

- Worker hazard awareness will be promoted during pre-job orientation, and weekly toolbox safety meetings.
- Excavated soils and materials that may be contaminated are to be placed adjacent to the site. A distance of at least two feet from the excavation edge will be maintained for all stockpiled material to prevent displacement back into the trench.
- All stored materials will be stacked, racked, blocked, or interlocked to prevent sliding, falling, or collapse.
- Maximum safe loads will not be exceeded (equipment load capacities and safe transport load limits).
- Storage areas will be kept in good repair, and aisles and passageways shall be kept clear to provide free and safe movement of personnel and material handling equipment.
- Noncompatible materials will be segregated in storage.

8.4.4 Vehicular Traffic

The work site is located in an area where personnel may be exposed to vehicular traffic. Personnel could therefore, be exposed to danger from moving vehicles. To minimize this hazard all personnel will adhere to the following requirements.

- When entering and exiting roadways workers will look both ways and will yield to all vehicles,
- While working in and around roadways all workers will stay within the area designated by the traffic control flagging or barricades with flashing lights, and
- Where possible, activities near roadways will be scheduled during low traffic periods.

8.4.5 Electrical

Work tasks during this project may subject personnel to possible electrical shock/burn hazards. Injuries may result due to faulty/damaged equipment, inadequate equipment grounding/bonding, wet environments, and unsafe acts committed by personnel using or working near energized electrical equipment. Potential hazards associated with electrical equipment will be mitigated by adherence with the following provisions.

- Prior to the commencement of construction site activities, any visible hazards such as overhead, aboveground and underground utilities shall be identified. Site drawings and excavation/penetration permit data shall be used for verification of electrical utilities.
- All electrically powered tools and equipment used on this project shall be inspected prior to each use, maintained to be safe, and adequate for the designated use.
- All drills, saws, grinders, and such shall be double-insulated and UL approved, or provided with a ground prong on the male plug. All temporary 120/125 volt, single-phase, 15 and 20-ampere receptacles and cord sets shall be protected by approved ground fault circuit interrupters (GFCI's).
- All electrical fixtures, fittings, equipment, and lights used inside confined spaces during the presence or use of flammable materials must be intrinsically safe and approved for use in

locations as outlined in 29 CFR 1926.440. This is necessary to avoid potential fires/explosions resulting from hazardous concentrations of flammable vapors, liquids, or gases during work activities.

- Grounding and bonding techniques are necessary to prevent the build-up of electrical potentials, which upon discharge could become a source of ignition/explosion. Therefore, grounding/bonding shall be utilized during fuel transfer activities from containers into equipment fuel tanks.

8.4.6 Excavations

Excavation operations will be required during this project. Trenching and loading excavated soils will be required. Potential hazards encountered during excavation operations include:

- falling, rolling, or sliding material or equipment;
- water accumulation/seepage;
- soil sloughing/cave-ins;
- hazardous atmospheres;
- failure of protective systems;
- vehicular traffic;
- underground utilities; and
- falls.

To minimize personnel exposure to these potential hazards, strict adherence to the following excavation safety provisions will be observed.

- An Excavation/Penetration Permit shall be obtained prior to commencement of **any** excavation activities and the permit must be conspicuously posted at the point of entry to the excavation area. Prior to opening an excavation, the estimated location of utilities or any underground installation identified on the excavation/penetration permit must be determined and clearly marked. The precise location of underground utilities/installations will be determined using hand-excavating techniques or specially designed detection equipment. If there is a potential for a hazardous atmosphere in the excavation, a Confined Space Entry Permit must be completed, and all applicable requirements must be met prior to entry into the space.
- A competent person will assess potential hazards by completing a daily inspection checklist which will be posted at the excavation area. The inspection shall be made prior to the start of work, and as needed throughout the shift. Inspections shall be made after each rainstorm or other hazard-promoting event.
- Personnel protection from excavated materials, hand tools, and supplies falling or rolling into excavations will be provided by placing and keeping such materials at least 2 feet from the edge of excavations. Protection from equipment that may fall or roll into excavations will be provided by the use of retaining devices. Whenever mobile equipment is operated adjacent to an excavation, and the operator does not have a clear and direct view of the edge of the excavation, a warning system must be utilized such as barricades, hand or mechanical signals, or stop logs. Personnel are not permitted underneath loads handled by lifting or digging equipment.
- Personnel protection from cave-ins shall be provided by an adequate protective system in accordance with OSHA 29 CFR 1926, Subpart P. Protection systems include sloping and benching systems or support systems, shield systems and other protective systems. The Competent Person shall determine the appropriate type of protection system necessary based on the appendices and tables in 29 CFR 1926.652. Protection system components are to be inspected daily by the competent person. Any damaged material or equipment shall be immediately removed from service.

- All excavations will be considered permit-required confined spaces until a documented determination has been made by the FSM in consultation with the Corporate Safety Manager.
- Stairways, ladders, or ramps will be provided to facilitate ingress/egress for trench excavations that are 4 feet or more in depth so as to require no more than 25 feet of lateral travel for personnel working in the excavation. Where personnel or equipment are permitted to cross over excavations, walkways or bridges with standard guardrails shall be provided. Adequate barriers (flagging placed 6 feet from excavation edges) and posting of signs (Open Trench/Confined Space) shall be provided to warn personnel of potential hazards.

9.0 TRAINING

All employees engaged in activities on site will be required to attend and successfully complete the following basic safety training:

- Site Safety Plan Review/Orientation, and
- Hazard Communication.

Other task specific training may be required for work tasks that may present unusual or specific hazards to workers. Specific training requirements will be determined as required by the Project Technical Specifications and the FSM. Examples of task specific training that may be required include:

- 40-Hour Hazardous Waste Operations (HAZWOPER)
- 8-Hour HAZWOPER Supervisor,
- Excavation Competent Person,
- Hearing Conservation,
- Respiratory Protection,
- Cardiopulmonary Resuscitation (CPR)/First-Aid,
- Confined Space Entry/Attendant, and
- fire extinguisher use.

10.0 GENERAL SAFE WORK PRACTICES

Site personnel and visitors shall be required to follow and maintain good hygiene/work practices that include the following.

- Unauthorized personnel are not allowed on-site.
- Work groups will always consist of at least two team members (buddy system).
- Smoking, eating, drinking, chewing gum or tobacco, taking medication, or any other hand-to-mouth activities will not be permitted within any flagged areas or exclusion zones.
- Wearing of contact lenses is strictly prohibited.
- Personnel under obvious influence of alcohol or controlled substances are not allowed on-site.
- Thoroughly wash hands, arms, and face before breaks, or any hand-to-mouth activity such as eating, drinking, smoking, or use of chewing tobacco.
- Personnel will discard and replace damaged, or heavily soiled protective clothing.
- Personnel shall notify the FSM of any defective monitoring, emergency, or other safety equipment.
- A supply of potable water, electrolyte replacement solutions, shaded areas, sufficient lighting, and sanitary facilities will be accessible to site personnel.
- All site personnel shall familiarize themselves with the provisions of this plan and emergency procedures by use of weekly safety meetings.

All personnel will be apprised of their rights and responsibilities pertaining to their own safety, and the safety of others at the job site. This will also include each employee's right and responsibility pertaining to known or suspected "imminent danger" situations, and their responsibility to initiate immediate "STOP WORK" until the imminent danger issue(s) have been satisfactorily resolved by management.

11.0 MEDICAL SURVEILLANCE REQUIREMENTS

Consistent with the requirements of OSHA 29 CFR 1926.65 all personnel working within an exclusion zone shall participate in a medical surveillance program. The purpose of the program is to assess and monitor employee health prior to employment, during the course, and at the end of work. Subcontractor personnel are required to be certified by their employer that they are in compliance with this requirement.

The program will consist of scheduled baseline exams, follow-ups, termination exams, and other exams as needed. The basic exam protocol is outlined in the STEP Corporate Medical Surveillance Program.

11.1 Respirator Fit and Training

The use of respiratory protection equipment is not anticipated for this project. However, if conditions warrant the use of respiratory protection during phases of work on site, personnel shall be quantitatively fit tested for each type of respirator to be worn to ensure proper seal of the respirator face piece. A signed physician's statement certifying that the individual is medically qualified to perform the work and is physically capable of wearing a respirator shall be required prior to utilizing the equipment. Respirator use, selection, issuance, and maintenance requirements outlined in the STEP Corporate Respiratory Protection Program must be strictly enforced.

Although respirator use is not anticipated, full-face respirators with combination organic vapor/HEPA (P95) cartridges will be maintained on site. In the event these respirators are used, the cartridges shall be changed out daily.

12.0 SITE CONTROL

The FSM will coordinate access control and security on site. Access to the site will be minimized as much as possible. Areas where work is in progress shall be flagged (or fenced) and posted as necessary. Additional work zones may be required depending on site conditions. Open trenches shall be protected when the site is unoccupied.

12.1 Visitors

Upon arrival, visitors will be logged-in by the FSM, and shall be allowed entrance only after undergoing a safety and emergency response orientation, and after verification of site/task specific training credentials. The orientation session includes a relevant briefing of site hazards, and includes a review of the "Emergency Response" section within this HASP.

Visitors are expected to comply with all relevant OSHA requirements such as medical surveillance, training, and respiratory protection.

12.2 Traffic

During drilling/excavation activities near roadways, vehicular traffic will be routed around the work zones by flags and traffic barricades with flashing lights.

13.0 ACCIDENT/INJURY REPORTING

Site personnel will immediately report any injury, accident, spills, or equipment failures (i.e., safety equipment, drill rigs, equipment, communication devices) to the FSM for prompt notification, reporting, and corrective action. Written reports will be prepared and filed immediately following an accident or injury. Injury and accident reports will become part of the permanent personnel file of involved employees. Additionally, any recordable accidents are to be reported to the STEP Corporate Safety Manager immediately - within two (2) hours. A written follow-up report (ENG Form 3394, Attachment E) will be completed and provided to the Department of the Navy within twenty- four (24) hours.

Monthly reporting of injury frequency and experience information will be maintained and provided in accordance with contract provisions. A comprehensive investigation of all accident/injuries shall be conducted by the FSM with findings documented and reported to both the STEP Corporate Safety Manager and the Department of the Navy. Lessons learned will be discussed immediately following completion of the accident/injury investigation and reporting.

The STEP FSM (or designee) will be the First Aid/CPR qualified individual at the field site, and will be present at all times during the course of on site work.

Any spills of chemicals (i.e., fuel, oil) on the ground will be immediately contained and cleaned-up. All chemical spills will be documented in the daily report.

14.0 HAZARD COMMUNICATIONS

STEP intends to fully comply with all requirements of the OSHA Hazard Communication Standard 29 CFR 1926.59 and 1910.1200. The procedures by which hazard information exchange will take place concerning job hazards and names and characteristics of toxic materials introduced to the site are detailed in the STEP Corporate Hazard Communication Program.

15.0 PERSONAL PROTECTIVE EQUIPMENT

The FSM will be responsible for enforcing the appropriate use of personal protective equipment (PPE) for all personnel during the course of work, through a program of regular site surveillance and progressive disciplinary policy. Task-specific PPE will be used in accordance with the provisions contained within this plan. At a minimum, hard hats, safety glasses, and ANSI-approved steel-toed boots will be mandatory in all flagged construction areas of this project. In addition, the following additional PPE may be required for specific job tasks.

- Respirators, when required, shall be supplied and used in accordance with OSHA 29 CFR 1926.103 and ANSI Z88.2. Respirator users must report to work clean-shaven.
- Chemical resistant protective clothing (impervious suits, protective gloves, booties) may be required during hazardous work tasks.
- Hearing protection will be provided to all workers in areas where sound levels exceed 85 dBA.
- Full-body harnesses with twin shock absorbing lanyards may be required when performing work that presents a fall hazard in excess of six feet.
- Appropriate hand protection shall be provided as necessary.

All personnel on-site performing work tasks shall use the level of protection as specified in this plan. This HASP requires the use of Level D, and Modified Level D according to specific tasks and concentrations of hazardous constituents. All PPE requirements for varied activities, tasks, and work zones are based upon the identified site-specific contaminants, and may require re-assessment necessitating upgrade or downgrade of PPE.

15.1 Level “D” PPE

General tasks which are not performed in an Exclusion Zone, and do not involve hazardous material exposures, will require the following minimum PPE:

- work shirt (with sleeves) and work pants;
- ANSI-approved work boots;
- hard hat (in posted areas); and
- approved safety glasses.

The following may also be included:

- leather gloves,
- protective goggles, and
- hearing protection (ear plugs/muffs).

15.2 Modified Level “D” PPE

Personnel and environmental monitoring for exposures to hazardous materials (i.e., petroleum distillates) will be performed for the purpose of evaluating the effectiveness, or necessity, of control measures implemented initially. Tasks presenting a skin contact exposure hazard will require the use of additional PPE. Therefore, modification to Level D PPE may be appropriate and could include the following:

- work shirt (with sleeves) and work pants;
- ANSI-approved work boots;
- hard hat (in designated areas);
- approved safety glasses; and
- *no respiratory protection.*

The following may also be included:

- Tyvek or Saranex suit;
- boot/shoe covers;
- inner vinyl gloves and/or outer nitrile rubber gloves;
- shoe/boot covers and protective gloves used in conjunction with tyvek suits must be taped at the ankles and cuffs; and
- hearing protection (ear plugs/muffs).

Violation of PPE requirements will be subject to disciplinary policy.

16.0 PROTECTIVE CLOTHING DONNING/DOFFING PROCEDURES

The purpose of the protective clothing donning/doffing procedures is to ensure that on-site personnel are instructed in the proper way to don/doff protective clothing. Failure to adhere to these procedures may result in the protective clothing being ineffective against a potential contaminant. The following donning/doffing procedures are given as a guide and may be altered by the FSM if improvements can be made to the procedure and these changes are warranted in the field.

16.1 Protective Clothing Donning Procedure

- Proceed to the PPE Storage area and dress out utilizing the task-specific required PPE. Always inspect protective gloves, boot/shoe covers, tyvek, and respiratory protective equipment for proper fit, integrity (i.e., rips, tears, holes), and proper functioning.
- Tape protective gloves and shoe covers at the cuffs and ankles when wearing protective clothing, if within task-specific PPE requirements.

16.2 Protective Clothing Doffing Procedure

- Wash/rinse (if necessary) excess dirt or debris from outer gloves/boots, and protective clothing prior to leaving the work zone.
- Remove outer tape and outer layers of clothing (Saranex, glove, boot/shoe covers) placing disposable PPE in designated drums, and reusable PPE in designated locations.
- Thoroughly wash hands and face prior to any hand-to-mouth activities including smoking, eating, and drinking, etc.

17.0 DECONTAMINATION

The purpose of decontamination is to prevent contaminants that may be present on protective clothing and equipment from coming into contact with personnel as they doff PPE. Also, decontamination protects workers from hazardous substances that may contaminate and eventually permeate the PPE used, and it protects personnel by minimizing the transfer of harmful materials into clean areas. Combining decontamination with the correct sequential method of removing PPE will minimize possible exposure to personnel leaving the work areas as well as off-site migration of contaminants.

Generally, decontamination is accomplished by starting at the first station with the most heavily contaminated item and progressing to the last station with the least contaminated item. Each item of PPE requires a separate station and shall be marked accordingly.

The purpose of equipment decontamination is to prevent exposure to personnel during loading, transporting and unloading at another site. It is also to prevent off-site migration of contaminants from one site to another. Also, in many cases, proper decontamination of equipment could eliminate the need to utilize PPE, or reduce PPE levels, during maintenance type activities.

17.1 Personnel Decontamination

Removal of loose mud or other substrate from personnel and equipment will be performed prior to leaving the exclusion zone. Additional material will be removed in the contamination reduction zone by

brushing, or washing as necessary. Personnel will remove any disposable PPE and discard into provided containers/drums prior to leaving the contamination reduction zone. Personnel shall thoroughly wash hands and face before leaving the area and engaging in any hand-to-mouth activities (i.e., eating, drinking, or smoking).

17.2 Equipment Decontamination

All equipment shall be decontaminated at the job site, prior to removal from contaminated work areas. All equipment decontamination, shall be performed by using wet-wipe methods or steam cleaner (large equipment, tools), if necessary, prior to removal from work areas. All equipment decontamination efforts shall be conducted in accordance with contract specifications.

18.0 DISCIPLINARY POLICY

All STEP and lower-tier subcontractor employees shall be subject to the following progressive disciplinary policy, per contract specifications, for violation of “Imminent - Danger Violations” by OSHA regulations or rulings.

These include:

1. for first violation: two (2) days off without pay;
2. for second violation: one (1) week off without pay; and
3. for third violation: indefinite suspension from job site.

Note: For flagrant disregard/violation of policy/procedure personnel are subject to immediate and permanent suspension from the job site and termination of employment.

Violating any safety rules of a lesser nature will involve the following progressive disciplinary actions:

1. for first offense: documented verbal warning;
2. for second offense: written warning;
3. for third violation: three (3) days restricted from site; and
4. for fourth violation: indefinite restriction from site.

19.0 SAFE OPERATING CONDITIONS

STEP has the responsibility for providing and maintaining safe tools and equipment for field personnel. This responsibility includes, but is not limited to: certification of safe operating conditions for all power and non-power tools; assuring proper maintenance of earthmoving equipment, vehicles, protective devices for power hand tools, and other portable equipment; and tag out or removal of defective tools and equipment from the work area. All tools and equipment shall be covered under a regular inspection and control program. Prior to arrival and use at the project site, tools and power-operated equipment shall be inspected and checked for defective parts or operation. Only tools and equipment passing this inspection shall be assigned to this project. Subsequent site inspections of tools and all power-operated machinery will occur daily. Regular tool and equipment inspections will be performed for the duration of the project as required in STEP’s *Corporate Safety and Health Requirements Manual*. Employee exposure to airborne contaminants, and other potential health effects shall be monitored on site by the FSM. The FSM shall serve in the role of “Competent Person” during inspection of work site conditions and equipment.

20.0 SANITATION/ILLUMINATION

Restrooms and field washing facilities shall be available on site for use on this project. All personnel are expected to utilize good personal hygiene practices when exiting potentially contaminated work areas. Observing hygiene practices will minimize the potential migration of contaminants from “dirty” areas into “clean” areas. Following exit from contaminated work areas, personnel are expected to wash hands and face prior to engaging in any hand-to-mouth activities (i.e., eating, drinking, smoking, applying cosmetics).

The FSM will evaluate illumination levels and require the following illumination intensities for the specified work:

<u>Intensity</u>	<u>Area of Operation</u>
5 footcandles	General Construction Area
5 footcandles	Hallways/Aisles
10 footcandles	Equipment Operations

21.0 MONITORING/SAMPLING

Monitoring and sampling shall be conducted to evaluate potential physical, inhalation, ingestion, absorption, and contact hazards or exposures to personnel. The evaluation of hazards and exposures will determine the effectiveness of engineering controls, PPE requirements, and safe work practices. This will be achieved through various instantaneous and integrated sampling techniques for physical, and chemical hazard/exposure concerns.

Instantaneous monitoring equipment used by STEP will be operated in accordance with manufacturer specifications and operation procedures. A copy of the manufacturers’ procedure or specification will be maintained at the project site for review, as necessary.

21.1 Industrial Hygiene Monitoring/Sampling Equipment

The following monitoring/sampling equipment may be used at the project site by STEP personnel in identifying, evaluating, and controlling contaminant exposure hazards.

- *Organic Vapor Monitor/Photoionization Detector* - used for pre-entry and periodic checks of confined areas, as well as periodic sampling of breathing zone organic concentrations
- *Sound Level Meter/Dosimetry* – may be used to obtain noise level or exposure data
- *Oxygen/Combustible Gas Meter* – used for pre-entry and periodic checks of confined areas

21.2 Industrial Hygiene Monitoring Action Levels

Industrial Hygiene Monitoring Action Levels

Industrial Hygiene Monitoring	Action Level	Response Actions
Organic Vapors (Petroleum Hydrocarbons)	50 ppm in breathing zone for >5 minutes.	Evacuate area until consultation with Corporate Safety Manager
Noise	TWA >85 dBA	Utilize hearing protection
Combustible gases	>10% of the LEL instantaneously	Evacuate area until consultation with Corporate Safety Manager

21.3 Documentation of Monitoring

All industrial hygiene sampling data will be maintained in the project files. Monitoring results from direct-reading instruments will be documented in the project log. Personal monitoring results will be presented and explained to the employee within 48 hours of receipt of the results.

22.0 PROJECT DOCUMENTATION

Documents applicable to safety and health shall be the responsibility of the FSM and shall be maintained on site for review. The safety and health documents listed below shall be maintained on site during working hours. These records will be available for review and shall become part of the project historical files upon completion of the project.

- Approved HASP
- Site Monitoring/Calibration Records
- Training/Safety Meeting Attendance Rosters
- Accident/Illness Reports
- Daily Safety Inspection Reports
- Training Documentation Records
- Medical Documentation Records
- Job Site Inspection Records
- Equipment Inspection Records

23.0 EMERGENCY RESPONSE

The purpose of this section is to safeguard human health and the environment in the event of an emergency. This section also addresses the actions to be taken in response to an emergency. The responsibility of the day-to-day implementation of this Emergency response information lies primarily with the FSM. During an actual response situation, the FSM will serve as the Emergency Coordinator.

23.1 Pre-Emergency Planning

The following pre-emergency tasks shall be accomplished prior to commencement of work.

- Locate telephones and emergency alarm devices.

- Post emergency telephone numbers at accessible telephone locations.
- Provide a site map marked with planned evacuation routes, assembly points, and emergency equipment.
- Review and revise the emergency response plan in the event of a failure of the plan in an emergency, changes in site conditions, or scope of work.
- Ensure at least one 10-lb ABC dry chemical fire extinguisher is immediately available on site at all times. If the extinguisher is to be placed on a vehicle, it should be left at the project site if that vehicle leaves.

23.2 Emergency Medical Treatment and First Aid

In the event of an emergency involving personal injury or illness, first aid should be rendered by a trained person and emergency medical services should be summoned. At least one First Aid/CPR trained person will be on site at all times. Personnel will be decontaminated (if injury/illness occurs in a contaminated area and PPE is being utilized) to the extent possible without further injury. Life saving and first aid procedures take priority over personal decontamination efforts. If further medical attention is required, injured personnel may be transported to Roper Hospital North or Charleston Memorial. A map showing the route from the job site to Roper Hospital North and Charleston Memorial is provided as Attachment 3.

23.3 Emergency Contact/Listing

Emergency Resources are as follows.

Fire Department

Fire (North Charleston) 911

Police

Police (North Charleston) 911

Ambulance/Hospital

Roper Hospital North (Primary) (843) 745-2787

Roper Hospital North (Non-emergency) (843) 744-2110

Charleston Memorial (Alternate) (843) 577-0600

Other Important Numbers

Poison Control Hotline 1-800-522-4611

EPA National Response Center 1-800-424-8802

SCDHEC (803) 898-3432

SCDHEC 24-hr Emergency Response (888) 481-0125

SCDHEC Ground Water Quality Section

Point of Contact: Michael Bishop (803) 898-3553

Concentra Medical Center (865) 425-4640

STEP Field Services Manager (865) 679-2098

STEP Corporate Safety Manager (865) 777-1401

Dept. of Navy POC: Gabriel Magwood (843) 820-7307

24.0 REFERENCES

Occupational Safety and Health Administration, 29 CFR 1910 and 1926 Standards.

STEP, Inc., August 2001. *Corporate Safety and Health Program Manual*.

Tetra Tech NUS, Inc., May 2002. *Active Corrective Action Plan for Chicora Tank Farm*.

U.S. Army Corps of Engineers, *Safety and Health Requirements Manual*, EM 385-1-1, latest edition.

Appendix A
Activity Hazard Analysis

STEP, Inc.
ACTIVITY HAZARD ANALYSIS LOG

Project Title: Soil Remediation and Free Product Recovery at Chicora Tank Farm, Charleston Naval Shipyard, Charleston, South Carolina

Contract No: N62467-02-R-0466

Delivery Order #: N/A

Revision #:0

Construction Phase: ALL

I have read or been briefed on the attached AHA and understand the hazards associated with this job and will comply with the provisions set forth herein.

#	Date	Time	Company Affiliation	Printed Name	Signature
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Mobilize/Demobilize	<ul style="list-style-type: none"> • Injury to head, eyes, foot, hand, and hearing • Back Injury • Shifting/Falling Materials • Slips, Trips, Falls • Motorized Equipment Failure 	<ul style="list-style-type: none"> • Hard hats (ANZI Z87.1), safety glasses with sideshields, ANSI approved steel-toed footwear required. • Leather or cotton gloves shall be worn when handling materials with rough or jagged surfaces. • Hearing protection required if exposed to high noise. <i>Rule of thumb – hearing protection required if you must raise your voice to be heard at 3 feet away.</i> • First-Aid/CPR trained individual must be onsite during performance of work. First-Aid kit and emergency reporting phone numbers must be accessible in the event of an emergency. • All accidents/injuries must be reported to the Safety Officer or Field Services Manager (FSM) as soon as possible. • Use proper lifting techniques - keep back straight when lifting, and bend at the knees. Maximum unassisted weight is 50 lbs. • Materials will be stacked neatly and orderly away from the work area, vehicular traffic areas, and pedestrian travel areas. • Housekeeping will be maintained at all times to remove obstructions and debris to prevent accidental slips, trips, and falls. • Flags will mark the construction area and warning signs will be posted to identify the hazards posed in the area (i.e., “Construction Area - Hard Hat and Safety Glasses Required”; “Hearing Protection Required”; “Confined Space - Permit Required Prior To Entry”; “Open Excavation”; etc.) • Trained, experienced, and authorized equipment operators only. • Daily operator checklist must be completed on all motorized equipment to ensure proper and safe functioning. • Set brake and chock wheels on equipment and haulage trucks when unattended.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
ALL TASKS	<ul style="list-style-type: none"> • Injury resulting from unknown hazard • Injury to head, eyes, foot, hands, or chemical exposure • Injury from defective or damaged equipment or tools • Injury or illness due to unsafe act or unsafe condition • Fire 	<ul style="list-style-type: none"> • The FSM or designee shall conduct a pre-work safety orientation briefing to include a review of the project Health and Safety Plan (HASP), activity hazard analysis, and permits. • Minimum PPE required - Hard Hat, Safety Glasses with sideshields, ANSI approved steel-toed footwear. Cotton or leather gloves required when handling materials with sharp or jagged parts. • Task-specific training and medical surveillance verification performed by Safety Officer or FSM prior to start of work tasks. • Daily operator inspection required for all tools/equipment prior to use. Quarterly inspection of electrical cords, and ladders required by Safety Officer or other designated "Competent Person". • Inspect tools and equipment daily prior to use. Defective tools and equipment shall be tagged immediately - DEFECTIVE: DO NOT USE, and shall be removed from the jobsite immediately. Tools and equipment that cannot be repaired shall be destroyed or otherwise made inoperable prior to removal from the site. • Weekly safety meetings will be conducted by the Safety Officer or FSM - all project personnel, including subcontractor personnel, are required to attend. An attendance roster will be maintained to provide documentation of the meetings. • A minimum of one person trained in First-Aid/CPR & Bloodborne Pathogens must be on site during any work. • Workers shall report all injuries or incidents. If you are not sure of the hazards posed by your work task, and are not aware of the safety requirements in performance of the work, ask the Field Services Manager, or the Safety Officer. • Avoid parking vehicles near tall vegetation. • Maintain a fire extinguisher on site at all times (at least a 10-lb. ABC dry chemical). • Flammable and combustible materials should be stored at least 10 to 30 feet away from potential ignition sources.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Hand and Mechanical Excavation	<ul style="list-style-type: none"> • Disturbing buried underground or above ground utilities • Electrical Shock • Pedestrian or vehicular traffic • Collapse of excavation 	<ul style="list-style-type: none"> • Utility clearances are required prior to commencing excavation work. Review excavation/penetration permit, if required, prior to excavating soils. Locate all above ground utilities to maintain safe distances with equipment. Use hand tools, if feasible, to excavate in areas within 2 feet of known or suspected underground structures (i.e., gas, sewer, water, communications, electrical). • Ground excavating equipment whenever the equipment is being operated in an area where contact with energized lines (aboveground/underground) may be possible - within 20 feet of energized lines). • GFCIs are required for use on all electrical extension cord sets and power-tools. Electrical hand tools must be UL-approved and of the double-insulated type or provided with a male ground prong on the service cord. • Signs and barricades shall be posted at all points where pedestrian or vehicle traffic approaches the excavation. • All excavation shall be supervised at all times by an excavation competent person. Inspection of the excavation must be completed by the designated competent person prior to personnel entry daily and following any event that may affect the stability of the excavation or changed conditions within the excavation. • Spoils from the excavation must be kept a minimum of 2 feet from the nearest edge of the excavation to prevent accidental entry into the open excavation. • Equipment is to be restricted from working near the edge of an open excavation while personnel are in the excavation. • Personnel entry into excavations greater than 4 feet in depth shall be performed using protective systems (i.e., trench boxes, hydraulic shoring, benching, or sloping) in compliance with OSHA and USACE Standards. The designated competent person will be responsible for selection and implementation of protective system use.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Mobile Equipment Operation (All Phases)	<ul style="list-style-type: none"> • Excessive Noise • Personnel struck by equipment • Equipment failure resulting in personnel injury 	<ul style="list-style-type: none"> • Use hearing protection devices (ear plugs) when working around heavy equipment producing excessive noise. The Safety Officer or FSM will conduct a noise survey to determine specific hearing protection requirements. Follow requirements outlined in the Site HASP, and the Corporate Hearing Conservation Program. • Back-up alarms are required for all heavy equipment and haulage trucks. A spotter may be utilized in-lieu of audible back-up alarms whenever necessary. • Maintain safe operating speeds, and frequently check mirrors for presence of personnel. • Personnel working in proximity of heavy equipment will be required to wear orange vests to increase visibility. • Flags and signs will be posted to identify and segregate heavy equipment hazard areas. Only trained and authorized personnel will be permitted within work areas. The FSM or another designated individual who is cognizant of site hazards will conduct pre-entry safety briefings. • Operators must conduct daily inspections of equipment prior to use. Follow manufacturer recommended equipment check-out procedure, if applicable. • All safety equipment and guards must remain in place and operational. • Use of seat belts is mandatory during operation of motorized equipment. • Maintain clear and adequate access ways, roadways, and work ways for safe vehicle equipment traffic. • Equipment operators must be aware of overhead and side clearances.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Excavation Entry (Confined Space Entry)	<ul style="list-style-type: none"> • Oxygen Deficiency or other Atmospheric Hazard 	<ul style="list-style-type: none"> • A Confined Space Entry Permit is required prior to entry into any confined space (such as a potentially contaminated excavation). If the Caretaker Site Office does not require a Permit, the Permit provided in the STEP Corporate Confined Space Entry Program will be utilized. Only trained and medically qualified personnel are permitted to perform confined space entry work. • The Site Safety Officer, or another designated, qualified individual must perform atmospheric monitoring before and during entry into a tank or excavation. Oxygen, carbon monoxide, and lower explosive limit levels must be within acceptable ranges prior to entry. • Conditions requiring the use of air-supplied respiratory protection will require evaluation and approval from the STEP Corporate Safety Manager, and designated Department of Defense (DOD) representatives. • A designated, trained confined space entry attendant is required. Emergency retrieval measures must be implemented for personnel performing confined space entry. Follow requirements within the STEP Confined Space Entry Program. • Communications devices must be immediately available to the attendant for emergency personnel notification in the event of an emergency. • The use of motorized equipment outside the confined space and other possible atmospheric hazard producing sources will be evaluated by the Site Safety Officer prior to and during confined space entry work. • Ventilation fans will be used whenever feasible. • Respiratory protection (full-face air purifying respirators with organic/P95 cartridges) will be maintained on site.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Excavation Entry - CONT. (Confined Space Entry)	<ul style="list-style-type: none"> • Fire/Explosion 	<ul style="list-style-type: none"> • Entry into a confined space containing a flammable or explosive atmosphere will not be permitted until further evaluation from the Site Safety Officer, STEP Corporate Safety Manager, and designated DOD representatives. • No use of compressed gas cylinders will be permitted inside confined spaces. • Personnel entering into confined spaces are not permitted to carry disposable lighters, matches, or other source of ignition. • Special approval must be obtained before "hot work" will be permitted inside confined spaces.
Material Handling (General)	<ul style="list-style-type: none"> • Spills of fuel or other liquids • Fires from fueling of equipment • Overloading Haulage Trucks 	<ul style="list-style-type: none"> • Maintain a spill cleanup kit onsite during any operations. Equipment fueling vehicles must have a spill kit immediately available. • Report any spills immediately. Contain and cleanup any leak or spill if feasible. DO NOT PUT YOUR SAFETY AT RISK - DIAL 911, if necessary. • No open flames, sparks, or smoking will be permitted within 50 feet of equipment fueling activities. Equipment engines must be turned off during fueling. • Bonding is required during fuel dispensing operations. Bonding may be achieved by using a common bonding wire attached to the dispensing container and the equipment frame. Bonding may also be achieved by direct contact between the metal safety container and the equipment's metal fuel tank. • Refilling of safety cans shall be accomplished by placing the can on the ground, then refilling. Safety cans will not be refilled in the beds of trucks that are equipped with liners. • Plan your route of travel and follow DOT requirements. Be aware of any height, width, and weight restrictions that may affect the safe transport of materials. • Know the capacity of the equipment being used to haul or transport the material. Secure materials on flat trailers with chains, boomers, or nylon "tie-down" straps to prevent shifting, sliding, or falling during transport. • Secure materials in the "load-carrier" (trailer). No materials are allowed to extend outside the trailer. Material loads must not extend above the top of trailer and must be covered (with tarp) prior to departure.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Hoisting/Rigging (During Material Handling Tasks)	<ul style="list-style-type: none"> • Failure of slings, chokers, or other hoisting/rigging equipment • Defective or unsafe hoisting and rigging equipment being used on the job site • Failure of custom lifting devices • Slings or shackles coming loose from hooks • Unqualified persons performing rigging operations 	<ul style="list-style-type: none"> • All hoisting/rigging equipment must be inspected by the FSM prior to entry to the job site. • All hoisting and rigging equipment shall be inspected for excessive wear and defects prior to, during, and after each use. • Hoisting/Rigging equipment shall not be loaded in excess of its safe working load limit. • All Hoisting/Rigging equipment (i.e., synthetic slings, wire rope chokers, shackles) shall be marked with its working load limit. • Job or shop hooks and links, or makeshift devices, formed from bolts, rods, etc., or other such attachments shall not be used. • All lifting equipment shall be brought to a designated staging area and inspected for excessive wear and defects prior to initial use on the job site. • Only equipment designed for hoisting and rigging shall be used in hoisting/rigging operations. • Wire ropes shall not be secured by knots or otherwise rigged to cause permanent distortion to the wire rope. • Custom lifting devices shall be marked with the safe working load limit. A documented proof test is required prior to initial use onsite. • Hooks used for hoisting/rigging operations shall be provided with safety latches. • Only trained and qualified persons shall engage in rigging and signaling activities. • Employees involved in hoisting and rigging activities shall receive awareness training in the limitations and proper use of the rigging equipment.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Hoisting/Rigging - CONT. (During Material Handling Tasks)	<ul style="list-style-type: none"> • Unforeseen problems during a lift • Shifting load or uncontrolled load • Overhead electrical 	<ul style="list-style-type: none"> • Each employee has the authority to stop a lift if any condition or situation occurs that could affect the safety or success of the lift. • Whenever practical loads shall be rigged to fixed lifting points on the item/material being hoisted. Otherwise, loads shall be rigged to maintain balance during the hoisting/rigging operation. • All hoisting/rigging operations shall be performed under the direct supervision of the designated Hoisting/Rigging Supervisor. • All suspended loads shall be controlled using tag lines whenever feasible. Personnel assigned tag line duty shall remain a safe distance from suspended loads. NO PERSONNEL ARE ALLOWED UNDERNEATH SUSPENDED LOADS. • Maintain safe distances from high voltage lines and mechanical pipe systems (crane grounding shall include use of a suitable ground rod and insulated 4/0 cable). Maintain a minimum of ten feet of clearance for all overhead lines.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Soil and Water Sampling	<ul style="list-style-type: none"> • Sampling Chemicals • Slips, Trips, Falls • Heavy Equipment 	<ul style="list-style-type: none"> • Use protective gloves during sampling events and during decon of sampling equipment. Wash hands immediately following sampling and deconning tasks prior to any hand-to-mouth activities. • Follow precautions (usage, storage, and disposal) and PPE recommendations outlined in the material safety data sheets (MSDS) for each of the chemicals used during sampling and for decon of sampling equipment. • Containers shall be legibly marked with their contents. National Fire Protection Association (NFPA) hazard labels are required for any secondary chemical containers used during sampling. • Exercise caution when standing or walking on uneven or unstable terrain. Maintain sure footing when working on sloped surfaces. • Personnel must maintain safe distances from operating equipment and haulage trucks. Wear orange vests to increase visibility when inside flagged work areas. • The equipment operators must follow safe operating speeds.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Soil Boring Installation	<ul style="list-style-type: none"> • Chemical exposure (petroleum distillates) • Slips, Trips, Falls • Back injury • Noise • Eye, hand, foot injury 	<ul style="list-style-type: none"> • Use protective gloves during drilling operations or whenever direct contact with soil cuttings. Wash hands immediately following sampling and decontamination tasks prior to any hand-to-mouth activities. • Follow precautions (usage, storage, and disposal) and PPE recommendations outlined in the MSDS for each of the chemicals used during decontamination of drilling equipment. • Containers shall be legibly marked as to its' content. NFPA hazard labels (with target organ effects) required for any secondary chemical containers used during sampling. • Monitoring should be performed during drilling operation to determine personnel exposures as prescribed in Section 21.0 in the Project HASP. • Exercise caution when standing or walking on uneven or unstable terrain. Maintain sure footing when working on sloped surfaces. • Utilize proper lifting techniques - bend at the knees and use legs instead of back during lifting tasks. Use the buddy system when lifting objects that are cumbersome or weighing more than 50 lb. • Utilize hearing protection (plugs or earmuffs) to reduce noise exposure. • Safety glasses, protective gloves, and steel-toed work boots are required when working near drilling equipment. • Work zones are to be established using signs and flagging to delineate the area. Unauthorized personnel are not allowed inside identified work zones. • Equipment operators should be trained in the safe operation of the equipment. Complete the daily operator checklist prior to use each day to ensure safe operation of the equipment.

STEP, Inc.
Activity Hazard Analysis (AHA)
for Construction Activities

Work Activity	Potential Hazard	Required Actions or Procedures
Monitoring Well Installation	<ul style="list-style-type: none"> • Chemical exposure (petroleum distillates) • Slips, Trips, Falls • Back injury • Noise • Eye, hand, foot injury 	<ul style="list-style-type: none"> • Use protective gloves during drilling operations or whenever direct contact with soil cuttings. Wash hands immediately following sampling and decontamination tasks prior to any hand-to-mouth activities. • Follow precautions (usage, storage, and disposal) and PPE recommendations outlined in the MSDS for each of the chemicals used during decontamination of drilling equipment. • Containers shall be legibly marked as to its' content. NFPA hazard labels (with target organ effects) required for any secondary chemical containers used during sampling. • Monitoring should be performed during drilling operation to determine personnel exposures as prescribed in Section 21.0 in the Project HASP. • Exercise caution when standing or walking on uneven or unstable terrain. Maintain sure footing when working on sloped surfaces. • Utilize proper lifting techniques - bend at the knees and use legs instead of back during lifting tasks. Use the buddy system when lifting objects that are cumbersome or weighing more than 50 lb. • Utilize hearing protection (plugs or earmuffs) to reduce noise exposure. • Safety glasses, protective gloves, and steel-toed work boots are required when working near drilling equipment. • Work zones are to be established using signs and flagging to delineate the area. Unauthorized personnel are not allowed inside identified work zones. • Equipment operators should be trained in the safe operation of the equipment. Complete the daily operator checklist prior to use each day to ensure safe operation of the equipment.

Attachment 1

Weekly Jobsite Checklist

STEP Inc.
Job Site Inspection Program
WEEKLY JOBSITE INSPECTION CHECKLIST

Project Name: _____

Inspection Date: _____

Project Supervisor: _____

DESCRIPTION	YES	N/A	NO	IF NO< WHY?
1.0 Project Administration: 1926, Subpart C				
1.1 OSHA and other required posters/sign posted				
1.2 Do all employees meet the required training level?				
1.3 Was a pre-job safety meeting held?				
1.4 Are toolbox meetings conducted and documented?				
2.0 Housekeeping: 1926, Subpart C				
2.1 General orderliness of the site acceptable?				
2.2 Passageways and walkways clear?				
2.3 Containers with lids provided for trash?				
3.0 Medical Services and First Aid: 19256, Subpart D				
3.1 One employee on site with current CPR/First Aid?				
3.2 First Aid Kit provided and properly stocked?				
3.3 Emergency communication numbers available?				
4.0 Sanitation, 1926, Subpart D				
4.1 Adequate supply of drinking water provided?				
5.0 Hazard Communication				
5.1 Is a hazardous material inventory available?				
5.2 Are MSDSs available for all hazardous materials on site?				
5.3 Are all containers properly labeled?				
5.4 Have all employees been trained?				
6.0 Personal Protective Equipment: 1926, Subpart E				
6.1 Are approved hard hats worn by all personnel?				
6.2 In eye and face protection provided and used as needed?				
6.3 Are full body harnesses with dual shock absorbing lanyards provided?				
6.4 Are employees tied of 100% of the time if over six feet?				
6.5 Are employees wearing gloves when required?				
6.6 Are employees dressed in appropriate work clothing?				
6.7 Are employees wearing proper boots?				
6.8 Is all equipment inspected regularly and maintained in a safe and sanitary condition?				
7.0 Fire Protection and Prevention: 1926, Subpart F				
7.1 Is the necessary fire fighting equipment provided?				
7.2 Are No Smoking signs posted within 50 feet of flammable liquids?				
7.3 Are combustible or flammable materials stored, dispensed, and used properly?				
8.0 Signs and Signals				
8.1 Are warning signs properly posted and visible?				
8.2 Is the construction area properly posted?				

STEP Inc.
Job Site Inspection Program
WEEKLY JOBSITE INSPECTION CHECKLIST

DESCRIPTION	YES	N/A	NO	IF NO< WHY?
9.0 Handling and Storage: 1926, Subpart H				
9.1 Is material stacked, racked, blocked, or otherwise secured to prevent falling or collapse?				
9.2 Are correct lifting methods used?				
9.3 Is all rigging equipment properly used and inspected?				
9.4 Is the Crane Operator certified and trained?				
10.0 Tools – Hand and Power: 1926, Subpart I				
10.1 Proper tools being used for the job?				
10.2 Proper inspection and maintenance of tools?				
10.3 Tools and cords in good condition & free of defects?				
10.4 All mechanical safeguards in place?				
10.5 Ground fault protection being utilized?				
11.0 Electrical: 1926, Subpart K				
11.1 Adequate wiring, well-insulated, no frayed cords?				
11.2 Are extension wires 3-prong and designed for rough usage?				
12.0 Other				
12.1 Are environmentally sensitive areas, equipment, or storage clearly identified and controlled?				

Supervisor Signature: _____

Date: _____

Attachment 2

Equipment Daily Inspection Checklist



SOLUTIONS TO ENVIRONMENTAL PROBLEMS, INC.
DAILY EQUIPMENT CHECKLIST

Operator: _____
Equipment Type: _____

Operational

- | | Yes | No |
|---|--------------------------|--------------------------|
| 1) Tires..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 2) Oil..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 3) Fuel System..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 4) Hydraulic Fluid..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 5) Hydraulic System (Pump, Hoses, Fittings)..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 6) Brakes – Including Parking Brake..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 7) Windshield: | | |
| a) No Cracks..... | <input type="checkbox"/> | <input type="checkbox"/> |
| b) Clean (Clear Visibility)..... | <input type="checkbox"/> | <input type="checkbox"/> |
| c) Wipers Operational..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 8) Steering System..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 9) Seat Belts..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 10) Controls..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 11) Fire Extinguisher (Current Inspection – Monthly)..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 12) Horn..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 13) Back-up Alarm Functioning..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 14) Lights | | |
| a) Head Lights..... | <input type="checkbox"/> | <input type="checkbox"/> |
| b) Tail Lights..... | <input type="checkbox"/> | <input type="checkbox"/> |
| c) Brake Signal..... | <input type="checkbox"/> | <input type="checkbox"/> |
| d) Turn Signals..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 15) Forks..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 16) Mast Components..... | <input type="checkbox"/> | <input type="checkbox"/> |
| 17) Rated Load Capacity Posted..... | <input type="checkbox"/> | <input type="checkbox"/> |


Comments

Inspected By (Signature): _____

Date: _____

Attachment 3

Route to Hospital

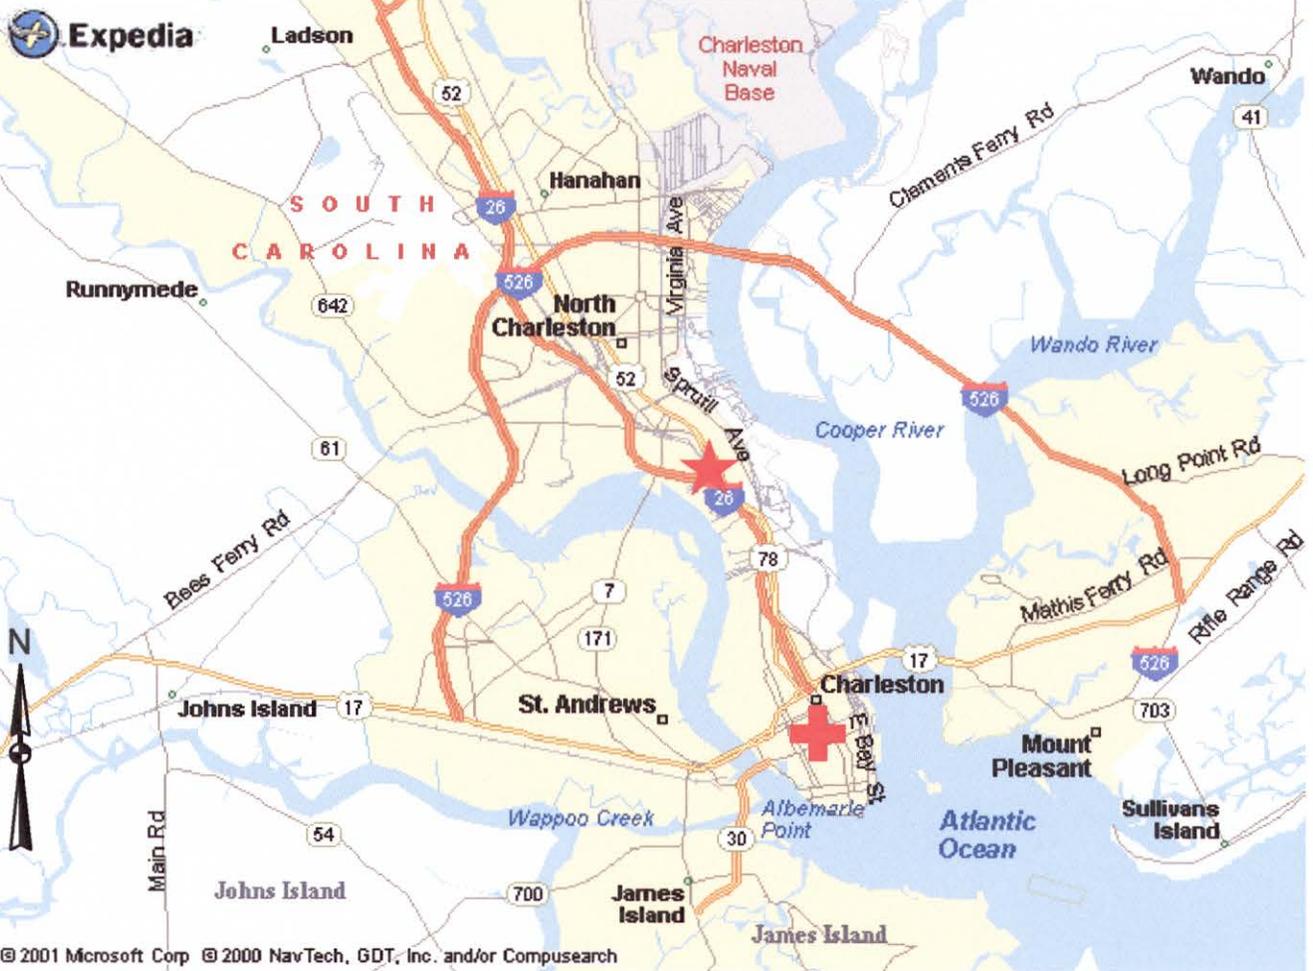


hospital-memorial chicora tank.apr 10/03/2002

LEGEND

- ★ Site Location
- ⊕ Hospital

Source: Expedia
 Prepared By: STEP, Inc. Oak Ridge, TN
 Job Title: Health and Safety Plan for
 Soil Remediation and Free Product
 Recovery at Chicora Tank Farm
 Charleston Naval Shipyard
 Charleston, South Carolina

Charleston Memorial Hospital Location Map

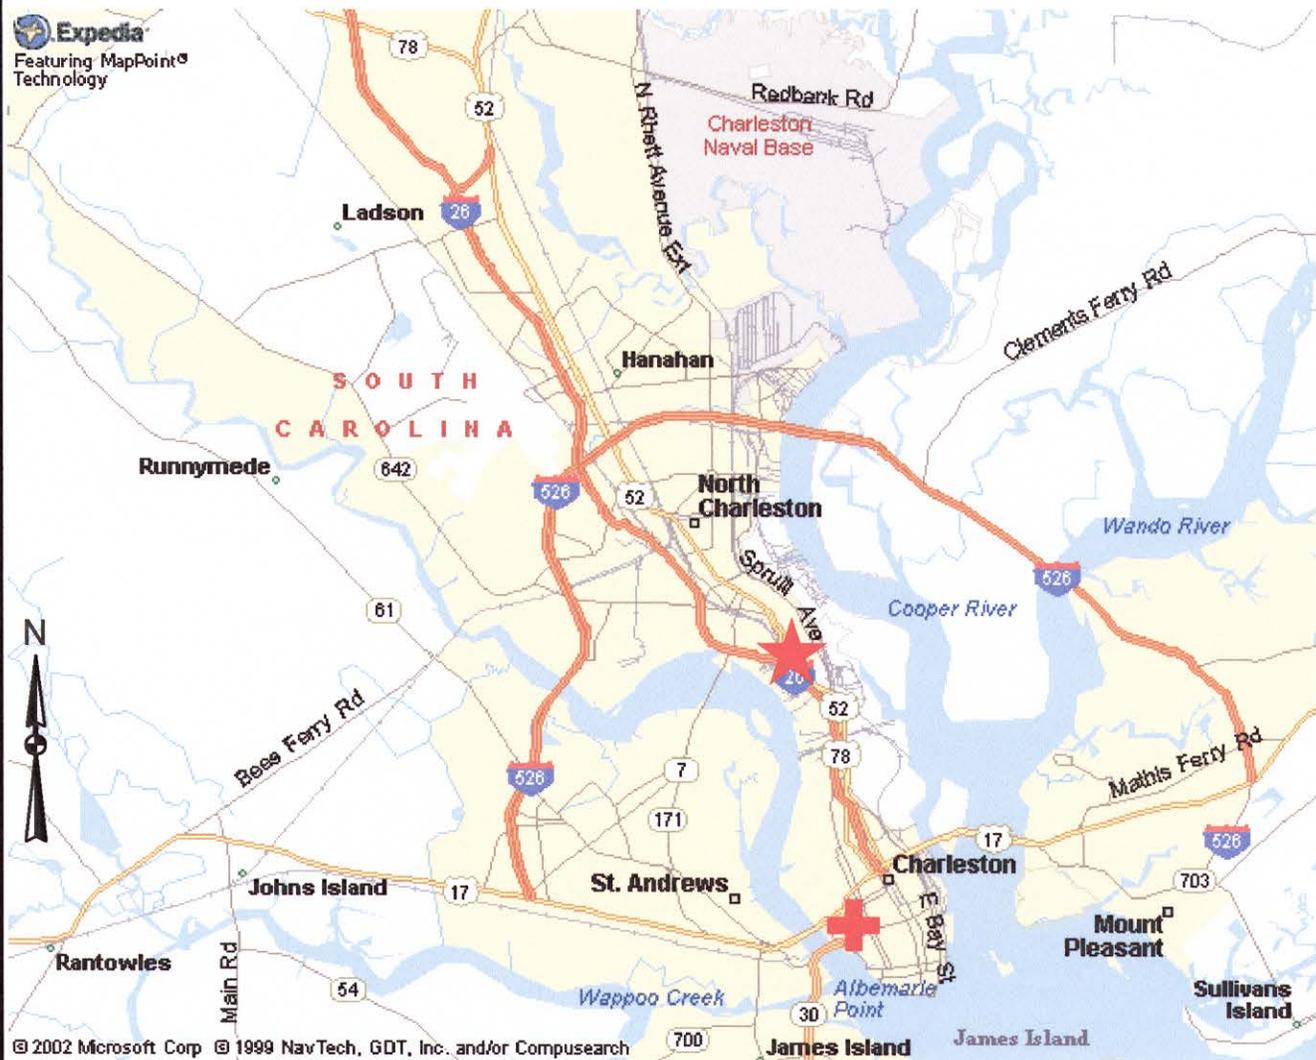

© 2002 Microsoft Corp © 1999 NavTech, GDT, Inc. and/or CompuSearch

Roper chicora tank.apr 10/03/2002

LEGEND

- ★ Site Location
- ⊕ Hospital

Source: Expedia
Prepared By: STEP, Inc. Oak Ridge, TN
Job Title: Health and Safety Plan for
Soil Remediation and Free Product
Recovery at Chicora Tank Farm
Charleston Naval Shipyard
Charleston, South Carolina

Roper Hospital Location Map