

N61165.AR.005680
CNC CHARLESTON
5090.3a

UNDERGROUND STORAGE TANK (UST) ASSESSMENT REPORT DATED 22 MAY 1998
FOR QUARTERS T WITH SOUTH CAROLINA DEPARTMENT OF HEALTH AND
ENVIRONMENTAL CONTROL REVIEW LETTER CNC CHARLESTON SC
07/14/1998
NAVFAC SOUTHERN



14 July 1998

2600 Bull Street
Columbia, SC 29201-1708

COMMISSIONER:
Douglas E. Bryant

BOARD:
John H. Burriss
Chairman

William M. Hull, Jr., MD
Vice Chairman

Roger Leaks, Jr.
Secretary

Mark B. Kent

Cyndi C. Mosteller

Brian K. Smith

Rodney L. Grandy

Department of the Navy
Southern Division NFEC
P.O. Box 190010
North Charleston, SC 29419-9010
Attn: Mr. Gabriel Magwood


Re: Underground Storage Tank Assessment Report dated 22 May 1998
Quarters "T" Housing (Site Identification # 15405-General File)
Charleston Naval Complex/Charleston Naval Base
Charleston, SC
Charleston County

Dear Mr. Magwood:

The author has completed technical review of the referenced document. As submitted, the report provides a narrative describing closure activities and analytical results of environmental sampling to determine if releases have occurred as a result of operation of the referenced vessel and/or associated piping system. The analytical results provided indicate reportable concentrations of BTEX compounds were detected in soil grab samples obtained from the UST excavation and the piping run excavation. The reported concentrations are below levels proposed in the SCAP (Soil Corrective Action Plan, amended July 1997). Based on review of the employed closure activities and sampling results it appears that no additional endeavors for remedial actions and/or contaminant characterization is warranted for Quarters "T" Housing at this time. Please be aware this statement pertains only to the portion of the facility addressed in the referenced document and does not apply to other areas of the facility and/or any other potential regulatory violations. The Department retains the authority to request additional assessments and/or remedial endeavors, as appropriate, if future conditions or information warrant and are deemed necessary.

Should you have any questions please contact me at (803) 734-5328.

Sincerely,


Paul L. Bristol, Hydrogeologist
Groundwater Quality Section
Bureau of Water


Tom Knight, Manager
Groundwater Quality Section
Bureau of Water

cc: Trident District EQC



DEPARTMENT OF THE NAVY
 SOUTHERN DIVISION
 NAVAL FACILITIES ENGINEERING COMMAND
 P.O. BOX 190010
 2155 EAGLE DRIVE
 NORTH CHARLESTON, S.C. 29419-9010

Li 5.28.98
 Lo 7.14.98
 NFA

5090
 Code 1849
 22 May 1998

Mr. Paul Bristol
 South Carolina Department of Health
 And Environmental Control
 Division of Underground Storage Tank
 2600 Bull Street
 Columbia, SC 29201

RECEIVED

MAY 26 1998

UST ASSESSMENT REPORTS FOR CHARLESTON NAVAL COMPLEX
 CHARLESTON, SC


Water Monitoring, Assessment &
 Protection Division

Dear Mr. Bristol:

Enclosed are the Assessment Reports for the closure of Underground Storage Tanks D, J, O, P, Q, R, S, T and W located at the Charleston Naval Complex, Charleston, SC.

If you have any questions please contact me at (843) 820-7307.

Sincerely,


 GABRIEL L. MAGWOOD
 Petroleum/UST

Encl:
 (1) Assessment Report

D
 J
 O
 P
 Q
 R
 S
 T
 W

NFA 7.14 low levels UCC soils

Li 5-28-98
Co 7-14-98
NFA

South Carolina Department of Health and Environmental Control (S.C.D.H.E.C.)
Underground Storage Tank (UST) Assessment Report

Submit Completed Form to:

Date Received

State Use Only

UST Regulatory Section
SCDHEC
2600 Bull Street
Columbia, South Carolina 29201
Telephone (803) 734-5331

I OWNERSHIP OF UST(S)

Agency/Owner: Southern Division, Naval Facilities Engineering Command, Caretaker Site Office
Mailing Address: P.O. Box 190010
City: N. Charleston State: SC Zip Code: 29419-9010
Area Code: 843 Telephone Number: 743-9985 Contact Person: Henry N. Shepard II, P. E.

II SITE IDENTIFICATION AND LOCATION

Site I.D. #: Unregulated
Facility Name: Charleston Naval Base Complex, Housing Quarters T
Street Address: 1531 Hobson Avenue
City: North Charleston, 29405-2413 County: Charleston

III CLOSURE INFORMATION

Closure Started: 14 April 1998 Closure Completed: 16 April 1998
Number of USTs Closed: 1
N/A Consultant SPORTENVDETHASN UST Removal Contractor

IV. CERTIFICATION (Read and Sign after completing entire submission)

I certify that I have personally examined and am familiar with the information submitted in this and all attached documents, and that based on my inquiry of those individuals responsible for obtaining this information, I believe that the submitted information is true, accurate and complete.
Henry Shepard II, P. E.
Name (Type or Print)
Signature *W. A. Brandy* for
MAY 26 1998
Water Monitoring, Assessment & Protection Division

V. UST INFORMATION

- A. Product.....
- B. Capacity.....
- C. Age.....
- D. Construction Material.....
- E. Month/Year of Last Use.....
- F. Depth (ft.) To Base of Tank.....
- G. Spill Prevention Equipment Y/N.....
- H. Overfill Prevention Equipment Y/N.....
- I. Method of Closure Removed/Filled.....
- J. Visible Corrosion or Pitting Y/N.....
- K. Visible Holes Y/N.....

	Tank 1	Tank 2	Tank 3	Tank 4	Tank 5
Fuel oil					
550 gal					
Unk.					
Steel					
3/98					
5'					
N					
N					
R					
Y					
N					

- L. Method of disposal for any USTs removed from the ground (attach disposal manifests)

UST Quarters T-1 was removed, drained, cut open at both ends, and cleaned with a steam cleaner. It was then cut up for recycling as scrap metal. (See Attachment III.)

- M. Method of disposal for any liquid petroleum, sludges, or waste waters removed from the USTs (attach disposal manifests)

The sludge, waste water, and residual fuel oil from UST Quarters T-1 were recycled.

- N. If any corrosion, pitting, or holes were observed, describe the location and extent for each UST

UST Quarters T-1 was covered with a protective coating of pitch. The tank was in good condition and contained no holes and only patches of surface corrosion.

VI. PIPING INFORMATION

- A. Construction Material.....
- B. Distance from UST to Dispenser.....
- C. Number of Dispensers.....
- D. Type of System P/S.....
- E. Was Piping Removed from the Ground? Y/N....
- F. Visible Corrosion or Pitting Y/N.....
- G. Visible Holes Y/N.....
- H. Age.....

Note 1: UST Quarters T-1 provided heating fuel oil to housing Quarters T.

	Tank 1	Tank 2	Tank 3	Tank 4	Tank 5
Copper & Steel 31"					
See note 1					
1 see note 1					
S					
Y					
N					
N					
Unk.					

- I. If any corrosion, pitting, or holes were observed, describe the location and extent for each line.

The steel ventilation pipe contained mild corrosion throughout its length, but no holes were found. The copper supply and return lines were in good condition.

VII. BRIEF SITE DESCRIPTION AND HISTORY

Quarters T was built in the late 1930s. It served as housing for Naval families until base closure.

VIII. SITE CONDITIONS

Yes No Unk

	Yes	No	Unk
<p>A. Were any petroleum-stained or contaminated soils found in the UST excavation, soil borings, trenches, or monitoring wells?</p> <p>If yes, indicate depth and location on the site map.</p>		X	
<p>B. Were any petroleum odors detected in the excavation, soil borings, trenches, or monitoring wells?</p> <p>If yes, indicate location on site map and describe the odor (strong, mild, etc.)</p>		X	
<p>C. Was water present in the UST excavation, soil borings, or trenches?</p> <p>If yes, how far below land surface (indicate location and depth)?</p> <p>_____</p>		X	
<p>D. Did contaminated soils remain stockpiled on site after closure?</p> <p>If yes, indicate the stockpile location on the site map.</p> <p>Name of DHEC representative authorizing soil removal:</p> <p>_____</p>		X*	
<p>E. Was a petroleum sheen or free product detected on any excavation or boring waters?</p> <p>If yes, indicate location and thickness.</p>		X**	

* All excavated soil was returned to the tank pit.

** No groundwater was encountered.

X. SAMPLING METHODOLOGY

Provide a detailed description of the methods used to collect and store (preserve) the samples.

After the removal of UST Quarters T-1, soil samples were taken. Sampling was performed in accordance with SC DHEC R.61-92 Part 280 and SC DHEC UST Assessment Guidelines.

Sample jars were prepared by the testing laboratory. The grab method was utilized to fill the sample containers leaving as little head space as possible and immediately capped. Samples were extracted at the tank ends and from beneath the piping at the mechanical connections.

The samples were marked, logged, and immediately placed in sample coolers packed with ice to maintain an approximate temperature of 4° C. Tools were thoroughly cleaned and decontaminated with organic-free soap and water after each sample.

The samples remained in the custody of SPORTENVDETCHASN until they were transferred to General Engineering Laboratories for analysis as documented in the attached Chain-of-Custody Record.

The laboratory soil used for the soil trip blanks that accompanied the samples was taken from the wrong container. This soil exhibited contamination of naphthalene at approximately 6 ug/kg, toluene at ~1 ug/kg, and xylenes at ~ 1 ug/kg. Although this had no effect on the soil samples, the condition renders the use of these trip blanks as unsatisfactory for quality control purposes. Accordingly, the data is not included with the site samples. The problem has been corrected and the unsatisfactory soil has been removed from the lab.

XI. RECEPTORS


Yes No

<p>A. Are there any lakes, ponds, streams, or wetlands located within 1000 feet of the UST system? [Noisette Creek ~ 986'] If yes, indicate type of receptor, distance, and direction on site map.</p>	<p>X</p>	
<p>B. Are there any public, private, or irrigation water supply wells within 1000 feet of the UST system? If yes, indicate type of well, distance, and direction on site map.</p>		<p>X</p>
<p>C. Are there any underground structures (e.g., basements) located within 100 feet of the UST system? If yes, indicate the type of structure, distance, and direction on site map.</p>		<p>X</p>
<p>D. Are there any underground utilities (e.g., telephone, electricity, gas, water, sewer, storm drain) located within 100 feet of the UST system that could potentially come in contact with the contamination? [water, electrical] If yes, indicate the type of utility, distance, and direction on the site map.</p>	<p>X</p>	
<p>E. Has contaminated soil been identified at a depth of less than 3 feet below land surface in an area that is not capped by asphalt or concrete? If yes, indicate the area of contaminated soil on the site map.</p>		<p>X</p>


SITE MAP

You must supply a scaled site map. It should include all buildings, road names, utilities, tank and pump island locations, sample locations, extent of excavation, and any other pertinent information.

Site Maps 1, 2, and 3
Photographs 1 and 2

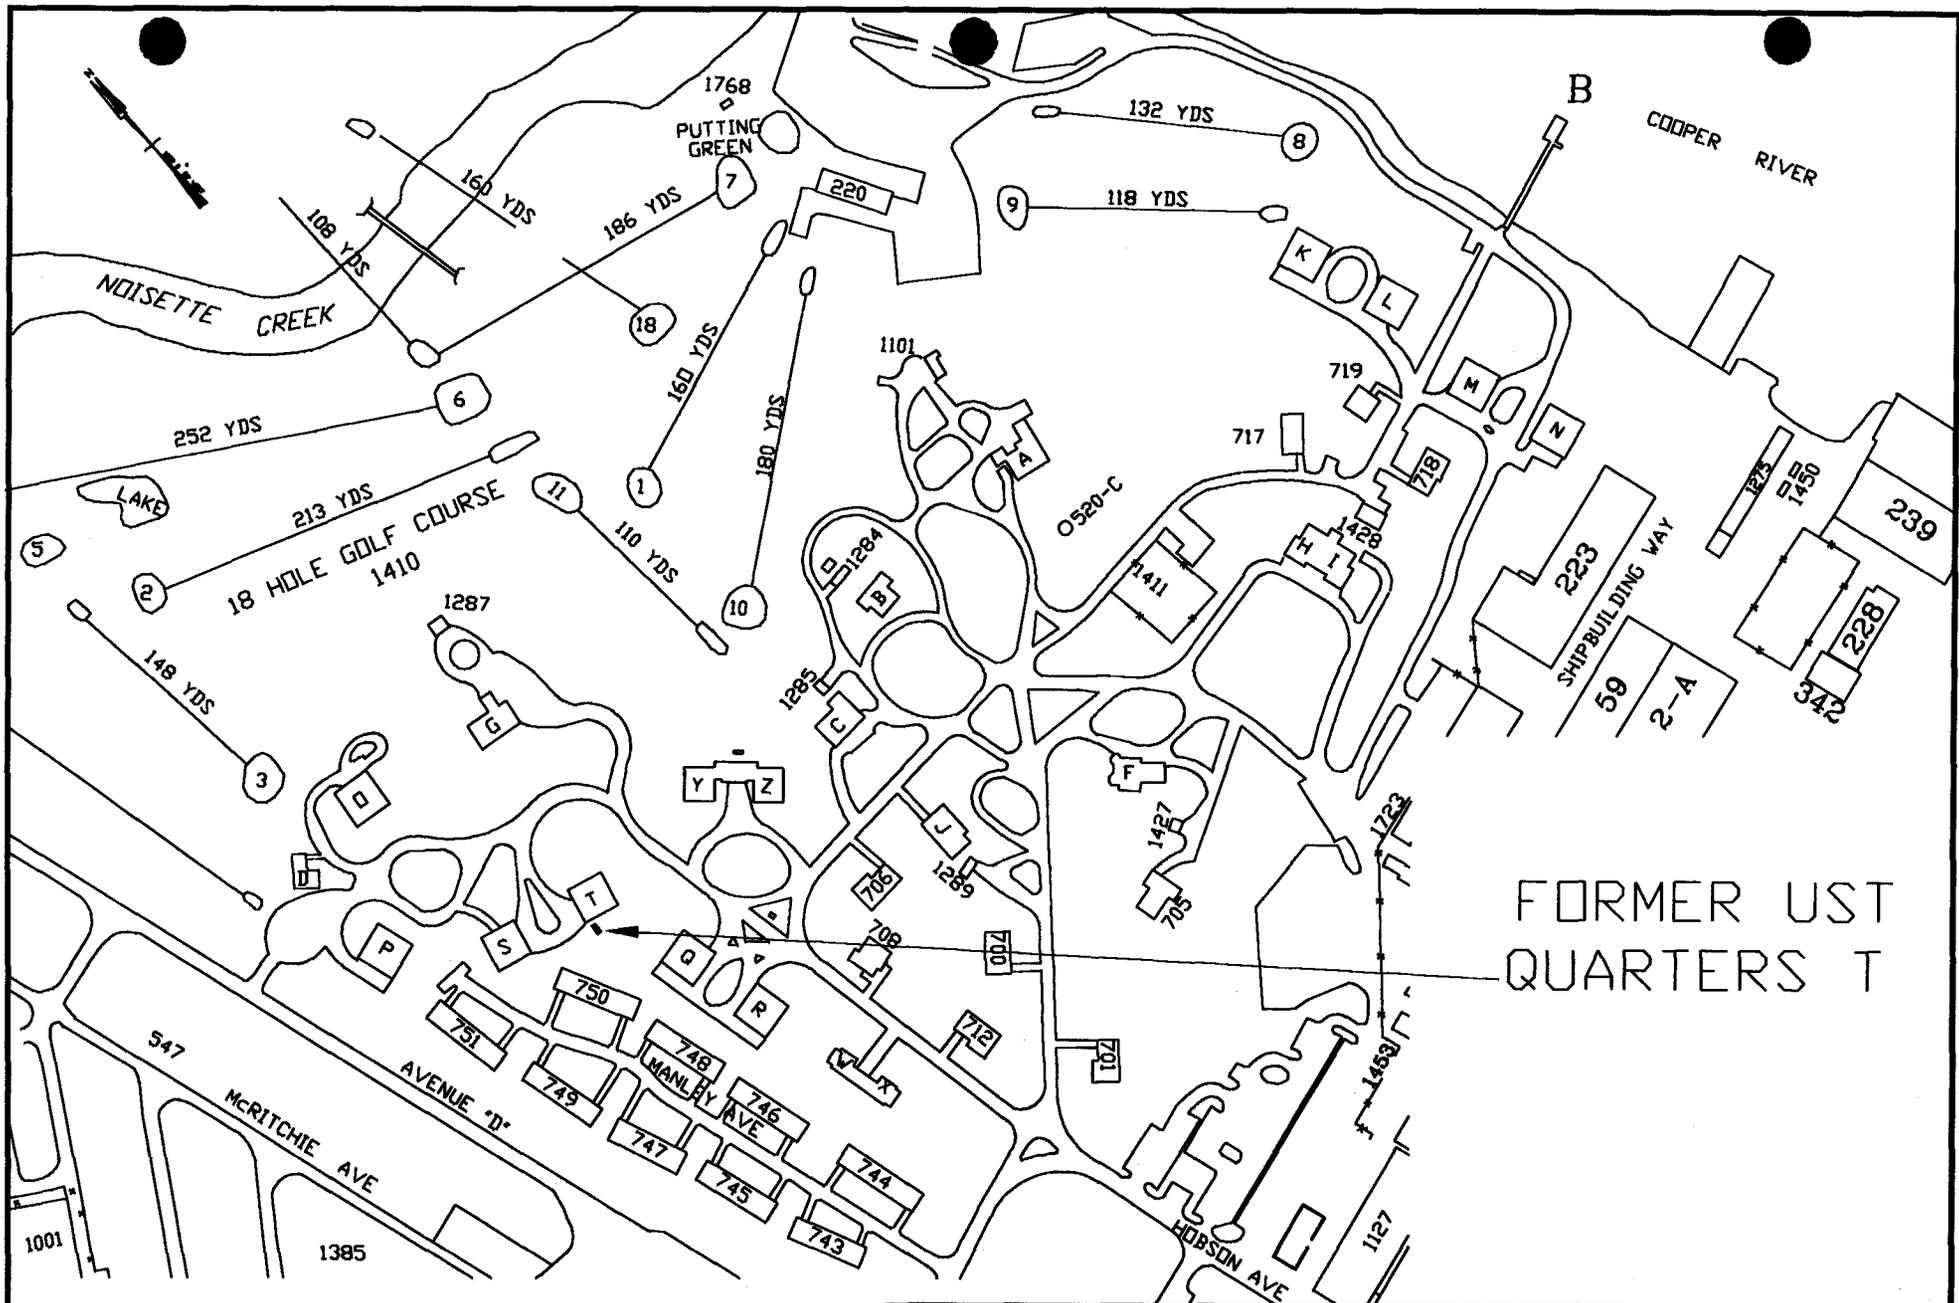

300 0 300 600



GRAPHIC SCALE

SPORTENVDETHASN
 1899 North Hobson Ave.
 North Charleston, SC
 29405-2106
 Ph. (803) 743-6777

Site Map 1
 UST Quarters T
 Charleston Naval Base
 Charleston, SC

DWG DATE: 21 APR 98 | DWG NAME: QT-T_1



BURIED ELECTRIC CABLE

FORMER
UST QUARTERS T-1

UST EXCAVATION

BURIED COMMUNICATION CABLE

CONCRETE SIDEWALK

GRASS

ASPHALT


QUARTERS T

GRASS

UST QUARTERS T TO NOISETTE CREEK ~986'

MANHOLE

TO HOBSON AVE.




GRAPHIC SCALE

SPORTENVDETHASN
1899 North Hobson Ave.
North Charleston, SC
29405-2106
Ph. (803) 743-6777

Site Map 2
USTs Quarters T-1
Charleston Naval Base
Charleston, SC

DWG DATE: 27 APR 98 | DWG NAME: QT-T_2

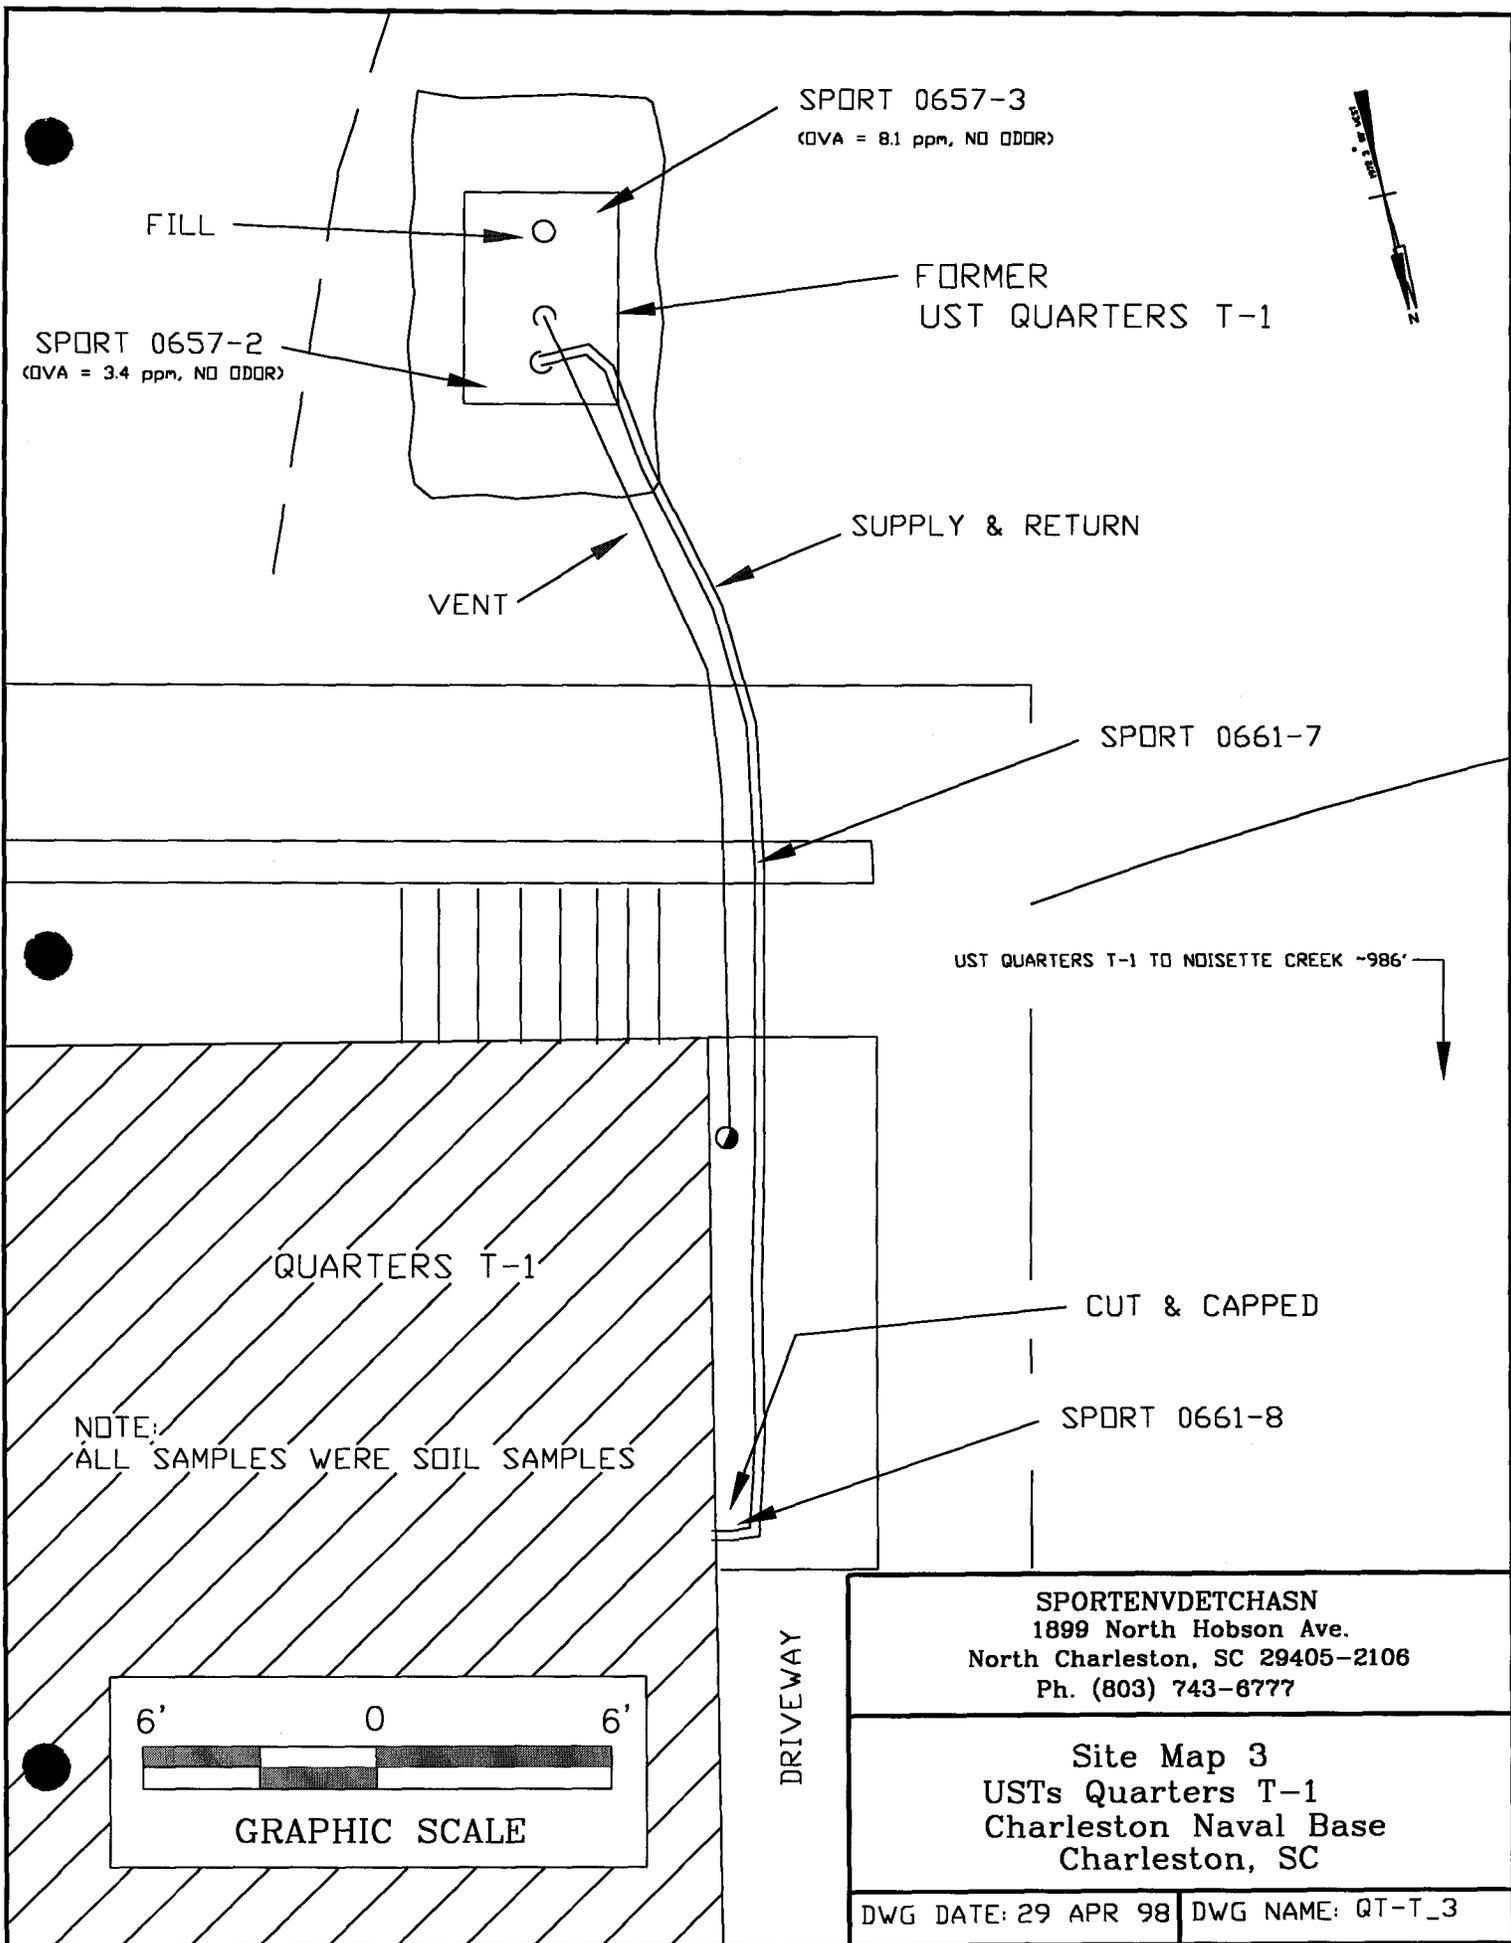

SPORT 0657-3
(OVA = 8.1 ppm, NO ODR)

FILL

FORMER
UST QUARTERS T-1

SPORT 0657-2
(OVA = 3.4 ppm, NO ODR)

SUPPLY & RETURN

VENT

SPORT 0661-7

UST QUARTERS T-1 TO NOISETTE CREEK ~986'

QUARTERS T-1


NOTE:
ALL SAMPLES WERE SOIL SAMPLES

CUT & CAPPED

SPORT 0661-8

DRIVEWAY

SPORTEVDETCHASN
1899 North Hobson Ave.
North Charleston, SC 29405-2106
Ph. (803) 743-6777

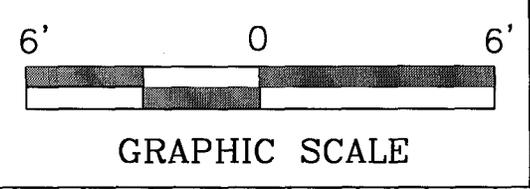

Site Map 3
USTs Quarters T-1
Charleston Naval Base
Charleston, SC

DWG DATE: 29 APR 98 | DWG NAME: QT-T_3

UST Quarters T



Photo 1: UST Quarters T being wrapped for transport the cleaning and cutting pad.

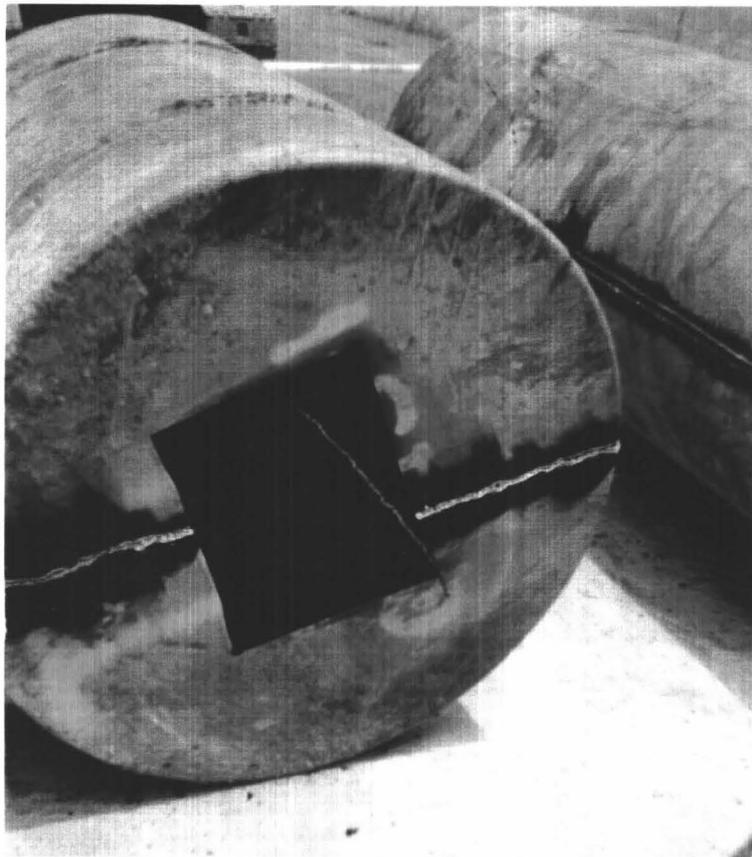


Photo 2: UST Quarters T after cutting and cleaning.

ANALYTICAL RESULTS

You must submit the laboratory report and chain-of-custody form for the samples. These samples must be analyzed by a South Carolina certified laboratory.

Certified Analytical Results
Chain-of-Custody



GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

1270 T & S

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/87294	E87472/87458
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 27, 1998

Page 1 of 2

Sample ID : SPORT0657-1
 Lab ID : 9804417-01
 Matrix : Soil
 Date Collected : 04/14/98
 Date Received : 04/16/98
 Priority : Routine
 Collector : Client

Parameter	Qualifier	Result	DL	RL	Units	DF	Analyst	Date	Time	Batch	M
Volatile Organics											
<i>BTEX - 4 items</i>											
Benzene	U	0.00	1.00	2.00	ug/kg	1.0	JEB	04/23/98	1818	120288	1
Ethylbenzene	U	0.00	1.00	2.00	ug/kg	1.0					
Toluene	U	0.00	1.00	2.00	ug/kg	1.0					
Xylenes (TOTAL)	U	0.00	1.00	4.00	ug/kg	1.0					
Naphthalene	U	0.460	1.00	2.00	ug/kg	1.0					

Surrogate Recovery	Test	Percent %	Acceptable Limits
Bromofluorobenzene	BTEX-8260	91.4	(53.5 - 154.)
Dibromofluoromethane	BTEX-8260	93.2	(63.4 - 136.)
Toluene-d8	BTEX-8260	87.8	(72.1 - 137.)
Bromofluorobenzene	NAP-8260	91.4	(53.5 - 154.)
Dibromofluoromethane	NAP-8260	93.2	(63.4 - 136.)
Toluene-d8	NAP-8260	87.8	(72.1 - 137.)

M = Method	Method-Description
M 1	EPA 8260

P O Box 30712 • Charleston, SC 29417 • 2040 Savage Road • 29414

(803) 556-8171 • Fax (803) 766-1178

Printed on recycled paper.



9804417-01



GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/87294	E87472/87458
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 27, 1998

Page 2 of 2

Sample ID : SPORT0657-1

M = Method	Method-Description
------------	--------------------

Notes:

The qualifiers in this report are defined as follows;

ND indicates that the analyte was not detected at a concentration greater than the detection limit.

J indicates presence of analyte at a concentration less than the reporting limit (RL) and greater than the detection limit (DL).

U indicates that the analyte was not detected at a concentration greater than the detection limit.

* indicates that a quality control analyte recovery is outside of specified acceptance criteria.

This data report has been prepared and reviewed
 in accordance with General Engineering Laboratories
 standard operating procedures. Please direct
 any questions to your Project Manager, Karen Blakeney at (803) 769-7386.

Karen Blakeney
 Reviewed By

P O Box 30712 • Charleston, SC 29417 • 2040 Savage Road • 29414

(803) 556-8171 • Fax (803) 766-1178

9804417-01

Printed on recycled paper.



GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/57294	E87472/87458
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 27, 1998

Page 1 of 2

Sample ID : SPOR0657-2
 Lab ID : 9804417-02
 Matrix : Soil
 Date Collected : 04/14/98
 Date Received : 04/16/98
 Priority : Routine
 Collector : Client

Parameter	Qualifier	Result	DL	RL	Units	DF	Analyst	Date	Time	Batch	M
Volatile Organics											
<i>BTEX - 4 items</i>											
Benzene	U	0.00	1.00	2.00	ug/kg	1.0	JEB	04/23/98	1433	120633	1
Ethylbenzene	J	1.70	1.00	2.00	ug/kg	1.0					
Toluene	U	0.00	1.00	2.00	ug/kg	1.0					
Xylenes (TOTAL)	U	0.00	1.00	4.00	ug/kg	1.0					
Naphthalene	U	0.00	1.00	2.00	ug/kg	1.0					
Extractable Organics											
<i>Polynuclear Aromatic Hydrocarbons - 16 items</i>											
Acenaphthene	U	0.00	165	330	ug/kg	1.0	RLC	04/24/98	1853	120496	2
Acenaphthylene	U	0.00	165	330	ug/kg	1.0					
Anthracene	U	0.00	165	330	ug/kg	1.0					
Benzo(a)anthracene	U	0.00	165	330	ug/kg	1.0					
Benzo(a)pyrene	U	0.00	165	330	ug/kg	1.0					
Benzo(b)fluoranthene	U	0.00	165	330	ug/kg	1.0					
Benzo(ghi)perylene	U	0.00	165	330	ug/kg	1.0					
Benzo(k)fluoranthene	U	0.00	165	330	ug/kg	1.0					
Chrysene	U	0.00	165	330	ug/kg	1.0					
Dibenzo(a,h)anthracene	U	0.00	165	330	ug/kg	1.0					
Fluoranthene	U	0.00	165	330	ug/kg	1.0					
Fluorene	U	0.00	165	330	ug/kg	1.0					
Indeno(1,2,3-c,d)pyrene	U	0.00	165	330	ug/kg	1.0					
Naphthalene	U	0.00	165	330	ug/kg	1.0					
Phenanthrene	U	0.00	165	330	ug/kg	1.0					
Pyrene	U	0.00	165	330	ug/kg	1.0					

The following prep procedures were performed:
 GC/MS Base/Neutral Compounds

HDB 04/21/98 0800 120496 3

P O Box 30712 • Charleston, SC 29417 • 2040 Savage Road • 29414

(803) 556-8171 • Fax (803) 766-1178



Printed on recycled paper.



9804417-02



GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	ES7156/87294	ES7472/87458
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 27, 1998

Page 2 of 2

Sample ID : SPORTO657-2

Surrogate Recovery	Test	Percent %	Acceptable Limits
2-Fluorobiphenyl	M610	84.5	(30.0 - 115.)
Nitrobenzene-d5	M610	95.1	(23.0 - 120.)
p-Terphenyl-d14	M610	85.2	(37.3 - 128.)
Bromofluorobenzene	BTEX-8260	101.	(53.5 - 154.)
Dibromofluoromethane	BTEX-8260	92.2	(63.4 - 136.)
Toluene-d8	BTEX-8260	91.4	(72.1 - 137.)
Bromofluorobenzene	NAP-8260	101.	(53.5 - 154.)
Dibromofluoromethane	NAP-8260	92.2	(63.4 - 136.)
Toluene-d8	NAP-8260	91.4	(72.1 - 137.)

M = Method	Method-Description
M 1	EPA 8260
M 2	EPA 8270
M 3	EPA 3550

Notes:

The qualifiers in this report are defined as follows:

ND indicates that the analyte was not detected at a concentration greater than the detection limit.

J indicates presence of analyte at a concentration less than the reporting limit (RL) and greater than the detection limit (DL).

U indicates that the analyte was not detected at a concentration greater than the detection limit.

* indicates that a quality control analyte recovery is outside of specified acceptance criteria.

This data report has been prepared and reviewed in accordance with General Engineering Laboratories standard operating procedures. Please direct any questions to your Project Manager, Karen Blakeney at (803) 769-7386.

Karen Blakeney
 Reviewed By

P O Box 30712 • Charleston, SC 29417 • 2040 Savage Road • 29414

(803) 556-8171 • Fax (803) 766-1178

9804417-02



Printed on recycled paper.



GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/87294	E87472/87458
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 27, 1998

Page 1 of 2

Sample ID : SPOR0657-3
 Lab ID : 9804417-03
 Matrix : Soil
 Date Collected : 04/14/98
 Date Received : 04/16/98
 Priority : Routine
 Collector : Client

Parameter	Qualifier	Result	DL	RL	Units	DF	Analyst	Date	Time	Batch	M
Volatile Organics											
<i>BTEX - 4 items</i>											
Benzene	U	0.00	1.00	2.00	ug/kg	1.0	JEB	04/23/98	1850	120633	1
Ethylbenzene	U	0.750	1.00	2.00	ug/kg	1.0					
Toluene	U	0.00	1.00	2.00	ug/kg	1.0					
Xylenes (TOTAL)		6.20	1.00	4.00	ug/kg	1.0					
Naphthalene	U	0.00	1.00	2.00	ug/kg	1.0					
Extractable Organics											
<i>Polynuclear Aromatic Hydrocarbons - 16 items</i>											
Acenaphthene	U	0.00	164	330	ug/kg	1.0	RLC	04/24/98	1923	120496	2
Acenaphthylene	U	0.00	164	330	ug/kg	1.0					
Anthracene	U	0.00	164	330	ug/kg	1.0					
Benzo(a)anthracene	U	0.00	164	330	ug/kg	1.0					
Benzo(a)pyrene	U	0.00	164	330	ug/kg	1.0					
Benzo(b)fluoranthene	U	0.00	164	330	ug/kg	1.0					
Benzo(g,h)perylene	U	0.00	164	330	ug/kg	1.0					
Benzo(k)fluoranthene	U	0.00	164	330	ug/kg	1.0					
Chrysene	U	0.00	164	330	ug/kg	1.0					
Dibenzo(a,h)anthracene	U	0.00	164	330	ug/kg	1.0					
Fluoranthene	U	0.00	164	330	ug/kg	1.0					
Fluorene	U	0.00	164	330	ug/kg	1.0					
Indeno(1,2,3-c,d)pyrene	U	0.00	164	330	ug/kg	1.0					
Naphthalene	U	0.00	164	330	ug/kg	1.0					
Phenanthrene	U	0.00	164	330	ug/kg	1.0					
Pyrene	U	0.00	164	330	ug/kg	1.0					

The following prep procedures were performed:
 GC/MS Base/Neutral Compounds

HDB 04/21/98 0800 120496 3


P O Box 30712 • Charleston, SC 29417 • 2040 Savage Road • 29414

(803) 556-8171 • Fax (803) 766-1178

Printed on recycled paper.



9804417-03



GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	687156/87294	E87472/87458
NC	333	
SC	10120	105R2
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 27, 1998

Page 2 of 2

Sample ID : SPORTO657-3

Surrogate Recovery	Test	Percent %	Acceptable Limits
2-Fluorobiphenyl	M610	76.3	(30.0 - 115.)
Nitrobenzene-d5	M610	89.6	(23.0 - 120.)
p-Terphenyl-d14	M610	82.5	(37.3 - 128.)
Bromofluorobenzene	BTEX-8260	104.	(53.5 - 154.)
Dibromofluoromethane	BTEX-8260	92.4	(63.4 - 136.)
Toluene-d8	BTEX-8260	90.0	(72.1 - 137.)
Bromofluorobenzene	NAP-8260	104.	(53.5 - 154.)
Dibromofluoromethane	NAP-8260	92.4	(63.4 - 136.)
Toluene-d8	NAP-8260	90.0	(72.1 - 137.)

M = Method	Method-Description
M 1	EPA 8260
M 2	EPA 8270
M 3	EPA 3550

Notes:

The qualifiers in this report are defined as follows:

ND indicates that the analyte was not detected at a concentration greater than the detection limit.

J indicates presence of analyte at a concentration less than the reporting limit (RL) and greater than the detection limit (DL).

U indicates that the analyte was not detected at a concentration greater than the detection limit.

* indicates that a quality control analyte recovery is outside of specified acceptance criteria.

This data report has been prepared and reviewed in accordance with General Engineering Laboratories standard operating procedures. Please direct any questions to your Project Manager, Karen Blakeney at (803) 769-7386.

Karen Blakeney
 Reviewed By

P O Box 30712 • Charleston, SC 29417 • 2040 Savage Road • 29414

(803) 556-8171 • Fax (803) 766-1178

9804417-03




CHAIN OF CUSTODY RECORD

9804417

Client Name/Facility Name		SAMPLE ANALYSIS REQUIRED (a) - use remarks area to specify specific compounds or methods														Use F or F in the boxes to indicate whether sample was filtered and/or preserved						
SPORTENV DET CHASN		# OF CONTAINERS	PHL conductivity	TOC/DOC	TOX	Chloride, Fluoride, Sulfide	Nitrate/Nitrite	VOC - Specify Method required	METALS - specify	Pesticide	Herbicide	Total Phosol	Acid Extractables	B/N Extractables	PCB's	Cyanide	Coliforms - specify type	BTEX/PAH	PHH	Remarks		
SAMPLE ID	DATE																			TIME	WELL	SOIL
21	SPORT 0657-1	4/14/98	0830	X	X	X													X	Soil Trip Blank	.1	
22	SPORT 0657-2	4/14/98	1210	X	X	Z													X	X	GTR'S T North	.2
23	SPORT 0657-3	4/14/98	1220	X	X	Z													X	X	GTR'S T South	.2
24	SPORT 0657-4	4/15/98	1030	X	X	Z													X	X	GTR'S S-1 east	.2
25	SPORT 0657-5	4/15/98	1037	X	X	Z													X	X	GTR'S S-21 West	.2
26	SPORT 0657-6	4/15/98	1510	X	X	Z													X	X	GTR'S S-2 North	.2
27	SPORT 0657-7	4/15/98	1528	X	X	Z													X	X	GTR'S S-2 South	.2
Relinquished by:		Date:	Time:	Received by:		Date:	Time:	Received by:		Date:	Time:	Received by:										
RW Coj		4/15/98	0915	W.K. Hiers, Jr.		4/16/98	1431	W.K. Hiers, Jr.		4/16/98	1431	K. Blakeman										
Relinquished by:		Date:	Time:	Received by lab by:		Date:	Time:	Remarks:														
Karem Blakeman		4/16/98	1500	Dome Francis		4/16/98	1500															

White = sample collector Yellow = file Pink = with report

MAY - 04 98 (MON) 12:03 GEN ENGINEERING TEL: 803-852-5812 P. 005

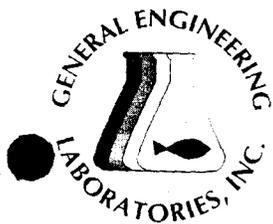

GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/87294	E87472/874
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 28, 1998

Page 1 of 3

Sample ID : SPORT0661-7
 Lab ID : 9804459-07
 Matrix : Soil
 Date Collected : 04/16/98
 Date Received : 04/17/98
 Priority : Routine
 Collector : Client

Parameter	Qualifier	Result	DL	RL	Units	DF	Analyst	Date	Time	Batch	M
Volatile Organics											
<i>BTEX - 4 items</i>											
Benzene	U	0.00	1.00	2.00	ug/kg	1.0	TCL	04/27/98	2103	120951	1
Ethylbenzene	U	0.00	1.00	2.00	ug/kg	1.0					
Toluene	U	0.00	1.00	2.00	ug/kg	1.0					
Xylenes (TOTAL)	U	0.00	1.00	4.00	ug/kg	1.0					
Naphthalene	U	0.00	1.00	2.00	ug/kg	1.0					
Extractable Organics											
<i>Polynuclear Aromatic Hydrocarbons - 16 items</i>											
Acenaphthene	U	0.00	325	650	ug/kg	2.0	RLC	04/26/98	1645	120496	2
Acenaphthylene	U	0.00	325	650	ug/kg	2.0					
Anthracene	U	0.00	325	650	ug/kg	2.0					
Benzo(a)anthracene	U	0.00	325	650	ug/kg	2.0					
Benzo(a)pyrene	U	0.00	325	650	ug/kg	2.0					
Benzo(b)fluoranthene	U	0.00	325	650	ug/kg	2.0					
Benzo(ghi)perylene	U	0.00	325	650	ug/kg	2.0					
Benzo(k)fluoranthene	U	0.00	325	650	ug/kg	2.0					
Chrysene	U	0.00	325	650	ug/kg	2.0					
Dibenzo(a,h)anthracene	U	0.00	325	650	ug/kg	2.0					
Fluoranthene	U	0.00	325	650	ug/kg	2.0					
Fluorene	U	0.00	325	650	ug/kg	2.0					
Indeno(1,2,3-c,d)pyrene	U	0.00	325	650	ug/kg	2.0					
Naphthalene	U	0.00	325	650	ug/kg	2.0					
Phenanthrene	U	0.00	325	650	ug/kg	2.0					
Pyrene	U	0.00	325	650	ug/kg	2.0					

The following prep procedures were performed:
 GC/MS Base/Neutral Compounds

HDB 04/21/98 0800 120496 3

P O Box 30712 • Charleston, SC 29417 • 2040 Savage Road • 29414


(803) 556-8171 • Fax (803) 766-1178



Printed on recycled paper.



9804459-07

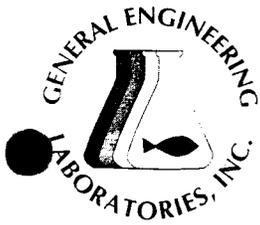

GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/87294	E87472/8745
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 28, 1998

Page 2 of 3

Sample ID : SPORT0661-7

Parameter	Qualifier	Result	DL	RL	Units	DF	Analyst	Date	Time	Batch	M
-----------	-----------	--------	----	----	-------	----	---------	------	------	-------	---

Comments:

A dilution was required for Extractable Organics due to matrix interference. As a result, the detection limits are elevated.

Surrogate Recovery	Test	Percent %	Acceptable Limits
2-Fluorobiphenyl	M610	85.2	(30.0 - 115.)
Nitrobenzene-d5	M610	93.6	(23.0 - 120.)
p-Terphenyl-d14	M610	98.8	(37.3 - 128.)
Bromofluorobenzene	BTEX-8260	105.	(53.5 - 154.)
Dibromofluoromethane	BTEX-8260	90.4	(63.4 - 136.)
Toluene-d8	BTEX-8260	93.2	(72.1 - 137.)
Bromofluorobenzene	NAP-8260	105.	(53.5 - 154.)
Dibromofluoromethane	NAP-8260	90.4	(63.4 - 136.)
Toluene-d8	NAP-8260	93.2	(72.1 - 137.)

M = Method	Method-Description
M 1	EPA 8260
M 2	EPA 8270
M 3	EPA 3550

Notes:


The qualifiers in this report are defined as follows:

ND indicates that the analyte was not detected at a concentration greater than the detection limit.

J indicates presence of analyte at a concentration less than the reporting limit (RL) and greater than the detection limit (DL).

U indicates that the analyte was not detected at a concentration greater than the detection limit.

* indicates that a quality control analyte recovery is outside of specified acceptance criteria.

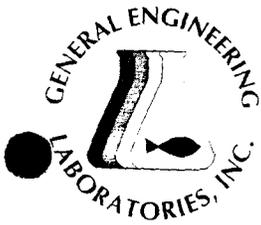

GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/87294	E87472/8745
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
SUPSHIP-Portsmouth Detachment-Env.
1899 North Hobson Ave.
North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 28, 1998

Page 3 of 3

Sample ID : SPORT0661-7

M = Method


Method-Description

This data report has been prepared and reviewed in accordance with General Engineering Laboratories standard operating procedures. Please direct any questions to your Project Manager, Karen Blakeney at (803) 769-7386.

Reviewed By

Karen Blakeney



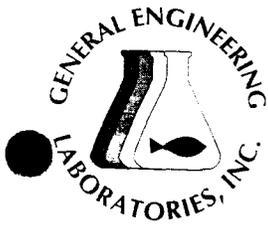

GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/87294	E87472/8745
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 28, 1998

Page 1 of 3

Sample ID : SPORT0661-8
 Lab ID : 9804459-08
 Matrix : Soil
 Date Collected : 04/16/98
 Date Received : 04/17/98
 Priority : Routine
 Collector : Client

Parameter	Qualifier	Result	DL	RL	Units	DF	Analyst	Date	Time	Batch	M
Volatile Organics											
<i>BTEX - 4 items</i>											
Benzene	U	0.00	1.00	2.00	ug/kg	1.0	TCL	04/27/98	2133	120951	1
Ethylbenzene	J	1.43	1.00	2.00	ug/kg	1.0					
Toluene	J	1.84	1.00	2.00	ug/kg	1.0					
Xylenes (TOTAL)		24.1	1.00	4.00	ug/kg	1.0					
Naphthalene		14.2	1.00	2.00	ug/kg	1.0					
Extractable Organics											
<i>Polynuclear Aromatic Hydrocarbons - 16 items</i>											
Acenaphthene	U	0.00	333	666	ug/kg	2.0	RLC	04/26/98	1712	120496	2
Acenaphthylene	U	0.00	333	666	ug/kg	2.0					
Anthracene	U	0.00	333	666	ug/kg	2.0					
Benzo(a)anthracene	U	0.00	333	666	ug/kg	2.0					
Benzo(a)pyrene	U	0.00	333	666	ug/kg	2.0					
Benzo(b)fluoranthene	U	0.00	333	666	ug/kg	2.0					
Benzo(ghi)perylene	U	0.00	333	666	ug/kg	2.0					
Benzo(k)fluoranthene	U	0.00	333	666	ug/kg	2.0					
Chrysene	U	0.00	333	666	ug/kg	2.0					
Dibenzo(a,h)anthracene	U	0.00	333	666	ug/kg	2.0					
Fluoranthene	U	0.00	333	666	ug/kg	2.0					
Fluorene	U	0.00	333	666	ug/kg	2.0					
Indeno(1,2,3-c,d)pyrene	U	0.00	333	666	ug/kg	2.0					
Naphthalene	U	0.00	333	666	ug/kg	2.0					
Phenanthrene	U	0.00	333	666	ug/kg	2.0					
Pyrene	U	0.00	333	666	ug/kg	2.0					

The following prep procedures were performed:
 GC/MS Base/Neutral Compounds


HDB 04/21/98 0800 120496 3

P O Box 30712 • Charleston, SC 29417 • 2040 Savage Road • 29414

(803) 556-8171 • Fax (803) 766-1178



9804459-08

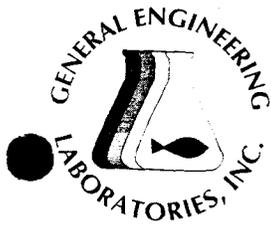

GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/87294	E87472/8745
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
 SUPSHIP-Portsmouth Detachment-Env.
 1899 North Hobson Ave.
 North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 28, 1998

Page 2 of 3

Sample ID : SPORT0661-8

Parameter	Qualifier	Result	DL	RL	Units	DF	Analyst	Date	Time	Batch	M
-----------	-----------	--------	----	----	-------	----	---------	------	------	-------	---

Comments:

A dilution was required for Extractable Organics due to matrix interference. As a result, the detection limits are elevated.

Surrogate Recovery	Test	Percent%	Acceptable Limits
2-Fluorobiphenyl	M610	84.0	(30.0 - 115.)
Nitrobenzene-d5	M610	100.	(23.0 - 120.)
p-Terphenyl-d14	M610	97.5	(37.3 - 128.)
Bromofluorobenzene	BTEX-8260	100.	(53.5 - 154.)
Dibromofluoromethane	BTEX-8260	86.6	(63.4 - 136.)
Toluene-d8	BTEX-8260	88.8	(72.1 - 137.)
Bromofluorobenzene	NAP-8260	100.	(53.5 - 154.)
Dibromofluoromethane	NAP-8260	86.6	(63.4 - 136.)
Toluene-d8	NAP-8260	88.8	(72.1 - 137.)

M = Method	Method-Description
M 1	EPA 8260
M 2	EPA 8270
M 3	EPA 3550

Notes:


The qualifiers in this report are defined as follows:

ND indicates that the analyte was not detected at a concentration greater than the detection limit.

J indicates presence of analyte at a concentration less than the reporting limit (RL) and greater than the detection limit (DL).

U indicates that the analyte was not detected at a concentration greater than the detection limit.

* indicates that a quality control analyte recovery is outside of specified acceptance criteria.

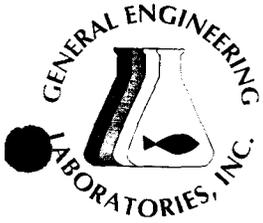

GENERAL ENGINEERING LABORATORIES

Meeting today's needs with a vision for tomorrow.

Laboratory Certifications

STATE	GEL	EPI
FL	E87156/87294	E87472/874.
NC	233	
SC	10120	10582
TN	02934	02934

Client: Supervisor of Ship Building & Conversion
SUPSHIP-Portsmouth Detachment-Env.
1899 North Hobson Ave.
North Charleston, South Carolina 29405-2106

Contact: Mr. Bill Hiers

Project Description: SUPSHIP-Portsmouth Detachment

cc: NPWC00197

Report Date: April 28, 1998


Page 3 of 3

Sample ID : SPORT0661-8

M = Method

Method-Description

This data report has been prepared and reviewed in accordance with General Engineering Laboratories standard operating procedures. Please direct any questions to your Project Manager, Karen Blakeney at (803) 769-7386.

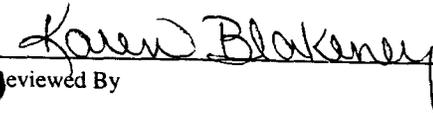
Reviewed By



NJC 00197

General Engineering Lab, Inc.
 2040 Savage Road
 Charleston, South Carolina 29417
 P.O. Box 30712
 Charleston, South Carolina 29417
 (803) 556-8171

CHAIN OF CUSTODY RECORD

9804459

Page 1 of 1

Client Name/Facility Name		SAMPLE ANALYSIS REQUIRED (x) - use remarks area to specify specific compounds or methods											Use F or P in the boxes to indicate whether sample was filtered and/or preserved								
SPORTENV DETCHASN		# OF CONTAINERS	pH, conductivity	TOC/DOC	TOX	Chloride, Fluoride, Sulfide	Nitrite/Nitrate	VOC - Specify Method required	METALS - specify	Pesticide	Herbicide	Total Phenol	Acid Extractables	B/N Extractables	PCB's	Cyanide	Coliform - specify type	BET/E/NS/SP/RY	PAH	Remarks	
Collected by/Company																				WELL SOIL COMP GRAB	
SAMPLE ID	DATE	TIME																			
01 SPORT 6661-1	4/16/98	13:46	✓	✓	2													X	X	gtrs-W-PPg-1	
02 Sport 6661-2	4/16/98	13:49	✓	✓	2													X	X	gtrs-W-PPg-2	
03 Sport 6661-3	4/16/98	13:56	✓	✓	2													X	X	gtrs-W-PPg-3	
04 Sport 6661-4	4/16/98	14:17	✓	✓	2													X	X	gtrs-R-PPg-4	
05 Sport 6661-5	4/16/98	14:30	✓		2													X	X	gtrs-Q-PPg-5	
06 Sport 6661-6	4/16/98	14:36	✓	✓	2													X	X	gtrs-Q-PPg-6	
07 Sport 6661-7	4/16/98	14:50	✓	✓	2													X	X	gtrs-T-PPg-7	
08 Sport 6661-8	4/16/98	14:54	✓	✓	2													X	X	gtrs-T-PPg-8	
09 Sport 6661-9	4/16/98	15:06	✓	✓	2													X	X	gtrs-S-PPg-9	
10 Sport 6661-10	4/16/98	15:12	✓	✓	2													X	X	gtrs-S-PPg-10	
11 Sport 6661-11	4/16/98	13:00	✓		1													X		Soil Trip Blank	

Relinquished by: <i>Kandy Holt</i>	Date: 4/17/98	Time: 0812	Received by: <i>W.R. Hieron, Jr.</i>	Relinquished by: <i>W.R. Hieron, Jr.</i>	Date: 4/17/98	Time: 1325	Received by: <i>Randy Reed</i>
Relinquished by: <i>Randy Reed</i>	Date: 4/17/98	Time: 1355	Received by lab by: <i>Douglas Francis</i>	Date: 4/17/98	Time: 1355	Remarks:	

White = sample collector Yellow = file Pink = with report

Attachment III

Certificate of Disposal (tank)

UST Certificate of Disposal

CONTRACTOR

Supervisor of Shipbuilding Conversion and Repair
Portsmouth, VA
Environmental Detachment Charleston
1899 North Hobson Avenue
North Charleston 29405-2106

Telephone (803) 743-6482

TANK ID & LOCATION

UST Quarters T-1; Quarters T, 1531 Hobson Ave., Charleston SC

DISPOSAL LOCATION

Bldg. 1601 Tank Cleaning
& Disposal Area
Charleston Naval Complex

TYPE OF TANK

Fuel oil

SIZE (GAL)


550 gal

CLEANING/DISPOSAL METHOD

The tank was cut open on both ends, cleaned with a steam cleaner, and disposed of as recyclable scrap metal.

DISPOSAL CERTIFICATION

I certify that the above tank has been properly cleaned and disposed of as recyclable scrap metal.

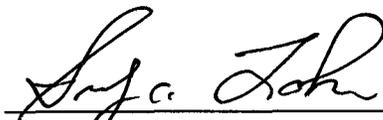

Sidney C. Ladson

15 May 98

(Date)